
Vidispine REST API Documentation

Release 4.17.2

Vidispine AB

Sep 23, 2019

CONTENTS

1	Introduction and data model	3
2	Items and Metadata	15
3	Collections and Libraries	95
4	Shapes, Components and Transcoding	105
5	Storages and Files	135
6	Jobs and Task Definitions	165
7	Notifications	177
8	Resources	181
9	Timelines and sequences	201
10	Users, Groups, and Access control	215
11	Multi-site	233
12	Miscellaneous Topics	235
13	Monitoring	241
14	Configuration and Integration	247
15	Troubleshooting and obtaining information	305
16	Standalone Vidispine	309
17	API Reference	323
18	Release Notes	877
	HTTP Routing Table	977
	Index	987

The Vidispine REST API is a rich interface for creating custom media management solutions for the most complex requirements.

This documentation is available as PDF [here](#). The documentation comes with its own searching functionality, in the upper left corner.

This reference documentation is divided into the following sections. Each section starts with an overview and is then followed by introductory guides. The API reference section at the end explains the API and resources in detail.

INTRODUCTION AND DATA MODEL

1.1 Entities in Vidispine

Before start playing with the API, a short introduction to the data model might be valuable. The figure *Overview of the entities in Vidispine* shows some of the entities that builds the assets in Vidispine.

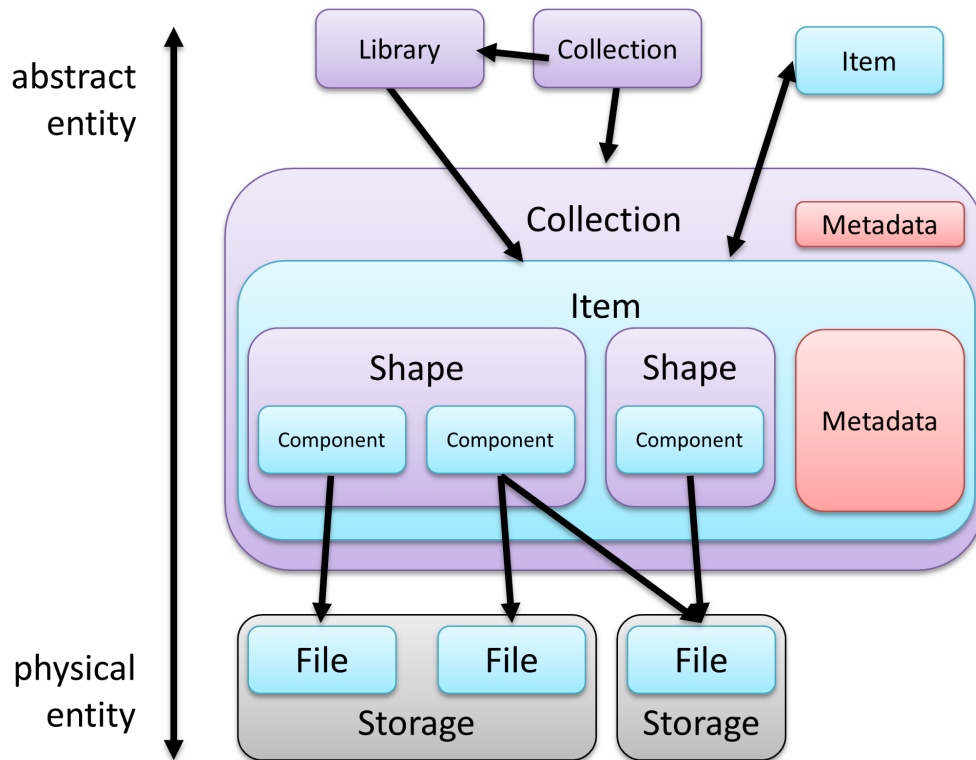


Fig. 1.1: Overview of the entities in Vidispine


1.1.1 Item

The item is the central piece in the data model. This corresponds to an *asset* in other systems. The item is an abstraction of the physical content (*essence*) and holds informa-

tion about the content (*metadata*). For information about how to create items, see *Imports*.

Other entities, further down in the hierarchy, may also hold metadata. The item has the richest functions for how metadata can be stored, searched, and indexed. For information about metadata on an item, see *Item metadata*.

The item also holds information about which users that are allowed to read and modify information (*access control*). For information about access control, see *Access control for items, libraries, collections*.

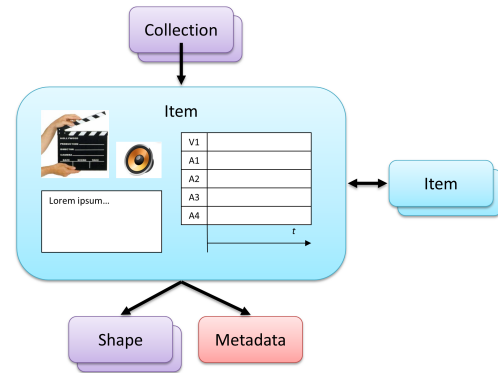


1.1.2 Shape

A shape is a physical rendition of an item.

- For a video, it can be a low-resolution editing version, a web version, ...
- For a document, it can be the pages as images, extracted text, ...
- Etc.

For information about shapes, see *Item shapes*.

A shape can have one or several shape tags. The shape tags are used when Vidispine selects which files that are being transcoded, exported, thumbnailed, etc. A special shape tag is *original*, a shape tag that the imported source file gets. The shape tag also contains the recipe for how to create new shapes using the transcoder. For information about shape tags, see *Shape tags and presets*.

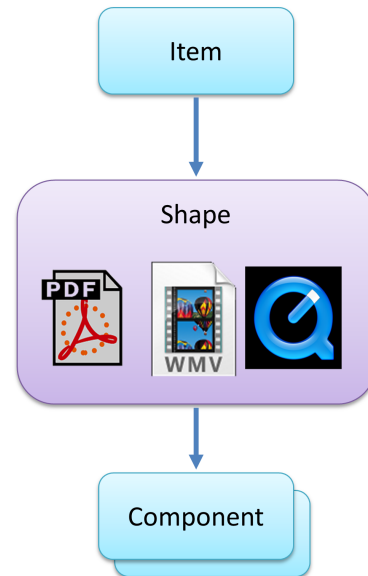

1.1.3 Component

Each shape has one or more components. A media shape might for example contain:

- A container component
- Video components
- Audio components

Each component corresponds to one file content. There may be several copies of the file however.

The component contains information (*technical metadata*) about codes, resolution, frame rate and more. For information about components, see *Item shapes*.

1.1.4 File and storage

The file entity represents a physical file on a file system. The file is stored on a storage. Vidispine manages all files, and knows which copies of a file that have been made, and how they relate.

For information about files and storages, see *Storages*.

1.1.5 Library


A library is a list of items. A library can be created manually, by adding the items to a library, or dynamically, by adding search results to a library. Libraries are useful when performing batch operations. Libraries can also be used when creating *rules*.

For information about libraries, see *Libraries*.

1.1.6 Collection

A collection is a list of items, libraries, and/or collections. Collections may have metadata and access rights, which are applied to the items that belong to the collection. While the library is typically created from a search operation, the collection is often used like a file system folder, to organize items.

For information about collections, see *Collections*.

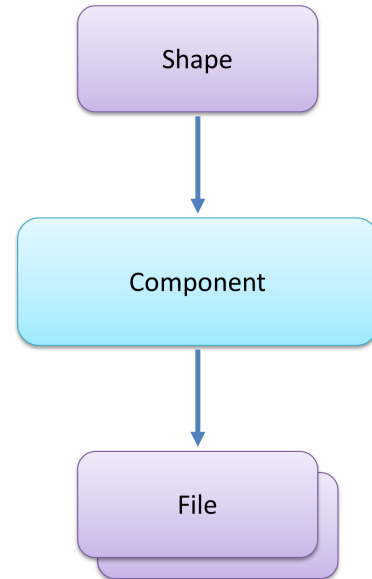

1.2 RESTful API

The Vidispine API is a REST API (http://en.wikipedia.org/wiki/Representational_State_Transfer), using HTTP as a transfer protocol.

1.2.1 Some basics in the RESTful API

URI

The URI is used as a resource (noun). This means each entity in Vidispine has its own (base) URI. Example:

- `/API/item` - All items
- `/API/item/VX-204` - A particular item
- `/API/item/VX-204/shape` - All shapes for a particular item
- `/API/item/VX-204/shape/VX-576` - A particular shape for a particular item

Method

The HTTP method is used as a verb. The verb is used to specify whether to Create (POST), Read (GET), Update (PUT) or Delete (DELETE) an entity. This is called **CRUD** (http://en.wikipedia.org/wiki/Create,_read,_update_and_delete).

GET

- Get list of items/jobs or storage definition etc.
- Does not change anything to the database.

POST

- Start jobs, create new collection, etc.
- Will create one or more new entities in the database.

PUT

- Update existing entity, create new entity with supplied id.
- Identical sequential requests will not create new entities.

DELETE

- Delete items, abort jobs, etc.
- Identical sequential requests will not change anything (fails gracefully on subsequent requests).

Media type

Media types are important. To specify which media type the *request* has, HTTP header *Content-type* is used. To specify which media type the caller accepts as response, HTTP header *Accept* is used. Most methods in Vidispine read XML (*application/xml*) or JSON (*application/json*) and write XML or JSON. Some methods reads and/or writes text (*text/plain*), though.

Parameters

Parameters are given as *query* parameters, *matrix* parameters, or *header* parameters.

Query parameters

Given at the end of the URI. The query parameters follows after a question mark (?), and each query parameter key/value pair is delimited by an ampersand (&). An equal sign = is used to separate key and value. Keys and values have to be URL encoded.

Matrix parameters

Matrix parameters are be applied to the *segments* of the path of the URI. The are used to discriminate or modify the result. Before each matrix parameter key/value pair there should be a semicolon (;). Equal signs are used to separate key and value, and they have to be URL encoded.

In Vidispine, most of the times, the matrix parameters should be applied to the last segment, but before any query parameters.

Header parameters

Header parameters are given in addition to the URI. The *Content-type* and *Accept* headers have already been mentioned. Other header worth mentioning is the *RunAs* header used for authentication (*Run-As option*), and the *index* and *size* header, used at import (*Import using the request body*).

1.3 Common elements in the API

1.3.1 Identifiers

Most entities in Vidispine are identified by a `Site ID`. A Site ID is a string of the form: `{ site } - { serial }` (example: `ATL-3033`). Note that a Site ID is not unique within the system, there could be both an item and a job with the Site ID `VX-195`, thus Site IDs are only unique within the entity type.

See also *External identifiers*.

Note:

- **site** is by the following regular expression form: `[_A-Za-z][_A-Za-z0-9]*`. The default site name is `VX`. This can be overridden with the Java system property `com.vidispine.site`.
 - **serial** is of the following regular expression form: `[1-9][0-9]*`
 - **site** is maximum 10 characters, and case sensitive
-

Long identifiers

In order to avoid confusion with non unique identifiers, it is possible to have Site IDs displayed as `ITEM-VX-1`, `JOB-VX-1`, `STORAGE-VX-3`, etc. To do this, add the *Java system property* `vidispine.identifier.format` with the value `full`. After this is done, a *re-index* of items and collections should be started. Now identifiers presented in the system will be of the form described above.

1.3.2 Boolean operators

XML elements to handle boolean expressions:

or

```
<or>
  <matching expression />
  ...
</or>
```

and

```
<and>
  <matching expression />
  ...
</and>
```

not

```
<not>
  <matching expression />
</not>
```

1.3.3 Text/plain formatting

CR LF

CRLF is used in *text/plain* representation when several values are returned, such as tuples or lists. CRLF is represented by the two bytes `0d 0a` in hexadecimal notation.

Tabbed tuples

Tabbed tuples are used in *text/plain* representation when several values are returned, such as tuples or lists. Tabbed tuples delimits each value by the tab character, `09` in hexadecimal notation. Together with *CR LF* it is used to create lists of tuples. Users should ignore any output after the last defined element in the tuple, more elements may be returned in future versions of the API.

1.4 Time representation

This section describes how time is handled in the system. There are five main categories related to time which will be discussed here: time bases, time positions (a.k.a. time codes), time intervals, time durations and time span.

1.4.1 Time bases

A time base describes how long one unit of time is in seconds using a ratio. This means that everything that has to do with time is done using rational numbers. For instance, ten seconds in the time base used by PAL (1/25) would be 250 units, or $250/25$.

Textual representations

When working with time bases it is sometimes necessary to construct textual representations which are human readable and can be more easily output and entered into the system. To that end the following textual representations are valid for time bases:

1. Its inverse as a rational number. The syntax is { **denominator** }[:{ **numerator** }], where numerator can be omitted if it's value is one.
2. A *TimeBaseConstant* string

TimeBaseConstant

The following time base constants are currently defined:

PAL	1/25
NTSC	1001/30000
NTSC30	1/30

Examples

1. 25, 30000:1001, 48000
2. PAL, NTSC

XSL

TimeBaseType is the XML representation of a time base.

```
<xs:complexType name="TimeBaseType">
  <xs:sequence>
    <xs:element name="numerator" type="xs:int"/>
    <xs:element name="denominator" type="xs:int"/>
  </xs:sequence>
</xs:complexType>
```

Examples

```
<timeBase>
  <numerator>1</numerator>
  <denominator>25</denominator>
</timeBase>
```

1.4.2 Time codes

A time code is a representation of a point in time in some time base.

Textual representations

When working with time codes it is sometimes necessary to construct textual representations with are human readable and can be more easily output and entered into the system. To that end the following textual representations are valid for time codes:

1. A sample count and a time base. The syntax is { **number of samples** }[@{ **textual representation of time base** }], where the time base is optional and implicitly one second if omitted. Examples: 124, 124222@44100, 400@30000:1001, 400@NTSC.
2. A decimal number. Example: 124.25 (will be treated as 12425/100 or 497/4). This is strongly not recommended, as most sampling frequencies do not have a finite decimal representation!
3. A decimal number and a time base. Example: 124.25/PAL (will be treated as 12425/2500). This is also not recommended!
4. The special constants -INF and +INF, representing the earlier than the earliest possible instant and later than the latest possible instant, respectively.

XSL

TimeCodeType is the XML representation of a time code.

```
<xs:complexType name="TimeCodeType">
  <xs:sequence>
    <xs:element name="samples" type="xs:long"/>
    <xs:element name="timeBase" type="tns:TimeBaseType"/>
  </xs:sequence>
</xs:complexType>
```

Examples

```
<timeCode>
  <samples>250</samples>
  <timeBase>
    <numerator>1</numerator>
    <denominator>25</denominator>
  </timeBase>
</timeCode>
```

1.4.3 Time intervals

A time interval consists of two time codes: start and end. The time between them denotes the period of time which is of interest. Note that start and end specify an interval like [start,end) in mathematical notation. In other words, the end time code is not within the interval.

Specifying an interval where both time codes have different time bases is valid.

XSL

```
<xs:complexType name="TimeIntervalType">
  <xs:sequence>
    <xs:element name="start" type="tns:TimeCodeType"/>
    <xs:element name="end" type="tns:TimeCodeType"/>
  </xs:sequence>
</xs:complexType>
```

Examples

Interval in PAL

```
<!-- Seconds 10-20 in PAL -->
<interval>
  <start>
    <samples>250</samples>
    <timeBase>
      <numerator>1</numerator>
      <denominator>25</denominator>
    </timeBase>
  </start>
  <end>
    <samples>500</samples>
    <timeBase>
      <numerator>1</numerator>
      <denominator>25</denominator>
    </timeBase>
  </end>
</interval>
```

Mixed time bases

```

<!-- Approximately seconds 10-20. Start in PALs time base, end in NTSCs time base_
↳(for instance cutting from PAL to NTSC video) -->
<interval>
  <start>
    <samples>250</samples>
    <timeBase>
      <numerator>1</numerator>
      <denominator>25</denominator>
    </timeBase>
  </start>
  <end>
    <samples>599</samples>
    <timeBase>
      <numerator>1001</numerator>
      <denominator>30000</denominator>
    </timeBase>
  </end>
</interval>

```

1.4.4 Time durations

A time duration is the length of a time interval. It can be calculated by subtracting the end time code from the start time code. This means it's simply another time code, with its time line's zero at the start of the interval.

1.4.5 Time span

A time span is an interval between two *time codes*.

There are two notations. The first notation is by using two time instants and separate them with a hyphen (-). The first time instant is included in the interval, the second one is excluded. That is, in the interval 124-221, the instant corresponding to second 124 is included in the interval, but not the instant corresponding to second 221. (E.g., if there is an instant corresponding to second 220.9999999, it is included.)

The other notation is by using one time instant and one *time duration*, separate with a plus sign (+). The notation { **a** } + { **b** } is equivalent to { **a** } - { **a + b** }.

1.5 Content paths

New in version 4.5.

Content paths are accepted by certain resources as a way of controlling the data that is returned for one or more entity.

1.5.1 Paths

A path consists of a list of keys that correspond to a field in the response. For example:

```

shape.containerComponent.format
shape.containerComponent.duration
shape.containerComponent.file.path
shape.containerComponent.file.size

```

Paths can also be written using a short-hand format:

```
shape.containerComponent.[format,duration]
shape.containerComponent.file.[path,size]
```

A path that selects from an element that represents a sequence will select on all elements in the sequence. This path selects the codec from all audio components for example:

```
shape.audioComponent.codec
```

Keys can contains a qualifier that further restricts the response:

```
shape[tag=original].containerComponent.[format,duration]
shape[tag=original].containerComponent.file.[path,size]
```

The syntax is:

```
path      ::= key ( '.' key ) *
key       ::= identifier ( '[' qualifier ']' ) *
qualifier ::= identifier '=' identifier
identifier ::= letter { letter | number } *
```

1.5.2 Aliases

Aliases can be used to shorten long path strings and to refer to multiple paths at once. Aliases can have arguments, making them similar to macros in other programming languages.

```
alias ::= name [ '[' arg ( ',' arg ) * ']' ] '=' path ( ',' path ) *
name  ::= letter { letter | number } *
arg   ::= letter { letter | number } *
```

As with fields and configuration properties, prefer to prefix alias names with a unique application prefix, to avoid possible conflicts in the future.

When an alias is evaluated, any arguments in the path, expressed as `$arg`, will be replaced by the argument value. The resulting path string must be a valid path. For example, an alias that provides information about a shape:

```
detail(tag)=shape[tag=$tag].containerComponent.format,shape[tag=$tag].videoComponent.
↪[codec,duration]
```

Configure aliases using the [path alias configuration resource](#).

```
PUT /configuration/path-alias
Content-Type: application/xml

<PathAliasConfigurationDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <alias>v(name)=metadata.timespan[start=-INF][end=+INF].field[name=$name].value.value
↪</alias>
  <alias>detail(tag)=shape[tag=$tag].containerComponent.format,shape[tag=$tag].
↪videoComponent.[codec,duration]</alias>
</PathAliasConfigurationDocument>
```


Default aliases

v(name) `metadata.timespan[start=-INF][end=+INF].field[name=$name].value.value`

1.6 Constants

An assorted list of constants found in the Vidispine API.

- *Job states*
- *Job types*
- *Storage states*
- *Storage types*
- *File States*
- *System configuration*

ITEMS AND METADATA

This chapter describes the Item, the central entity in the Vidispine data model, and how metadata (information about the item) can be associated with the item.

2.1 Imports

Importing is the process of registering essence/media with Vidispine. As Vidispine works with files and objects, either local or in the cloud, another way of putting it is to say that the media file(s) become under Vidispine's supervision.

Note: Vidispine does not support machine control or [baseband video ingest](http://en.wikipedia.org/wiki/Serial_digital_interface) (http://en.wikipedia.org/wiki/Serial_digital_interface) . However, growing files are supported, including operations on items that are currently being ingested.

2.1.1 Importing items

There are several ways of importing media into Vidispine. Which one that is used depends on where the media is located, the order of operations, and what automation that is required.

On a high level, the different ways of importing are:

Regular import This import uses a URI pointing outside of Vidispine storages to reference the source media. Vidispine will make a copy of the source material (and sidecar files given by the user) to a Vidispine storage.

The job type for this type of import is `PLACEHOLDER_IMPORT`. For reference information, see *Import using a URI*.

Raw import Here, the caller supplies the material in the REST API call as data in the request body. This is useful when the data is stored as a file at the caller's point, for example when the end user is uploading information in a web browser. It is also useful when the information resides in a location which Vidispine cannot reach, for example behind a firewall.

Vidispine supports partial upload, so the caller can split the input in multiple parts in order to better handle network problems or in order to parallelize uploads.

The job type for this type of import is `RAW_IMPORT`. Note that the job is not created until all parts of the file has been uploaded. For reference information, see *Import using the request body*.

File import This import is used where the file is already located on a storage which is supervised by Vidispine. In this type of import, no copying takes place. Instead, a new item is created, and the file is associated with the file.

The job type for this type of import is `RAW_IMPORT`. For reference information, see *Importing a file from a storage*.

Auto-import This is a special case of file import, where no explicit call has to be done for every file. The user sets up *rules* for how files are imported, and if any sidecar files are processed as well.

The job type for this type of import is AUTO_IMPORT. For reference information, see *Auto-import rules*.

Placeholder import A placeholder import is an import where the placeholder item and a placeholder shape are created before any file is imported. When creating the placeholder shape, the caller gives item metadata and information about the components. The creation of the placeholder item is a synchronous operation, and the item id is immediately returned.

Using the item id, the caller can populate the placeholder shape with files, either by posting the URI or the raw content to the components of the shape. The placeholder import is the import method that gives the highest flexibility.

For reference information, see *Placeholder imports*.

Sidecar files

Sidecar files, containing metadata, subtitles, or other supplementary information, can be imported to an item either at the same time as the item is imported, or afterwards using a sidecar import job.

2.1.2 Steps of import operation

Every import job consists of a number of job steps. Some of the the job steps run in parallel, and some in sequence. These are the most important steps in an import job:

- Create entities. The item and the *original* shape is created. This will not take place if the caller already has created the item before the job (placeholder import).
- Transfer media. The media is transferred from the source URI to a Vidispine storage. This will not take place if the media is already located on a Vidispine storage (raw import, file import, auto-import).
- Initial media check. The media is checked using a *shape deduction* by the transcoder. The components of the original shape are created.
- Transcoding. Using the information about the original shape and all shape tags given by the caller at the invocation of the job, a transcoding task is created and given to the transcoder.
- A media check of all new shapes takes place, as soon as the transcoder has started to work.
- A final media check of the original media and transcoder shapes is done after the transcoder has finished.
- Any XMP, EXIF, or document metadata is extracted.
- Optionally, the original shape can be replaced by a transcoded shape. This is useful if one seeks to have one “house format” as the original shape format, and all incoming material of other types should be converted into the house format.
- Sidecar files are imported.

2.1.3 Transcoding

During import, the caller decides which shape tags that are to be created from the original media. By default, thumbnails are created according to the shape tag definitions. The caller can choose which thumbnail service resource to use, if multiple resources are set up. This is done using the query parameter `thumbnailService`. In addition to thumbnails, full-resolution posters images can be created, by supplying a list of timecodes in the query parameter `createPosters`. The creation of thumbnails can be disabled by setting the query parameter `thumbnails` to `false`.

2.1.4 Notifications

As with all jobs in Vidispine, the caller can be notified about the job progress by HTTP messages or other actions. This is described in the *Notifications* section.

2.1.5 Adjusting import

The import API is very rich and contains several parameters. Fortunately, most of the time, the default values can be used.

Import settings

Settings that are used during imports can be set prior to starting an import job. An example of such a setting are access control lists. The settings can then be used by specifying the id of the settings profile using the query parameter `settings`.

Special job metadata values

Special instructions can be supplied to the import job via the the query parameter `jobmetadata= { key = value }`. Note that the equals sign is part of the value of the query parameter, so it has to be URL encoded (`%3d`)

Cut off start and end of video

Given that the video has SMPTE timecodes, an interval can be cut out using the metadata `smpteTimeCode` and `lastSmpteTimeCode`. If the video has no SMPTE timecode, the interval is calculated based on the first timestamp in the video.

Changed in version 4.6: Updated to use the video timestamp if the SMPTE timecode is missing.

Checksum on file transfer

New in version 4.2.8.

Normally, the checksum of the imported files will be computed asynchronously in the background. For `PLACEHOLDER_IMPORT` jobs, by specifying the jobmetadata `checksumMode%3Dtransfer`, the checksum of files will be computed during the transfer step of the job. See *checksumMode*.

2.2 Exports

An item export is the process of copying a file from storage to a location accessible by the system.

2.2.1 Exporting items

Exporting the files of an item is an asynchronous operation that is performed by an `EXPORT` job. The *export resource* allows you to:

- Export files for an item.
- Export files for the items in a specific collection or library.

- Export files for specific shapes only.
- Export partial file content, by specifying a start and end time code.

There are a number of operations that can be performed as part of an export. An export job can:

- Restore files from archive if necessary.
- Transcode into the selected formats.
- Rewrite the XMP in the exported files so that it matches the XMP in the item metadata.
- Create a sidecar XML file containing the item metadata.
- Transfer the files to the final location.

Example

To export the original shape of a specific item to a directory on the local file system:

```
POST /item/VX-191440/export?uri=file:///srv/exported/&tag=original
```

```
<JobDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <jobId>VX-169822</jobId>
  <user>admin</user>
  <started>2014-07-03T09:39:52.969Z</started>
  <status>READY</status>
  <type>EXPORT</type>
  <priority>MEDIUM</priority>
</JobDocument>
```

2.2.2 Export locations

It is possible to pre-define named export locations. When starting an export job, the location name can be passed as a parameter, the files will then be exported to the URI associated with the export location.

```
PUT /API/export-location/default-exports
```

```
Content-Type: application/xml
```

```
<ExportLocationDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <uri>file:///srv/exported/</uri>
</ExportLocationDocument>
```

```
POST /item/VX-191440/export?locationName=default-exports&tag=original
```

```
<JobDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <jobId>VX-169824</jobId>
  <user>admin</user>
  <started>2014-07-03T09:49:12.972Z</started>
  <status>READY</status>
  <type>EXPORT</type>
  <priority>MEDIUM</priority>
</JobDocument>
```

See the *export location resource* for more information.

File naming scripts

Export locations can have a JavaScript associated with them. These work the same way as file name scripts on storages (see *Naming files on storage*). The difference is that for export locations, the script will not be retried if there is a filename conflict. That is, if the filename generated by the script is already taken, then the existing file will be overwritten.

There are two ways to add a script to an export location, either using XML, or by using the *script resource*.

Example

Adding a script to an export location using XML.

```
PUT /export-location/External_FTP HTTP/1.1
Content-Type: application/xml

<ExportLocationDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <uri>ftp://user:password@10.2.23.25/export/</uri>
  <script>filename = context.getOriginalFilename() + "." + context.getExtension();</
  <script>
</ExportLocationDocument>
```

Example

Adding a script to an export location using the *script REST resource*.

```
PUT /export-location/External_FTP/script HTTP/1.1
Content-Type: text/plain

filename = context.getOriginalFilename() + "." + context.getExtension();
```

2.2.3 Export templates

New in version 4.5.

Added as BETA in 4.5

Export templates are a way of expressing complex export content. That is, the exact structure of the files exported can be described by an XML or JSON structure. See *export-templates*.

2.3 Item metadata

The metadata of an item consists of fields, groups and values that belong to a specific interval or timespan. Metadata that does not apply to a specific interval, that is, it is non-timed, belong to the timespan with a start and end of $-INF$ and $+INF$, respectively.

- A timespan describes an interval within the item, denoted by two *time codes* (a start value and an end value).
- A timespan contains sets of fields and groups.
- Groups are named sets of fields and groups.
- Fields have a *name* and a set of values of a specific type.

In addition, metadata can apply to a specific component track, identified by a track name, for example, A1 or V1 (a name on the regular expression form `[A-Za-z][1-9][0-9]*`), and a specific language, typically a ISO 639 language code.

Examples of usage can be found at *Creating fields/groups, modifying and moving metadata*.

2.3.1 Fields

Before you can use fields and groups in the metadata of an item you need to define them. When defining a field you must select its data type, that is, the type of values that will be accepted for the field. You can also restrict values further by adding additional *restrictions* to the field.

```
PUT /metadata-field/event_type HTTP/1.1
Content-Type: application/xml

<MetadataFieldDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <type>string-exact</type>
  <stringRestriction>
    <pattern>[a-z]+</pattern>
  </stringRestriction>
</MetadataFieldDocument>
```

```
HTTP/1.1 200 OK
```

Field identifiers

Metadata field ids are case sensitive and must have a certain format to avoid conflicts with existing and possible future fields used by Vidispine or other partners.

A metadata field id (name) is one of:

- **Core set**, the standard metadata set. Metadata field ids are assigned by Vidispine, and are of the regular expression form: `[A-Za-z][A-Za-z0-9]*`. maximum 32 characters.
- **Common set**. Metadata field ids have the form `{ category } _ { field-name }`. The *category* is of the regular expression form: `[A-Za-z][A-Za-z0-9]*`, maximum 4 characters, and assigned by Vidispine to be used by industry partners. *field-name* is the regular expression form: `[A-Za-z][A-Za-z0-9]*`. Total length of id is maximum 32 characters, including the underscore (`_`) character.
- **Custom set**. Metadata field ids have the form `{ custom-name } _ { field-name }`. The *custom-name* is of the regular expression form: `[A-Za-z][A-Za-z0-9]*`, *minimum 5* characters, and assigned by Vidispine. *field-name* is the regular expression form: `[A-Za-z][A-Za-z0-9]*`. Total length of id is maximum 32 characters, including the underscore (`_`) character.

Data types

The data types at your disposal are:

Data type	Description
date	An ISO-8601 compatible timestamp.
float	A floating point value.
integer	A 32-bit signed integer value.
long	A 64-bit signed integer value.
string	A string.
string-exact	A string that uses exact matching.
boolean	A boolean value. (New in 4.1.)
timeCode	A <i>time code</i> value. (New in 4.1.)

Changed in version 4.7: The `long` datatype was added.

string vs string-exact

During index time, the value of a `string` field is broken into small tokens, and then processed by various filters before being indexed. By doing so, users would get nice phrase search results, but lose the ability of “exact match”.

The value of a `string-exact` field, on the other hand, is indexed directly as a single token. This makes a “exact match” possible, and leads to smaller index size.

Note: In order to make search working properly, a re-index is required if the field type is changed.

Noindex-types

Deprecated since version 4.1: The `index` element on the metadata field should be used instead to control if a field should be indexed.

Use the `noindex` types for fields that will contain data that should not be indexed, for example if it will never be searched for or if it contains data in some format, for example JSON or Base64-encoded binary data.

Data type	Description
date-noindex	An ISO-8601 compatible timestamp. No indexing will take place.
float-noindex	A floating point value. No indexing will take place.
integer-noindex	A 32-bit signed integer value. No indexing will take place.
long-noindex	A 64-bit signed integer value. No indexing will take place.
string-noindex	A string. No indexing will take place.
boolean-noindex	A boolean value. No indexing will take place. (New in 4.1.)
timeCode-noindex	A <i>time code</i> value. No indexing will take place. (New in 4.1.)

Sortable types

Deprecated since version 3.2: Sortable types are deprecated. This is since any field type can be used for sorting as long as it is indexed.

Sortable types can be used when searching to sort search results. A sortable field is one that uses a sortable type. Fields that are sortable have two limitations:

1. They can only exist within non-timed metadata.
2. They cannot contain lists of values.

Data type	Description
date-sortable	An ISO-8601 compatible timestamp. Can be used for sorting.
float-sortable	A floating point value. Can be used for sorting.
integer-sortable	An integer value. Can be used for sorting.
string-sortable	A string. Can be used for sorting.
string-exact-sortable	A string that uses exact matching. Can be used for sorting.

Restrictions

Add restrictions to metadata fields for further restrict the values that are to be allowed for a field. The table below shows the different types of restrictions that exist.

Data type	Parameter	Restriction
string	pattern	A Java compatible regular expression (http://java.sun.com/javase/6/docs/api/java/util/regex/Pattern.html)
	minLength	A minimum allowed length of the string.
	maxLength	A maximum allowed length of the string.
float	minInclusive	A minimum allowed value (inclusive).
	maxInclusive	A maximum allowed value (inclusive).
integer	minInclusive	A minimum allowed value (inclusive).
	maxInclusive	A maximum allowed value (inclusive).
long	minInclusive	A minimum allowed value (inclusive).
	maxInclusive	A maximum allowed value (inclusive).

For example, adding a field that only accept integer values in the interval [1, 5].

```
PUT /metadata-field/event_rating HTTP/1.1
Content-Type: application/xml

<MetadataFieldDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <type>integer</type>
  <integerRestriction>
    <minInclusive>1</minInclusive>
    <maxInclusive>5</maxInclusive>
  </integerRestriction>
</MetadataFieldDocument>
```

Note: The naming of your field must follow certain rules, see *Field identifiers*.

Default values

You can assign a default value to a field if you want a field to be included when retrieving the metadata of an item even if it has not been set.

```
PUT /metadata-field/testing_default HTTP/1.1
Content-Type: application/xml

<MetadataFieldDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <type>integer</type>
  <defaultValue>0</defaultValue>
</MetadataFieldDocument>
```

```
HTTP/1.1 200 OK
```

Use the `defaultValue` parameter to control if the field should be included with the default value. Here item VX-12 does not have the field set:

```
GET /item/VX-12/metadata;field=testing_default;defaultValue=false HTTP/1.1
```

```
<MetadataListDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <item id="VX-12">
    <metadata>
      <revision>VX-59,VX-60,VX-57</revision>
    </metadata>
  </item>
</MetadataListDocument>
```

```
GET /item/VX-12/metadata;field=testing_default;defaultValue=true HTTP/1.1
```

```
<MetadataListDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <item id="VX-12">
    <metadata>
      <revision>VX-59,VX-60,VX-57</revision>
      <timespan end="+INF" start="-INF">
        <field>
          <name>testing_default</name>
          <value>0</value>
        </field>
      </timespan>
    </metadata>
  </item>
</MetadataListDocument>
```

2.3.2 Field groups

Metadata fields can be organized in zero or more *field groups*. Use groups to represents events or other types of objects in the metadata.

```
PUT /metadata-field/field-group/event HTTP/1.1
```

```
Content-Type: application/xml
```

```
<MetadataFieldGroupDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <data>
    <key>description</key>
    <value>An event in a clip</value>
  </data>
  <field>
    <name>event_type</name>
    <data>
      <key>text</key>
      <value>Here is some text.</value>
    </data>
  </field>
  <field>
    <name>event_rating</name>
  </field>
</field>
```

```

<name>event_text</name>
<type>string</type>
<data>
  <key>someextradata</key>
  <value>Some additional data</value>
</data>
</field>
<access>
  <user>admin</user>
  <permission>DELETE</permission>
</access>
</MetadataFieldGroupDocument>

```

Fields in a group that have not yet been created will be created for you. The example above also shows how additional metadata can be added to fields and groups.

2.3.3 Metadata schema

Finally, you can define a *metadata schema* to make sure that the metadata conforms to a specific data model.

For an example of how to define a metadata schema, see *Defining a metadata schema*. You can also define the schema when creating field groups, as shown in *Alternate way of creating a schema*.

There are three different types of elements in the schema: groups, fields and nested groups. They all have in common three attributes, `name`, `min` and `max`, and the two latter elements also have the attribute `reference`.

- **Name** is the name of the field or group that the element refers to. The table below shows the semantics of a property for the different elements.
- **Min** specifies the minimum of times that the element can occur in that context and is a non-negative integer.
- **Max** specifies the maximum of times that the element can occur in that context and if set to a negative value it will be interpreted as an infinite number of times.


	Group	Nested groups	Field
min	The minimum number of times that the group can occur at top-level.	The minimum number of times that the group can occur inside the given group	The minimum number of times the field can occur inside the given group
max	The maximum number of times that the group can occur at top-level.	The maximum number of times that the group can occur inside the given group	The maximum number of times the field can occur inside the given group
name	The name of the group.	The name of the group.	The name of the field.
reference	-	If set, controls whether the group must be a reference or not.	If set, controls whether the group must be a reference or not.

Top-level groups are used to specify what a fields and groups that they are allowed to contain. Furthermore they specify whether or not that group can exist outside of other groups. Nested groups and fields are used to specify the content of a top-level group.

2.3.4 Hierarchical metadata

Complex data relations can be represented with hierarchical metadata. Let's say we have three classes in our data model, Organization, Employee and Project. An organization has a name, one or more employees and one or more projects. An employee has a name and a title. A project has a name and one or more employees assigned to it. This data model can be represented by using *field groups* to represent the classes and *fields* to represent the attributes.

Below an example of this data model is given:

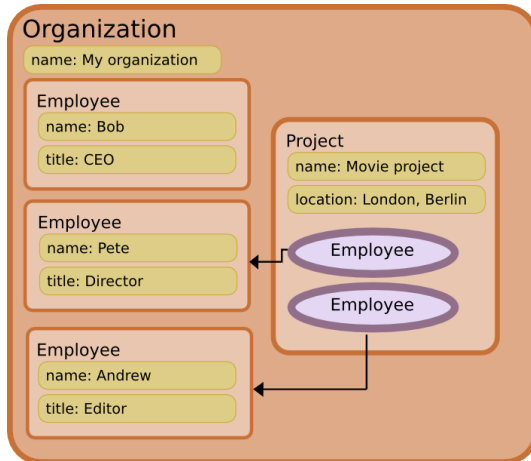

As can be seen in the diagram, weak references are used in the project to point to the employees in the organization to avoid data duplication. An equivalent XML of the above diagram:

```
<MetadataDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <timespan start="-INF" end="+INF">
    <group>
      <name>organization</name>
      <field>
        <name>name</name>
        <value>My organization</value>
      </field>
      <group uuid="c9be268e-03f4-4378-8061-e1c8b8f6b45c">
        <name>employee</name>
        <field>
          <name>name</name>
          <value>Bob</value>
        </field>
        <field>
          <name>title</name>
          <value>CEO</value>
        </field>
      </group>
      <group uuid="96a333b1-06f0-4975-adee-78b93c2a7614">
        <name>employee</name>
        <field>
          <name>name</name>
          <value>Pete</value>
        </field>
        <field>
          <name>title</name>
          <value>Director</value>
        </field>
      </group>
      <group uuid="82f92192-d2ef-422a-984a-b03cb0476a8a">
        <name>employee</name>
        <field>
          <name>name</name>
          <value>Andrew</value>
        </field>
        <field>

```

```

    <name>title</name>
    <value>Editor</value>
  </field>
</group>
<group>
  <name>project</name>
  <field>
    <name>name</name>
    <value>Movie project</value>
  </field>
  <field>
    <name>location</name>
    <value>London</value>
    <value>Berlin</value>
  </field>
  <group>
    <name>employee</name>
    <reference>96a333b1-06f0-4975-adee-78b93c2a7614</reference>
  </group>
  <group>
    <name>employee</name>
    <reference>82f92192-d2ef-422a-984a-b03cb0476a8a</reference>
  </group>
</group>
</timespan>
</MetadataDocument>

```

2.3.5 Metadata inheritance

Metadata fields can be marked as *inheritable*. Inheritable metadata fields set on a collection will be inherited to all items in the collection. If an inheritable field is set on the collection *and* the item, the value on the item takes precedence.

To enable metadata inheritance add the attribute `inheritance="true"` to the root element of the `MetadataFieldDocument`:

```

PUT /metadata-field/event_rating HTTP/1.1
Content-Type: application/xml

<MetadataFieldDocument xmlns="http://xml.vidispine.com/schema/vidispine" inheritance=
↪ "true">
  <type>integer</type>
  <integerRestriction>
    <minInclusive>1</minInclusive>
    <maxInclusive>5</maxInclusive>
  </integerRestriction>
</MetadataFieldDocument>

```

When retrieving an item with inherited metadata the attribute `inheritance` on the field element will contain the ID of the collection from which the field was inherited:

```

GET /item/VX-51/metadata HTTP/1.1
Accept: application/xml

<?xml version="1.0" encoding="UTF-8" standalone="yes"?>

```

```

<MetadataListDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <item id="VX-51">
    <metadata>
      <revision>VX-206,VX-146,VX-145,VX-154</revision>
      <timespan start="-INF" end="+INF">
        ...
        <field inheritance="Collection/VX-6" uuid="9beea1d8-0560-40c2-bfaf-
↵03ff2dd5f02e" user="admin" timestamp="2018-03-14T13:23:14.238+01:00" change="VX-148
↵">
          <name>event_rating</name>
          <value uuid="593e6678-1ace-4d69-9362-1add839024bf" user="admin"
↵timestamp="2018-03-14T13:23:14.238+01:00" change="VX-148">3</value>
        </field>
        ...
      </timespan>
    </metadata>
  </item>
</MetadataListDocument>

```

Changed in version 4.13: Metadata inheritance was added for metadata groups. The same rules as for metadata fields apply.

2.3.6 Versioning

Metadata essentially consists of key-value pairs. The key of a value is its UUID, but can also often be described by the quintuple (timespan, group, field name, track, language). However the latter does not guarantee unambiguity. If at any point a key corresponds to more than one value, then a conflict exists.

Change sets

A change set is a set of changes to the metadata. The change set has a unique id and can be related to other change sets. The current revision of the metadata is essentially the superset of all change sets.

Example

If we start with a newly imported item, its metadata might look like this:

```
GET item/VX-250/metadata
```

```

<MetadataListDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <item id="VX-250">
    <metadata>
      <revision>VX-30</revision>
      <timespan end="+INF" start="-INF">
        <field>
          <name>durationSeconds</name>
          <value change="VX-30" timestamp="2010-03-19T09:08:09.563+01:00" user="system
↵">232.32</value>
        </field>
        <field>
          <name>durationTimeCode</name>
          <value change="VX-30" timestamp="2010-03-19T09:08:09.576+01:00" user="system
↵">232320000@1000000</value>

```

```

    </field>
  </timespan>
</metadata>
</item>
</MetadataListDocument>

```

Assume two users, u1 and u2, both wants to add a title, not knowing of each others changes.

```

PUT item/VX-250/metadata?revision=VX-30
Content-Type: application/xml

```

```

<MetadataDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <timespan end="+INF" start="-INF">
    <field>
      <name>title</name>
      <value>u1's title</value>
    </field>
  </timespan>
</MetadataDocument>

```

```

PUT item/VX-250/metadata?revision=VX-30
Content-Type: application/xml

```

```

<MetadataDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <timespan end="+INF" start="-INF">
    <field>
      <name>title</name>
      <value>u2's title</value>
    </field>
  </timespan>
</MetadataDocument>

```

The result of the two operations will result in a conflict, because u2 did not know of the change made by u1.

```

GET item/VX-250/metadata

```

```

<MetadataListDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <item>
    <metadata>
      <revision>VX-30, VX-32, VX-31</revision>
      <timespan end="+INF" start="-INF">
        <field conflict="true">
          <name>title</name>
          <value change="VX-32" timestamp="2010-03-19T09:16:56.419+01:00" user=
↪ "u2">u2's title</value>
          <value change="VX-31" timestamp="2010-03-19T09:16:25.454+01:00" user=
↪ "u1">u1's title</value>
        </field>
        <field>
          <name>durationSeconds</name>
          <value change="VX-30" timestamp="2010-03-19T09:08:09.563+01:00" user=
↪ "system">232.32</value>
        </field>
        <field>
          <name>durationTimeCode</name>
          <value change="VX-30" timestamp="2010-03-19T09:08:09.576+01:00" user=
↪ "system">232320000@1000000</value>
        </field>
      </timespan>
    </metadata>
  </item>
</MetadataListDocument>

```



```

    </field>
  </timespan>
</metadata>
</item>
</MetadataListDocument>

```

In order to resolve the conflict u1 inserts another change set:

```

PUT item/VX-250/metadata?revision=VX-30,VX-32,VX-31
Content-Type: application/xml

<MetadataDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <timespan end="+INF" start="-INF">
    <field>
      <name>title</name>
      <value>u1's and u2's title</value>
    </field>
  </timespan>
</MetadataDocument>

```

Which results in:


```
GET item/VX-250/metadata
```

```

<MetadataListDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <item>
    <metadata>
      <revision>VX-30,VX-33</revision>
      <timespan end="+INF" start="-INF">
        <field>
          <name>title</name>
          <value change="VX-33" timestamp="2010-03-19T09:21:28.692+01:00" user=
↪ "u1">u1's and u2's title</value>
        </field>
        <field>
          <name>durationSeconds</name>
          <value change="VX-30" timestamp="2010-03-19T09:08:09.563+01:00" user=
↪ "system">232.32</value>
        </field>
        <field>
          <name>durationTimeCode</name>
          <value change="VX-30" timestamp="2010-03-19T09:08:09.576+01:00" user=
↪ "system">232320000@1000000</value>
        </field>
      </timespan>
    </metadata>
  </item>
</MetadataListDocument>

```

A graph of this can be seen below. Worth noting is that it is the leaves of the graph that represent the current revision.

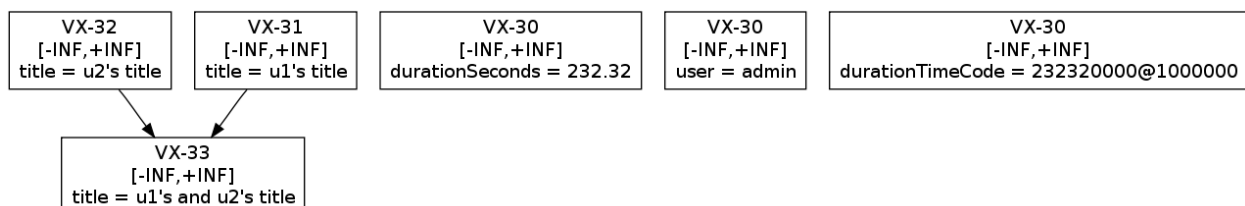

2.3.7 Structure of metadata

Lists of values

A field can contain multiple values.

Example

Retrieving the current metadata:

```
GET /item/VX-250/metadata
```

```
<MetadataListDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <item id="VX-7612">
    <metadata>
      <revision>VX-16113,VX-16114</revision>
      <timespan end="+INF" start="-INF">
        <field change="VX-16114" timestamp="2010-08-16T08:28:18.592+02:00" user=
↪"system" uuid="4cc88be0-4fc3-4243-a6e0-b1a151e6cde0">
          <name>shapeTag</name>
          <value change="VX-16114" timestamp="2010-08-16T08:28:18.592+02:00"
↪user="system" uuid="b98a5553-a6ca-4235-bb14-fc17fdf7eda3">original</value>
        </field>
        <field change="VX-16113" timestamp="2010-08-16T08:28:18.366+02:00" user=
↪"admin" uuid="d35fb0ea-cd05-4429-a707-b248420b3fe7">
          <name>field_a</name>
          <value change="VX-16113" timestamp="2010-08-16T08:28:18.366+02:00"
↪user="admin" uuid="31602cd8-4cfa-4912-a6fb-d731841f880c">my value</value>
        </field>
      </timespan>
    </metadata>
  </item>
</MetadataListDocument>
```

Adding a new value to field_a, if the mode attribute is left out the existing value will be modified instead of adding it as a new value.

```
PUT /item/VX-250/metadata
Content-Type: application/xml
```

```
<MetadataDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <timespan start="-INF" end="+INF">
    <field>
      <name>field_a</name>
      <value mode="add">my other value</value>
    </field>
  </timespan>
</MetadataDocument>
```

```
<MetadataListDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <item>
    <metadata>
      <revision>VX-16113,VX-16114,VX-16115</revision>
      <timespan end="+INF" start="-INF">
        <field change="VX-16115" timestamp="2010-08-16T08:35:18.550+02:00" user=
↪"admin" uuid="d35fb0ea-cd05-4429-a707-b248420b3fe7">
```

```

        <name>field_a</name>
        <value change="VX-16113" timestamp="2010-08-16T08:28:18.366+02:00"
↪user="admin" uuid="31602cd8-4cfa-4912-a6fb-d731841f880c">my value</value>
        <value change="VX-16115" timestamp="2010-08-16T08:35:18.550+02:00"
↪user="admin" uuid="cb47404c-5d69-466e-ad61-733b2cf8496b">my other value</value>
    </field>
    <field change="VX-16114" timestamp="2010-08-16T08:28:18.592+02:00" user=
↪"system" uuid="4cc88be0-4fc3-4243-a6e0-b1a151e6cde0">
        <name>shapeTag</name>
        <value change="VX-16114" timestamp="2010-08-16T08:28:18.592+02:00"
↪user="system" uuid="b98a5553-a6ca-4235-bb14-fc17fdf7eda3">original</value>
    </field>
</timespan>
</metadata>
</item>
</MetadataListDocument>

```

In order to modify either of the two values of the field the UUID must be specified, otherwise ambiguity will exist.

```

PUT /item/VX-250/metadata
Content-Type: application/xml

```

```

<MetadataDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <timespan start="-INF" end="+INF">
    <field>
      <name>field_a</name>
      <value>my new value</value>
    </field>
  </timespan>
</MetadataDocument>

```

```

400 An invalid parameter was entered
Context: metadata
Reason: Ambiguous path to value

```

Values can be removed by setting the mode attribute to remove.

```

PUT /item/VX-250/metadata
Content-Type: application/xml

```

```

<MetadataDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <timespan start="-INF" end="+INF">
    <field>
      <name>field_a</name>
      <value mode="remove" uuid="31602cd8-4cfa-4912-a6fb-d731841f880c"/>
    </field>
  </timespan>
</MetadataDocument>

```

```

<MetadataListDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <item>
    <metadata>
      <revision>VX-16114,VX-16115,VX-16117</revision>
      <timespan end="+INF" start="-INF">
        <field change="VX-16117" timestamp="2010-08-16T08:48:21.474+02:00" user=
↪"admin" uuid="d35fb0ea-cd05-4429-a707-b248420b3fe7">
          <name>field_a</name>

```

```

        <value change="VX-16115" timestamp="2010-08-16T08:35:18.550+02:00"
↪user="admin" uuid="cb47404c-5d69-466e-ad61-733b2cf8496b">my other value</value>
        </field>
        <field change="VX-16114" timestamp="2010-08-16T08:28:18.592+02:00" user=
↪"system" uuid="4cc88be0-4fc3-4243-a6e0-b1a151e6cde0">
            <name>shapeTag</name>
            <value change="VX-16114" timestamp="2010-08-16T08:28:18.592+02:00"
↪user="system" uuid="b98a5553-a6ca-4235-bb14-fc17fdf7eda3">original</value>
        </field>
    </timespan>
</metadata>
</item>
</MetadataListDocument>

```

Weak references

Groups and fields can refer to other groups and fields by using weak references. Furthermore the metadata of other items and collections as well as global metadata can be referenced.

Example: referencing global metadata

Adding some global metadata:

```

PUT /metadata
Content-Type: application/xml

<MetadataDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <timespan start="-INF" end="+INF">
    <group mode="add">
      <name>test</name>
      <field>
        <name>example_name</name>
        <value>Global name</value>
      </field>
    </group>
  </timespan>
</MetadataDocument>

```

```

<MetadataDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <revision>VX-76,VX-82,VX-80,VX-84</revision>
  <timespan start="-INF" end="+INF">
    <group uuid="aaf7fde8-308d-4555-8a8b-8954f5ec5fd9" user="admin" timestamp="2010-
↪12-27T09:40:32.667+01:00" change="VX-84">
      <name>test</name>
      <field uuid="376e831b-8e8e-4c0a-a7b2-dfddb49d2e20" user="admin" timestamp="2010-
↪12-27T09:40:32.667+01:00" change="VX-84">
        <name>example_name</name>
        <value uuid="431d8078-fb05-42f0-87ae-a9ea73b8c4d1" user="admin" timestamp=
↪"2010-12-27T09:40:32.667+01:00" change="VX-84">Global name</value>
      </field>
    </group>
  </timespan>
</MetadataDocument>

```

Referencing it from an item:

```
PUT /item/VX-15/metadata
Content-Type: application/xml
```

```
<MetadataDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <timespan start="-INF" end="+INF">
    <group mode="add">
      <name>test</name>
      <reference>aaf7fde8-308d-4555-8a8b-8954f5ec5fd9</reference>
    </group>
  </timespan>
</MetadataDocument>
```

```
<MetadataListDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <item id="VX-15">
    <metadata>
      <revision>VX-86, VX-87</revision>
      <timespan end="+INF" start="-INF">
        <field change="VX-86" timestamp="2010-12-27T09:44:43.594+01:00" user="system"
↔ uuid="154c5b1c-575d-42f8-947d-5b0d38a78e96">
          <name>shapeTag</name>
          <value change="VX-86" timestamp="2010-12-27T09:44:43.594+01:00" user="system"
↔ " uuid="eb05a782-75f1-4e42-9e5f-4d93be6f4247">original</value>
        </field>
        <group change="VX-87" timestamp="2010-12-27T09:45:21.786+01:00" user="admin"
↔ uuid="7c3d0b12-9b0a-48b8-b603-67fdcc26108d">
          <name>test</name>
          <referenced id="" type="global" uuid="aaf7fde8-308d-4555-8a8b-8954f5ec5fd9"/
↔ >
          <field change="VX-84" timestamp="2010-12-27T09:40:32.667+01:00" user="admin"
↔ " uuid="376e831b-8e8e-4c0a-a7b2-dfddb49d2e20">
            <name>example_name</name>
            <value change="VX-84" timestamp="2010-12-27T09:40:32.667+01:00" user=
↔ "admin" uuid="431d8078-fb05-42f0-87ae-a9ea73b8c4d1">Global name</value>
          </field>
        </group>
      </timespan>
    </metadata>
  </item>
</MetadataListDocument>
```

2.3.8 Metadata defined by the systems

Name	Description
<code>user</code>	The name of the user that imported the item. (Removed in 4.14, see below.)
<code>title</code>	The title of the item.
<code>shapeTag</code>	A shape tag that is used on a shape belonging to the item.
<code>representativeThumbnail</code>	A thumbnail that is representative of the item. Initially set by the system, but can be modified by a user.
<code>representativeThumbnailNS</code>	Same as above, with the exception that no authentication is required.
<code>itemId</code>	The id of the item.
<code>mediaType</code>	The type of the media, e.g. video/audio/image/document/pdf/binary.
<code>mimeType</code>	The mime type of the media, e.g. image/jpeg.
<code>created</code>	The time when item was created.
<code>startTimeCode</code>	The start time of the item expressed as a time code.
<code>startSeconds</code>	The start time of the item expressed in seconds.
<code>fieldValidationError</code>	A error message that can be set if a metadata-field did not validate.
<code>schemaValidationError</code>	A error message that corresponds to what have failed during validation against a metadata-schema.
<code>originalFilename</code>	The original file name of the essence.
<code>originalAudioCodec</code>	The original audio codec of the essence.
<code>originalVideoCodec</code>	The original video codec of the essence.
<code>originalHeight</code>	The original height of the essence.
<code>originalWidth</code>	The original width of the essence.
<code>originalFormat</code>	The original container format of the essence.
<code>durationSeconds</code>	The duration of the item expressed in seconds.
<code>durationTimeCode</code>	The duration of the item expressed as a time code.

Changed in version 4.3: The mime type was added.

Changed in version 4.6: The PDF and document media types were added.

Deprecated since version 4.14: The system field `user` is not available any more, use the transient field `__user` instead. A transient field `user` ensures backwards compatibility for existing applications but will be removed in a future version.

Transient metadata

Transient metadata is a special type of metadata that is not revision controlled and only continuously updated by the system. It can be used to create complex search queries. All transient metadata are prefixed by double underscores.

Name	Description	In-dexed
<code>__user</code>	The name of the user that imported the item. (New in 4.14.)	Yes
<code>__collection</code>	The id of the collection an item belongs to.	Yes
<code>__collection_size</code>	The number of collections that the item belongs to.	Yes
<code>__ancestor_collection</code>	The id of an ancestor collection of an item.	Yes
<code>__ancestor_collection_size</code>	The number of ancestor collections of an item.	Yes
<code>__shape</code>	The id of a shape that belongs to the item.	Yes
<code>__shape_size</code>	The number of shapes that the item has.	Yes
<code>__shape_last_added</code>	The creation date of the newest shape of the item.	Yes
<code>__shapetag_{tag}_hash[_{a}]</code>	The checksum of a file of the item, where <i>a</i> is the algorithm.	Yes
<code>__placeholder_shape_size</code>	The number of placeholder shapes that the item has.	Yes
<code>__version</code>	The essence version numbers.	Yes
<code>__version_size</code>	The number of essence versions that the item has.	Yes
<code>__storage</code>	The id of a storage that has files that belongs to the item.	Yes
<code>__storage_size</code>	The number of storages that has files that belongs to the item.	Yes
<code>__storagegroup</code>	The id of a group that has files that belongs to the item.	Yes
<code>__storagegroup_size</code>	The number of groups that has files that belongs to the item.	Yes
<code>__sequence</code>	The format of a sequence that belongs to the item.	Yes
<code>__sequence_size</code>	The number of sequences that the item has.	Yes
<code>__metadata_last_modified</code>	The time of the last metadata update.	Yes
<code>__external_id</code>	The external identifier assigned to the item.	Yes
<code>__deletion_lock_id</code>	The id of the effective deletion lock.	Yes
<code>__deletion_lock_expiry</code>	The expiration time of the effective deletion lock.	Yes

For collections, the following transient metadata fields exist:

Name	Description	In-dexed
<code>__user</code>	The name of the user that imported the collection. (New in 4.14.)	Yes
<code>__child_collection</code>	The id of the collection that the collection contains.	Yes
<code>__child_collection_size</code>	The number of collections that the collection contains.	Yes
<code>__parent_collection</code>	The id of the collection that the collection belongs to.	Yes
<code>__parent_collection_size</code>	The number of collections that the collection belongs to.	Yes
<code>__ancestor_collection</code>	The id of an ancestor collection of a collection.	Yes
<code>__items_size</code>	The number of direct item children. (New in 4.6.)	Yes
<code>__ancestor_collection_size</code>	The number of ancestor collections of a collection.	Yes
<code>__metadata_last_modified</code>	The time of the last metadata update.	Yes
<code>__folder_mapped</code>	True if the collection maps to a folder, else false.	Yes
<code>__child_folder_collection</code>	The id of the folder collection that the collection contains.	Yes
<code>__parent_folder_collection</code>	The id of the folder collection that the collection belongs to.	Yes
<code>__external_id</code>	The external identifier assigned to the collection.	Yes
<code>__deletion_lock_id</code>	The id of the effective deletion lock.	Yes
<code>__deletion_lock_expiry</code>	The expiration time of the effective deletion lock.	Yes

Changed in version 4.15: The deletion lock transient metadata fields were added.

Changed in version 4.11: The external identifier transient metadata field was added.

New in version 4.14: The transient field `__user` has been introduced and replaces the system field `user`. A transient field `user` ensures backwards compatibility for existing applications but will be removed in a future version.

File metadata

Metadata can be parsed from some file formats. The metadata is inserted as non-temporal metadata contained in different groups, depending on the source of the metadata. The exact structure of the groups may differ based on the encountered metadata. The parsing of file metadata must be enabled in the *configuration*.

Name	Type	Description
xmp_root	Group	The root group containing all XMP metadata.
document_root	Group	The root group for document metadata present in Office and PDF files.
document_text	Field	The text present in the document
document_metadata	Group	The group containing the metadata of the document.

2.4 Searching for items (and collections)

2.4.1 Searching in Vidispine

Searching in Vidispine is implemented using either Solr or Elasticsearch (New in 4.10.) as the backend. This allows functionality such as boolean operators, faceted searching, term highlighting, search term suggestions, etc. It is possible to search for just items, just collections, or both at the same time, depending on which RESTful resource the search request is made to (*/item*, */collection* or */search*). The search criteria are expressed using an XML or JSON document of type *ItemSearchDocument*, described in more detail below.

Tip: For best performance

- Don't retrieve the hit count if you don't use it.
 - Use *filters* if possible as these can be cached separately and do not affect the score nor highlighting.
 - Disable *full text indexing* for fields that contain JSON or other content that should not be included in the full text index.
 - Only fetch the specific metadata fields and groups that you need instead of fetching all metadata. See *Get information*.
 - If you only want to search in the generic metadata, or if your application does not use timed metadata, then make sure to specify `<intervals>generic</intervals>`.
-

2.4.2 Search history

Vidispine stores the search document, as well as the timestamp and user for all searches that are made. If the same user makes an identical search twice, only one entry will be shown in the search history, with the timestamp of the last search.

2.4.3 Queries

Boolean operators

Boolean operators AND, OR and NOT can be used in search queries. A boolean operator can contain zero or more field-value pairs and zero or more boolean operators.

Implicit operators

If no operators are specified operators are implicitly added using the following rules:

Multiple values within a field

If a field contains multiple values, an implicit OR operator is added.

```
<ItemSearchDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <field>
    <name>originalFormat</name>
    <value>dv</value>
    <value>mp4</value>
  </field>
</ItemSearchDocument>
```

is logically equivalent to

```
<ItemSearchDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <operator operation="OR">
    <field>
      <name>originalFormat</name>
      <value>dv</value>
    </field>
    <field>
      <name>originalFormat</name>
      <value>mp4</value>
    </field>
  </operator>
</ItemSearchDocument>
```

Multiple field elements at top level

If a document has multiple field elements at top level, an implicit AND operator is added.

```
<ItemSearchDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <field>
    <name>originalFormat</name>
    <value>dv</value>
  </field>
  <field>
    <name>originalFormat</name>
    <value>mp4</value>
  </field>
</ItemSearchDocument>
```

is logically equivalent to

```
<ItemSearchDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <operator operation="AND">
    <field>
      <name>originalFormat</name>
      <value>dv</value>
    </field>
    <field>
      <name>originalFormat</name>
      <value>mp4</value>
    </field>
  </operator>
</ItemSearchDocument>
```

```

    <name>originalFormat</name>
    <value>mp4</value>
  </field>
</operator>
</ItemSearchDocument>

```

Text elements

In version 1 of the query syntax text elements are added with an implicit AND operator, and in version 2 it's an implicit OR.

Example

Searching for items that were not created within the last week and have either the formats mp4 or dv.

```

<ItemSearchDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <operator operation="AND">
    <operator operation="NOT">
      <field>
        <name>created</name>
        <range>
          <value>NOW-7DAYS</value>
          <value>NOW</value>
        </range>
      </field>
    </operator>
    <field>
      <name>originalFormat</name>
      <value>mp4</value>
      <value>dv</value>
    </field>
  </operator>
</ItemSearchDocument>

```

Phrase search

Vidispine supports *wildcard* search and *phrase* search for field type string and string-exact. A phrase is a group of words surrounded by double quotes, such as "foo bar".

Wildcard search

The wildcard special character in Vidispine is *, meaning matching zero or more sequential characters.

he*	words start with "he", like he, hey, hello
h*e	will match he, hope, house, etc.
*he	words end with "he", like he, the.

Note: wildcard in a phrase search is not supported (e.g. "foo b*" won't be able to find foo bar).

Range search

Use a range query to find fields with values within a certain range. The minimum and maximum values for the data type of the field can be specified using the attributes `minimum` and `maximum`.

To search for any values:

```
<ItemSearchDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <field>
    <name>app_score</name>
    <range>
      <value minimum="true"/>
      <value maximum="true"/>
    </range>
  </field>
</ItemSearchDocument>
```

To search for values in range [10..20], that is, inclusive of 10 and 20:

```
<ItemSearchDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <field>
    <name>app_score</name>
    <range>
      <value>10</value>
      <value>20</value>
    </range>
  </field>
</ItemSearchDocument>
```

The `exclusiveMinimum` and/or the `exclusiveMaximum` attributes can be used to perform exclusive range queries.

For example, to search for values between 10 and 20 (exclusive):

```
<ItemSearchDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <field>
    <name>app_score</name>
    <range exclusiveMinimum="true" exclusiveMaximum="true">
      <value>10</value>
      <value>20</value>
    </range>
  </field>
</ItemSearchDocument>
```

New in version 4.8: The `exclusiveMinimum` and `exclusiveMaximum` attributes were added.

Search intervals

By setting `<intervals>` in the `ItemSearchDocument`, search criteria can be applied to metadata within different ranges accordingly:

generic	only search generic metadata, a.k.a metadata inside (-INF, +INF)
timed	search metadata within ranges other than (-INF, +INF)
all	search metadata both <i>timed</i> and <i>generic</i> metadata (default option)

For example, search items with only **timed** metadata containing `originalFormat=dv`:

```
<ItemSearchDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <field>
    <name>originalFormat</name>
    <value>dv</value>
  </field>
  <intervals>timed</intervals>
</ItemSearchDocument>
```

Group search

New in version 4.3.

Searching items by its metadata groups are supported.

Example

To find items with any groups:

```
<ItemSearchDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <group>
  </group>
</ItemSearchDocument>
```

To find items without any groups:

```
<ItemSearchDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <operator operation="NOT">
    <group>
    </group>
  </operator>
</ItemSearchDocument>
```

To find items without a “movie_info” group:

```
<ItemSearchDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <operator operation="NOT">
    <group>
      <name>movie_info</name>
    </group>
  </operator>
</ItemSearchDocument>
```

To find items with a “movie_info” group containing two fields with specific values. Note that the AND is implicit.

```
<ItemSearchDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <group>
    <name>movie_info</name>
    <field>
      <name>movie_name</name>
      <value>StarWars</value>
    </field>
    <field>
      <name>episode_no</name>
      <value>1</value>
    </field>
  </group>
```

```

</group>
</ItemSearchDocument>

```

To find items with a “movie_info” group with an episode number of either 1 or 2.

```

<ItemSearchDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <group>
    <name>movie_info</name>
    <operator operation="OR">
      <field>
        <name>episode_no</name>
        <value>1</value>
      </field>
      <field>
        <name>episode_no</name>
        <value>2</value>
      </field>
    </operator>
  </group>
</ItemSearchDocument>

```

To find items with either a “movie_info” or a “video_info” group.

```

<ItemSearchDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <operator operation="OR">
    <group>
      <name>movie_info</name>
    </group>
    <group>
      <name>video_info</name>
    </group>
  </operator>
</ItemSearchDocument>

```

Query syntax versions

In 4.2.0 a new query syntax was introduced. In order to use the new syntax, set the `version` attribute in the search document to 2. If no version is set, the old query syntax will be used (version 1).

Version 1

1. The search value of a `string-exact` field is always interpreted literally.
2. The search value of a `string` field is interpreted literally only if it's surrounded by quotation marks. In other cases, implicit ORs are used in between the words.
3. Multiple values means OR. Multiple `text` elements means AND.
4. The `noescape` attribute is needed, if user want to search quotation marks or wildcard characters literally in a `string` field;

```

<?xml version="1.0"?>
<ItemSearchDocument>
  <field>
    <name></name>
    <value noescape="true">\ "foo bar\" </value>
  </field>
</ItemSearchDocument>

```

```
<value noescape="true">foo\*</value>
</field>
</ItemSearchDocument>
```

Version 2

1. One or more SPACE characters means logical AND. So `<value>foo bar</value>` and `<value>foo bar</value>` means searching a field value containing both `foo` and `bar`.
2. Multiple values means OR. To search for `foo` or `bar`, in the title or text:

```
<ItemSearchDocument version="2" xmlns="http://xml.vidispine.com/schema/vidispine">
  <field>
    <name>title</name>
    <value>foo</value>
    <value>bar</value>
  </field>
</ItemSearchDocument>
```

```
<ItemSearchDocument version="2" xmlns="http://xml.vidispine.com/schema/vidispine">
  <text>foo</text>
  <text>bar</text>
</ItemSearchDocument>
```

3. Special characters in Vidispine search are `"`, `SPACE`, `\`, and `*`. Any character followed by `\` is considered as literal. so `*` means literal `*`, and `\f` is the same as the single character `f`.
4. The characters inside quotes are consider as literal, except `"`. A `\"` is still needed to represent a literal quote inside quotes.
5. The `noescape` attribute of a metadata field value has been removed since Vidispine 4.2.

Operators and special characters

To highlight the differences between the two versions:

Query	Version 1	Version 2
<code><text>foo bar</text></code>	foo OR bar	foo AND bar
<code><field>foo bar</field></code>	foo OR bar	foo AND bar
<code><text>foo</text></code> <code><text>bar</text></code>	foo AND bar	foo OR bar
<code><field>foo</field></code> <code><field>bar</field></code>	foo OR bar ¹	foo OR bar
<code>"foo bar"</code>	<code>"foo bar"</code>	<code>"foo bar"</code>
<code>\`foo\`</code>	<code>\`foo\`</code> ²	<code>\`foo\`</code>
<code>foo*</code>	<code>foo*</code>	<code>foo*</code>
<code>foo*</code>	<code>foo*</code> ²	<code>foo*</code>
<code>foo_bar</code> ³	<code>foo\ OR bar</code> ²	<code>foo_bar</code>

¹ Use `<operator operation="AND">` to search for `foo AND bar` for example.

² Use `noescape=true` to search for literal `"`, `*` and `SPACE`.

³ Here `_` means `SPACE`.

String types

An example of the differences when searching string fields, assuming a field value of `foo bar`.

	foo bar			
	Version 1		Version 2	
	string	string-exact	string	string-exact
foo	Y	N	Y	N
FOO	Y	N	Y	N
foo bar	Y	Y	Y	N ⁵
"foo bar"	Y	N ⁴	Y	Y ⁶
foo\ bar	Y	N	Y	Y ⁵
"foo xy"	N	N	N	N
foo xy	Y	N	N ⁷	N

2.4.4 Filters

New in version 4.2.3.

A search filter is a query does not affect scoring nor highlighting, similar to a filter query in Solr. A filter can:

- Contain both fields and operators.
- Be named and *excluded from facets*.

Example

```
<ItemSearchDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <filter operation="OR" name="productType">
    <field>
      <name>type</name>
      <value>pc</value>
    </field>
    <field>
      <name>type</name>
      <value>phone</value>
    </field>
  </filter>
</ItemSearchDocument>
```

2.4.5 Joins

New in version 4.2.2.

Joint searches on metadata of item, share and file are supported. The old search schema is extended with three new search criterion types: `<item>`, `<share>`, and `<file>`. Please refer to [xmlSchema.xsd](#) for the full schema.

Depending on the search result needed (items, shares, or files), `ItemSearchDocument`, `ShareSearchDocument` or `FileSearchDocument` should be sent to Vidispine respectively. Those three search documents use the same syntax, only the document names are different.

⁵ SPACE is a special character and needs to be escaped in order to get literally meaning.

⁴ The character " is interpreted literally.

⁶ It's a phrase search, and "string-exact" only have one token in the index, which the same as the query in this case.

⁷ It's `foo OR xy` in version 1, and `foo AND xy` in version 2.

Note:

1. A `version = 2` document is needed in order to perform the joint search.
2. The `<intervals>` constrain only works for item metadata in a `ItemSearchDocument`. It has not effect in `ShapeSearchDocument` and `FileSearchDocument`.

Examples

Joins on item search

Find items containing shapes with metadata `shapeCodec=mp4`:

```
<?xml version="1.0" encoding="UTF-8" standalone="yes"?>
<ItemSearchDocument version="2" xmlns="http://xml.vidispine.com/schema/vidispine">
  <shape>
    <field>
      <name>shapeCodec</name>
      <value>mp4</value>
    </field>
  </shape>
</ItemSearchDocument>
```

Find items that have generic metadata `title = vidispine`, and contain a shape with `shapeCodec=mp4`, and contain a file with metadata `filetitle = demo`:

```
<?xml version="1.0" encoding="UTF-8" standalone="yes"?>
<ItemSearchDocument version="2" xmlns="http://xml.vidispine.com/schema/vidispine">
  <item>
    <field>
      <name>title</name>
      <value>vidispine</value>
    </field>
  </item>
  <shape>
    <field>
      <name>shapeCodec</name>
      <value>mp4</value>
    </field>
  </shape>
  <file>
    <field>
      <name>filetitle</name>
      <value>demo</value>
    </field>
  </file>
  <intervals>generic</intervals>
</ItemSearchDocument>
```

Find items that have generic metadata `title = vidispine`, and contain a shape with `shapeCodec=mp4`, and contain a file with metadata `filetitle = demo`:

```
<?xml version="1.0" encoding="UTF-8" standalone="yes"?>
<ItemSearchDocument version="2" xmlns="http://xml.vidispine.com/schema/vidispine">
  <item>
    <field>
      <name>title</name>
```



```

    <value>vidispine</value>
  </field>
</item>
<shape>
  <field>
    <name>shapeCodec</name>
    <value>mp4</value>
  </field>
</shape>
<file>
  <field>
    <name>filetitle</name>
    <value>demo</value>
  </field>
</file>
<intervals>generic</intervals>
</ItemSearchDocument>

```

Find items that have metadata title = vidispine, and contain a shape with shapeCodec=mp4; the shape must contain a file with metadata filetitle = demo:

```

<?xml version="1.0" encoding="UTF-8" standalone="yes"?>
<ItemSearchDocument version="2" xmlns="http://xml.vidispine.com/schema/vidispine">
  <item>
    <field>
      <name>title</name>
      <value>item</value>
    </field>
  </item>
  <shape>
    <field>
      <name>shapeCodec</name>
      <value>mp4</value>
    </field>
    <file>
      <field>
        <name>filetitle</name>
        <value>demo</value>
      </field>
    </file>
  </shape>
</ItemSearchDocument>

```

Operators are also supported as part of a search criterion.

Find items that have metadata title = vidispine, or items that have metadata title = demo and contain shapes with shapeCodec=mp4:

```

<?xml version="1.0" encoding="UTF-8" standalone="yes"?>
<ItemSearchDocument version="2" xmlns="http://xml.vidispine.com/schema/vidispine">
  <operator operation="OR">
    <item>
      <field>
        <name>title</name>
        <value>vidispine</value>
      </field>
    </item>
  </operator operation="AND">

```

```

    <item>
      <field>
        <name>title</name>
        <value>demo</value>
      </field>
    </item>
    <shape>
      <field>
        <name>shapeCodec</name>
        <value>mp4</value>
      </field>
    </shape>
  </operator>
  <intervals>all</intervals>
</ItemSearchDocument>

```

Joins on search shapes

Find shapes belong to items that have metadata title = vidispine, and the shape should have a file with metadata filetype = demo:

```

<?xml version="1.0" encoding="UTF-8" standalone="yes"?>
<ShapeSearchDocument version="2" xmlns="http://xml.vidispine.com/schema/vidispine">
  <item>
    <field>
      <name>title</name>
      <value>vidispine</value>
    </field>
  </item>
  <shape>
    <field>
      <name>shapeCodec</name>
      <value>mp4</value>
    </field>
  </shape>
  <file>
    <field>
      <name>filetitle</name>
      <value>demo</value>
    </field>
  </file>
</ShapeSearchDocument>

```

Find shapes belong to items that have files with metadata filetype = demo, and metadata title = vidispine:

```

<?xml version="1.0" encoding="UTF-8" standalone="yes"?>
<ShapeSearchDocument version="2" xmlns="http://xml.vidispine.com/schema/vidispine">
  <item>
    <field>
      <name>title</name>
      <value>vidispine</value>
    </field>
  <file>
    <field>

```

```

    <name>filetitle</name>
    <value>demo</value>
  </field>
</file>
</item>
<shape>
  <field>
    <name>shapeCodec</name>
    <value>mp4</value>
  </field>
</shape>
</ShapeSearchDocument>

```

Joins on file search

Find files belong to items with metadata title=demo; it should also belongs to shapes with metadata shape_title=shape:

```

<?xml version="1.0" encoding="UTF-8" standalone="yes"?>
<FileSearchDocument version="2" xmlns="http://xml.vidispine.com/schema/vidispine">
  <item>
    <field>
      <name>title</name>
      <value>demo</value>
    </field>
  </item>
  <shape>
    <field>
      <name>shape_title</name>
      <value>shape</value>
    </field>
  </shape>
</FileSearchDocument>

```

Joins on collection search

Note: Not yet supported with Elasticsearch.

New in version 4.2.4.

Find collections that have metadata title=vidispine or collections contains an item with metadata title=demo:

```

<?xml version="1.0" encoding="UTF-8" standalone="yes"?>
<ItemSearchDocument version="2" xmlns="http://xml.vidispine.com/schema/vidispine">
  <operator operation="OR">
    <field>
      <name>title</name>
      <value>vidispine</value>
    </field>
    <item>
      <field>
        <name>title</name>

```

```
<value>demo</value>
</field>
</item>
</operator>
</ItemSearchDocument>
```

To find items with specific shapes or files, use a shape or file query as a subquery of the item query.

```
<?xml version="1.0" encoding="UTF-8" standalone="yes"?>
<ItemSearchDocument version="2" xmlns="http://xml.vidispine.com/schema/vidispine">
  <field>
    <name>title</name>
    <value>vidispine</value>
  </field>
  <item>
    <shape>
      <field>
        <name>shape_title</name>
        <value>demo</value>
      </field>
    </shape>
  </item>
</ItemSearchDocument>
```

Important: Using an item subquery is only possible when the search interval is either `generic` or `all`. When using `timed` then no item subquery is allowed.

Find empty collections.

New in version 4.2.5.

```
<?xml version="1.0" encoding="UTF-8" standalone="yes"?>
<ItemSearchDocument version="2" xmlns="http://xml.vidispine.com/schema/vidispine">
  <operator operation="NOT">
    <item>
    </item>
  </operator>
</ItemSearchDocument>
```

2.4.6 Highlighting

Highlighting can be enabled to determine which part of the metadata that matched the query.

Changed in version 4.2.4: Use the `field` element to enable highlighting for a certain set of fields only.

```
<highlight>
  <field>title</field>
</highlight>
```

Example

```
PUT /item
Content-Type: application/xml
```

```

<ItemSearchDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <field>
    <name>title</name> <!-- Search for the words "interview" or "credits" within
↳the title -->
    <value>interview</value>
    <value>credits</value>
  </field>
  <highlight> <!-- Having a highlight element will enable highlighting even if it is
↳empty -->
    <matchingOnly>true</matchingOnly> <!-- Only highlight fields that actually
↳matched the query. -->
    <prefix></prefix> <!-- A string that appears before the highlighted text -->
    <suffix></suffix> <!-- A string that appears after the highlighted text -->
  </highlight>
</ItemSearchDocument>

```

```

<ItemListDocument>
  <item id="VX-123" start="-INF" end="+INF"> <!-- Matches in the document were on
↳the interval [-INF, +INF] -->
    <timespan start="-INF" end="100"> <!-- One match on [-INF, 100] -->
      <field>title</field>
      <value>[Interview] with the CEO.</value> <!-- The word "interview" is
↳highlighted with the suffix and prefix -->
    </timespan>
    <timespan start="400" end="+INF"> <!-- Another match on [400, +INF] -->
      <field>title</field>
      <value>Closing [credits]</value> <!-- The word "credits" is highlighted with
↳the suffix and prefix -->
    </timespan>
  </item>
</ItemListDocument>

```

2.4.7 Sorting

Results can be sorted using *sortable fields*. Multiple fields can be used for sorting and are used in the order they are given.

It is also possible to sort by relevance by specifying `_relevance` as the field name.

Changed in version 4.2.4: Specify `_type` to sort by type. The type of an item is `item` and `collection` for collections, so if you want collections first in the results, then sort on `_type` in ascending order.

Changed in version 3.2: Any field can be used for sorting, it does not need to be flagged as sortable. If a field contains multiple values: ascending order will compare with its minimum value and descending order will compare with its maximum value.

Example

Listing all items sorted according to length in descending order and format in ascending order.

```

PUT /item
Content-Type: application/xml

<ItemSearchDocument xmlns="http://xml.vidispine.com/schema/vidispine">

```

```

<sort>
  <field>durationSeconds</field>
  <order>descending</order>
</sort>
<sort>
  <field>originalFormat</field>
  <order>ascending</order>
</sort>
</ItemSearchDocument>

```

2.4.8 Faceting

Faceting is used to show number of matching items for one or more sub-constraints for a given result-set. You might for example be interested in displaying how many of the items returned from a search are of type `video`, how many are of type `audio`, and how many are of type `data`.

There are two types of operations that can be performed, counting and specifying ranges. Counting means that it will count the occurrences of each unique value. When specifying ranges, the number of occurrences within a certain range is counted. Both the start and the end of a range are inclusive and “*” can be used to represent minimum or maximum. Note that faceted search only can be used over non-timed metadata.

Example

item	category	price
VX-251	tv	100
VX-252	radio	200
VX-253	tv	300
VX-254	phone	400
VX-255	radio	500
VX-256	radio	100
VX-257	phone	200
VX-258	phone	300
VX-259	phone	200
VX-260	phone	300

Consider the items in the table above, together with their metadata on the fields `my_category` and `my_price`. A faceted search that should count the occurrences of each category and the occurrences of prices within the ranges `[*, 199]`, `[200, 399]` and `[400, *]` might look like this:

```

PUT /item
Content-Type: application/xml

<ItemSearchDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <facet count="false">
    <field>my_price</field>
    <range start="*" end="199"/>
    <range start="200" end="399"/>
    <range start="400" end="*" />
  </facet>

  <facet count="true">
    <field>my_category</field>
  </facet>
</ItemSearchDocument>

```

```

<ItemListDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <hits>13</hits>
  <item id="VX-248" start="-INF" end="+INF" />
  <item id="VX-249" start="-INF" end="+INF" />
  <item id="VX-250" start="-INF" end="+INF" />
  <item id="VX-251" start="-INF" end="+INF" />
  <item id="VX-252" start="-INF" end="+INF" />
  <item id="VX-253" start="-INF" end="+INF" />
  <item id="VX-254" start="-INF" end="+INF" />
  <item id="VX-255" start="-INF" end="+INF" />
  <item id="VX-256" start="-INF" end="+INF" />
  <item id="VX-257" start="-INF" end="+INF" />
  <item id="VX-258" start="-INF" end="+INF" />
  <item id="VX-259" start="-INF" end="+INF" />
  <item id="VX-260" start="-INF" end="+INF" />
  <facet>
    <field>my_category</field>
    <count fieldValue="phone">5</count>
    <count fieldValue="radio">3</count>
    <count fieldValue="tv">2</count>
  </facet>
  <facet>
    <field>my_price</field>
    <range start="*" end="199">2</range>
    <range start="200" end="399">6</range>
    <range start="400" end="*">2</range>
  </facet>
</ItemListDocument>

```

Now assume we want to see how the prices are distributed for phones, we could filter the search in the following manner:

```

PUT /item
Content-Type: application/xml

<ItemSearchDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <filter>
    <field>
      <name>my_category</name>
      <value>phone</value>
    </field>
  </filter>
  <facet count="false">
    <field>my_price</field>
    <range start="*" end="199" />
    <range start="200" end="399" />
    <range start="400" end="*" />
  </facet>
</ItemSearchDocument>

```

```

<ItemListDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <hits>5</hits>
  <item id="VX-254" start="-INF" end="+INF" />
  <item id="VX-257" start="-INF" end="+INF" />
  <item id="VX-258" start="-INF" end="+INF" />
  <item id="VX-259" start="-INF" end="+INF" />
  <item id="VX-260" start="-INF" end="+INF" />

```

```

<facet>
  <field>my_price</field>
  <range start="*" end="199">0</range>
  <range start="200" end="399">4</range>
  <range start="400" end="*">1</range>
</facet>
</ItemListDocument>

```

The opposite is also possible, to see the distribution of the categories over a range of prices.

```

PUT /item
Content-Type: application/xml

<ItemSearchDocument xmlns="http://xml.vidispine.com/schema/vidispine">

  <filter>
    <field>
      <name>my_price</name>
      <range start="200" end="399"/>
    </field>
  </filter>

  <facet count="true">
    <field>my_category</field>
  </facet>
</ItemSearchDocument>

```

```

<ItemListDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <hits>6</hits>
  <item id="VX-252" start="-INF" end="+INF" />
  <item id="VX-253" start="-INF" end="+INF" />
  <item id="VX-257" start="-INF" end="+INF" />
  <item id="VX-258" start="-INF" end="+INF" />
  <item id="VX-259" start="-INF" end="+INF" />
  <item id="VX-260" start="-INF" end="+INF" />
  <facet>
    <field>my_category</field>
    <count fieldValue="phone">4</count>
    <count fieldValue="radio">1</count>
    <count fieldValue="tv">1</count>
  </facet>
</ItemListDocument>

```

For counted facets, it is possible to supply a `minCount`, thereby excluding any fields that has a count lower than the specified minimum count.

```

PUT /item
Content-Type: application/xml

<ItemSearchDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <facet count="true" minCount="3">
    <field>my_category</field>
  </facet>
</ItemSearchDocument>

```

```

<ItemListDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <hits>13</hits>

```



```

<item id="VX-248" start="-INF" end="+INF" />
<item id="VX-249" start="-INF" end="+INF" />
<item id="VX-250" start="-INF" end="+INF" />
<item id="VX-251" start="-INF" end="+INF" />
<item id="VX-252" start="-INF" end="+INF" />
<item id="VX-253" start="-INF" end="+INF" />
<item id="VX-254" start="-INF" end="+INF" />
<item id="VX-255" start="-INF" end="+INF" />
<item id="VX-256" start="-INF" end="+INF" />
<item id="VX-257" start="-INF" end="+INF" />
<item id="VX-258" start="-INF" end="+INF" />
<item id="VX-259" start="-INF" end="+INF" />
<item id="VX-260" start="-INF" end="+INF" />
<facet>
  <field>my_category</field>
  <count fieldValue="phone">5</count>
  <count fieldValue="radio">3</count>
</facet>
</ItemListDocument>

```

By default, at most 100 facet counts will be returned. By using the `maxResults` attribute, this behaviour can be changed.

```

PUT /item
Content-Type: application/xml

<ItemSearchDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <facet count="true" maxResults="1">
    <field>my_category</field>
  </facet>
</ItemSearchDocument>

```

```

<ItemListDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <hits>13</hits>
  <item id="VX-248" start="-INF" end="+INF" />
  <item id="VX-249" start="-INF" end="+INF" />
  <item id="VX-250" start="-INF" end="+INF" />
  <item id="VX-251" start="-INF" end="+INF" />
  <item id="VX-252" start="-INF" end="+INF" />
  <item id="VX-253" start="-INF" end="+INF" />
  <item id="VX-254" start="-INF" end="+INF" />
  <item id="VX-255" start="-INF" end="+INF" />
  <item id="VX-256" start="-INF" end="+INF" />
  <item id="VX-257" start="-INF" end="+INF" />
  <item id="VX-258" start="-INF" end="+INF" />
  <item id="VX-259" start="-INF" end="+INF" />
  <item id="VX-260" start="-INF" end="+INF" />
  <facet>
    <field>my_category</field>
    <count fieldValue="phone">5</count>
  </facet>
</ItemListDocument>

```

New in version 4.6: The `minCount` and `maxResults` parameters were added.

Facet exclusion

New in version 4.2.3.

One or more search filters can be excluded from a facet using `<exclude>` tags. Facets can be named to make it possible to distinguish between different facets, for example when using multiple facets on the same field but with different excludes.

The facet exclusion is similar to how one can tag and exclude filters in Solr (https://wiki.apache.org/solr/SimpleFacetParameters#Tagging_and_excluding_Filters).

Example

```
<ItemSearchDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <filter name = "tvFilter">
    <field>
      <name>my_category</name>
      <value>tv</value>
    </field>
  </filter>
  <filter name = "priceFilter">
    <field>
      <name>my_price</name>
      <range start="200" end="399"/>
    </field>
  </filter>

  <facet count="true">
    <field>my_category</field>
  </facet>

  <facet name="excludeTv" count="true">
    <field>my_category</field>
    <exclude>tvFilter</exclude>
    <!-- <exclude>tvFilter2</exclude> Multiple exclusions -->
  </facet>
</ItemSearchDocument>
```

```
<ItemListDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <item id="VX-253" start="-INF" end="+INF"/>
  <facet>
    <field>my_category</field>
    <count fieldValue="tv">1</count>
    <count fieldValue="phone">0</count>
    <count fieldValue="radio">0</count>
  </facet>
  <facet name="excludeTv">
    <field>my_category</field>
    <count fieldValue="tv">4</count>
    <count fieldValue="phone">1</count>
    <count fieldValue="radio">1</count>
  </facet>
</ItemListDocument>
```

2.4.9 Spell checking

Search terms can be checked against a dictionary. This enables “Did you mean…” types of searches. The dictionary used is built from the search index and updated periodically.

Example

Consider a user is intending to searching for the “original duration” but misspells both words:

```
PUT /item
Content-Type: application/xml

<ItemSearchDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <text>original durraton</text>

  <suggestion> <!-- Enables spell checking -->
    <maximumSuggestions>2</maximumSuggestions> <!-- Optional: Specifies the
↳maximum number of suggestions -->
    <accuracy>0.7</accuracy> <!-- Optional: A value between 0.0 (least accurate)
↳and 1.0 (most accurate) of how accurate the spell check should be -->
  </suggestion>
</ItemSearchDocument>
```

```
<ItemListDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <hits>0</hits>
  <suggestion>
    <term>original</term> <!-- A misspelled search term -->

    <!-- A list of suggestions, with the most likely suggestion being first -->
    <suggestion>original</suggestion>
    <suggestion>ordinal</suggestion>
  </suggestion>
  <suggestion>
    <term>durraton</term>
    <suggestion>duration</suggestion>
  </suggestion>
</ItemListDocument>
```

2.4.10 Autocompletion

Text can be autocompleted against the search index.

Example

Assuming the user intends to type “original duration”. The user first starts typing “original”:

```
PUT /search/autocomplete
Content-Type: application/xml

<AutocompleteRequestDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <text>orig</text>
  <maximumSuggestions>3</maximumSuggestions>
</AutocompleteRequestDocument>
```

```
<AutocompleteResponseDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <suggestion>original</suggestion>
  <suggestion>origin</suggestion>
  <suggestion>originated</suggestion>
</AutocompleteResponseDocument>
```

Then the user continues to start typing “duration”:

```
<AutocompleteRequestDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <text>original dur</text>
  <maximumSuggestions>3</maximumSuggestions>
</AutocompleteRequestDocument>
```

```
<AutocompleteResponseDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <suggestion>original duration</suggestion>
</AutocompleteResponseDocument>
```

Autocomplete on metadata fields

New in version 4.1.

You can also autocomplete on specific metadata fields. In order to make the autocompletion case insensitive, the metadata field should be set as `<index>extend</index>`.

Example:

A metadata field `foo_bar` with config:

```
<MetadataFieldDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <type>string-exact</type>
  <index>extend</index>
</MetadataFieldDocument>
```

and this field contains multiple values: “Animal”, “Sky”, “Animal and Sky”, “animal and sky”

An auto-complete request with user input “animal a”:

```
PUT /search/autocomplete
Content-Type: application/xml

<AutocompleteRequestDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <field>foo_bar</field>
  <text>animal a</text>
</AutocompleteRequestDocument>
```

will give result:

```
<AutocompleteResponseDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <suggestion>Animal and Sky</suggestion>
  <suggestion>animal and sky</suggestion>
</AutocompleteResponseDocument>
```

Autocomplete within a search

New in version 4.6.

It is also possible to get autocomplete suggestions while searching. The suggestions will then only match against the search result set.

Example

Let's say you have a large number of assets, all of which are tagged with one or more tags. A user might want to filter down the result set, so in this example we search for any assets with category "stock_photo", and at the same time we request autocomplete suggestions for the tag field matching the string "hi".

```
PUT /item
Content-Type: application/xml

<ItemSearchDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <field>
    <name>my_category</name>
    <value>stock_photo</value>
  </field>
  <autocomplete>
    <field>my_tag</field>
    <text>hi</text>
  </autocomplete>
</ItemSearchDocument>
```

The result might then look like:

```
<ItemListDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <hits>5</hits>
  <item id="VX-6934" start="-INF" end="+INF">
    <timespan start="-INF" end="+INF"/>
  </item>
  <item id="VX-3464" start="-INF" end="+INF">
    <timespan start="-INF" end="+INF"/>
  </item>
  <item id="VX-2658" start="-INF" end="+INF">
    <timespan start="-INF" end="+INF"/>
  </item>
  <item id="VX-7234" start="-INF" end="+INF">
    <timespan start="-INF" end="+INF"/>
  </item>
  <item id="VX-3723" start="-INF" end="+INF">
    <timespan start="-INF" end="+INF"/>
  </item>
  <autocomplete>
    <field>my_tag</field>
    <suggestion>highres</suggestion>
    <suggestion>hills</suggestion>
    <suggestion>history</suggestion>
  </autocomplete>
</ItemListDocument>
```

2.4.11 Search Boost

New in version 4.16.

It is also possible to boost some field values during a search.

To enable search boosting, either add the boost factor in the search document or as the default boost factor in the metadata field definition. Also, `_score` has to be used as the sorting field.

Example

To find items that have the word `phoenix` in either `title_field` or `description_field`. But the matches in `title_field` are more important.

```
PUT /item
Content-Type: application/xml

<?xml version="1.0" encoding="UTF-8"?>
<ItemSearchDocument xmlns="http://xml.vidispine.com/schema/vidispine" version="2">
  <operator operation="OR">
    <field>
      <name>title_field</name>
      <value boost="10">phoenix</value>
    </field>
    <field>
      <name>description_field</name>
      <value>phoenix</value>
    </field>
  </operator>
  <sort>
    <name>_score</name>
    <value>descending</value>
  </sort>
</ItemSearchDocument>
```

Alternatively, the boost factor can also be set the the metadata field definition.

```
<MetadataFieldDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <name>title_field</name>
  <type>string</type>
  <boost>10.0</boost>
</MetadataFieldDocument>
```

2.5 Caching

2.5.1 Search result caching

New in version 4.7.

Saved searches


When searching using the `PUT` (<http://www.w3.org/Protocols/rfc2616/rfc2616-sec9.html#sec9.6>) method, the query parameter `save=true` can be used save the query and request parameters for later retrieval. This can be used to

improve performance for queries that are performed frequently, as the saved search endpoint supports conditional GET using ETag.

The response will then have status `303 See Other` (<http://www.w3.org/Protocols/rfc2616/rfc2616-sec10.html#sec10.3.4>) and `Location` header, from where the search result can be fetched. The URI from the `Location` header supports the `ETag` and `If-None-Match` headers for `GET` (<http://www.w3.org/Protocols/rfc2616/rfc2616-sec9.html#sec9.3>) requests. `GET` requests to the location URI without the `If-None-Match` header will return the search result with its `ETag`, or `404` if the saved search has been invalidated and removed.

For item or collection search, the saved search will be invalidated and removed if any entity of that type is re-indexed.

Note: The ETags returned from saved search requests are weak ETags; meaning that the “Content-Type” headers and query parameters won’t affect the value of the ETag.

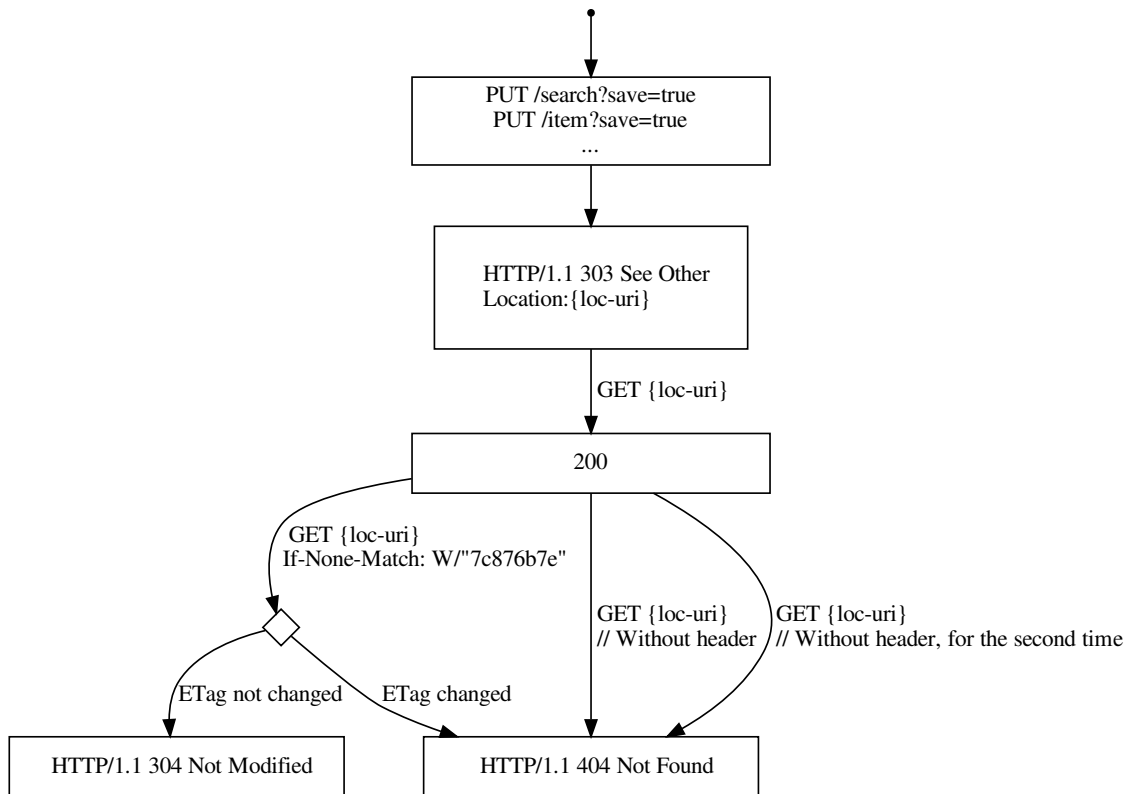

Example

An item search request is first made using `save=true`:

```

PUT API/item?save=true
Content-Type: application/xml

<?xml version="1.0" encoding="utf-8"?>
  
```

```
<ItemSearchDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <text>squirrel</text>
</ItemSearchDocument>
```

```
HTTP/1.1 303 See Other
Location: http://localhost:8080/API/item/saved/f8297c9d02083d66731b4438415fd26b?
↪type=ITEM
```

Then, to fetch the query results:

```
GET http://localhost:8080/API/item/saved/f8297c9d02083d66731b4438415fd26b?type=ITEM
```

```
HTTP/1.1 200 OK
Content-Type: application/xml
ETag: W/"50521d364314765d9f672279375939b8"

<?xml version="1.0" encoding="UTF-8" standalone="yes"?>
<ItemListDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <hits>1</hits>
  <item id="VX-26424" start="-INF" end="+INF">
    <timespan start="-INF" end="+INF"/>
  </item>
</ItemListDocument>
```

After that, the ETag can be used to perform a conditional GET:

```
GET http://localhost:8080/API/item/saved/f8297c9d02083d66731b4438415fd26b?type=ITEM
If-None-Match: W/"50521d364314765d9f672279375939b8"
```

```
HTTP/1.1 304 Not Modified
```

2.6 Metadata projections

Vidispine supports two kinds of conversion tools for automating integration with other systems.

Projection A metadata projection is a bidirectional XSLT transformation, meant to simplify integration of the Vidispine system with several third party systems.

Auto-projection The auto-projection is used to interact on metadata changes. For example, a change to one field may automatically trigger changes to other fields.

2.6.1 Projections

A projection consists of an incoming and an outgoing XSLT transformation.

- The incoming projection transforms information in some format to a format supported by Vidispine.
- The outgoing projection transforms information from Vidispine to a some other format.

When you use projections to transform item metadata then the outgoing projection will transform a [MetadataListDocument](#) and the incoming projection must produce a [MetadataDocument](#).

Projection id

Projections are identified by a projection id of the regular expression form: `[_A-Za-z][_A-Za-z0-9]*`, maximum 32 characters. The projection is is case sensitive.

Example

This is an example of valid XSL:

```
<?xml version="1.0" encoding="UTF-8"?>
<xsl:stylesheet version="1.0" xmlns:xsl="http://www.w3.org/1999/XSL/Transform" xmlns:
↪vs="http://xml.vidispine.com/schema/vidispine">

<xsl:template match="/">
  <metadata>
    <item><xsl:value-of select="vs:MetadataListDocument/vs:item/@id"/></item>
    <xsl:for-each select="vs:MetadataListDocument/vs:item/vs:metadata/vs:timespan/vs:
↪field">
      <metadataField>
        <name><xsl:value-of select="vs:name"/></name>
        <xsl:for-each select="vs:value">
          <value><xsl:value-of select="."/></value>
        </xsl:for-each>
      </metadataField>
    </xsl:for-each>
  </metadata>
</xsl:template>
</xsl:stylesheet>
```

2.6.2 XSLT 2.0

New in version 4.2.

XSL Transformations version 2.0 (<http://www.w3.org/TR/xslt20/>) are supported. Remember to specify the correct version in the stylesheet.

2.6.3 Job Information

New in version 4.2.

It is possible to access job information in the XSLT. This is done by adding the element `<vs:vsXSLTVersion>2</vs:vsXSLTVersion>` (`xmlns:vs="http://xml.vidispine.com/schema/vidispine"`) at the global level of the XSLT. When the `xsltVersion` option is set, the actual input to the transformation is no longer a `MetadataListDocument`, but an `ExportInformationDocument`. The new input contains two element:

metadataList The same as the old input to the transformation.

job The current job, as outputted by `/API/job/{jobid}?metadata=true`.

Example

The following example uses both XSLT v2.0 and the job information:

```
<?xml version="1.0" encoding="UTF-8"?>
<xsl:stylesheet version="2.0" xmlns:xsl="http://www.w3.org/1999/XSL/Transform" xmlns:
↪vs="http://xml.vidispine.com/schema/vidispine">
  <vs:vsXSLTVersion>2</vs:vsXSLTVersion>
  <xsl:template match="/">
    <root>
      <job>
        <xsl:value-of select="vs:ExportInformationDocument/vs:job/vs:jobId/
↪text()" />
      </job>
      <custom>
        <xsl:for-each select="vs:ExportInformationDocument/vs:job/vs:data[vs:
↪key='custom']/vs:value/tokenize(., ', ')">
          <data>
            <xsl:value-of select="."/>
          </data>
        </xsl:for-each>
      </custom>
    </root>
  </xsl:template>
</xsl:stylesheet>
```

2.6.4 Auto-projection rules

The auto projection is used to interact on metadata changes. For example, a change to one field may automatically trigger changes to other fields.

An `AutoProjectionRuleDocument` contains of four parts: `<step>`, `<description>`, `<inputFilters>` and `<triggers>`.

MetadataWrapperDocument

During the projection, a temporary structure called “`MetadataWrapperDocument`” is created for manipulation.

A `MetadataWrapperDocument` contains some of the fields below, depending on the values of `inputFilters` in `AutoProjectionRuleDocument` :

metadata	The new incoming item metadata
oldMetadata	The old metadata of the item
shapeMetadata	The new incoming shape metadata
shape	The shape list of the item
bulkyMetadata	The new incoming bulky metadata of the item or shape
oldBulkyMetadata	The old bulky metadata of the item

Projection steps

Multiple projection steps can be defined in different `<step>`, with their execution order, description, and script/XSLT respectively. Please note that `<script>` and `<xslt>` are used to hold JavaScript and XSLT respectively and each step can only contain one of them.

Example:

```
<step>
  <order>1</order>
```

```

<description>step1 description</description>
<script>...</script>
</step>
<step>
  <order>2</order>
  <description>step2 description</description>
  <xslt>...</xslt>
</step>

```

Input filters

Input filter defines which information should go into the `MetadataWrapperDocument` during the projection. There are two kinds of filters: `inputFilter` and `bulkyMetadataKeysRegex`

Legal values of `inputFilter` are

<code>oldMetadata</code>	Add old metadata of the item into the <code>MetadataWrapperDocument</code>
<code>shapeDocument</code>	Add old shape metadata of the item into the <code>MetadataWrapperDocument</code>

All bulky metadata of the item whose key matches the pattern defined in `bulkyMetadataKeysRegex` will go into `MetadataWrapperDocument`. Multiple filters are allowed.

Example:

```

<inputFilters>
  <inputFilter>oldMetadata</inputFilter>
  <inputFilter>shapeDocument</inputFilter>
  <bulkyMetadataKeysRegex>.*</bulkyMetadataKeysRegex>
</inputFilters>

```

Rule triggers

Rule triggers defines what kinds of metadata update triggers this rule. They are:

<code>itemMetadata</code>	Rule triggered if there is an item metadata update
<code>shapeMetadata</code>	Rule triggered if there is a shape metadata update
<code>bulkyMetadata</code>	Rule triggered if there is a bulky metadata update

Multiple triggers are allowed.

```

<triggers>
  <trigger>itemMetadata</trigger>
  <trigger>shapeMetadata</trigger>
</triggers>

```

2.6.5 Auto-projection using JavaScript

A JavaScript projection is created by including the JavaScript in the `script` element of `AutoProjectionRuleDocument`. Vidispine is using `Rhino` (<https://developer.mozilla.org/en-US/docs/Rhino>) as the JavaScript engine

A number of global variables are defined for the script to use:

- `api`
- `helper`

- wrapper

The api object

Please see *The api object*.

The helper object

Please see *The metadatahelper object*. In Auto-projection scripts, it is also available under the name `helper`.

The wrapper object

The wrapper object represents the `MetadataWrapperDocument` during the projection. Below are available functions:

`wrapper.getMetadata()`

Get the new incoming item metadata.

Returns *MetadataType*.

`wrapper.getOldMetadata()`

Get the old metadata of the item.

Returns *MetadataListType*.

`wrapper.getShapeMetadata()`

Get the new incoming shape metadata.

Returns *SimpleMetadataType*.

`wrapper.getShape()`

Get the shape list of the item.

Returns *List<ShapeType>*.

`wrapper.getBulkyMetadata()`

Get the new incoming bulky metadata of the item/shape.

Returns *BulkyMetadataType*.

`wrapper.getOldBulkyMetadata()`

Get the old bulky metadata of the item.

Returns *BulkyMetadataType*.

`wrapper.getOldBulkyMetadata()`

Get the old bulky metadata of the item.

Returns *BulkyMetadataType*.

`wrapper.setMetadata(value)`

Assign a new metadata to the wrapper document.

Arguments

- **value** – *MetadataType*

There are two ways to apply projection results to an item:

1. If the rule is triggered by an item metadata update, one should manipulate the object reference returned by `wrapper.getMetadata()` directly. Because Vidispine will take that object as the projection result.

- If the rule is triggered by a shape metadata update or bulky metadata update, one should use the `api` object to update the item metadata:

```

var metadata = helper.createMetadata();
...
var xml = helper.metadataToStr(metadata);
var id = wrapper.getTargetId();
var result = api.path("item/" + id + "/metadata").input(xml, "application/xml").
    put();

```

2.6.6 Auto-projection using XSLT

A XSLT projection is created by including the XSL script in the `xsl` element of `AutoProjectionRuleDocument`.

The transformation result could either be a `MetadataDocument` or `MetadataWrapperDocument`. If the result is a `MetadataWrapperDocument`, the value of `metadata` element will be used as the projection result.

During a shape/bulky metadata update, one need to set up another step using the JavaScript `api` object to update the item metadata.

Example:

```

<xsl:stylesheet version="1.0" xmlns:xsl="http://www.w3.org/1999/XSL/Transform" xmlns:
    vs="http://xml.vidispine.com/schema/vidispine">
  <xsl:template match="/">
    <MetadataDocument xmlns="http://xml.vidispine.com/schema/vidispine">
      <timespan start="-INF" end="+INF">
        <xsl:for-each select="vs:MetadataWrapperDocument/vs:metadata/vs:
            timespan/vs:field">
          <field>
            <name>
              <xsl:value-of select="vs:name"/>
            </name>
            <value><xsl:value-of select="vs:value"/>+projection</value>
          </field>
        </xsl:for-each>
      </timespan>
    </MetadataDocument>
  </xsl:template>
</xsl:stylesheet>

```

2.7 Metadata migrations

Vidispine has support for migrating metadata to adhere to a new structure. For example, you might have changed the group hierarchies in your metadata schema, and want to migrate old items and collections to the new schema. This is done by posting a migration definition. Vidispine will then automatically go through all the metadata in the system and migrate it.

2.7.1 Migration operations

There are a number of operations available for metadata migrations:

- **Move** This is used to move a field or a group from one position in the hierarchy to another.

- **Rename** This can be used to rename fields. Note that the new name must already be defined as a metadata field in the system, and the data types of the old and new fields must be compatible (e.g. a string field cannot be renamed to a date field, since it could cause invalid values to be introduced)
- **Delete** Used to delete a field or a group from a metadata hierarchy.

2.7.2 Migration definition

Migrations are defined using XML (or JSON). Here is an example of a migration containing all of the above operations:

```
<MetadataSchemaMigrationDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <move type="field">
    <from>
      <group>
        <name>Film</name>
        <field>
          <name>actor</name>
        </field>
      </group>
    </from>
    <to>
      <group>
        <name>Film</name>
        <group>
          <name>Personnel</name>
        </group>
      </group>
    </to>
  </move>
  <rename>
    <from>
      <group>
        <name>Film</name>
        <field>
          <name>internal_title</name>
        </field>
      </group>
    </from>
    <to>production_id</to>
  </rename>
  <delete type="group">
    <target>
      <group>
        <name>Film</name>
        <group>
          <name>Soundtrack</name>
        </group>
      </group>
    </target>
  </delete>
</MetadataSchemaMigrationDocument>
```

The above migration would perform three operations:

- A move operation on any actor field that is located in the Timespan > Film group. It would instead be placed in Timespan > Film > Personnel group.
- A rename operation. It would rename any internal_title field located in the Timespan > Film group.

It would rename it to `production_id`.

- A delete operation which would delete any group matching Timespan -> Film -> Soundtrack.

2.8 Metadata datasets

New in version 4.13.

A metadata dataset is a set of metadata values that have semantic relations between each other. Datasets can be used to validate metadata documents.

2.8.1 Defining the dataset

A dataset is defined using a [RDF](https://www.w3schools.com/xml/xml_rdf.asp) (https://www.w3schools.com/xml/xml_rdf.asp) document. Vidispine supports creating a dataset using either a [RDF/XML](https://www.w3.org/TR/rdf-syntax-grammar/) (<https://www.w3.org/TR/rdf-syntax-grammar/>) document or a [TURTLE](https://www.w3.org/TR/turtle/) (<https://www.w3.org/TR/turtle/>) document.

For example, the geographical hierarchy relations of USA, New York, California, Los Angeles and San Francisco can be defined as follows:

```
@prefix r: <http://example.com/random/id#> .
@prefix c: <http://example.com/country/#> .
@prefix st: <http://example.com/state/#> .
@prefix city: <http://example.com/city/#> .
@prefix rdf: <http://www.w3.org/1999/02/22-rdf-syntax-ns#> .
@prefix skos: <http://www.w3.org/2004/02/skos/core#> .

c:usa    skos:definition  "country" ;
         skos:member      r:bid1 ;
         skos:prefLabel   "USA" .

r:bid1   a      rdf:Bag ;
         rdf:_1  st:ny ;
         rdf:_2  st:ca .

st:ny    skos:definition  "state" ;
         skos:prefLabel   "New York" .

st:ca    skos:definition  "state" ;
         skos:member      r:bid2 ;
         skos:prefLabel   "California" .

r:bid2   a      rdf:Bag ;
         rdf:_1  c:la ;
         rdf:_2  c:sf .

c:la     skos:definition  "city" ;
         skos:prefLabel   "Los Angeles" .

c:sf     skos:definition  "city" ;
         skos:prefLabel   "San Francisco" .
```

In the above dataset, five subjects (or resources) have been defined: USA, New York, California, Los Angeles and San Francisco. Each subject has its own id (`c:usa`, `st:ca` etc.), and two predicates (or properties) `skos:prefLabel` and `skos:definition`; representing the subject's "display value" and "hierarchical

level” respectively. The hierarchical relationships between the subjects are defined by the `skos:member` and the RDF container `rdf:Bag`.

You can also use self-defined vocabularies. The example below uses self-defined `hasState` and `hasCity` properties to represent the geographical relationship:

```
@prefix c: <http://example.com/country/#> .
@prefix st: <http://example.com/state/#> .
@prefix city: <http://example.com/city/#> .
@prefix rdf: <http://www.w3.org/1999/02/22-rdf-syntax-ns#> .
@prefix skos: <http://www.w3.org/2004/02/skos/core#> .

c:usa skos:definition "country" ;
      skos:prefLabel "USA" ;
      c:hasState st:ca , st:ny .

st:ca st:hasCity city:la , city:sf ;
      skos:definition "state" ;
      skos:prefLabel "California" .

st:ny skos:definition "state" ;
      skos:prefLabel "New York" .

city:sf skos:definition "city" ;
        skos:prefLabel "San Francisco" .

city:la skos:definition "city" ;
        skos:prefLabel "Los Angeles" .
```

2.8.2 Create the dataset

The dataset above can be used to *create a metadata dataset* in Vidispine:

```
PUT /metadata/dataset/mytestmodel
```

```
Content-Type: text/turtle
```

```
@prefix c: <http://example.com/country/#> .
@prefix st: <http://example.com/state/#> .
@prefix city: <http://example.com/city/#> .
@prefix rdf: <http://www.w3.org/1999/02/22-rdf-syntax-ns#> .
@prefix skos: <http://www.w3.org/2004/02/skos/core#> .

c:usa skos:definition "country" ;
      skos:prefLabel "USA" ;
      c:hasState st:ca , st:ny .

st:ca st:hasCity city:la , city:sf ;
      skos:definition "state" ;
      skos:prefLabel "California" .

st:ny skos:definition "state" ;
      skos:prefLabel "New York" .

city:sf skos:definition "city" ;
        skos:prefLabel "San Francisco" .
```



```
city:la skos:definition "city" ;
      skos:prefLabel "Los Angeles" .
```

2.8.3 Configure metadata fields

After creating the dataset, the metadata fields needs to be configured accordingly:

```
<MetadataFieldDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <name>rdf_country</name>
  <type>string</type>
  <constraint>
    <dataset>mytestmodel</dataset>
    <levelProperty>skos:definition</levelProperty>
    <levelValue>country</levelValue>
    <value>skos:prefLabel</value>
  </constraint>
</MetadataFieldDocument>
```

```
<MetadataFieldDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <name>rdf_state</name>
  <type>string</type>
  <constraint>
    <dataset>mytestmodel</dataset>
    <levelProperty>skos:definition</levelProperty>
    <levelValue>state</levelValue>
    <value>skos:prefLabel</value>
    <parent>rdf_country</parent>
  </constraint>
</MetadataFieldDocument>
```

```
<MetadataFieldDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <name>rdf_city</name>
  <type>string</type>
  <constraint>
    <dataset>mytestmodel</dataset>
    <levelProperty>skos:definition</levelProperty>
    <levelValue>city</levelValue>
    <value>skos:prefLabel</value>
    <parent>rdf_state</parent>
  </constraint>
</MetadataFieldDocument>
```

The configuration above defines three metadata fields: `rdf_country`, `rdf_state` and `rdf_city`, whose values are restricted by the metadata dataset `mytestmodel`.

- `<dataset>`: Which dataset the field value should be validated against.
- `<levelProperty>`: Should be the property in the dataset that defines a level value.
- `<levelValue>`: Which level in the dataset does this metadata field belong to.
- `<value>`: The display value of the metadata field.
- `<parent>`: (Optional). The parent field if any. This defines the field hierarchy. Fields in the same hierarchy will be validated together.
- `<validationGroup>`: (Optional). Containing an **ordered**, comma separated value, defining which fields should be validated together, and the **hierarchical (validation) order** of those fields.

Changed in version 4.17.2: The `parent` element was added. The `validationGroup` element was deprecated.

2.8.4 Updating metadata

There are two ways to post metadata documents containing semantically related fields:

1. Using the value directly, like we have always been doing:

```
<?xml version="1.0" encoding="UTF-8"?>
<MetadataDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <timespan start="-INF" end="+INF">
    <field>
      <name>rdf_country</name>
      <value>USA</value>
    </field>
    <field>
      <name>rdf_state</name>
      <value>New York</value>
    </field>
  </timespan>
</MetadataDocument>
```

2. Using the corresponding subject id from the dataset:

```
<?xml version="1.0" encoding="UTF-8"?>
<MetadataDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <timespan start="-INF" end="+INF">
    <field>
      <name>rdf_country</name>
      <value id="c:usa"/>

      <!-- or the full URI -->
      <!-- <value id="http://example.com/country#usa"/> -->
    </field>
    <field>
      <name>rdf_state</name>
      <value id="st:ny"/>
    </field>
  </timespan>
</MetadataDocument>
```

The resulting value will contain both `id` and the “display value”:

```
GET item/\(item-id\)/metadata
```

```
...
<field uuid="783a6bc1-7917-4aa4-9d37-0c1dd4f6787f">
  <name>rdf_country</name>
  <value id="c:usa" uuid="459b3d37-c3a1-4ae6-8ad7-ab4a934f3a42">USA</value>
</field>
<field uuid="41ffab92-e984-4a36-b8ed-2aae41be56e6">
  <name>rdf_state</name>
  <value id="st:ny" uuid="898cb68c-b661-4923-8ded-3e9cb02a200b">New York</value>
</field>
...
```

The `includeConstraintValue` matrix parameter can be used to only fetch the “display value” of the specified fields:

```
GET item/(item-id)/metadata;includeConstraintValue=rdf_country
```

```
...
<field uuid="783a6bc1-7917-4aa4-9d37-0c1dd4f6787f">
  <name>rdf_country</name>
  <value id="c:usa" uuid="459b3d37-c3a1-4ae6-8ad7-ab4a934f3a42">USA</value>
</field>
<field uuid="41ffab92-e984-4a36-b8ed-2aae41be56e6">
  <name>rdf_state</name>
  <value id="st:ny" uuid="898cb68c-b661-4923-8ded-3e9cb02a200b"/>
</field>
...
```

2.8.5 Validation of metadata values

Vidispine will try to validate the incoming metadata document accordingly to the constraint configured on the metadata fields. Fields defined in the same hierarchy and that belongs to the same timespan and metadata group will be validated together.

For example, this is an invalid document because London is not a city in USA according to the metadata dataset:

```
<?xml version="1.0" encoding="UTF-8"?>
<MetadataDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <timespan start="-INF" end="+INF">
    <field>
      <name>rdf_city</name>
      <value>London</value>
    </field>
    <field>
      <name>rdf_country</name>
      <value>USA</value>
    </field>
  </timespan>
</MetadataDocument>
```

This is an invalid document because the field values in `my_test_group` are not correct:

```
<?xml version="1.0" encoding="UTF-8"?>
<MetadataDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <timespan start="-INF" end="+INF">
    <field>
      <name>rdf_city</name>
      <value>Los Angeles</value>
    </field>
    <field>
      <name>rdf_state</name>
      <value>California</value>
    </field>
    <group>
      <name>my_test_group</name>
      <field>
        <name>rdf_city</name>
        <value>Los Angeles</value>
      </field>
    </group>
  </timespan>
</MetadataDocument>
```

```

    <field>
      <name>rdf_state</name>
      <value>New York</value>
    </field>
  </group>
</timespan>
</MetadataDocument>

```

This is a valid document, because `rdf_state2` belongs to a different hierarchy than `rdf_city` and `rdf_state` belong to. And they all contain valid values:

```

<?xml version="1.0" encoding="UTF-8"?>
<MetadataDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <timespan start="-INF" end="+INF">
    <field>
      <name>rdf_city</name>
      <value>Los Angeles</value>
    </field>
    <field>
      <name>rdf_state</name>
      <value>California</value>
    </field>
    <field>
      <name>rdf_state2</name>
      <value>New York</value>
    </field>
  </timespan>
</MetadataDocument>

```

2.8.6 Retrieving allowed values

To get all allowed value of a metadata field:

```
GET metadata-field/rdf_city/allowed-values
```

Response:

```

<?xml version="1.0" encoding="UTF-8" standalone="yes"?>
<ConstraintValueListDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <value id="city:man">Manchester</value>
  <value id="city:nyc">New York City</value>
  <value id="city:la">Los Angeles</value>
  <value id="city:buf">Buffalo</value>
  <value id="city:sf">San Francisco</value>
  <value id="city:roc">Rochester</value>
  <value id="city:lnd">London</value>
</ConstraintValueListDocument>

```

To find all allowed values:

```
POST metadata-field/rdf_city/allowed-values
```

```

<?xml version="1.0" encoding="UTF-8" standalone="yes"?>
<MetadataFieldValueConstraintListDocument xmlns="http://xml.vidispine.com/schema/
↵vidispine">
  <constraint>

```

```

<field>rdf_country</field>
<value>USA</value>
<!-- or use the constraint subject id -->
<id>http://example.com/country#usa</id>
</constraint>
<constraint>
  <field>rdf_state</field>
  <value>New York</value>
</constraint>
</MetadataFieldValueConstraintListDocument>

```

Response:

```

<?xml version="1.0" encoding="UTF-8" standalone="yes"?>
<ConstraintValueListDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <value id="city:nyc">New York City</value>
</ConstraintValueListDocument>

```

2.9 Subtitles

Vidispine supports adding subtitles to an item. They can then for example be exported to Final Cut. Subtitles can also be used with sequences and can be included in the video when a sequence is rendered.


2.9.1 Subtitle metadata fields and groups

To add subtitles to a Vidispine item, the metadata field group `stl_subtitle` must be used. The group should be placed within a `timespan` corresponding to the in- and out timecodes the subtitles should be displayed. Within this group, the following fields can be set:

- `stl_text`. This sets the actual text which should be displayed. Multiple lines are delimited by a line feed character.
- `stl_justification`. Determines the justification of multiple lines of text.
 - left** all lines are aligned to left border of text bounding box
 - center** all lines are aligned in center of text bounding box
 - right** all lines are aligned to right border of text bounding box
- `stl_xrelative`. Horizontal position of base point relative to full video frame. (New in 4.2.6.)
 - 0.0** left border
 - 1.0** right border
- `stl_yrelative`. Vertical position of base point relative to full video frame. (New in 4.2.6.)
 - 0.0** top border
 - 1.0** bottom border
- `stl_horizontalbase`. Horizontal position of base point relative to text bounding box. (New in 4.2.6.)
 - 0.0 (or left)** base point is left border of bounding box.
 - 0.5 (or center)** base point is center of bounding box.
 - 1.0 (or right)** base point is right border of of bounding box.

- `stl_verticalbase`. Vertical position of base point relative to text bounding box. (New in 4.2.6.)
 - 0.0 (or top)** base point is top border of of bounding box.
 - 0.5 (or middle)** base point is middle of bounding box.
 - 1.0 (or bottom)** base point is bottom border of bounding box.
- `stl_sizelrelative`. Height of font relative to full video frame.
- `stl_color`. Color of text. Can be standard colors (`red`) or hexadecimal (`#ff0000`). (New in 4.4.1.)
- `stl_outline`. Type of outline. (New in 4.4.1.)
 - (none)** no outline
 - bar** rectangular outline
 - stroke** fat stroke around text
- `stl_outlinecolor`. Color of outline. (New in 4.4.1.)
- `stl_outlinesize`. Size (margin) of outline. (New in 4.4.1.)
- `stl_font`. Font of subtitle. (New in 4.4.1.)
 - monospace** fixed-width font (default)
 - sans** sans-serif font
 - serif** font with serifs

Example

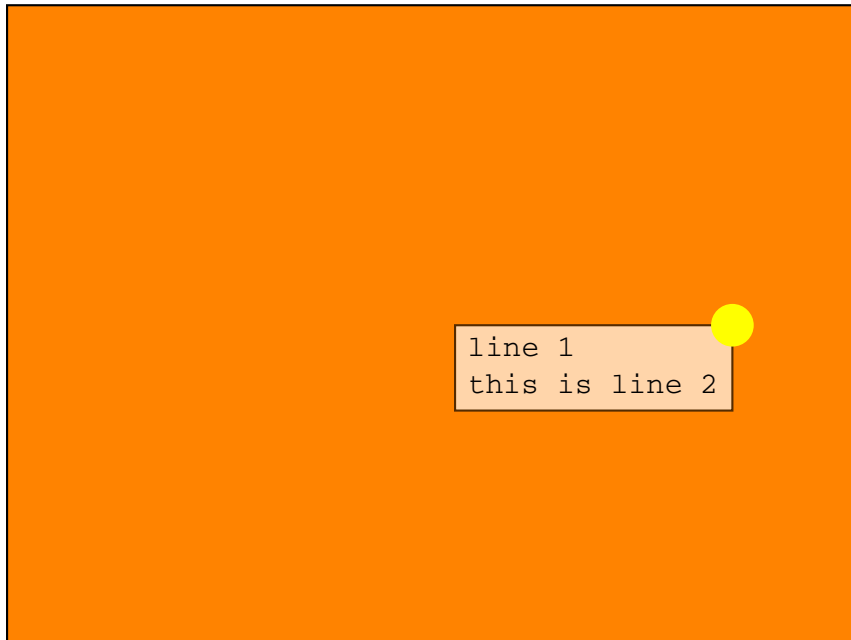

- `stl_justification=left`
- `stl_xrelative=0.9`
- `stl_yrelative=0.5`
- `stl_horizontalbase=right`

- stl_verticalbase=top

The subtitle language can be extracted from the .stl file itself or set using jobmetadata, key subtitleLanguage; jobmetadata has a higher priority.

Example

```
<MetadataDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <timespan start="10@PAL" end="100@25">
    <group>
      <name>stl_subtitle</name>
      <field><name>stl_justification</name><value>left</value></field>
      <field><name>stl_vertical</name><value>6</value></field>
      <field><name>stl_text</name><value>some text&#13;&#10;actually two lines</value>
    </field>
    </group>
  </timespan>
</MetadataDocument>
```

2.9.2 Rendering subtitles in a sequence

New in version 4.0.

If you have a sequence attached to an item in Vidispine the subtitle metadata can be included in the output file. To do this, you need to use a shape tag where <burnSubtitles>>true</burnSubtitles> is set in the <video> element. Note that overlapping subtitle timespans are not allowed and will cause the render job to fail.

Example

Let's say we have an item VX-811 which has a sequence attached to it, and the following metadata:

```
<MetadataDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  ...
  <timespan start="72140@PAL" end="72260@PAL">
    <group>
      <name>stl_subtitle</name>
      <field><name>stl_justification</name><value>center</value></field>
      <field><name>stl_text</name><value>No, I am your father.</value></field>
    </group>
  </timespan>
  <timespan start="72320@PAL" end="72490@PAL">
    <group>
      <name>stl_subtitle</name>
      <field><name>stl_justification</name><value>center</value></field>
      <field><name>stl_text</name><value>No... that's not true!&#13;&#10;That's_
    </field>
    </group>
  </timespan>
  ...
</MetadataDocument>
```

And we have the following shape-tag called MP4_512_SUB:

```
<TranscodePresetDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <format>mp4</format>
  <audio>
    <codec>aac</codec>
    <bitrate>96000</bitrate>
  </audio>
  <video>
    <scaling>
      <width>512</width>
      <height>288</height>
    </scaling>
    <codec>h264</codec>
    <bitrate>2000000</bitrate>
    <framerate>
      <numerator>1</numerator>
      <denominator>25</denominator>
    </framerate>
    <burnSubtitles>>true</burnSubtitles>
  </video>
</TranscodePresetDocument>
```

Then a render job is started using:

```
POST /item/VX-811/sequence/render?tag=MP4_512_SUB
```

```
<JobDocument xmlns="http://xml.vidispine.com/schema/vidispine"><jobId>VX-1436</jobId>
↪<user>admin</user><started>2013-03-08T13:02:15.654Z</started><status>READY</status>
↪<type>CONFORM</type><priority>MEDIUM</priority></JobDocument>
```

This will render the sequence and include any subtitle metadata as subtitles in the output video.

2.9.3 SCC support

New in version 4.7.

To export subtitle metadata for an item in SCC format, use the *SCC export resource*.

```
GET /item/VX-56/metadata/export/scc
```

```
Scenarist_SCC V1.0

00:00:00:00  942c 942c 9420 9420 9470 9470 54e5 f8f4

00:00:10:00  942f 942f

00:00:20:00  942c 942c
```

2.9.4 TTML support

Subtitles for an item can also be retrieved in TTML format using *Export to TTML*.

```
GET /item/{id}/metadata/export/ttml
```



```

<?xml version="1.0" encoding="UTF-8" standalone="yes"?>
<tt xmlns:ns2="http://www.w3.org/ns/ttml#styling" xmlns="http://www.w3.org/ns/ttml"
↳xmlns:ns4="http://www.w3.org/ns/ttml#metadata" xmlns:ns3="urn:ebu:tt:style" xmlns:
↳ns5="http://www.w3.org/ns/ttml#parameter" xmlns:ns6="urn:ebu:tt:metadata" ns5:
↳frameRate="25" ns5:cellResolution="50 30" ns2:extent="704px 576px" xml:lang="en">
  <head>
    <metadata>
      <ns6:documentMetadata>
        <ns6:documentTargetAspectRatio>4:3</ns6:documentTargetAspectRatio>
        <ns6:documentTotalNumberOfSubtitles>11</ns6:documentTotalNumberOfSubtitles>
        <ns6:documentMaximumNumberOfDisplayableCharacterInAnyRow>40</ns6:
↳documentMaximumNumberOfDisplayableCharacterInAnyRow>
        <ns6:documentStartOfProgramme>00:00:00:00</ns6:documentStartOfProgramme>
        <ns6:documentCountryOfOrigin>GB</ns6:documentCountryOfOrigin>
        <ns6:documentPublisher>Institut fuer Rundfunktechnik </ns6:
↳documentPublisher>
      </ns6:documentMetadata>
    </metadata>
    <styling>
      <style xml:id="textCenter" ns2:textAlign="center"/>
      <style xml:id="defaultStyle" ns2:fontFamily="monospaceSansSerif" ns2:fontSize=
↳"1c 1c" ns2:lineHeight="normal" ns2:textAlign="center" ns2:color="white" ns2:
↳backgroundColor="transparent" ns2:fontStyle="normal" ns2:fontWeight="normal" ns2:
↳textDecoration="none"/>
      <style xml:id="whiteOnblackDH" ns2:fontSize="1c 2c" ns2:color="white" ns2:
↳backgroundColor="black"/>
    </styling>
    <layout>
      <region xml:id="bottom" ns2:origin="10% 10%" ns2:extent="80% 80%" ns2:
↳displayAlign="after" ns2:padding="0c" ns2:writingMode="lrbt"/>
      <region xml:id="top" ns2:origin="10% 10%" ns2:extent="80% 80%" ns2:displayAlign=
↳"before" ns2:padding="0c" ns2:writingMode="lrbt"/>
    </layout>
  </head>
  <body>
    <Change to 'iv' xml:id="SGN1" style="defaultStyle">
      <p region="top" style="textCenter" begin="00:00:00:00" end="00:00:02:10">
        <br/>
        <span style="whiteOnblackDH">two-line</span>
        <br/>
        <span style="whiteOnblackDH">top</span>
      </p>
      <p region="top" style="textCenter" begin="00:00:02:14" end="00:00:04:21">
        <br/>
        <span style="whiteOnblackDH">one-line top</span>
      </p>
      ...
    </div>
  </body>
</tt>

```

2.10 Examples

2.10.1 Creating fields/groups, modifying and moving metadata

Let's say that we have an item that contains a sports game. We want to record the goals that have occurred within the game. To do this we have the triple (time, team, player), where the time is the real-world time when the goal took place, the player that scored and the team the player plays for.

Creating the metadata fields

First to create the field for time, we choose the data type “date” since we want it to be indexed, but we will use it as temporal metadata so it is not applicable to be a sortable field.

```
PUT /metadata-field/sport_time
Content-Type: application/xml

<MetadataFieldDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <type>date</type>
</MetadataFieldDocument>
```

As for creating the team and the player, we use the same reasoning above, with the exception of that we want a string instead

```
PUT /metadata-field/sport_team
Content-Type: application/xml

<MetadataFieldDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <type>string</type>
</MetadataFieldDocument>
```

```
PUT /metadata-field/sport_player
Content-Type: application/xml

<MetadataFieldDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <type>string</type>
</MetadataFieldDocument>
```

Creating the metadata field group

With the fields created we now want a way to group these fields together so we create a field group called “goal”.

```
PUT /metadata-field/field-group/goal
```

Now we simply add the fields, created above, to the group.

```
PUT /metadata-field/field-group/goal/sport_time
```

```
PUT /metadata-field/field-group/goal/sport_team
```

```
PUT /metadata-field/field-group/goal/sport_player
```

Retrieving the group:

```
GET /metadata-field/field-group/goal
```

```
<MetadataFieldListDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <field sortable="false">
    <name>sport_time</name>
    <type>date</type>
  </field>
  <field sortable="false">
    <name>sport_player</name>
    <type>string</type>
  </field>
  <field sortable="false">
    <name>sport_team</name>
    <type>string</type>
  </field>
</MetadataFieldListDocument>
```


Modifying metadata

Let's say that the item VX-7632 contains two goals that occurred during a game that matches the triples (time='2010-09-05T16:20:33Z', team='Sweden', player='Pete') and (time='2010-09-05T16:42:05Z', team='Germany', player='Bob'). Within the item the first goal can be seen between the time codes (1200, 1380) and the second goal between the time codes (2700, 2940).

Each step will contain a diagram, where the dashed red line illustrates the semantics of the request being performed.

Adding the first goal

Adding the first goal without adding the player:

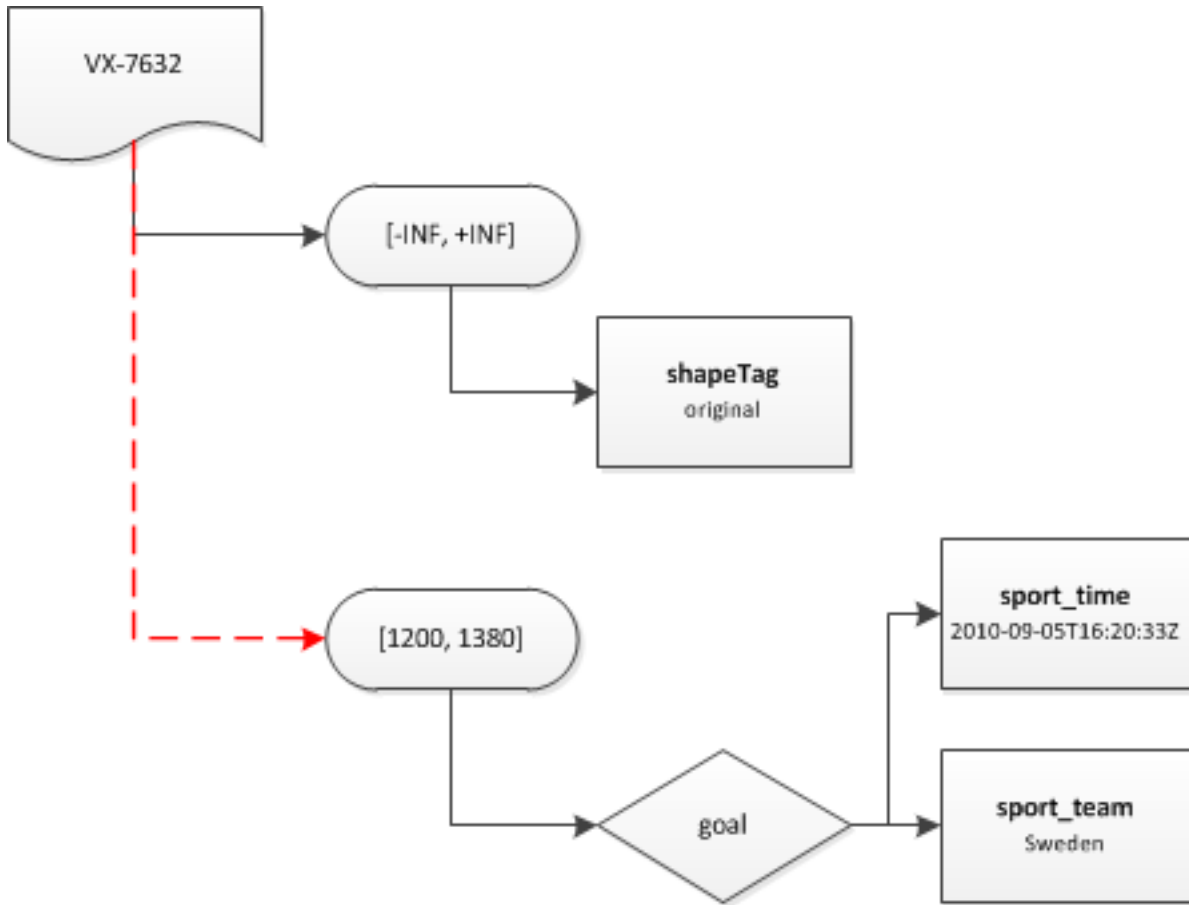

```
PUT /item/VX-7632/metadata
Content-Type: application/xml
```

```
<MetadataDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <timespan start="1200" end="1380">
    <group mode="add">
      <name>goal</name>
      <field>
        <name>sport_time</name>
        <value>2010-09-05T16:20:33Z</value>
      </field>
      <field>
        <name>sport_team</name>
        <value>Sweden</value>
      </field>
    </group>
  </timespan>
</MetadataDocument>
```

```
<MetadataListDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <item id="VX-7632">
    <metadata>
      <revision>VX-16295,VX-16296,VX-16299</revision>
      <timespan end="1380" start="1200">
        <group change="VX-16299" timestamp="2010-09-08T15:36:01.836+02:00"
        ↪user="admin" uuid="1f89d35d-02b6-4871-aa17-62c5ed4992f4">
```


```

        <name>goal</name>
        <field change="VX-16299" timestamp="2010-09-08T15:36:01.836+02:00
↪" user="admin" uuid="915b6023-f374-4432-832c-a2c48c1efb56">
            <name>sport_time</name>
            <value change="VX-16299" timestamp="2010-09-08T15:36:01.
↪836+02:00" user="admin" uuid="cce8f89a-a220-4e53-8734-5831a3a4eb77">2010-09-05T16:
↪20:33Z</value>
            </field>
            <field change="VX-16299" timestamp="2010-09-08T15:36:01.836+02:00
↪" user="admin" uuid="d9d9b21c-171d-402b-878d-cefa5b3f9727">
                <name>sport_team</name>
                <value change="VX-16299" timestamp="2010-09-08T15:36:01.
↪836+02:00" user="admin" uuid="7493df98-be67-4fb6-97fe-a89b9e501207">Sweden</value>
            </field>
        </group>
    </timespan>
    <timespan end="+INF" start="-INF">
        <field change="VX-16295" timestamp="2010-09-08T11:00:15.833+02:00"
↪user="system" uuid="7c5c49f9-c740-4b0a-93e8-81490fb65799">
            <name>shapeTag</name>
            <value change="VX-16295" timestamp="2010-09-08T11:00:15.833+02:00
↪" user="system" uuid="9c2945d5-3480-436e-bfbb-2444e586961d">original</value>
        </field>
    </timespan>
</metadata>
</item>
</MetadataListDocument>

```

Adding the second goal

Adding the second goal, accidentally to same timespan as the first goal:

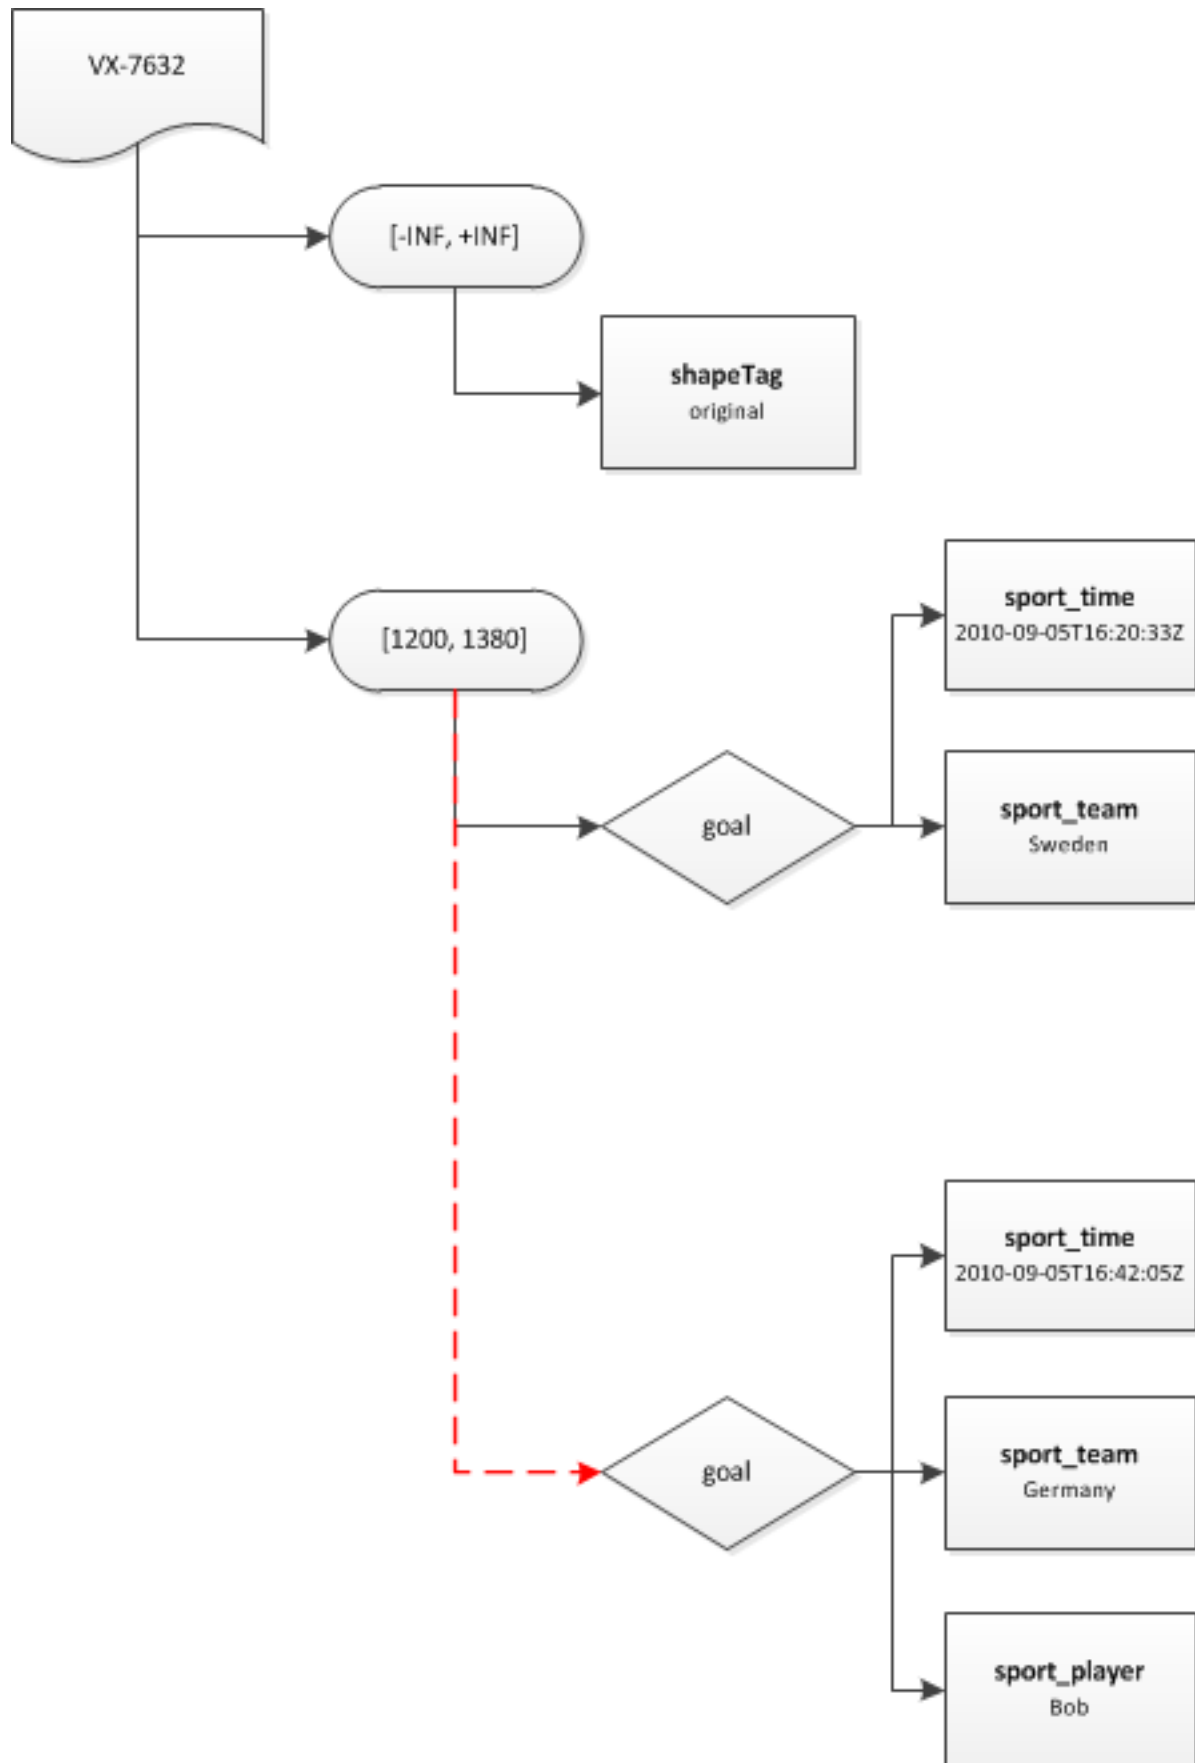

PUT `/item/VX-7632/metadata`
 Content-Type: application/xml

```
<MetadataDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <timespan start="1200" end="1380">
    <group mode="add">
      <name>goal</name>
      <field>
        <name>sport_time</name>
        <value>2010-09-05T16:42:05Z</value>
      </field>
      <field>
        <name>sport_team</name>
        <value>Germany</value>
      </field>
      <field>
        <name>sport_player</name>
        <value>Bob</value>
      </field>
    </group>
  </timespan>
</MetadataDocument>
```

```
<MetadataListDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <item>
    <metadata>
      <revision>VX-16295, VX-16296, VX-16299, VX-16300</revision>
      <timespan end="1380" start="1200">
        <group change="VX-16299" timestamp="2010-09-08T15:36:01.836+02:00"
        ↪ user="admin" uuid="1f89d35d-02b6-4871-aa17-62c5ed4992f4">
          <name>goal</name>
          <field change="VX-16299" timestamp="2010-09-08T15:36:01.836+02:00
          ↪" user="admin" uuid="915b6023-f374-4432-832c-a2c48c1efb56">
            <name>sport_time</name>
            <value change="VX-16299" timestamp="2010-09-08T15:36:01.
            ↪836+02:00" user="admin" uuid="cce8f89a-a220-4e53-8734-5831a3a4eb77">2010-09-05T16:
            ↪20:33Z</value>
          </field>
          <field change="VX-16299" timestamp="2010-09-08T15:36:01.836+02:00
          ↪" user="admin" uuid="d9d9b21c-171d-402b-878d-cefa5b3f9727">
            <name>sport_team</name>
            <value change="VX-16299" timestamp="2010-09-08T15:36:01.
            ↪836+02:00" user="admin" uuid="7493df98-be67-4fb6-97fe-a89b9e501207">Sweden</value>
          </field>
        </group>
        <group change="VX-16300" timestamp="2010-09-08T15:38:28.715+02:00"
        ↪ user="admin" uuid="0e9a54eb-0b90-4ed9-ac68-d2cb5d7abc73">
          <name>goal</name>
          <field change="VX-16300" timestamp="2010-09-08T15:38:28.715+02:00
          ↪" user="admin" uuid="4e5ffd77-ab59-46fe-9939-47ab61df7523">
            <name>sport_team</name>
            <value change="VX-16300" timestamp="2010-09-08T15:38:28.
            ↪715+02:00" user="admin" uuid="2a64f141-b3aa-4686-973c-7c254a0b77cb">Germany</value>
          </field>
          <field change="VX-16300" timestamp="2010-09-08T15:38:28.715+02:00
          ↪" user="admin" uuid="2444055e-40e0-49b6-8493-0f68df82f01a">
            <name>sport_player</name>
            <value change="VX-16300" timestamp="2010-09-08T15:38:28.
            ↪715+02:00" user="admin" uuid="441404a4-882c-458a-af88-b2fad592d71c">Bob</value>
```


```

        </field>
        <field change="VX-16300" timestamp="2010-09-08T15:38:28.715+02:00
↔" user="admin" uuid="01d54bbb-d01e-4c6f-880e-1c1cbc4e598e">
            <name>sport_time</name>
            <value change="VX-16300" timestamp="2010-09-08T15:38:28.
↔715+02:00" user="admin" uuid="71dd57e3-4a39-41ad-b351-78c4bc20ac0b">2010-09-05T16:
↔42:05Z</value>
        </field>
    </group>
</timespan>
<timespan end="+INF" start="-INF">
    <field change="VX-16295" timestamp="2010-09-08T11:00:15.833+02:00"
↔user="system" uuid="7c5c49f9-c740-4b0a-93e8-81490fb65799">
        <name>shapeTag</name>
        <value change="VX-16295" timestamp="2010-09-08T11:00:15.833+02:00
↔" user="system" uuid="9c2945d5-3480-436e-bfbb-2444e586961d">original</value>
    </field>
</timespan>
</metadata>
</item>
</MetadataListDocument>

```

Modifying the first goal

Adding the missing player to first goal:

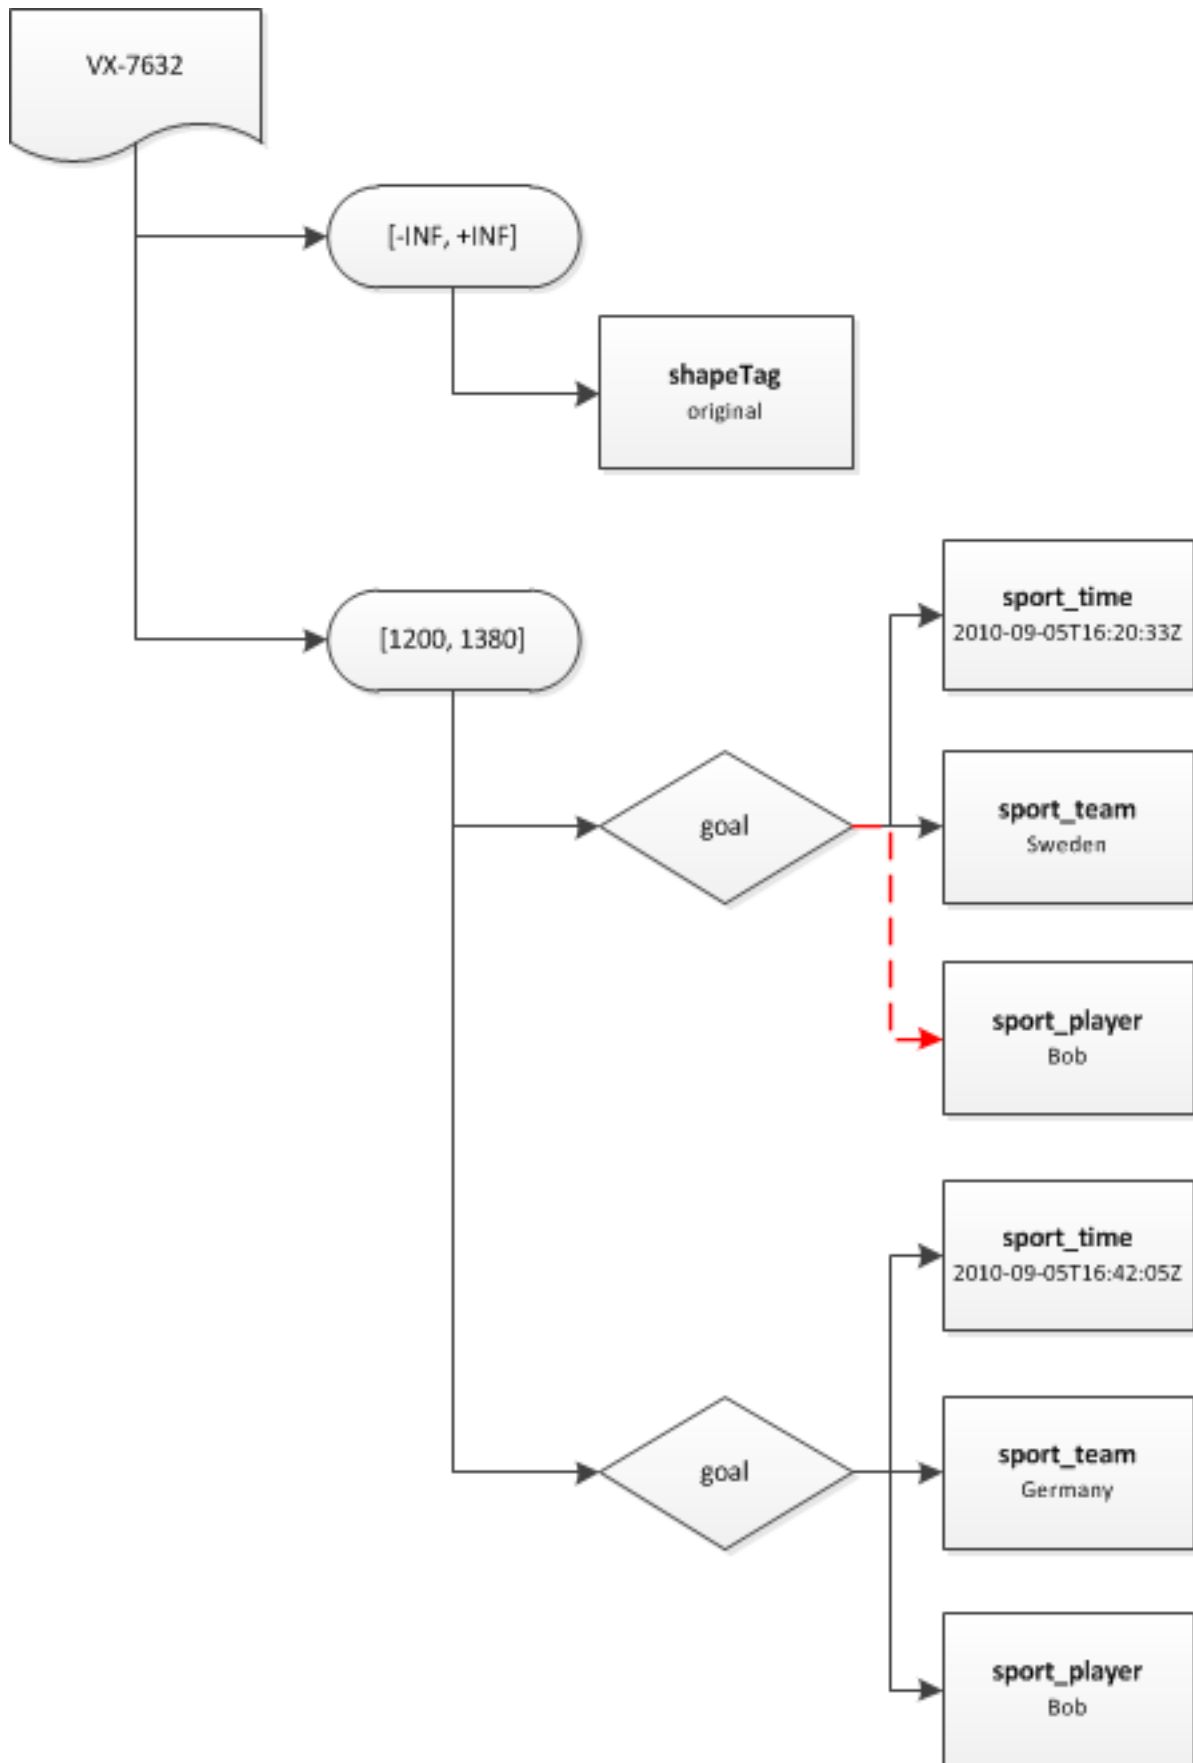

```
PUT /item/VX-7632/metadata
Content-Type: application/xml
```

```
<MetadataDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <timespan start="1200" end="1380">
    <group uuid="1f89d35d-02b6-4871-aa17-62c5ed4992f4">
      <name>goal</name>
      <field mode="add">
        <name>sport_player</name>
        <value>Pete</value>
      </field>
    </group>
  </timespan>
</MetadataDocument>
```

```
<MetadataListDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <item>
    <metadata>
      <revision>VX-16301,VX-16295,VX-16296,VX-16299,VX-16300</revision>
      <timespan end="1380" start="1200">
        <group change="VX-16301" timestamp="2010-09-08T15:41:22.212+02:00"
↪ user="admin" uuid="1f89d35d-02b6-4871-aa17-62c5ed4992f4">
          <name>goal</name>
          <field change="VX-16301" timestamp="2010-09-08T15:41:22.212+02:00"
↪ user="admin" uuid="e374df6f-deb5-4d5e-bfea-d1c2ae6df9aa">
            <name>sport_player</name>
            <value change="VX-16301" timestamp="2010-09-08T15:41:22.
↪ 212+02:00" user="admin" uuid="dbb77bcb-c3e5-4d9e-90a6-3114ecald091">Pete</value>
          </field>
          <field change="VX-16299" timestamp="2010-09-08T15:36:01.836+02:00"
↪ user="admin" uuid="915b6023-f374-4432-832c-a2c48c1efb56">
            <name>sport_time</name>
            <value change="VX-16299" timestamp="2010-09-08T15:36:01.
↪ 836+02:00" user="admin" uuid="cce8f89a-a220-4e53-8734-5831a3a4eb77">2010-09-05T16:
↪ 20:33Z</value>
          </field>
          <field change="VX-16299" timestamp="2010-09-08T15:36:01.836+02:00"
↪ user="admin" uuid="d9d9b21c-171d-402b-878d-cefa5b3f9727">
            <name>sport_team</name>
            <value change="VX-16299" timestamp="2010-09-08T15:36:01.
↪ 836+02:00" user="admin" uuid="7493df98-be67-4fb6-97fe-a89b9e501207">Sweden</value>
          </field>
        </group>
        <group change="VX-16300" timestamp="2010-09-08T15:38:28.715+02:00"
↪ user="admin" uuid="0e9a54eb-0b90-4ed9-ac68-d2cb5d7abc73">
          <name>goal</name>
          <field change="VX-16300" timestamp="2010-09-08T15:38:28.715+02:00"
↪ user="admin" uuid="4e5ffd77-ab59-46fe-9939-47ab61df7523">
            <name>sport_team</name>
            <value change="VX-16300" timestamp="2010-09-08T15:38:28.
↪ 715+02:00" user="admin" uuid="2a64f141-b3aa-4686-973c-7c254a0b77cb">Germany</value>
          </field>
          <field change="VX-16300" timestamp="2010-09-08T15:38:28.715+02:00"
↪ user="admin" uuid="2444055e-40e0-49b6-8493-0f68df82f01a">
            <name>sport_player</name>
            <value change="VX-16300" timestamp="2010-09-08T15:38:28.
↪ 715+02:00" user="admin" uuid="441404a4-882c-458a-af88-b2fad592d71c">Bob</value>
          </field>
        </group>
      </timespan>
    </metadata>
  </item>
</MetadataListDocument>
```


```

        <field change="VX-16300" timestamp="2010-09-08T15:38:28.715+02:00
↔" user="admin" uuid="01d54bbb-d01e-4c6f-880e-1c1cbc4e598e">
            <name>sport_time</name>
            <value change="VX-16300" timestamp="2010-09-08T15:38:28.
↔715+02:00" user="admin" uuid="71dd57e3-4a39-41ad-b351-78c4bc20ac0b">2010-09-05T16:
↔42:05Z</value>
        </field>
    </group>
</timespan>
<timespan end="+INF" start="-INF">
    <field change="VX-16295" timestamp="2010-09-08T11:00:15.833+02:00"
↔user="system" uuid="7c5c49f9-c740-4b0a-93e8-81490fb65799">
        <name>shapeTag</name>
        <value change="VX-16295" timestamp="2010-09-08T11:00:15.833+02:00
↔" user="system" uuid="9c2945d5-3480-436e-bfbb-2444e586961d">original</value>
    </field>
</timespan>
</metadata>
</item>
</MetadataListDocument>

```

Moving metadata

Since the second is placed in the wrong timespan it can be corrected by moving it.

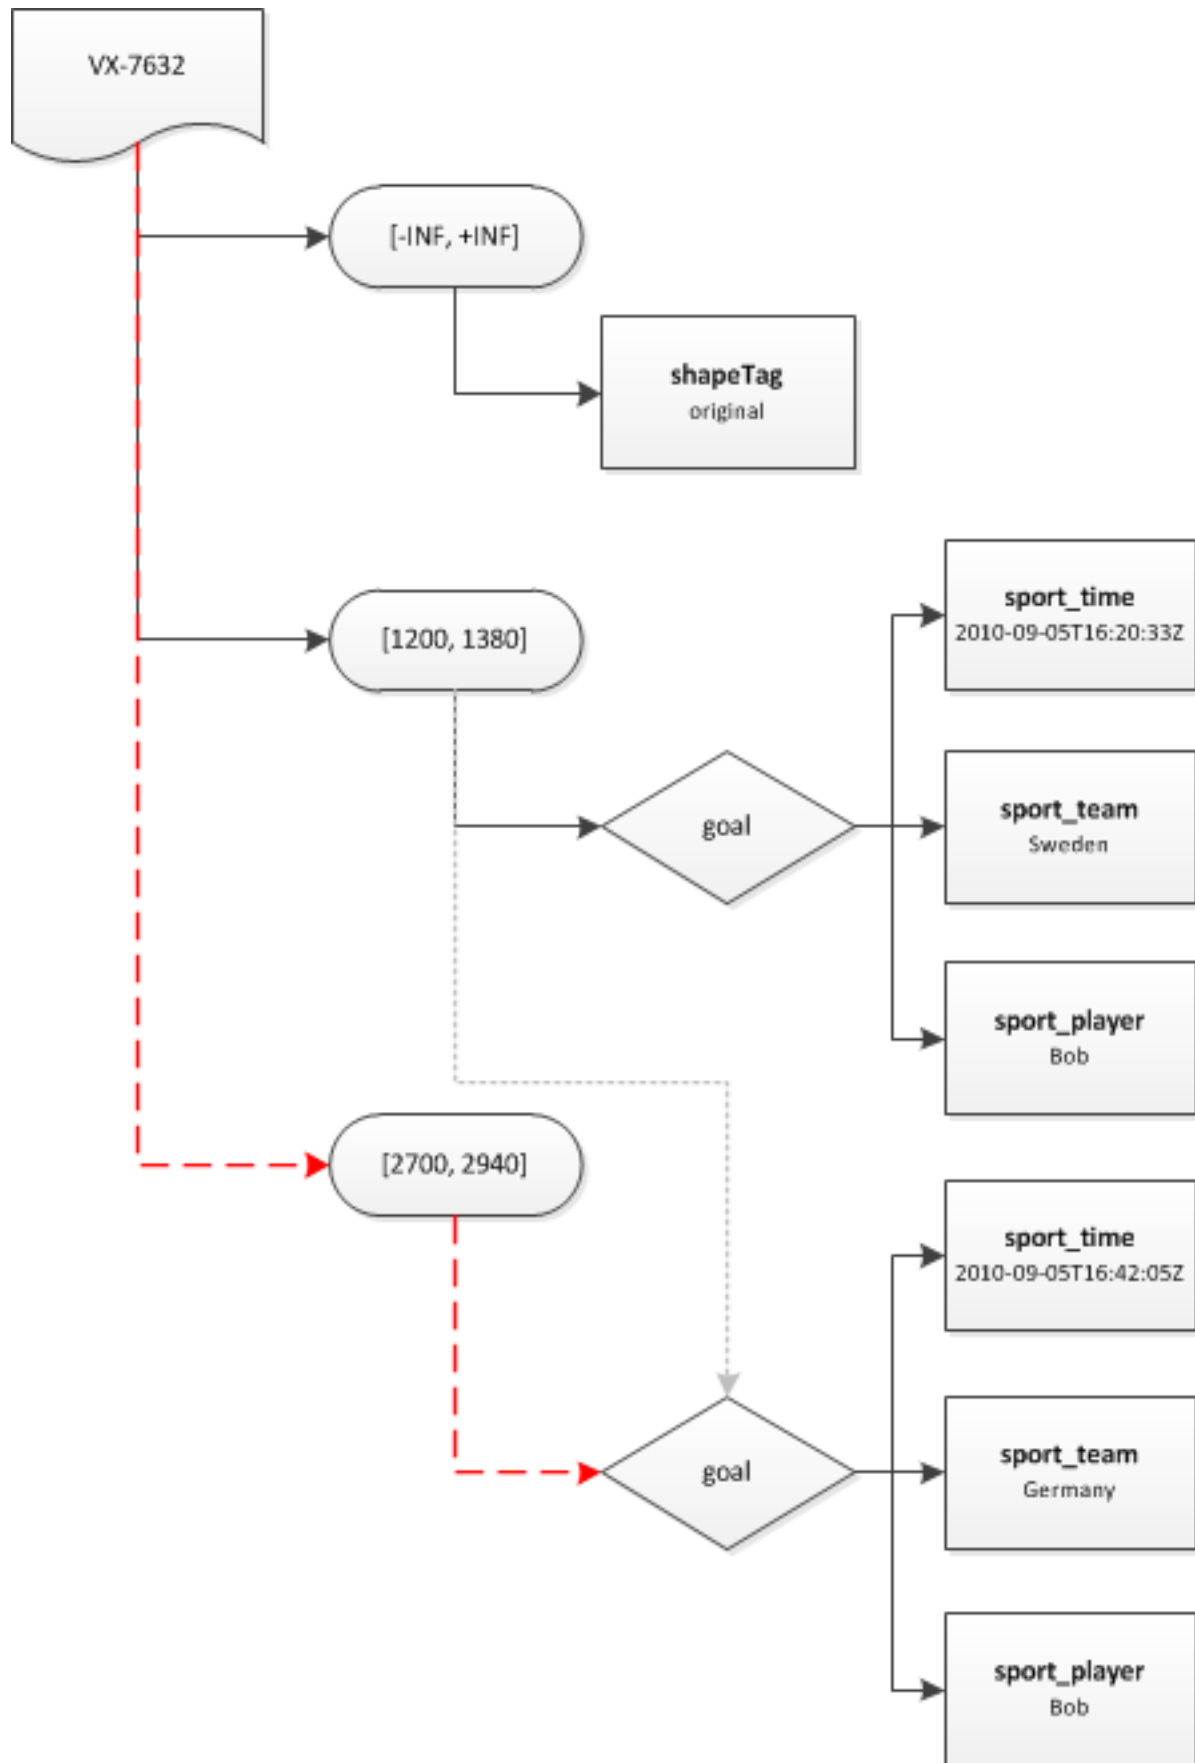

```

PUT /item/VX-7632/metadata/move?start=2700&end=2940&uuid=0e9a54eb-0b90-4ed9-ac68-
↳d2cb5d7abc73
Content-Type: application/xml

<MetadataDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <revision>VX-16301,VX-16295,VX-16296,VX-16299,VX-16300</revision>
  <timespan start="1200" end="1380">
    <group uuid="1f89d35d-02b6-4871-aa17-62c5ed4992f4" user="admin" timestamp=
↳"2010-09-08T15:41:22.212+02:00" change="VX-16301">
      <name>goal</name>
      <field uuid="e374df6f-deb5-4d5e-bfea-d1c2ae6df9aa" user="admin" timestamp=
↳"2010-09-08T15:41:22.212+02:00" change="VX-16301">
        <name>sport_player</name>
        <value uuid="dbb77bcb-c3e5-4d9e-90a6-3114ecald091" user="admin"
↳timestamp="2010-09-08T15:41:22.212+02:00" change="VX-16301">Pete</value>
      </field>
      <field uuid="915b6023-f374-4432-832c-a2c48c1efb56" user="admin" timestamp=
↳"2010-09-08T15:36:01.836+02:00" change="VX-16299">
        <name>sport_time</name>
        <value uuid="cce8f89a-a220-4e53-8734-5831a3a4eb77" user="admin"
↳timestamp="2010-09-08T15:36:01.836+02:00" change="VX-16299">2010-09-05T16:20:33Z</
↳value>
      </field>
      <field uuid="d9d9b21c-171d-402b-878d-cefa5b3f9727" user="admin" timestamp=
↳"2010-09-08T15:36:01.836+02:00" change="VX-16299">
        <name>sport_team</name>
        <value uuid="7493df98-be67-4fb6-97fe-a89b9e501207" user="admin"
↳timestamp="2010-09-08T15:36:01.836+02:00" change="VX-16299">Sweden</value>
      </field>
    </group>
  </timespan>
  <timespan start="-INF" end="+INF">
    <field uuid="7c5c49f9-c740-4b0a-93e8-81490fb65799" user="system" timestamp=
↳"2010-09-08T11:00:15.833+02:00" change="VX-16295">
      <name>shapeTag</name>
      <value uuid="9c2945d5-3480-436e-bfbb-2444e586961d" user="system"
↳timestamp="2010-09-08T11:00:15.833+02:00" change="VX-16295">original</value>
    </field>
  </timespan>
  <timespan start="2700" end="2940">
    <group uuid="0e9a54eb-0b90-4ed9-ac68-d2cb5d7abc73" user="admin" timestamp=
↳"2010-09-08T15:38:28.715+02:00" change="VX-16300">
      <name>goal</name>
      <field uuid="4e5ffd77-ab59-46fe-9939-47ab61df7523" user="admin" timestamp=
↳"2010-09-08T15:38:28.715+02:00" change="VX-16300">
        <name>sport_team</name>
        <value uuid="2a64f141-b3aa-4686-973c-7c254a0b77cb" user="admin"
↳timestamp="2010-09-08T15:38:28.715+02:00" change="VX-16300">Germany</value>
      </field>
      <field uuid="2444055e-40e0-49b6-8493-0f68df82f01a" user="admin" timestamp=
↳"2010-09-08T15:38:28.715+02:00" change="VX-16300">
        <name>sport_player</name>
        <value uuid="441404a4-882c-458a-af88-b2fad592d71c" user="admin"
↳timestamp="2010-09-08T15:38:28.715+02:00" change="VX-16300">Bob</value>
      </field>
      <field uuid="01d54bbb-d01e-4c6f-880e-1c1cbc4e598e" user="admin" timestamp=
↳"2010-09-08T15:38:28.715+02:00" change="VX-16300">
        <name>sport_time</name>

```

```

        <value uuid="71dd57e3-4a39-41ad-b351-78c4bc20ac0b" user="admin"
↳timestamp="2010-09-08T15:38:28.715+02:00" change="VX-16300">2010-09-05T16:42:05Z</
↳value>
        </field>
    </group>
</timespan>
</MetadataDocument>

```

The metadata has now been corrected and contain the information that we wanted to record.

2.10.2 Defining a metadata schema

Based on the types in the *metadata example* we can specify a schema.

```

PUT /metadata-schema
Content-Type: application/xml

<MetadataSchemaDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <!-- The organization is optional and can exist [0,n] outside of groups -->
  <group name="organization" min="0" max="-1">
    <!-- An organization has one or more employees -->
    <group name="employee" min="1" max="-1" reference="false"/>
    <!-- An organization has zero or more projects -->
    <group name="project" min="0" max="-1" reference="false"/>
    <!-- An organization has exactly one name -->
    <field name="example_name" min="1" max="1" reference="false"/>
  </group>

  <!-- A project cannot exist outside of a group -->
  <group name="project" min="0" max="0">
    <!-- A project has at least one employee, which has to be referenced -->
    <group name="employee" min="1" max="-1" reference="true"/>
    <!-- A project has exactly one name -->
    <field name="example_name" min="1" max="1" reference="false"/>
    <!-- A project has exactly one location element (it still can have more than
↳one value) -->
    <field name="example_location" min="1" max="1" reference="false"/>
  </group>

  <!-- An employee cannot exist outside of a group -->
  <group name="employee" min="0" max="0">
    <!-- An employee has exactly one name -->
    <field name="example_name" min="1" max="1" reference="false"/>
    <!-- An employee might have a title -->
    <field name="example_title" min="0" max="1" reference="false"/>
  </group>
</MetadataSchemaDocument>

```

Retrieving the metadata of a new item:

```
GET /item/VX-11/metadata
```

```

<MetadataListDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <item id="VX-11">
    <metadata>
      <revision>VX-47</revision>
    </item>
  </MetadataListDocument>

```

```

<timespan end="+INF" start="-INF">
  <field change="VX-47" timestamp="2010-12-17T13:15:04.495+01:00" user="system"
↪ uuid="0f4ec1a0-8a5e-4b96-958a-blea7516e38a">
    <name>shapeTag</name>
    <value change="VX-47" timestamp="2010-12-17T13:15:04.495+01:00" user="system
↪" uuid="99a471ee-18fd-4440-a218-80a3df40b471">original</value>
  </field>
</timespan>
</metadata>
</item>
</MetadataListDocument>

```

Validating it:

```
PUT /item/VX-11/metadata/validate
```

```
200 OK
```

Adding the organization in the example:

```

PUT /item/VX-11/metadata
Content-Type: application/xml

<MetadataDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <timespan start="-INF" end="+INF">
    <group>
      <name>organization</name>
      <field>
        <name>example_name</name>
        <value>My organization</value>
      </field>
    </group>
    <group>
      <name>employee</name>
      <field>
        <name>example_name</name>
        <value>Bob</value>
      </field>
      <field>
        <name>example_title</name>
        <value>CEO</value>
      </field>
    </group>
    <group uuid="A">
      <name>employee</name>
      <field>
        <name>example_name</name>
        <value>Pete</value>
      </field>
      <field>
        <name>example_title</name>
        <value>Director</value>
      </field>
    </group>
    <group uuid="B">
      <name>employee</name>
      <field>
        <name>example_name</name>
        <value>Andrew</value>
      </field>
    </group>
  </timespan>
</MetadataDocument>

```

```

    </field>
    <field>
      <name>example_title</name>
      <value>Editor</value>
    </field>
  </group>
  <group>
    <name>project</name>
    <field>
      <name>example_name</name>
      <value>Movie project</value>
    </field>
    <field>
      <name>example_location</name>
      <value>London</value>
      <value>Berlin</value>
    </field>
    <group>
      <name>employee</name>
      <reference>A</reference>
    </group>
    <group>
      <name>employee</name>
      <reference>B</reference>
    </group>
  </group>
</timespan>
</MetadataDocument>

```

200 OK

Adding an employee without a name to the organization:

```

PUT /item/VX-11/metadata
Content-Type: application/xml

<MetadataDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <timespan start="-INF" end="+INF">
    <group>
      <name>organization</name>
      <group mode="add">
        <name>employee</name>
        <field>
          <name>example_title</name>
          <value>Developer</value>
        </field>
      </group>
    </group>
  </timespan>
</MetadataDocument>

```

```

HTTP/1.1 400 An invalid parameter was entered
Context: metadata-schema
Reason: Too few of member example_name in group organization: 0 vs 1

```


Alternate way of creating a schema

A schema can also be built when creating and modifying metadata field groups. To create the schema above, the following three requests can be made.

```
PUT /metadata-field/field-group/employee
Content-Type: application/xml

<MetadataFieldGroupDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <schema min="0" max="0"/>
  <field>
    <name>example_name</name>
    <schema min="1" max="1" reference="false"/>
  </field>
  <field>
    <name>example_title</name>
    <schema min="0" max="1" reference="false"/>
  </field>
</MetadataFieldGroupDocument>
```

```
PUT /metadata-field/field-group/project
Content-Type: application/xml

<MetadataFieldGroupDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <schema min="0" max="0"/>
  <field>
    <name>example_name</name>
    <schema min="1" max="1" reference="false"/>
  </field>
  <field>
    <name>example_location</name>
    <schema min="1" max="1" reference="false"/>
  </field>
  <group>
    <name>employee</name>
    <schema min="1" max="-1" reference="true"/>
  </group>
</MetadataFieldGroupDocument>
```

```
PUT /metadata-field/field-group/organization
Content-Type: application/xml

<MetadataFieldGroupDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <schema min="0" max="-1"/>
  <field>
    <name>example_name</name>
    <schema min="1" max="1" reference="false"/>
  </field>
  <group>
    <name>employee</name>
    <schema min="1" max="-1" reference="false"/>
  </group>
  <group>
    <name>project</name>
    <schema min="0" max="-1" reference="false"/>
  </group>
</MetadataFieldGroupDocument>
```


COLLECTIONS AND LIBRARIES

This chapter describes collections and libraries, two concepts in Vidispine used to group items. The main differences between collections and libraries are:

- Collections can have metadata attached to them, libraries cannot.
- Collections can contain sub collections and can also contain libraries. Libraries can only contain items.
- Libraries can have dynamic content. You can attach an item search document to a library, and have it automatically update its content based on which items match the query.

Both can be assigned access controls and storage rules that apply to the items, and for collections, libraries and sub collections in them.

3.1 Collections

Collections are generic storage containers and can for example be used as:

- A sort of folder structure, where files are mapped as items and sub folders are mapped as sub collections in the hierarchy.
- A simple container for a number of items and collections.
- A representation of a Non Linear Editor (NLE) “bin”.
- A representation of an entity in your domain.

3.1.1 Creating collections

Create a collection using *POST* `/collection`. Once created you can add items, libraries or other collections to it, add metadata or grant access to other users by adding access controls.

```
POST /collection?name=Pending%20review
```

```
<CollectionDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <loc>http://localhost:8080/API/collection/VX-16</loc>
  <id>VX-16</id>
  <name>Pending review</name>
</CollectionDocument>
```

3.1.2 Searching for collections

You can search for collections in the same way as you can *search for items*.

```
PUT /collection
Content-Type: application/xml

<ItemSearchDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <text>Pending</text>
</ItemSearchDocument>
```

```
<CollectionListDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <hits>1</hits>
  <collection>
    <id>VX-16</id>
    <name>Pending review</name>
  </collection>
</CollectionListDocument>
```

Searching for collections with specific items

New in version 4.2.4.

Use an *item* query to find collections that contain specific items. For example, to find collections with a title containing ‘Peach’ or collections with items with similar titles:

```
<ItemSearchDocument version="2" xmlns="http://xml.vidispine.com/schema/vidispine">
  <operator operation="OR">
    <field>
      <name>title</name>
      <value>Peach</value>
    </field>
    <item>
      <field>
        <name>title</name>
        <value>Peach</value>
      </field>
    </item>
  </operator>
</ItemSearchDocument>
```

See *Joins on collection search*.

Searching in a collection

You can also search for *items* in a collections using *PUT /collection/(collection-id)/item*. An alternative way of finding only items that exist in a collection is to query on the `__collection` transient metadata field. This is also more flexible as it allows you to find items in multiple collections, or using it as part of a more complex query.

```
<ItemSearchDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <field>
    <name>__collection</name>
    <value>VX-16</value>
  </field>
```

```

<operator operation="NOT">
  <field>
    <name>__collection</name>
    <value>VX-1</value>
  </field>
</operator>
</ItemSearchDocument>

```

The difference between searching for items in a collection using *PUT /collection/(collection-id)/item* and *PUT /item* with a query on `__collection` is the default ordering, which is by collection order and by creation date, respectively.

There is also the `__ancestor_collection` transient metadata field that allows you to find items that exist in a collection or in a sub collection of that collection.

Listing collections that contain an item

If you want to see which collections contain an item, you can either look at the item metadata and look at the `__collection` field. There will be one entry for each collection that includes the item. This, however, does not take into account which collections a user has read access to. In order to see which collections contain an item with read permissions honored you can use *GET /item/(item-id)/collection*

3.1.3 Ordering collections

The entities in the collection are ordered, and new entities will be added at the end of the list. Use *POST /collection/(collection-id)/order* to change the order. The order will be enforced in requests to *GET /collection/(collection-id)* and *GET /collection/(collection-id)/item* for example.

To get the same ordering as in *GET /item* you will have to explicitly sort on the creation date, the `created` field, which is the default.

3.1.4 Update collection content

New in version 4.7.

Items, libraries and collections can be added, removed and reordered in a collection in a single call. Use *GET /collection/(collection-id)* to get the content of the collection. Then rearrange, add and/or remove content and use *PUT /collection/(collection-id)* to update the collection.

3.1.5 Partial update collection content

New in version 4.7.

If you only want to specify each change (add, move or remove entity) in a collection you can use *PUT /collection/(collection-id)* and specifying a mode in each content element.

```

PUT /collection
Content-Type: application/xml

<CollectionDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <loc>http://localhost:8080/API/collection/VX-2000/</loc>
  <id>VX-2000</id>

```

```

<!-- Set the name to "New name" -->
<name>New name</name>

<!-- Move item VX-3 after VX-2 -->
<content mode="move" after="VX-2">
  <id>VX-3</id>
  <uri>http://localhost:8080/API/item/VX-3</uri>
  <type>item</type>
  <metadata/>
</content>

<!-- Add the items from library VX*40 to after item VX-2 -->
<content mode="add" addItems="true" after="VX-2">
  <id>VX*40</id>
  <uri>http://localhost:8080/API/library/VX*40</uri>
  <type>library</type>
  <metadata/>
</content>

<!-- Add the library VX*44 before VX*33 -->
<content mode="add" before="VX*33">
  <id>VX*44</id>
  <uri>http://localhost:8080/API/library/VX*44</uri>
  <type>library</type>
  <metadata/>
</content>

<!-- Remove the collection VX-500 -->
<content mode="remove">
  <id>VX-500</id>
  <uri>http://localhost:8080/API/collection/VX-500</uri>
  <type>collection</type>
  <metadata/>
</content>
</CollectionDocument>

```

3.1.6 Metadata on collection to entity relations

New in version 4.7.

Each collection to entity relation can contain metadata which is stored in fields with a key and a value and can be modified when updating the collection.

```
GET /collection/VX-3866
```

```

<CollectionDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <loc>http://localhost:8080/API/collection/VX-3866/</loc>
  <id>VX-3866</id>
  <content>
    <id>VX-5480</id>
    <uri>http://localhost:8080/API/item/VX-5480</uri>
    <type>item</type>
    <metadata/>
  </content>
  <content>
    <id>VX*1810</id>

```

```

<uri>http://localhost:8080/API/library/VX*1810</uri>
<type>library</type>
<metadata/>
</content>
</CollectionDocument>

```

```

PUT /collection/VX-3866
Content-Type: application/xml

```

```

<CollectionDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <loc>http://localhost:8080/API/collection/VX-3866</loc>
  <id>VX-3866</id>
  <content>
    <id>VX-5480</id>
    <uri>http://localhost:8080/API/item/VX-5480</uri>
    <type>item</type>
    <metadata>
      <field>
        <key>AddedBy</key>
        <value>Jane Doe</value>
      </field>
    </metadata>
  </content>
  <content>
    <id>VX*1810</id>
    <uri>http://localhost:8080/API/library/VX*1810</uri>
    <type>library</type>
    <metadata>
      <field>
        <key>AddedBy</key>
        <value>John Doe</value>
      </field>
    </metadata>
  </content>
</CollectionDocument>

```

3.1.7 Collections as folders

As mentioned in the introduction, collections could be used to represent folders, as a way for your users to organize their items.

This could be an entirely logical grouping, or correspond to the actual directory structure of the items files on the file system. To achieve the later, you can mark the collections as folder mapped collections. See *Folder mapped collections* in the API reference on how to set this up.

3.1.8 Representative thumbnails

New in version 4.0.

A new metadata field has been added to the collection metadata: `representativeItems`. This field can contain a list of items that will represent this collection. Vidispine will automatically get the representative thumbnails of each item and add a transient metadata field on the collection metadata.

For example:

```
<field>
  <name>representativeItems</name>
  <value>VX-653</value>
  <value>VX-657</value>
  <value>VX-658</value>
  <value>VX-659</value>
</field>
```

will add those values to the metadata:

```
<field>
  <name>__representativeThumbnails</name>
  <value>/API/thumbnail/VX-2/VX-653;version=0/2100@NTSC30</value>
  <value>/API/thumbnail/VX-2/VX-657;version=0/0@24000</value>
  <value>/API/thumbnail/VX-2/VX-658;version=0/3300297@30000</value>
  <value>/API/thumbnail/VX-2/VX-659;version=0/500@PAL</value>
</field>
<field>
  <name>__representativeThumbnailsNoAuth</name>
  <value>/APInoauth/thumbnail/VX-2/VX-653;version=0/2100@NTSC30?
  ↪hash=9dfb29f8159532b1d3a119462e64c03f</value>
  <value>/APInoauth/thumbnail/VX-2/VX-657;version=0/0@24000?
  ↪hash=bb75e99dd2f1f961810c85fab99cd75f</value>
  <value>/APInoauth/thumbnail/VX-2/VX-658;version=0/3300297@30000?
  ↪hash=696fa412368ccc0ac11fc30018ea8062</value>
  <value>/APInoauth/thumbnail/VX-2/VX-659;version=0/500@PAL?
  ↪hash=0737888e52cb4e66041ba7d1e58b22be</value>
</field>
```

In combination with *Stitching images*, this can be used to easily create and cache a collection thumbnail without having to track the item update notifications.

3.2 Libraries

Whereas collections are more of a generic container for entities, the strength of libraries lies in the ability to have the library content dynamically updated based on a query.

Use libraries to for example:

- Manage the current search performed by a user.
- To represent saved searches created by your users.
- To implement dynamic storage rules or access control restrictions based on the metadata of items.

3.2.1 Creating libraries

When searching for items you can create a library containing the items matching the query by specifying `result=library`. If used together with `;autoRefresh=true` you can create a “saved search”. When accessing the library later, its content will return

```
PUT /item;updateMode=REPLACE;autoRefresh=TRUE?result=library HTTP/1.1
Accept: application/xml
Content-type: application/xml
```



```
<ItemSearchDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <field>
    <name>project_priority</name>
    <value>urgent</value>
  </field>
</ItemSearchDocument>
```

```
<ItemListDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <library>VX*19</library>
  <item>VX-13</item>
  <item>VX-14</item>
  <item>VX-71</item>
</ItemListDocument>
```

Check the library settings to find out how a library was created, or why a library contains a specific set of items, for example when using self-refreshing libraries.

```
GET /library/VX*67/settings
```

```
<LibrarySettingsDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <id>VX*67</id>
  <username>admin</username>
  <updateMode>REPLACE</updateMode>
  <autoRefresh>true</autoRefresh>
  <query>
    <field>
      <name>originalWidth</name>
      <range>
        <value>640</value>
        <value>720</value>
      </range>
    </field>
  </query>
</LibrarySettingsDocument>
```

Libraries without a query

Libraries can also be created using *POST /library*. You will need to specify the items that the library should contain, but this can also be changed afterwards.

```
POST /library HTTP/1.1
Content-Type: application/xml

<ItemListDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <item id="VX-250"/>
  <item id="VX-1000"/>
</ItemListDocument>
```

```
<URIListDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <uri>VX*48</uri>
</URIListDocument>
```

Check the library settings and you will see that it does not specify a query, in comparison to libraries created when searching.

3.2.2 Automatic deletion

Libraries will be automatically deleted after having not being accessed for a period of 24 hours. There are some exception to this rule. If any of the following conditions apply, the library will not be automatically deleted:

- The library is part of a collection
- The library has a storage rule set
- The library has a site rule set
- The library has `autoRefresh=true`
- The library has an `updateFrequency` set.

3.2.3 Self-refreshing libraries

Libraries can be set to keep their contents up to date with the queries in two ways (see the table below). The two different methods can either be used together or separately. Neither of these modes will have an affect on transient libraries, as they will always be kept up to date.

Name	Values	Description
<code>autoRefresh</code>	<code>true</code> or <code>false</code> (default)	If <code>true</code> , items will be tracked as their metadata is modified.
<code>updateFrequency</code>	positive integer	If set, the library will be rebuilt periodically. The integer describes the minimum time, in minutes, between updates.

Having `autoRefresh` set means that metadata changes will have an almost immediate effect on libraries. But it has the drawback that libraries using variables, such as a timestamp search containing ranges with the “NOW” variable, will not be updated unless a user changes its metadata. To remedy this libraries can be updated periodically. From a performance point of view though, it is more efficient to check if an item belongs to a library then to refresh an entire library – so period updates should be done with care.

Caution: *Queries involving variables*

Using variables in queries, e.g. the use of the word “NOW” when searching timestamped metadata, is not reliable for libraries unless they are either set as TRANSIENT or they are set to be updated periodically.

Update modes

MERGE In this mode any items that matches query will be added to the library without removing any existing items.

REPLACE Unlike MERGE, this mode will also remove items that no longer matches the query.

TRANSIENT This mode has the same semantics as REPLACE, with some important differences. It only contains items on a logical basis, so instead of simply retrieving its items it needs to perform a search every time its contents is being requested. This leads to a faster creation time than REPLACE, but slower lookup and cannot be used to *restrict item access*.

Example

Creating a library that contains items created within the last 5 days.

```
PUT /item;autoRefresh=false;updateFrequency=60;updateMode=REPLACE?result=library
Content-Type: application/xml

<ItemSearchDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <field>
    <name>created</name>
    <range>
      <value>NOW-5DAYS</value>
      <value>NOW</value>
    </range>
  </field>
</ItemSearchDocument>
```

Restrictions

At most 999 self-refreshing libraries can exist in the system simultaneously.

If using the default Solr configuration, it is a good idea to set the *useLucene* property to speed up matching of self-refreshing libraries.

3.2.4 Restricting access to items

Setting access controls on a library will cascade down on the items. This means that libraries can be used to batch update access controls on a set of items. Note that this does not work on libraries with `updateMode TRANSIENT`.

3.2.5 Storage rules on libraries

You can set storage rules on libraries. All items belonging to the library will then be affected by the rule. Note that this does not work on libraries with `updateMode TRANSIENT`. Having a storage rule on a library will also prevent it from being automatically deleted.

SHAPES, COMPONENTS AND TRANSCODING

4.1 Item shapes

A shape is a physical representation of an item. Each shape is made up out of one or more components that correspond to content of a file.

4.1.1 Shapes

Each item will typically have at least a single shape, the *original* shape, along with one or more alternate representations of the asset.

- For video, this can be a low-resolution version, a web version and a mobile version. Another example is if you have multiple versions of the same video, but each with different audio or text tracks. Those versions would then be separate shapes.
- For text this could be the word processor document format, a PDF or a plain text version.

You will find that the information extracted and presented for video and audio files is richer than what's provided for other type of files, such as PDFs or zip files. For the former information about the container and video- and audio streams is provided, while the latter is typically presented as a shape with a binary component.

To distinguish between different shapes you can use tags. These are described in the *Shape tags and presets* section.

Importing shapes

Vidispine will create an *original* shape when an item is first *imported*. To import additional shapes to an item, for example files created by an external transcoder, then that can be done by creating a `SHAPE_IMPORT` job.

A shape import job will:

- Transfer content to a Vidispine supervised storage.
- Media check the imported file.
- Create a new shape and add it to the item.

Use the *item shape resource* to import new shapes. An image could for example be imported to an item, and tagged with the `large-jpg` tag, using:

```
POST /item/VX-12/shape?uri=file:///srv/ftp/the-doctor.jpg&tag=large-jpg
```

```
<JobDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <jobId>VX-169826</jobId>
  <user>admin</user>
```

```
<started>2014-07-03T18:21:09.795Z</started>
<status>READY</status>
<type>SHAPE_IMPORT</type>
<priority>MEDIUM</priority>
</JobDocument>
```

4.1.2 Essence versions

If you have assets that change over time, and wish to track all of those versions, then you can use an item to represent the asset and then import each update to the asset as a new essence version on the item.

Vidispine will return the shapes and thumbnails for the latest essence version by default, but you can of course select to have older versions returned as well.

Creating a new essence version

New essence versions are created using ESSENCE_VERSION jobs. See *Essence versions* for the different ways of starting such jobs. For example, creating a new essence version for an item by providing the location of the new asset.

```
POST /item/VX-37/shape/essence?uri=file:///home/lisa/render-1.jpg
```

```
<JobDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <jobId>VX-39</jobId>
  <user>lisa</user>
  <started>2014-07-03T06:52:45.114Z</started>
  <status>READY</status>
  <type>ESSENCE_VERSION</type>
  <priority>MEDIUM</priority>
</JobDocument>
```

This new image will then show up as the original shape of the item, and will be used as the input on any future transcodes. By viewing the shape we can see that this shape belongs to a new essence version. Note that the essence version numbers are zero-based.

```
<ItemDocument xmlns="http://xml.vidispine.com/schema/vidispine" id="VX-37">
  <shape>
    <id>VX-38</id>
    <essenceVersion>1</essenceVersion>
    <tag>original</tag>
    <mimeType>image/jpeg</mimeType>
    <containerComponent>...</containerComponent>
    <videoComponent>...</videoComponent>
    <metadata>
      <field>
        <key>originalFilename</key>
        <value>render-1.jpg</value>
      </field>
    </metadata>
  </shape>
</ItemDocument>
```

We can also see that there's a new essence version by retrieving the essence versions for the items.

```
GET /item/VX-37/shape/version
```

```
<URIListDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <uri>http://localhost:8080/API/item/VX-37/shape/version/1</uri>
  <uri>http://localhost:8080/API/item/VX-37/shape/version/0</uri>
</URIListDocument>
```

4.1.3 Transcoding

An item can be transcoded either when it is *imported* or afterwards by using the item transcode resource. When transcoding an already imported item a TRANSCODE job will be used. A transcode job will:

- Create any new entities, such as the new files that are about to appear.
- Create a transcoding task and submits it to a transcoder.
- Media check the new files and update the item.

The difference between transcoding while and after importing is that the former can be done in parallel to any transfers that may be needed, while the latter is a serial task as the input files, the files from the original shape of the item, should already exist on a storage managed by Vidispine.

Starting transcode jobs

The transcodes to perform are identified using *shape tags* that contains the *transcode preset* that defines the desired outputs.

Use the `tag` parameter when starting an import job to transcode an item while it is being imported. See *Transcoding* for more information on the subject.

```
POST /import?uri=file:///srv/incoming/media.mov&tag=lowres,android
```

```
<JobDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <jobId>VX-169819</jobId>
  <user>admin</user>
  <started>2014-07-03T07:20:14.220Z</started>
  <status>READY</status>
  <type>PLACEHOLDER_IMPORT</type>
  <priority>MEDIUM</priority>
</JobDocument>
```

To transcode an existing item, use the *transcode resource* with the `tag` parameter as above.

```
POST /item/VX-191440/transcode?tag=lowres,android
```

```
<JobDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <jobId>VX-169820</jobId>
  <user>admin</user>
  <started>2014-07-03T07:22:47.900Z</started>
  <status>READY</status>
  <type>TRANSCODE</type>
  <priority>MEDIUM</priority>
</JobDocument>
```

Transcode progress

The progress of the transcode is available from the job, both as progress on the transcode step and as key-value metadata on the job.

```
<task id="237">
  <step>200</step>
  <attempts>0</attempts>
  <status>STARTED_ASYNCHRONOUS</status>
  <timestamp>2014-07-03T07:27:58.030Z</timestamp>
  <description>Transcoding.</description>
  <progress total="100" unit="percent">75.0</progress>
  <subStep>
    <timestamp>2014-07-03T07:22:48.051Z</timestamp>
    <description>Starting transcode</description>
  </subStep>
</task>
```

And from the job metadata, where you will find the `transcode*` job metadata, that also includes the estimated time left and the progress expressed in the media time.

```
<data>
  <key>transcodeDurations</key>
  <value>8000000@1000000</value>
</data>
<data>
  <key>transcodeMediaTimes</key>
  <value>288000@48000</value>
</data>
<data>
  <key>transcodeProgress</key>
  <value>75.0</value>
</data>
<data>
  <key>transcodeEstimatedTimeLeft</key>
  <value>6.2072</value>
</data>
<data>
  <key>transcodeWallTime</key>
  <value>18.6216</value>
</data>
```

4.1.4 Thumbnailing

Thumbnails are by default created if an item is transcoded while being imported. To create thumbnails or posters for an item, use a `THUMBNAIL` job. A thumbnail job will:

- Create a thumbnailing task and submit it to a transcoder.
- Update the representative thumbnail of the item.

The location of the representative thumbnail is stored in the item metadata, so if you wish to present a number of items to a user, along with a thumbnail of each item, then it is recommended that you read the thumbnails from the `representativeThumbnail` metadata field instead of fetching all thumbnails for all items. There is also the `representativeThumbnailNoAuth` field that provides the thumbnail at a location that does not require authentication.


```

<timespan start="-INF" end="+INF">
  <field uuid="b578cfe7-cf8b-476f-866f-7027e0dba542" user="system" timestamp="2014-07-
  ↪03T09:23:24.172+02:00" change="VX-1345770">
    <name>representativeThumbnail</name>
    <value uuid="a159d13c-4a70-4e6a-83fd-36a7b0ef25af" user="system" timestamp="2014-
  ↪07-03T09:23:24.172+02:00" change="VX-1345770">/API/thumbnail/VX-2/VX-191440;
  ↪version=0/0@PAL</value>
  </field>
  <field uuid="12c6553d-7473-42bf-95b4-875afd1cac74" user="system" timestamp="2014-07-
  ↪03T10:46:40.728+02:00" change="VX-1345771">
    <name>representativeThumbnailNoAuth</name>
    <value uuid="9b70a04c-8755-426b-9446-3f4857cb87e1" user="system" timestamp="2014-
  ↪07-03T10:46:40.728+02:00" change="VX-1345771">/API/inoauth/thumbnail/VX-2/VX-191440;
  ↪version=0/0@PAL?hash=b5424e9878940a333b6230817ae88eef</value>
  </field>
</timespan>

```

Starting a thumbnail job

Use the *thumbnail resource* to create thumbnail jobs for an item.

```
POST /item/VX-191440/thumbnail?createThumbnails=true
```

```

<JobDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <jobId>VX-169821</jobId>
  <user>admin</user>
  <started>2014-07-03T08:46:09.960Z</started>
  <status>READY</status>
  <type>THUMBNAIL</type>
  <priority>MEDIUM</priority>
</JobDocument>

```

The thumbnails will be uploaded to the item as the job progresses. You can find them by inspecting the item. For example:

```
GET /item/VX-191440?content=thumbnail
```

```

<ItemDocument xmlns="http://xml.vidispine.com/schema/vidispine" id="VX-191440">
  <thumbnails>
    <uri>http://localhost:8080/API/thumbnail/VX-2/VX-191440;version=0/0@PAL</uri>
  </thumbnails>
</ItemDocument>

```

If you wish to see which thumbnails were created by a specific thumbnail job, then you can check the thumbnails job metadata.

```

<data>
  <key>thumbnails</key>
  <value>{" [TC:0@PAL] ":"http://localhost:8080/API/thumbnail/VX-2/VX-191440;version=0/
  ↪0@25"}</value>
</data>

```

4.1.5 Analyzing media

Shapes can be analyzed to detect for example detect cropping and silence. See *Shape analysis*.

4.2 Shape tags and presets

Shapes can be tagged in order to retrieve their file contents easily using *Retrieving item information*. The system adds certain tags to shapes automatically during certain operations, such as an import job. Predefined tags can be seen in the table below.

Tag	Description
original	The first shape that was created for the item.

While shape tags serve as a “name tag” for shapes, they also contain the recipe for how new shape instances with the shape tag should be constructed, or transcoded, from other shapes. This is defined using a *transcode preset* that defines the format, codec, bitrate etc of the shapes.

4.2.1 Transcode presets

The transcode preset specifies the output format, codec and encoding settings that should be used when transcoding. You can either

- Use one of the built in *preset templates*.
- Use one of the presets *defined in this documentation*.
- Define your own preset. See *Transcode preset elements* for more information.

Preset templates

New in version 4.0.3.

Vidispine comes with some preset templates built in. These can be added to the system by making a PUT request to `APIinit/preset-templates`. These template tags have names that begin with double underscore and cannot be overwritten (Also, shape tags with names starting with double underscore cannot be added to the system).

4.2.2 Scripting transcode presets

Transcode presets can be made dynamic by assigning a JavaScript to them. Made available to the script will be the shape that is going to be transcoded as well as the unmodified preset. The shape can be used as input to determine for example the original resolution of the media. For output the preset can be modified before it is sent to the transcoder. An overview is given in the table below.

Mode	Identifier	XML Type	Java Type
input	jobMetadata	-	<code>java.util.Map<String, String></code>
input	metadata	<i>MetadataType</i>	<code>com.vidispine.generated.MetadataType</code>
input	shape	<i>ShapeType</i>	<code>com.vidispine.generated.ShapeType</code>
output	preset	<i>TranscodePresetType</i>	<code>com.vidispine.generated.TranscodePresetType</code>

The given data types are generated from the XML schema and belong to the package `com.vidispine.generated`. They follow JavaBean standard, i.e. getters and setters for their attributes.

Caution: *Lists of integer*

When adding integers of a list, simply using integer literals will not work. Instead `java.lang.Integer` must be used, for example: `list.add(new java.lang.Integer(5));`

Tip: When writing the script, or after you have written one, write tests that verifies it for a range of shapes using the [script test resource](#).

Examples**A preset that only produces two audio channels in the output**

First we create a preset with only the formats and codecs set.

```
PUT /shape-tag/h264
Content-Type: application/xml

<TranscodePresetDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <format>mp4</format>
  <audio>
    <codec>aac</codec>
  </audio>
  <video>
    <codec>h264</codec>
  </video>
</TranscodePresetDocument>
```

200 OK

Then we add the script

```
PUT /shape-tag/h264/script
Content-Type: application/javascript

// Retrieve the channel count: <ShapeDocument><audioComponent><channelCount>
var channelCount = shape.getAudioComponent().get(0).getChannelCount();

// If we have more than two channels, limit it to the first two:
if (channelCount > 2) {
  // Adding elements to <TranscodePresetDocument><audio><channel>
  preset.getAudio().getChannel().add(new java.lang.Integer(0));
  preset.getAudio().getChannel().add(new java.lang.Integer(1));
}
```

200 OK

The result preset will then look like this if the input shape has more than two audio channels:

```
<TranscodePresetDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <format>mp4</format>
  <audio>
    <codec>aac</codec>
```

```
<channel>0</channel>
<channel>1</channel>
</audio>
<video>
  <codec>h264</codec>
</video>
</TranscodePresetDocument>
```

Scaling the output depending on the input

Using the same shape-tag as in the example above we can use the following script.

```
// Retrieve the width and height of the input
var width = shape.getVideoComponent().get(0).getResolution().getWidth();
var height = shape.getVideoComponent().get(0).getResolution().getHeight();

if (width == 720 && height == 608) {
  // Create the scaling element
  var scaling = new com.vidispine.generated.ScalingType();
  preset.getVideo().setScaling(scaling);

  // Crop 32 pixels from the top
  scaling.setTop(32);

  // Set the desired display aspect ratio
  var targetDar = new com.vidispine.generated.AspectRatioType();
  targetDar.setHorizontal(4);
  targetDar.setVertical(3);
  scaling.setTargetDAR(targetDar);

  // Set the desired resolution
  scaling.setWidth(480);
  scaling.setHeight(360);
} else if (height > 700) {
  // Create the scaling element
  var scaling = new com.vidispine.generated.ScalingType();
  preset.getVideo().setScaling(scaling);

  // Set the desired display aspect ratio
  var targetDar = new com.vidispine.generated.AspectRatioType();
  targetDar.setHorizontal(16);
  targetDar.setVertical(9);
  scaling.setTargetDAR(targetDar);

  // Set the desired resolution
  scaling.setWidth(640);
  scaling.setHeight(360);
} else {
  // Create the scaling element
  var scaling = new com.vidispine.generated.ScalingType();
  preset.getVideo().setScaling(scaling);

  // Set the desired display aspect ratio
  var targetDar = new com.vidispine.generated.AspectRatioType();
  targetDar.setHorizontal(4);
  targetDar.setVertical(3);
```

```

scaling.setTargetDAR(targetDar);

// Set the desired resolution
scaling.setWidth(320);
scaling.setHeight(240);
}

```

4.2.3 Transcode preset elements

This section highlights some of the settings and possibilities that are often useful when authoring a transcode preset.

Setting a preferred source tag

New in version 4.0.

It is possible to specify that another file than the original should be used as the source file when transcoding. This is done using the `preferredSourceTag` element.

Burning in the timecode in the video

New in version 4.0.

Vidispine can burn the timecode into the output video. To enable this, set the `burnTimecode` element to true within the `video` element.

Customizing the timecode

New in version 4.5.

The following settings can be added as key-value pairs in the transcode preset:

- `bitc_font`. Font to use.
 - monospace** fixed-width font (default)
 - sans** sans-serif font
 - serif** font with serifs
- `bitc_size`. Height of font in pixels. Defaults to 15th of the video height.
- `bitc_sizeRel`. Height of font relative to full video frame.
- `bitc_xRel`. Position relative to width of video. Defaults to 0.5 (middle).
- `bitc_yRel`. Position relative to height of video. Defaults to 0.9 (bottom).
- `bitc_horizontalbase`. Horizontal position of base point relative to text bounding box.
 - 0.0 (or left)** base point is left border of bounding box.
 - 0.5 (or center)** base point is center of bounding box.
 - 1.0 (or right)** base point is right border of of bounding box.
- `bitc_verticalbase`. Vertical position of base point relative to text bounding box.
 - 0.0 (or top)** base point is top border of of bounding box.

0.5 (or middle) base point is middle of bounding box.

1.0 (or bottom) base point is bottom border of bounding box.

- `bitc_r, bitc_g, bitc_b, bitc_a`. RGB+alpha of text. Defaults to opaque white.
- `bitc_outlineR, bitc_outlineG, bitc_outlineB, bitc_outlineR`. RGB+alpha of surrounding block. Defaults to opaque black.
- `bitc_outline`. Type of outline. Defaults to bar.
- `bitc_outlinesize`. Size (margin) of outline.

Setting a maximum duration of a chunk in QuickTime files

New in version 4.1.

It is possible to specify a maximum duration for chunks in QuickTime files (MOV/MP4/3GPP). To set the duration add the `maxChunkDuration` element to the `TranscodePresetType`.

Example: setting the maximum chunk duration to 2 seconds

```
<?xml version="1.0" encoding="UTF-8" standalone="yes"?>
<TranscodePresetDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <format>mp4</format>
  <maxChunkDuration>
    <samples>50</samples>
    <timeBase>
      <numerator>1</numerator>
      <denominator>25</denominator>
    </timeBase>
  </maxChunkDuration>
  <audio>
    <codec>aac</codec>
    <bitrate>320000</bitrate>
  </audio>
  <video>
    <codec>h264</codec>
    <bitrate>500000</bitrate>
    <framerate>
      <numerator>1</numerator>
      <denominator>25</denominator>
    </framerate>
    <resolution>
      <width>512</width>
      <height>288</height>
    </resolution>
  </video>
</TranscodePresetDocument>
```

Mixing audio channels

New in version 4.0.

It is possible to define advanced mappings between input and output audio channels. This is done using the `mix` element.

Example: mixing 5.1 audio into stereo

```

<TranscodePresetDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <format>mp4</format>
  <audio>
    <codec>aac</codec>
    <bitrate>128000</bitrate>
    <mix>
      <input channel="0" stream="1" gain="1.0"/>
      <input channel="2" stream="1" gain="0.5"/>
      <input channel="4" stream="1" gain="1.0"/>
    </mix>
    <mix>
      <input channel="1" stream="1" gain="1.0"/>
      <input channel="2" stream="1" gain="0.5"/>
      <input channel="5" stream="1" gain="1.0"/>
    </mix>
  </audio>
  <video>
    <scaling>
      <width>512</width>
      <height>288</height>
    </scaling>
    <codec>h264</codec>
    <bitrate>256000</bitrate>
    <framerate>
      <numerator>1</numerator>
      <denominator>25</denominator>
    </framerate>
  </video>
</TranscodePresetDocument>

```

The value of the `stream` attribute can be deduced from the input shape. The `gain` attribute is expressed linearly, i.e. a value of 1.0 means a gain of 0 dB. Also, since the number of input channels will probably vary with different inputs, this functionality is best utilized in conjunction with the JavaScript functionality described below.

The `mix` element can also be used to insert silent audio channels in the output.

Example: adding two silent audio channels in output

```

<TranscodePresetDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <format>mp4</format>
  <audio>
    <codec>aac</codec>
    <bitrate>128000</bitrate>
    <mix silence="true"/>
    <mix silence="true"/>
  </audio>
  <video>
    <scaling>
      <width>512</width>
      <height>288</height>
    </scaling>
    <codec>h264</codec>
    <bitrate>256000</bitrate>
    <framerate>

```

```
<numerator>1</numerator>
<denominator>25</denominator>
</framerate>
</video>
</TranscodePresetDocument>
```

Splitting audio channels to mono files

New in version 4.1.

It is possible to split audio channels into separate mono audio files. And they can be *renamed according to their channel ids*.

Example: split specific channels

```
<TranscodePresetDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <format>wav</format>
  <audio>
    <codec>pcm_s16le</codec>
    <channel>0</channel>
    <channel>3</channel>
    <channel>5</channel>
    <monoFile>true</monoFile>
  </audio>
  <video>
    <noVideo>true</noVideo>
  </video>
</TranscodePresetDocument>
```

Example: split all channels

```
<TranscodePresetDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <format>wav</format>
  <audio>
    <codec>pcm_s16le</codec>
    <monoFile>true</monoFile>
    <allChannel>true</allChannel>
  </audio>
  <video>
    <noVideo>true</noVideo>
  </video>
</TranscodePresetDocument>
```

Splitting audio channels to different output files

New in version 4.1.1.

It is possible to split audio channels into files that contain more than one channels. And they can be *renamed according to their channel ids*.

Example

This preset below will produce three files:

1. A WAV file containing 1 audio stream with 2 channels.
2. A MOV file containing 2 audio streams, each stream has one channel.
3. A MP4 file containing only the video.

```
<TranscodePresetDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <format>mp4</format>
  <audio>
    <output>
      <format>wav</format>
      <codec>pcm_s24le</codec>
      <channel>0</channel>
      <channel>1</channel>
    </output>
    <output>
      <format>mov</format>
      <codec>aac</codec>
      <bitrate>320000</bitrate>
      <channel>2</channel>
      <channel>3</channel>
      <stream>1</stream>
      <stream>1</stream>
    </output>
  </audio>
  <video>
    <codec>h264</codec>
    <bitrate>1000000</bitrate>
    <framerate>
      <numerator>1</numerator>
      <denominator>25</denominator>
    </framerate>
    <resolution>
      <width>512</width>
      <height>288</height>
    </resolution>
  </video>
</TranscodePresetDocument>
```

Specifying multiple audio tracks with different audio codecs in output

New in version 4.14.

It is possible to output multiple audio tracks, with different audio codecs, using the `audioTrack` element in the `preset`. The `AudioTrackTranscodePresetType` has the `channel` and `mix` elements from the `AudioTranscodePresetType`. However, there is no `stream` element, since adding multiple `AudioTrackTranscodePresetType` gives the same behaviour.

If you add a *script* to your preset you can access the `audioTrack` list with: `preset.getAudioTrack()`. This is useful for doing advanced channel mappings and mixdown depending on the input(s).

Example: two audio tracks, one with AC-3 and one with AAC

```
<?xml version="1.0" encoding="UTF-8" standalone="yes"?>
<TranscodePresetDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <format>mov</format>
  <audioTrack>
    <codec>ac3</codec>
    <bitrate>384000</bitrate>
  </audioTrack>
  <audioTrack>
    <codec>aac</codec>
    <bitrate>96000</bitrate>
  </audioTrack>
</TranscodePresetDocument>
```

Example: two audio tracks, one with AC-3 and one with a mixdown to stereo AAC

```
<?xml version="1.0" encoding="UTF-8" standalone="yes"?>
<TranscodePresetDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <format>mov</format>
  <audioTrack>
    <codec>ac3</codec>
    <bitrate>384000</bitrate>
  </audioTrack>
  <audioTrack>
    <codec>aac</codec>
    <bitrate>96000</bitrate>
    <mix>
      <input channel="0" gain="1.0"/>
      <input channel="2" gain="0.5"/>
      <input channel="4" gain="1.0"/>
    </mix>
    <mix>
      <input channel="1" gain="1.0"/>
      <input channel="2" gain="0.5"/>
      <input channel="5" gain="1.0"/>
    </mix>
  </audioTrack>
</TranscodePresetDocument>
```

Example: two audio tracks, one with AC-3 and one with AAC, picking some channels

```
<?xml version="1.0" encoding="UTF-8" standalone="yes"?>
<TranscodePresetDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <format>mov</format>
  <audioTrack>
    <codec>ac3</codec>
    <bitrate>384000</bitrate>
    <channel>0</channel>
    <channel>1</channel>
  </audioTrack>
  <audioTrack>
    <codec>aac</codec>
```

```

    <bitrate>96000</bitrate>
    <channel>2</channel>
    <channel>3</channel>
  </audioTrack>
</TranscodePresetDocument>

```

Image overlays

One can overlay images on the output at specific positions and intervals by using the `overlay` element. Note that the image is overlaid as is and will not be scaled in any way, meaning that you may want to overlay different images depending on the output resolution. Specifying an overlay interval in an image preset is not supported. Only PNG overlays are supported.

Multiple overlays are supported. (New in 4.4.)

Example: overlaying a logo

```

<TranscodePresetDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  ...
  <overlay>
    <uri>http://example.com/logo.png</uri>
    <x>10</x>
    <y>30</y>
  </overlay>
</TranscodePresetDocument>

```

Text overlays

New in version 4.7.

In addition to image overlays, text overlays can also be added. The XML syntax is somewhat different from the image overlay syntax, see `TextOverlayType` in *XML Schema* for details.

Example: overlaying text

```

<TranscodePresetDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  ...
  <textOverlay>
    <text xRel="0.1" yRel="0.9" horizontalBase="left" align="left" verticalBase=
↪ "bottom" sizeRel="0.05">
      <line>Happy</line>
      <line>birthday!</line>
    </text>
  </textOverlay>
  <textOverlay>
    <text xRel="0.9" yRel="0.9" horizontalBase="right" align="right"
      verticalBase="bottom" sizeRel="0.02" r="0" g="0" b="0" language="ar">
      <line>&#1571;&#1580;&#1605;&#1604; &#1575;&#1604;&#1571;&#1605;&#1606;&#1610;&
↪ &#1575;&#1578;&#1616; &#1576;&#1575;&#1604;&#1605;&#1586;&#1610;&#1583; &#1605;&
↪ &#1606; &#1575;&#1604;&#1587;&#1593;&#1575;&#1583;&#1577; &#1608;&#1575;&#1604;&
↪ &#1607;&#1606;&#1575;&#1569;!</line>
    </text>
  </textOverlay>

```

```
</textOverlay>
</TranscodePresetDocument>
```

Thumbnails at specific interval

By adding the element `<thumbnailPeriod>` to the preset, the interval of the the thumbnails can be customized. The default interval is 10 seconds. Example, for one thumbnail per second:

```
<TranscodePresetDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  ...
  <thumbnailPeriod>
    <samples>1</samples>
    <timeBase>
      <numerator>1</numerator>
      <denominator>1</denominator>
    </timeBase>
  </thumbnailPeriod>
  ...
</TranscodePresetDocument>
```

Thumbnails at scene changes

By adding the element `<thumbnailPlugin>scenechange</thumbnailPlugin>` to the preset, the fixed thumbnail interval is replaced by an algorithm that extracts thumbnail at scene changes in the version.

Since 4.14, you can combine this element with `<thumbnailPeriod>` to specify the maximum interval between thumbnails. The example below will create a thumbnail at every scene change, but never more than 20 seconds apart:

```
<TranscodePresetDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  ...
  <thumbnailPeriod>
    <samples>1</samples>
    <timeBase>
      <numerator>1</numerator>
      <denominator>1</denominator>
    </timeBase>
  </thumbnailPeriod>
  <thumbnailPlugin>scenechange</thumbnailPlugin>
  ...
</TranscodePresetDocument>
```

4.2.4 Custom settings

Some codecs support fine-grained custom settings. These settings are specified by adding `setting` element inside the `video` or `audio` element, or by adding a `muxerSetting`.

Common settings for video and image

thumbnailformat

By default, video thumbnails are JPEG and image thumbnails are PNG.

New in version 4.2.12.

This can be changed with `thumbnailformat`. Valid values are `jpeg` and `png`.

Video-only settings

sceneChangeThreshold

Can be used to control GOP structure based on scene changes for `mpeg2video`. By default, GOPs are adjusted according to detected scene changes. Set to a very high number (1000000000) to disable scene change detection in order to get equal-sized GOPs.

noTimeCodeTrack

If true, do not write time code track. Primarily used for MP4 and MOV containers.

Image-only settings

colorspace

Sets the color space to specified value. Valid values are `CIELab`, `CMY`, `CMYK`, `Gray`, `HCL`, `HCLp`, `HSB`, `HSI`, `HSL`, `HSV`, `HWB`, `Lab`, `LCH`, `LCHab`, `LCHuv`, `LMS`, `Log`, `Luv`, `OHTA`, `Rec601Luma`, `Rec601YCbCr`, `Rec709Luma`, `Rec709YCbCr`, `RGB`, `sRGB`, `sRGB`, `Transparent`, `XYZ`, `YCbCr`, `YDbDr`, `YCC`, `YIQ`, `YPbPr`, `YUV`.

New in version 4.5.

In addition, `colorspace` can be set as `demuxerSetting` as well. This works for PDF and PS files, and will cause PDF/PS parsing to generate result in the correct color space already when reading the file.

profile

Sets a profile. Profiles must be installed on transcoder node (`/usr/share/color/icc`).

New in version 4.5.

The transcoder now comes preinstalled with the most common profiles.

New in version 4.5.

A special profile is added, `detect-xmp`. The profile will read the profile from XMP metadata and use that profile. An example, that will read the XMP profile and then set `sRGB`:

```
<TranscodePresetDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  ...
  <setting>
    <key>profile</key>
    <value>detect-xmp</value>
  </setting>
  <setting>
    <key>profile</key>
    <value>sRGB</value>
  </setting>
</TranscodePresetDocument>
```

strip

If `true`, strip profile info. If `false`, do not strip profile.

density

Set the density (resolution) of the image. The format is `xRes["x" yRes] WHITESPACE ("dpi" | "dpcm")`. If only one value is set, the same resolution is used for x and y. By specifying `dpi` or `dpcm`, resolution can explicitly be set to mean pixels per inch or pixels per centimeter, respectively.

sharpen

New in version 4.4.3.

If `true`, sharpens the image. May produce better results after scaling.

Muxer settings

streamOrder

Controls in which order streams are numbered in the output. Comma separated list of `audio, video, subtitle`.

Demuxer settings

extract closed captions

New in version 4.14.

It is possible to extract EIA-608(also known as “line 21 captions”) and CEA-708 captions from source file and store it in item metadata by specifying `extract_closed_captions = true` in `demuxerSetting`.

Example: preset with `extract_closed_captions=true`

```
PUT /shape-tag/extract_CC
Content-Type: application/xml

<TranscodePresetDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <format>mp4</format>
  <audio>
    <codec>aac</codec>
  </audio>
  <video>
    <codec>h264</codec>
  </video>
  <demuxerSetting>
    <key>extract_closed_captions</key>
    <value>true</value>
  </demuxerSetting>
</TranscodePresetDocument>
```

```
200 OK
```

Example: transcode using previously defined preset

```
PUT item/VX-82/transcode?tag=extract_CC
```

```
200 OK
```

When the job is finished item metadata will contain extracted closed caption *Subtitles* if the extraction was successful.

4.3 Common presets

It is not always straightforward to construct a transcode preset that result in output with the desired format. Here are some guidelines for some of the most common formats.

4.3.1 H264

The `codec` element should be set to `h264`. The default profile is `Baseline`. This can be overridden using the `preset` element. The following values are accepted:

- `baseline`
- `ipod`
- `main`
- `high`

There are also AVC-Intra specific profiles, see below.

Example

An MP4 using the Main profile:

```
<TranscodePresetDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <format>mp4</format>
  <audio>
    <codec>mp3</codec>
    <framerate>
      <numerator>1</numerator>
      <denominator>44100</denominator>
    </framerate>
    <channel>0</channel>
    <channel>1</channel>
    <stream>2</stream>
  </audio>
  <video>
    <scaling>
      <width>1280</width>
      <height>720</height>
    </scaling>
    <codec>h264</codec>
```

```

<bitrate>3000000</bitrate>
<framerate>
  <numerator>1</numerator>
  <denominator>25</denominator>
</framerate>
<preset>main</preset>
</video>
</TranscodePresetDocument>

```

4.3.2 AVC-Intra

To produce AVC-Intra output, the preset element should be set to `intra50` or `intra100` depending on desired output. Also add a setting of `codecTagString` to further specify the variant of AVC-Intra. The possible values are:

- ai5p – 50M 720p24/p30/p60
- ai5q – 50M 720p25/p50
- ai56 – 50M 1080i60
- ai55 – 50M 1080i50
- ai53 – 50M 1080p24/p30
- ai52 – 50M 1080p25
- ai1p – 100M 720p24/p30/p60
- ai1q – 100M 720p25/p50
- ai16 – 100M 1080i60
- ai15 – 100M 1080i50
- ai13 – 100M 1080p24/p30
- ai12 – 100M 1080p25

Example

```

<TranscodePresetDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <format>mov</format>
  <audio>
    <codec>pcm_s16le</codec>
    <framerate>
      <numerator>1</numerator>
      <denominator>48000</denominator>
    </framerate>
    <channel>0</channel>
    <channel>1</channel>
    <stream>2</stream>
  </audio>
  <video>
    <scaling>
      <width>1920</width>
      <height>1080</height>
    </scaling>
    <codec>h264</codec>
    <bitrate>100000000</bitrate>
  </video>
</TranscodePresetDocument>

```



```

<framerate>
  <numerator>1</numerator>
  <denominator>25</denominator>
</framerate>
<gopSize>0</gopSize>
<pixelFormat>yuv422p</pixelFormat>
<preset>intra100</preset>
<profile>CBR</profile>
<setting>
  <key>codecTagString</key>
  <value>ai12</value>
</setting>
</video>
</TranscodePresetDocument>

```

4.3.3 ProRes

Set the codec element to `prores`. The preset element must also be set to one of the following values:

- PR422HQ – ProRes HQ
- PR422 – ProRes 422
- PR422LT – ProRes LT
- PR422Proxy – ProRes Proxy
- PR4444 – ProRes 4444
- PR4444XQ – ProRes 4444 XQ (New in 4.13.)

The ProRes encoder will use the field-order information that Vidispine can read from the input file. In the case that Vidispine has the wrong information, you can override it by adding a `setting` key-value to the `video` element in the `TranscodePresetDocument`. The key should be `interlace_flag` and value one of:

- `progressive`
- `top_first`
- `bottom_first`

Example

ProRes 422 LT:

```

<TranscodePresetDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <format>mov</format>
  <audio>
    <codec>pcm_s16le</codec>
    <framerate>
      <numerator>1</numerator>
      <denominator>48000</denominator>
    </framerate>
    <channel>0</channel>
    <channel>1</channel>
    <stream>2</stream>
  </audio>
  <video>
    <scaling>

```

```

    <width>1920</width>
    <height>1080</height>
  </scaling>
  <codec>prores</codec>
  <bitrate>85000000</bitrate>
  <preset>PR422LT</preset>
  <framerate>
    <numerator>1</numerator>
    <denominator>25</denominator>
  </framerate>
</video>
</TranscodePresetDocument>

```

With `interlace_flag` set to `top_first`:

```

<TranscodePresetDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <format>mov</format>
  <audio>
    <codec>pcm_s16le</codec>
    <framerate>
      <numerator>1</numerator>
      <denominator>48000</denominator>
    </framerate>
    <channel>0</channel>
    <channel>1</channel>
    <stream>2</stream>
  </audio>
  <video>
    <scaling>
      <width>1920</width>
      <height>1080</height>
    </scaling>
    <codec>prores</codec>
    <bitrate>85000000</bitrate>
    <framerate>
      <numerator>1</numerator>
      <denominator>25</denominator>
    </framerate>
    <preset>PR422LT</preset>
    <setting>
      <key>interlace_flag</key>
      <value>top_first</value>
    </setting>
  </video>
</TranscodePresetDocument>

```

4.3.4 XDCAM IMX-30/40/50

The `preset` element must be set to `imx30`, `imx40` or `imx50` depending on desired output. Also, a setting must be added specifying `codecTagString`. Accepted values are:

- `mx5p` – IMX-50
- `mx4p` – IMX-40
- `mx3p` – IMX-30

NTSC

To get NTSC output, there are a few changes that need to be made.

- The `framerate` should have a numerator of 1001 and a denominator of 30000.
- The `scaling` element should have a height of 518.
- Exchange the last letter of the `codedTagString` from `p` to `n` (i.e. `mx5p` to `mx5n`)

Example

IMX-50:

```
<TranscodePresetDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <format>mx5n_d10</format>
  <audio>
    <codec>pcm_s24le</codec>
    <channel>0</channel>
    <channel>1</channel>
    <channel>2</channel>
    <channel>3</channel>
    <stream>4</stream>
  </audio>
  <video>
    <scaling>
      <width>720</width>
      <height>608</height>
      <top>-32</top>
    </scaling>
    <codec>mpeg2video</codec>
    <bitrate>50000000</bitrate>
    <framerate>
      <numerator>1</numerator>
      <denominator>25</denominator>
    </framerate>
    <displayWidth>
      <numerator>720</numerator>
      <denominator>1</denominator>
    </displayWidth>
    <displayHeight>
      <numerator>576</numerator>
      <denominator>1</denominator>
    </displayHeight>
    <displayXOffset>
      <numerator>0</numerator>
      <denominator>1</denominator>
    </displayXOffset>
    <displayYOffset>
      <numerator>32</numerator>
      <denominator>1</denominator>
    </displayYOffset>
    <containerSAR>
      <horizontal>64</horizontal>
      <vertical>45</vertical>
    </containerSAR>
    <gopSize>0</gopSize>
    <pixelFormat>yuv422p</pixelFormat>
  </video>
</TranscodePresetDocument>
```

```

<preset>imx50</preset>
<setting>
  <key>codecTagString</key>
  <value>mx5p</value>
</setting>
</video>
</TranscodePresetDocument>

```

4.3.5 XDCAM HD422

The `format` element must be set to `mx_ffmpeg`. There are also some settings that must be added, see example below. The `codecTagString` setting should be one of the following values:

- `xd54` – 720p24 50Mb/s CBR
- `xd55` – 720p25 50Mb/s CBR
- `xd59` – 720p60 50Mb/s CBR
- `xd5a` – 720p50 50Mb/s CBR
- `xd5b` – 1080i60 50Mb/s CBR
- `xd5c` – 1080i50 50Mb/s CBR
- `xd5d` – 1080p24 50Mb/s CBR
- `xd5e` – 1080p25 50Mb/s CBR
- `xd5f` – 1080p30 50Mb/s CBR

NTSC

To get NTSC output, set the `framerate` to have a numerator of 1001 and a denominator of 30000, and use the appropriate `codecTagString` from the list above.

Example

```

<TranscodePresetDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <format>mx_ffmpeg</format>
  <audio>
    <codec>pcm_s24le</codec>
    <channel>0</channel>
    <channel>1</channel>
    <channel>2</channel>
    <channel>3</channel>
    <stream>1</stream>
    <stream>1</stream>
    <stream>1</stream>
    <stream>1</stream>
  </audio>
  <video>
    <scaling>
      <width>1920</width>
      <height>1080</height>
    </scaling>
    <codec>mpeg2video</codec>
  </video>
</TranscodePresetDocument>

```

```

<bitrate>50000000</bitrate>
<framerate>
  <numerator>1</numerator>
  <denominator>25</denominator>
</framerate>
<pixelFormat>yuv422p</pixelFormat>
<setting>
  <key>flags</key>
  <value>+ildct+ilme</value>
</setting>
<setting>
  <key>top</key>
  <value>1</value>
</setting>
<setting>
  <key>dc</key>
  <value>10</value>
</setting>
<setting>
  <key>qmin</key>
  <value>1</value>
</setting>
<setting>
  <key>lmin</key>
  <value>1*QP2LAMBDA</value>
</setting>
<setting>
  <key>rc_max_vbv_use</key>
  <value>1</value>
</setting>
<setting>
  <key>rc_min_vbv_use</key>
  <value>1</value>
</setting>
<setting>
  <key>minrate</key>
  <value>50000k</value>
</setting>
<setting>
  <key>maxrate</key>
  <value>50000k</value>
</setting>
<setting>
  <key>bufsize</key>
  <value>36408333</value>
</setting>
<setting>
  <key>bf</key>
  <value>2</value>
</setting>
<setting>
  <key>codecTagString</key>
  <value>xd5c</value>
</setting>
</video>
</TranscodePresetDocument>

```

4.3.6 DV

For DVCAM, DVCPRO and DVCPRO50, codec should be set to dvvideo, for DVCPRO HD, it should be dv_100. To get 16x9 aspect ratio, targetDAR must be set (see example below). The value of pixelFormat determines whether the output will be DV, DVCPRO or DVCPRO50.

Pixel format	Output
yuv420p	DVCAM
yuv411p	DVCPRO
yuv422p	DVCPRO50

NTSC

To get NTSC output the following changes should be made.

- The framerate should have a numerator of 1001 and a denominator of 30000.
- The scaling should have a height of 480.
- codecTagString should have a value of dvpn.

Example

16x9 DVCPRO:

```
<TranscodePresetDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <format>avi</format>
  <audio>
    <codec>pcm_s16le</codec>
    <framerate>
      <numerator>1</numerator>
      <denominator>48000</denominator>
    </framerate>
    <channel>0</channel>
    <channel>1</channel>
    <stream>2</stream>
  </audio>
  <video>
    <scaling>
      <width>720</width>
      <height>576</height>
      <targetDAR>
        <horizontal>16</horizontal>
        <vertical>9</vertical>
      </targetDAR>
    </scaling>
    <codec>dvvideo</codec>
    <bitrate>25000000</bitrate>
    <framerate>
      <numerator>1</numerator>
      <denominator>25</denominator>
    </framerate>
    <gopSize>0</gopSize>
    <pixelFormat>yuv411p</pixelFormat>
    <profile>CBR</profile>
    <setting>
      <key>codecTagString</key>
```

```

    <value>dvpp</value>
  </setting>
  <setting>
    <key>dt.smode</key>
    <value>pts</value>
  </setting>
</video>
</TranscodePresetDocument>

```

4.3.7 DNxHD

The codec should be set to dnxhd.

Avid DNxHR/DNxHD

New in version 4.13.

In version 4.13, the MainConcept codec is available for DNxHD encoding. Set `codec` to `mc_vc3`. Set the preset element to one of the following values.

preset	width	height	interlace_flag	quality	Avid profile	Id
VC3_SQ_720p_TR	960	720	progressive	medium	Avid DNxHD 100	1258
VC3_SQ_720p	1280	720	progressive	medium	Avid DNxHD 145	1252
VC3_HQ_720p	1280	720	progressive	high	Avid DNxHD 220	1251
VC3_HQX_720p	1280	720	progressive	high extended	Avid DNxHD 220x	1250
VC3_LB_1080p	1920	1080	progressive	low	Avid DNxHD 36	1253
VC3_SQ_1080p_TR	1440	1080	progressive	medium	Avid DNxHD 100	1259
VC3_SQ_1080p	1920	1080	progressive	medium	Avid DNxHD 145	1237
VC3_HQ_1080p	1920	1080	progressive	high	Avid DNxHD 220	1238
VC3_HQX_1080p	1920	1080	progressive	high extended	Avid DNxHD 220x	1236
VC3_444_1080p	1920	1080	progressive	RGB 4:4:4	Avid DNxHD 444	1256
VC3_SQ_1080i_TR	1440	1080	top_first	medium	Avid DNxHD 100	1243
VC3_SQ_1080i	1920	1080	top_first	medium	Avid DNxHD 145	1244
VC3_HQ_1080i	1920	1080	top_first	high	Avid DNxHD 220	1242
VC3_HQX_1080i	1920	1080	top_first	high extended	Avid DNxHD 220x	1241
VC3_HQ_DCI_2K	2048	1080	progressive	high		1272
VC3_HQX_DCI_2K	2048	1080	progressive	high extended		1271
VC3_444_DCI_2K	2048	1080	progressive	RGB 4:4:4		1270
VC3_HQ_DCI_4K	4096	2160	progressive	high		1272
VC3_HQX_DCI_4K	4096	2160	progressive	high extended		1271
VC3_444_DCI_4K	4096	2160	progressive	RGB 4:4:4		1270
VC3_LB	any	any	progressive	low	Avid DNxHR LB	1274
VC3_SQ	any	any	progressive	medium	Avid DNxHR SQ	1273
VC3_HQ	any	any	progressive	high	Avid DNxHR HQ	1272
VC3_HQX	any	any	progressive	high extended	Avid DNxHR HQX	1271
VC3_444	any	any	progressive	RGB 4:4:4	Avid DNxHR 444	1270

Example:

```

<TranscodePresetDocument>
  <format>mx f</format>
  <audio>
    ...

```

```
</audio>
<video>
  <codec>mc_vc3</codec>
  <preset>VC3_HQ_1080p</preset>
  <setting>
    <key>interlace_flag</key>
    <value>progressive</value>
  </setting>
  <scaling>
    <width>1920</width>
    <height>1080</height>
  </scaling>
</video>
</TranscodePresetDocument>
```

4.3.8 RED

New in version 4.1.

Vidispine support RED as an input format so there is no special shape-tag settings that needs to be made. However, there are a few limitations and things to keep in mind.

Local file access

The transcoder needs to be able to read the RED file locally. Transcoder and Middleware needs to be running at the same machine.

Choosing an appropriate quality

New in version 4.2.

Demuxing of RED material is a very computational demanding task. Normal RED footage has a resolution of 4K or 5K. Decoding such a frame in full resolution and quality is sometimes a bit overkill. That is, when creating a lowres file in 640x360 resolution you can save a lot of time by decoding the RED footage in a lower resolution.

You can specify what decoding/demuxing quality the transcoder should use by setting the `demuxerSetting` element in your shape-tag:

```
<TranscodePresetDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <format>mp4</format>
  <audio>
    ...
  </audio>
  <video>
    ...
  </video>
  <demuxerSetting>
    <key>r3d_demuxer_quality</key>
    <value>full_premium</value>
  </demuxerSetting>
</TranscodePresetDocument>
```

Valid values for `r3d_demuxer_quality` is:

- `full_premium` - Full resolution and the best quality

- `half_premium` - Half of the width and height of the original resolution and the best quality
- `half_good` - Half of the width and height of the original resolution with good quality
- `quarter_good` - Quarter of the width and height of the original resolution with good quality
- `eight_good` - An eight of the width and height of the original resolution with good quality
- `sixteenth_good` - A sixteenth of the width and height of the original resolution with good quality

Multi-file RED clips

In case of multi-file RED clip the naming of the clips will be crucial. They should already be named (which they are as default):

```
<filename><index>.R3D
```

To preserve the filename of a RED file you can add a *filename script* to the storage where the RED files will be imported. For example:

```
PUT /API/storage/<storage-id>/metadata/filenameScript HTTP/1.1
Content-Type:text/plain

if (context.getExtension() != null && (context.getExtension() == "R3D" || context.
→getExtension() == "r3d"))
    "VX-" + context.getOriginalFilename();
else
    context.getFileId() + "." + context.getExtension();
```

Then you need to import the clips into an *placeholder*, this way there will only be one transcoded file instead of X (X being the number of clips). For example:

```
POST /API/import/placeholder?container=0&video=2
Content-Type: application/xml

<MetadataDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <timespan start="-INF" end="+INF">
    <field>
      <name>title</name>
      <value>My placeholder for RED files</value>
    </field>
  </timespan>
</MetadataDocument>
```

```
POST /API/import/placeholder/<placeholder-id>/video?uri=file:/REDTEST_001.R3D&tag=mp4
Content-Type: application/xml

<MetadataDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <timespan start="-INF" end="+INF">
  </timespan>
</MetadataDocument>
```

```
POST /API/import/placeholder/<placeholder-id>/video?uri=file:/REDTEST_002.R3D&tag=mp4
Content-Type: application/xml

MetadataDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <timespan start="-INF" end="+INF">
```

```
</timespan>  
</MetadataDocument>
```

STORAGES AND FILES

5.1 Storages

Storages are where Vidispine will store any files that are ingested/created in the system. All files on a storage location will get an entry in the Vidispine database, containing state, file size, hash etc. This is to keep track of any file changes.

For information about files in storage, see *Files*.

5.1.1 Storages

Storage types

A storage must be designated a type, based on what type of operations are to be performed on the contained files. Operations in this context are transcode, move, delete, and destination (that is, placing new files here).

LOCAL A Vidispine specific storage, suitable for all operations. Note that LOCAL doesn't necessarily imply that the storage is physically local. It should however be a dedicated Vidispine storage. That is, files on such storages should not be written to/deleted by any external application.

SHARED A storage shared with another application, Vidispine will not create new files, nor perform any write operations here.

REMOTE A storage on a remote computer, files should be copied to a local storage before used.

EXTERNAL A storage placeholder.

ARCHIVE A storage meant for archiving, needs a plugin bean or a JavaScript, described in more detail at *Archive Integration*.

EXPORT Files are not monitored, but copy operations to here will create a file entry in the database.

Storage states

Storages will have one of the following states:

NONE Not used.

READY Operating normally.

OFFLINE No available storage method could be reached.

FAILED Currently not used in Vidispine.

DISABLED Currently not used in Vidispine.

EVACUATING Storage is being evacuated.

EVACUATED Evacuating process finished.

For more information about storage evacuation, see section on *Evacuating storages*.

Storage priority

New in version 4.17.

Storage priority can be set when creating a storage. If a shape has duplicate files on different storages, the file on the highest priority storage will be selected as the source of transcoder or transfer jobs

Example:

```
<StorageDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <priority>HIGH</priority>
  <method>
    ...
  </method>
</StorageDocument>
```

Available priority values are: HIGHEST, HIGH, MEDIUM, LOW, LOWEST. Default priority of a storage is MEDIUM.

Storage groups

Storages can be placed in named groups, called storage groups. These storage groups can then be used in *Storage rules* and *Quota rules*.

Storage capacity

When a storage is created a capacity can be specified. This is the total number of bytes that is freely available on the storage. The free capacity is calculated as `total capacity - sum(file sizes in database list)`. Note that this means that the size of MISSING and LOST files are included in the used capacity. If you do not expect a file with these states to return, it is best to *delete the file entity using the API*.

Auto-detecting the storage capacity

By setting the element `autoDetect` in the `StorageDocument` you can make Vidispine read the capacity from the file system. This only works if the storage has a storage method that points to the local file system, that is, a `file://` URI.

Warning: Do not enable auto-detection for multiple storages located on the same device, as each storage will then have the capacity of the device. This means that storages may appear to have free space in Vidispine, when there is actually no space left on the device.

Storage cleanup

If you have used storage rules to control the placement of files on storages then you may have noticed that files have been copied to the storages selected by the rules, but that files on the source storages have not been removed.

This is by design. Vidispine prefers to keep multiple copies of a file, and only remove the files when a storage is about to become full. The storage high and low watermarks control when files should start to be removed, and when enough files have been removed and storage cleanup should stop.

For example, for a 1 TB storage with a high watermark at 80% and a low watermark at 40%, Vidispine will keep adding files to the storage until the usage exceeds 800 GB. Once that happens cleanup would occur. Files that are deletable, that is, that have a copy on another storage and that is not required to exist according to the storage rules, will be deleted. Cleanup will stop once the usage has reached 400 GB or when there are no more deletable files.

If this behavior is not desirable, then there are two options.

1. Update the storage rules to specify where files should *not* exist, using the `not` element. For example, using `<not><any/></not>`.

```
<StorageRuleDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <storageCount>1</storageCount>
  <storage>VX-122</storage>
  <not><any/></not>
</StorageRuleDocument>
```

2. Set the high watermark on the storage to 0%. Updating the storage rules is preferred as storage cleanup will be triggered continuously if the high watermark is set at a low level.

Evacuating storages

If you would like to delete a storage, but you still have files there which are connected to items, you can first trigger an evacuation of the storage. This will cause Vidispine to attempt to delete redundant files, or move files to other storages. Once the evacuation is complete, the storage will get the state `EVACUATED`.

5.1.2 Storage methods

Methods are the way Vidispine talks to the storage. Every method has a base URL. See *Storage method URIs* for the list of supported schemes.

Retrieve a storage to check its status. The storage `state` shows if the storage is accessible to Vidispine. If a storage is *not* accessible, then its state will be `OFFLINE`. Check the `failureMessage` in the storage methods to find out why. The failure message will be the error from when the last attempt to connect to the storage was made, and will be available even when the storage comes back online again. Compare `lastSuccess` to `lastFailure` to determine if the error message is current or not.

If multiple methods are defined for one storage, it is important, in order to avoid inconsistencies, that they all point to the same physical location. E.g. a storage might have one file system method, and one HTTP method. The HTTP URL must point to the same physical location as the file system method.

Storage method examples

Here are some examples of valid storage methods:

- `file:///mnt/vidistorage/`
- `ftp://vidispine:pA5sw0rd!?!@10.85.0.10/storage/`
- `azure://:%2ZmFuOD10MGg0MmJ5ZnZucz5YmhndjkrZThodnV5Ymhqb2lwbW91cmN4c2Rmc2Q0NThmdjQ0Mzc`

Method types

Methods can also be of different type. By default, the type is empty. Only those methods (with empty types) are used by Vidispine when doing file operations, the other methods are ignored, but can be returned, for example when requesting URLs in search results.

New in version 4.1: Credentials are encrypted. This means that passwords cannot be viewed through the API/server logs.

Auto method types

One exception is method type `AUTO`, or any method type with prefix `AUTO-`. When a file URL is requested, with such method type, the a no-auth URL will be created (with the method URL as base).

If there is no `AUTO` method defined, but a file URL is requested with method type `AUTO`, an implicit one will be used automatically.

```
GET /item/VX-2406?content=uri&methodType=AUTO
Accept: application/xml
```

```
<ItemDocument xmlns="http://xml.vidispine.com/schema/vidispine" id="VX-2406">
  <files>
    <uri>http://vs.example.com:8089/APInoauth/storage/VX-1/file/VX-6537/0.
    ↪7354486788234469/VX-6537.mp4</uri>
    <uri>http://vs.example.com:8089/APInoauth/storage/VX-1/file/VX-6536/0.
    ↪7638025887084131/VX-6536.dv</uri>
  </files>
</ItemDocument>
```

The URL returned is only valid for the duration of `fileTempKeyDuration` minutes. The expiration timer is reset whenever the URL is used in a new operation (e.g. `HEAD` (<http://www.w3.org/Protocols/rfc2616/rfc2616-sec9.html#sec9.4>) or `GET` (<http://www.w3.org/Protocols/rfc2616/rfc2616-sec9.html#sec9.3>)).

AUTO-VSA method type

New in version 4.16.

When using URIs generated from the `AUTO` method type with a VSA storage, the files will be streamed from VSA through Vidispine server. Instead of that, the `AUTO-VSA` method type can be used to generate proxy URIs, which can later be used to generate noAuth URIs from the VSA on-demand.

The same Vidispine configuration property `fileTempKeyDuration` (default 10 minutes) is used to control the duration of both the proxy uri from the server and noAuth URI from the VSA.

Example:

First, generate a `AUTO-VSA` noauth URI:

```
GET /storage/file/VX-123?methodType=AUTO-VSA
Accept: application/xml
```

Response:

```
<FileDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <id>VX-123</id>
  <path>demo.mov</path>
  <uri>
    http://localhost:8080/APInoauth/proxy/4e714b56-c3ab-49e9-b3f3-224aeaad7380?
    ↪redirect=true
  </uri>
  <state>CLOSED</state>
  ...
</FileDocument>
```

And then, ask VSA to generate a noauth URI.

```
GET http://localhost:8080/APInoauth/proxy/4e714b56-c3ab-49e9-b3f3-224aeaad7380?
↳redirect=true
```

Response:

```
HTTP/1.1 302 Found
Date: Thu, 20 Dec 2018 16:23:53 GMT
Accept-Ranges: bytes
Location: http://127.0.0.1:7090/4016eff6-5801-4ed2-a89d-518c9ee3b54a/demo.mov
Content-Length: 0
```

The uri in the Location header can be used to stream files from VSA directly.

The VSA noauth service will be running on port 7090 by default. And a `noAuthUri` property can be added to `agent.conf` to configure the noauth uri returned from the VSA.

For example:

```
noAuthUri=http://example.com:7090
```

VSA related settings

Method metadata

In addition to select method types, method metadata can be given as instructions for the URI returned. Two metadata values are defined:

format Specifies if any special format of the URI should be returned. By default, the normal URI is returned. Two values are defined:

SIGNED Returns a `http` URI that points contains a signed URI directly to Azure or S3 storage. If a signed URI cannot be generated from the underlying (default) URI, no URI is returned.

SIGNED-AUTO New in version 4.2.9.

As above, but if no URI can be generated, an `AUTO` URI (see above) is returned.

expiration Sets the expiration time of the signed URI, in minutes. If not specified, the expiration time is 60 minutes, unless `azureSasValidTime` is set.

contentDisposition Sets the Content-Disposition header for the signed URI. If not specified, the Content-Disposition header will be set to null.

vsauri Specifies if the VSA URI (schema `vxa`) should use UUID or name syntax. By default, UUID is used.

UUID Return URI with hostname being the UUID of the VSA.

NAME Return URI with hostname being the NAME of the VSA.

```
GET /item/VX-206?content=uri&methodMetadata=format=SIGNED-AUTO&
↳methodMetadata=contentDisposition=attachment%3b+filename%3dmyfile.mov
Accept: application/xml
```

```
<ItemDocument xmlns="http://xml.vidispine.com/schema/vidispine" id="VX-206">
  <files>
    <uri>https://vstest.s3.amazonaws.com/VX-362.mp4?Expires=1439545041&
    ↪AWSAccessKeyId=AKIAJCCXQRY2MW4YQUVQ&Signature=UcNdTIm1vlomM%2FaIGaYXf4QNfc%3D</
    ↪uri>
    <uri>http://vs.example.com:8089/APInoauth/storage/VX-1/file/VX-336/0.
    ↪7638025117084131/VX-336.dv</uri>
  </files>
</ItemDocument>
```

Parent directory management

For local file systems (method is using a `file://` URI), Vidispine will by default remove empty parent directories when deleting the last file in the directory.

New in version 4.2.5: This can be controlled, either on system level or on storage level. If the storage metadata `keepEmptyDirectories` is set to true, empty directories are preserved in that storage. Likewise, if the configuration property `keepEmptyDirectories` is set to true, empty directories are preserved for all storages. Storage configuration overrules system configuration.

5.1.3 Files

When are files scanned?

In order to discover changes made to files, or if any files have been removed/added, Vidispine will scan the storages periodically. It is possible to disable the scanning by not having any methods with `browse=true` on the storage. The scan interval is also configurable on a per storage basis by setting the `scanInterval` storage metadata. The value should be in seconds. Setting this to a higher value will lower the I/O load of the device, but any file changes will take longer to be discovered. This also means that file notifications for file changes or file creation will be triggered later for changes occurring outside of Vidispine's control.

You can force a rescan of a storage by calling `POST /storage/(storage-id)/rescan`. This will trigger an immediate rescan of a storage *if* the supervisor is idle. If a supervisor is already busy processing the files then you may notice that the rescan happens some time later.

Avoiding frequent scan of S3 storages

New in version 4.4.

Scanning a S3 storage can be expensive both in terms of time and money. To make it cheaper to access a S3 bucket, you can configure Vidispine to poll Amazon SQS for S3 events (<http://docs.aws.amazon.com/AmazonS3/latest/dev/NotificationHowTo.html>).

See *S3 Event Notifications* for more information.

File States

Files can be in one of the following states:

NONE Just created, not used.

OPEN Discovered or created, not yet marked as finished.

CLOSED File does no longer grow.

UNKNOWN The current state is not known.

MISSING File is missing from the file system/storage.

LOST File has been missing for a longer period. Candidate for restoration from archive.

TO_APPEAR File will appear on file system/storage, transfer subsystem or transcoder will create it.

TO_BE_DELETED The file is no longer in use, and will be deleted at the next clean-up sweep.

BEING_READ File is in use by transfer subsystem or transcoder.

ARCHIVED File is archived.

AWAITING_SYNC File will be synchronized by multi-site agent.

Vidispine will mark a file as **MISSING** when it is first detected that the file no longer exists on the storage. No action is taken for files that are missing. If the file does not appear within the time specified by *lostLimit*, then the file will be marked as **LOST**. Lost files will be restored from other copies if such exist.

5.1.4 Items and storages

By default, when creating a new file, Vidispine will choose the **LOCAL** storage with the highest free capacity. This can be changed in a few different ways:

- Setting the *defaultIngestStorage* configuration property.
- Supplying the *storageId* parameter on the import request.
- Using *Storage rules*.

5.1.5 File hashing

Vidispine will calculate a hash for all files in a storage. This is done by a background process, running continuously. Files are hashed one by one for performance reasons, so if a large number of files are added to the system in a short time span it might take some time for all hashes to be calculated. The default hashing algorithm is SHA-1. This can be changed by setting the configuration property *fileHashAlgorithm*. See below for a list of supported values.

Additional algorithms

Vidispine can be configured to calculate hashes using additional algorithms by setting the *additionalHash* metadata field on the storage. It should contain a comma separated list (no spaces) of algorithms. The supported algorithms are:

- MD2
- MD5
- SHA-1
- SHA-256
- SHA-384
- SHA-512

5.1.6 Throttling storage I/O

Vidispine will retrieve information about files on a storage at the configured scan intervals. If you find that the I/O on your local disk drives is high, even when no transfers or transcodes are being performed, then you can try rate limiting the stat calls performed by Vidispine. Do this by setting `statsPerSecond` or the configuration property `statsPerSecond` to a suitable limit. During the file system scan, Vidispine will typically perform one stat per file.

An easy way to check if rate limiting the stat calls will have any effect is to disable the storage supervisors in Vidispine. This can be done using `PUT /vidispine-service/service/StorageSupervisorServlet/disable`. Remember to enable the service afterwards or you will find that Vidispine no longer detects new files on the storages, among other things.

It could also be that it's the file hashing service that is the cause of the I/O. You should be able to tell which service is behind it by monitoring your disk devices. If there's a high read activity/a large amount of data read from a device then it could be the file hashing that's the cause. If the number of read operations per seconds is high then it's more likely the storage supervisor.

Tip: Use tools such as `htop`, `iostat`, `dstat` and `iostat` to monitor your systems and devices.

5.1.7 Throttling transfer to and from a storage

New in version 4.0.

It is possible to specify a bandwidth on a storage or a specific storage method. This causes any file transfers involving the specified storage or storage method to be throttled. If multiple transfers take place concurrently, the total bandwidth will be allocated between the transfers. If a bandwidth is set on both the storage and its storage methods, the lowest applicable bandwidth will be used.

To set a bandwidth you can set the `bandwidth` element in the `StorageMethodDocument` when creating or updating a storage or storage method. The bandwidth is set in bytes per second.

Example

Updating a storage to set a bandwidth of 50,000,000 bytes per second.

```
PUT /storage/VX-2
Content-Type: application/xml

<StorageDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <type>LOCAL</type>
  <capacity>1000000000</capacity>
  <bandwidth>50000000</bandwidth>
</StorageDocument>
```

Example

Updating a storage method to set a bandwidth of 20,000,000 bytes per second.

```
PUT /storage/VX-2/method?uri=http://10.5.1.2/shared/&bandwidth=20000000
```

5.1.8 Temporary storages for transcoder output

New in version 4.2.3.

The Vidispine transcoder requires that the destination (output) file can be partially updated. This is in order to be able to write header files after the essence has been written.

In previous versions, this is solved by the application server storing the intermediate result as a temporary file on the local file system (`/tmp`). This requires a lot of space on the application server.

With version 4.2.3, another strategy is available. Instead of storing the result as one file on the application server, several small files are stored directly on the destination file system as “segments”. After the transcode has finished, the segments are merged. On S3 storage, this merging can be done with S3 object(s)-to-object copy.

Control of the segment file strategy is via the `useSegmentFiles` configuration property.

5.1.9 Storage credentials

Storage credentials can be specified in the storage URL, but can also be saved in an external location and referenced by an alias. This is configured in the server *configuration file*. Credentials can be stored in either:

- A Java [Keystore](https://en.wikipedia.org/wiki/Keystore) (<https://en.wikipedia.org/wiki/Keystore>).
- [Hashicorp Vault](https://www.vaultproject.io/) (<https://www.vaultproject.io/>).
- The local file system.

For example, a FTP storage could be configured either using `ftp://testuser:testpassword@ftp.example.com/`, or using `ftp://exampleftp@ftp.example.com/`; with `exampleftp` being an alias referencing the externally stored credentials.

Java Keystore

A Java Keystore can be used to store private keys, for example, the private keys for a Google Cloud Platform service account.

Listing 5.1: server.yaml

```
secrets:
  keyStore:
    path: /etc/vidispine/server.keystore
    password: changeit
```

Local file

For local file secret storage, the alias refers to the file under the configured secret path, containing the private key or username and password credentials.

- With private keys, the file should contain the private key as is.

Changed in version 4.11.

In certain configurations where there is a directory present in the secrets path with the same alias, the private key should be stored under that directory as `private_key`.

- With username and password credentials, the file should be a directory, containing two files, `username` and `password`.

New in version 4.11.

- To use a private key to authenticate a sftp storage, the file should be a directory, containing the files `username`, `private_key` and `private_key_password`.

For example:

Listing 5.2: server.yaml

```
secrets:
  file:
    path: /etc/secrets/
```

```
$ mkdir -p /etc/secrets/exampleftp/
$ echo -n "testuser" > /etc/secrets/exampleftp/username
$ echo -n "testpassword" > /etc/secrets/exampleftp/password
$ echo -n "keyphrase" > /etc/secrets/exampleftp/private_key_password
```

This could be one way to consume credentials from [secrets in Kubernetes](http://kubernetes.io/docs/user-guide/secrets/) (<http://kubernetes.io/docs/user-guide/secrets/>), or similar services that expose secrets via the local file system.

Hashicorp Vault

Using Hashicorp Vault the alias should match the name of a secret in Vault. Username and password credentials will be read from the keys `username` and `password`; private keys from the `private_key` key and passphrase to the private key from `private_key_password`.

For example:

Listing 5.3: server.yaml

```
secrets:
  vault:
    address: http://vault.example.com:8200
    token: 2262e94c-39c3-b9a8-605d-f0450dfc558b
    keyPrefix: secret/
```

The `keyPrefix` setting can be used to for example select the backend to use. For example, with Vault configured with a “generic” backend mounted at `secret/`:

```
$ vault mounts
Path      Type      Default TTL  Max TTL  Description
secret/   generic   system      system   generic secret storage
sys/      system    n/a         n/a      system endpoints used for control,
↳policy and debugging
```

```
$ vault write secret/exampleftp username=testuser password=testpassword
```

```
$ vault read secret/exampleftp
Key      Value
----
refresh_interval  720h0m0s
password          testpassword
username          testuser
```

5.1.10 Storage method URIs

Note: Storage method URIs require URI escaping for all characters that are reserved in URIs.

The following URI schemes are defined.

file

Syntax `file:///{path}`

Example `file:///mnt/storage/,file:///C:/mystorage/`

Note The URI `file://mnt/storage/` is not valid! (But `file:/mnt/storage/` is.)

ftp

Syntax `ftp://{user}:{password}@{host}/{path}`

Example `ftp://johndoe:secr3t@example.com/mystorage/`

New in version 4.1.2: Add query parameter `passive=false` to force active mode. To set the client side ports used in active mode, set the configuration property `ftpActiveModePortRange`, the value should be a range, e.g. `42100-42200`.

To set the client IP used in active mode, set the configuration property `ftpActiveModeIp`.

New in version 4.17: For some servers using a basic implementation of ftp and which does not support some of the commands often found, e.g. listing a directory without having to step into it first, the queryparameter `serverType=basic` can be used if issues with connecting and listing files are experienced. This will in some cases provide a better compatibility.

sftp

Syntax `sftp://{user}:{password}@{host}/{path}`

Example `sftp://johndoe:secr3t@example.com/mystorage/`

New in version 4.11: When using a private key to authenticate:

Syntax `sftp://{alias}@{host}/{path}`

Example `sftp://examplesftp@example.com/mystorage/`

Note Currently only PKCS#1 keys are supported; using vault or local secrets.

http

Syntax `http://{user}:{password}@{host}/{path}`

Example `http://johndoe:secr3t@example.com/mystorage/`

Note Requires WebDAV support in host.

https

Syntax `https://{user}:{password}@{host}/{path}`

Example `https://johndoe:secr3t@example.com/mystorage/`

Note Requires WebDAV support in host.

omms

Syntax `omms://{userId}:{userKey}@{hostList}/{clusterId}/{vaultId}/`

Example `omms://c2f6a2f4-6927-11e1-cc94-ab94bd11183f:some%20secret@10.0.0.3,10.0.0.4/425`

Note Object Matrix Matrix Store.

s3

Syntax `s3://{accessKey}:{secretKey}@{bucket}/{path}`

Example `s3://KDASODSALSIDI8U:RxZY1u23NDSIN293002WdlNyq@mystore/storage1/`

If no access key is provided, then the credentials will be read from the `AwsCredentials.properties` file in the *credentials directory*, if one exists. Else, credentials will be read from the *default locations used by the AWS SDK* (<http://docs.aws.amazon.com/AWSSdkDocsJava/latest/DeveloperGuide/java-dg-roles.html>).

Valid S3 bucket names (<https://docs.aws.amazon.com/AWSJavaSDK/latest/javadoc/com/amazonaws/services/s3/model/Bucket.html>) must agree with DNS requirements.

Changed in version 4.6: The default locations specified by the AWS SDK are now also searched.

The following query parameters are supported:

endpoint The endpoint that the S3 requests will be sent to.

See *Regions and Endpoints* (<http://docs.aws.amazon.com/general/latest/gr/rande.html>) in the Amazon documentation for more information.

New in version 4.4.

region The region that will be used in the S3 requests.

See *Regions and Endpoints* (<http://docs.aws.amazon.com/general/latest/gr/rande.html>) in the Amazon documentation for more information.

New in version 4.4.

signer The algorithm to use to signing requests. Valid values include `S3SignerType` for AWS signature v2, and `AWSS3V4SignerType` for AWS signature v4.

New in version 4.5.3.

Default Signature algorithm will be selected by region.

Note: For *Version 4 Signature only regions* (<http://docs.aws.amazon.com/AmazonS3/latest/dev/UsingAWSSDK.html#specify-signature-version>) (Beijing and Frankfurt) to work, the endpoint or region parameter **must** be set. Example:

- `s3://frankfurt-bucket/?endpoint=s3.eu-central-1.amazonaws.com`
- `s3://frankfurt-bucket/?region=eu-central-1`

Storage method metadata keys can be used control the interaction with the storage.

storageClass The default Amazon S3 storage class that will be used for new files created on an Amazon S3 storage. Can be either `standard`, `infrequent` or `reduced`

Default `standard`

New in version 4.0.3.

Changed in version 4.5: Support for infrequent access was added.

sseAlgorithm The encryption used to encrypt data on the server side. See [Server-Side Encryption](http://docs.aws.amazon.com/AmazonS3/latest/dev/serv-side-encryption.html) (<http://docs.aws.amazon.com/AmazonS3/latest/dev/serv-side-encryption.html>). By default no encryption will be performed.

This sets the `x-amz-server-side-encryption` header on PUT Object S3 requests.

Example `AES256`

New in version 4.4.1.

sseKeyId The encryption used to encrypt data on the server side. See [Server-Side Encryption](http://docs.aws.amazon.com/AmazonS3/latest/dev/serv-side-encryption.html) (<http://docs.aws.amazon.com/AmazonS3/latest/dev/serv-side-encryption.html>). By default no encryption will be performed.

This sets the `x-amz-server-side-encryption-aws-kms-key-id` header on PUT Object S3 requests.

If the `sseAlgorithm` is present and has the value of `aws:kms`, this indicates the ID of the AWS Key Management Service (AWS KMS) master encryption key that was used for the object.

The KMS KEY you specify in the policy must use the `arn:aws:kms:region:acct-id:key/key-id` format.

Example `arn:aws:kms:us-west-2:360379543683:key/071a86ff-8881-4ba0-9230-95af6d01ca01`

New in version 4.13.

accelerate Enable [S3 Transfer Acceleration](http://docs.aws.amazon.com/AmazonS3/latest/dev/transfer-acceleration.html) (<http://docs.aws.amazon.com/AmazonS3/latest/dev/transfer-acceleration.html>).

Default `false`

New in version 4.8.

retrievalTier The default Glacier retrieval tier to use when restoring the file. Can be set to either `Expedited`, `Standard` or `Bulk`. See [Restoring Archived Objects](http://docs.aws.amazon.com/AmazonS3/latest/dev/restoring-objects.html) (<http://docs.aws.amazon.com/AmazonS3/latest/dev/restoring-objects.html>) for more information.

New in version 4.9.

ssl Vidispine is by default using SSL when communicating with S3. Set to `false` to disable SSL support.

Default `true`

New in version 4.14.

Note: For [S3 Transfer Acceleration](http://docs.aws.amazon.com/AmazonS3/latest/dev/transfer-acceleration.html) (<http://docs.aws.amazon.com/AmazonS3/latest/dev/transfer-acceleration.html>) to work, the endpoint or region parameter **must** be set. Also make sure that transfer acceleration is enabled on the bucket.

Other S3 compatible endpoints may not support transfer acceleration.

ds3

Syntax `ds3://{accessKey}:{secretKey}@{bucket}/{path}`

Example `ds3://KDASODSALSIDI8U:RxZY1u23NDSIN2Nyq@bucketname/?endpoint=http://blackpearl-e`

Note Spectra BlackPearl Deep Storage Gateway.

New in version 4.5.

The following query parameters are supported:

endpoint The endpoint of the BlackPearl service. This is mandatory.

chunkReadyTimeout The maximum time (in seconds) of waiting for BlackPearl to prepare the target data chunk, or an EOF will be returned.

Default 1800

checksumType If set, a client-side checksum will be computed and sent to BlackPearl gateway for data integrity verification. Supported checksum types are: `md5`, `crc32` and `crc32c`.

Default Empty, no checksum will be sent.

azure

Syntax `azure://{accessKey}@{accountName}/{containerName}`

Example `azure://:KLKau23dEE02WdlLiO@companyname/container1/`

New in version 4.0.1.

gs

Google Cloud Storage (<https://cloud.google.com/storage/>).

New in version 4.7.

Using a P12 *private key*:

Syntax `gs://{privateKeyAlias}@{bucket}/?project={project}&account={account}`

Example `gs://test-key-p12@test-bucket/?project=12345&account=67890`

Using a JSON private key:

Syntax `gs://{privateKeyAlias}@{bucket}/?project={project}`

Example `gs://test-key-json@test-bucket/?project=12345`

Using an OAuth2 access token:

Syntax `gs://:{accessToken}@{bucket}/?project={project}`

Example `gs://:abc123@test-bucket/?project=12345`

Using the credentials file specified in the `GOOGLE_APPLICATION_CREDENTIALS` environmental variable:

Syntax `gs://{bucket}/`

Example `gs://test-bucket/`

universal

A universal URI is used to create a universal storage method. A universal storage method does not have a root URI, instead all files contain their own absolute URI.

New in version 4.10.

See also:

See [here](#) for some notes on how to write URIs.

5.1.11 The universal storage method

New in version 4.10.

A universal storage can be used to let Vidispine manage files which are not stored under a common root. Universal storages can be used like other storages, but there are certain differences. Before jumping to the differences, an example on how to use the storage:

Adding a universal storage

```
POST /storage
Content-Type: application/xml

<StorageDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <type>LOCAL</type>
  <capacity>150000000000</capacity>
  <method>
    <uri>universal:/</uri>
    <read>true</read>
    <write>true</write>
    <browse>true</browse>
  </method>
  <showImportables>true</showImportables>
</StorageDocument>
```

```
<StorageDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <id>STORAGE-VX-722</id>
  <state>NONE</state>
  <type>LOCAL</type>
  <capacity>1000000000000</capacity>
  <freeCapacity>1000000000000</freeCapacity>
  <method>
    <id>STORAGEMETHOD-VX-728</id>
    <uri>universal:/</uri>
    <read>true</read>
    <write>true</write>
    <browse>true</browse>
    <type>NONE</type>
  </method>
  <metadata/>
  <lowWatermark>1000000000000</lowWatermark>
  <highWatermark>1000000000000</highWatermark>
  <showImportables>true</showImportables>
</StorageDocument>
```

Adding a file

```
POST /storage/VX-722/file?path=file:///home/baz/vacation.mp4
```

```
<FileDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <id>FILE-VX-68264</id>
  <path>file:///home/baz/vacation.mp4</path>
  <uri>file:///home/baz/vacation.mp4</uri>
  <state>OPEN</state>
  <size>-1</size>
  <timestamp>2017-05-11T13:37:46.737+02:00</timestamp>
  <refreshFlag>1</refreshFlag>
  <storage>STORAGE-VX-722</storage>
  <metadata/>
</FileDocument>
```

After scanning, the metadata and hash checksum of the file will be updated.

Adding and importing a file

A file can be registered to a universal storage with its original URI, and imported at the same time:

```
POST /storage/VX-722/file/import?path=https://www.vidispine.com/wp-content/themes/
↳vidispine/assets/image/vidispine-logo-small.png
```

The https URI in the request will be the actual source of the original shape of the item created.

Compared with a regular import request:

```
POST /import?uri=https://www.vidispine.com/wp-content/themes/vidispine/assets/image/
↳vidispine-logo-small.png
```

The source file will be copied to a *Vidispine managed storage*. The newly copied file will be the file that makes up the original shape of the item. The https URI is then no longer used after the import.

Differences to regular methods

- New files are not discovered by a universal method. For new files to be registered, an API call has to be done. However, Vidispine will detect when files have changed or been deleted.
- Files can be written to a universal storage. However, it requires that either a full URI is given as API input, or returned by a file name script. Example for copying a file:

```
POST /storage/file/VX-4448/storage/VX-722?filename=file:///tmp/somenewfile.txt
```

- There is no capacity detection.
- Scanning can be slower than for regular storages. The universal URI is not meant to be used to thousands of files in one file system. Then it is better to use the regular URI, and reference files by their relative paths.

5.2 Automatic import

A storage can be configured to automatically import new files/image sequences that are detected. Auto-import rules define what transcodes that should be performed as well as what metadata to be used if none can be found. Metadata

can automatically be found if it shares the same filename and has the extension `.xml`, for example `video.avi` and `video.xml`.

Auto-import rules can also use *Import settings* to set up access control lists by setting the optional `settingsId` element.

5.2.1 Import using a specific transcoder resource

New in version 4.12.

To use a specific transcoder resource during auto import, specify its resource id in the auto import rule using the `resourceId` element:

```
PUT /storage/VX-2/auto-import
Content-Type: application/xml

<AutoImportRuleDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <tag>myflvtag</tag>
  <resourceId>VX-1</resourceId>
</AutoImportRuleDocument>
```

New in version 4.13.

You may also specify which transcoder resource to use by setting the defaultTranscoder configuration *System configuration*.

5.2.2 Setting a user for jobs started as a result of an auto import rule

New in version 4.6.

The default behavior is that jobs started from an auto import rule will not have a user set. This can be changed by setting the `user` element in the rule:

```
PUT /storage/VX-2/auto-import
Content-Type: application/xml

<AutoImportRuleDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <tag>myflvtag</tag>
  <user>angela@company.com</user>
</AutoImportRuleDocument>
```

5.2.3 Importing with a metadata file of an external format

Vidispine also supports auto imports with a metadata XML file that is of a different format than the native Vidispine *MetadataDocument*. This is achieved by associating a *Metadata projections* (XSLT transformation) with the auto import rule. First, create the projection, then set the auto import rule:

```
PUT /storage/VX-2/auto-import
Content-Type: application/xml

<AutoImportRuleDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <tag>myflvtag</tag>
  <projection>myProjection</projection>
</AutoImportRuleDocument>
```

Where the `projection` element contains a *Projection id*.

Any auto imports from this storage will then first transform the supplied XML file using the specified projection.

5.2.4 Disable automatic import rules

New in version 4.9.

Auto-import rules can be disabled by setting the `enabled` field to `false`, or by using the *disable rule request*. When a rule is disabled then no new auto-import jobs will be created for new files discovered on the storage.

Jobs will be created once the rule is enabled again. By default rules are enabled.

Example

If the admin only wants the user to be able to import during specific hours a program like `cron` (<https://help.ubuntu.com/community/CronHowto>) could be used:

```
0 0 * * * curl -X PUT -uadmin:admin http://localhost:8080/API/storage/VX-1/auto-  
→import/enable  
0 5 * * * curl -X PUT -uadmin:admin http://localhost:8080/API/storage/VX-1/auto-  
→import/disable
```

5.2.5 Sidecar auto import

If auto-import is enabled, sidecar files are by default identified by file extension and imported as metadata to files with matching filenames. See *Importing sidecar files* for the supported sidecar formats which are automatically identified. The `AutoImportRuleDocument` contains two fields determining how sidecar are handled by auto-import:

`ignoreSidecarImport`

False by default. If set to true, files with a sidecar file extension are not imported in any way.

Since 4.8

`disabledSidecarExtensions`

Extensions can be specified here to be excluded from being treated as sidecar files, and may instead be imported as new items.

Since 4.16

If there are several files in a storage with the same file name (prefix) with different extensions, only one will be imported as an item and others will be either imported as sidecars or ignored. This can be changed by setting the system-wide configuration property `groupImportableFiles` to `false`. Multiple files with the same prefix can then be auto-imported as individual items.

Multiple sidecar files can be imported to the same item. If `groupImportableFiles` is `false`, one sidecar file may be auto-imported multiple times as metadata for different items with the same file prefix.

5.2.6 Title as metadata

The `AutoImportRuleDocument` contains a field `fileNameAsTitle`. Setting this property to `true` means that the “title” fields of all single files imported from this storage will be set to their file names.

5.2.7 Applying file name filters to auto import rules

There are two kinds of filename filters that can be applied to auto import rules:

Exclusion filters Used to exclude files from being auto imported. This can be useful when the OS creates files automatically, e.g. `Thumbs.db` on Windows or `.DS_Store` files on Mac OS. Note that the expression must match the entire path, not only a part of the path.

Shape tag filters These can be used to transcode the imported file using a specific shape tag when a file name follows a certain pattern. You might want files ending in `.tiff` to be transcoded using the tag `lowimage` for example.

The filters are specified in the XML document you use to create/update the auto import rule.

Example

```
<AutoImportRuleDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <metadata>
    <timespan start="-INF" end="+INF">
      <field>
        <name>title</name>
        <value>This is an auto-imported item.</value>
      </field>
    </timespan>
  </metadata>
  <tag>generictag</tag>
  <excludeFilter>
    <pattern>.*\.DS_Store</pattern>
  </excludeFilter>
  <shapeTagFilter>
    <pattern>.*\.tiff</pattern>
    <tag>lowimage</tag>
  </shapeTagFilter>
  <shapeTagFilter>
    <pattern>.*\.mxf</pattern>
    <tag>lowvideo</tag>
  </shapeTagFilter>
</AutoImportRuleDocument>
```

This rule will exclude any file ending with `.DS_Store`. Any files ending with `.tiff` will be imported with the shape tag `lowimage`, and any files ending in `.mxf` will be imported with the shape tag `lowvideo`. All files will be imported with the shape tag `generictag`.

5.2.8 Auto import of image sequences

Deprecated since version 4.6: Define a *sequence pattern on the storage* and use an auto-import rule without a sequence definition instead.

Image sequences can be auto detected and imported if their file names match the predefined regex in [AutoImportRuleDocument](#). The elements in the document are:

fileSequence Defines the file name pattern, and it is **mandatory**.

sequenceMetadata Defines the metadata file name pattern.

idGroup The matching group in the regex should be used as the id of the file sequence.

numGroup The matching group in the regex that should represent the position of a file in a sequence.

timeout A sequence is considered as completed after a certain timeout (in seconds). The default timeout is 60 seconds.

Example:

```
<AutoImportRuleDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <tag>mp4</tag>
  <metadata>
    <timespan end="+INF" start="-INF">
      <field>
        <name>title</name>
        <value>auto-imported item.</value>
      </field>
    </timespan>
  </metadata>
  <sequenceDefinition>
    <sequenceMetadata>
      <regex>(.*)-metadata.xml</regex>
      <idGroup>1</idGroup>
    </sequenceMetadata>

    <fileSequence>
      <regex>(.*)-([0-9]+).(dpx|tga|png|jpg)</regex>
      <idGroup>1</idGroup>
      <numGroup>2</numGroup>
      <timeout>10</timeout>
      <!-- seconds-->
    </fileSequence>
  </sequenceDefinition>
</AutoImportRuleDocument>
```

Given a storage with the above import rule, with the files:

```
foo-metadata.xml
foo-001.dpx
foo-002.dpx
foo-002.dpx
```

Then these would be recognized as a sequence `foo` with `foo-metadata.xml` as the metadata.

5.3 Storage rules

Storage rules are a way of controlling the availability of files. The rules describe where files of different types are stored. Settings include a minimum number of storages, specific storages and priorities for how suited a storage is for a particular type. A rule can be applied on a specific item, collection, library or shape tag. To further filter which shapes that the rules applies to, a shape tag can be set. Files can be named using *storage name rules*.

New in version 4.1.1: A storage rule can also describe where files should **not** be stored, in which case files will be eagerly removed. The default is otherwise to start removing files once the high watermark on a storage has been reached. A rule can specify specific storages or storage groups, or that all other storages should be excluded by using the “all” qualifier.

Warning: Negative rules do not work for storages of type ARCHIVE

New in version 4.2.2: Storage rules on collections can now be inherited to items in sub-collections. See *Inherited rule example*.

New in version 4.6: Support for load balancing files across multiple storages was added.

5.3.1 Resolving storage rules

If a minimum number of storages has been set and an insufficient amount of specific storages are given, priorities are used to pick a suitable storage. The different priority criteria can be seen in the table below. The criteria type is given together with an integer describing its priority, where a lower number means that it is more important than an entry with a higher number.

Type	Description
bandwidth	Prioritizes bandwidth.
capacity	Prioritizes free available space.

Which rules apply?

Certain rules takes precedence over other rules. There are three things that factors into this decision process (ordered according to their importance):

1. The precedence given to the rule.
2. The type of the entity the rule is applied to.
3. Whether the rule is set to a certain shape tag or not.

Below a table of available precedence values can be seen, ordered from most important to least important.

Name
HIGHEST
HIGH
MEDIUM (default value)
LOW
LOWEST

Below a table of the difference entity types can be seen, ordered from most important to least important.

Name
ITEM
COLLECTION
LIBRARY
GENERIC (the type used if set directly on a shape tag)

So for example a rule with the precedence value HIGHEST, that is applied to a certain shape tag on an item will always take precedence over any other rule.

How are storage rules applied?

Since a shape can have 0 or more shape tags, there can be some ambiguity between the rules. Below a basic algorithm, that describes how the rules are applied, can be seen.

1. Start out with an empty set of storages, *S*.

2. Add all storages, given in the specific rules, to S .
3. If S is empty, add in storages specified in the generic rule.
4. Set the minimum required storages, n , to equal the highest number specified in the specific rules and the generic rule.
5. If the size of S is less than n :
 - (a) Retrieve the priorities from one of the specific rules.
 - (b) If no specific rule specified any priorities, use the generic rule.
 - (c) If the generic rule did not specify any priorities, use some system default priorities.
 - (d) Attempt to fill S using the priorities.

5.3.2 Examples

Simple rule example

Setting a simple rule on a item, dictating that the item's original shape should exist on at least two storages, and one of them must be storage VX-3

```
PUT /item/VX-28/storage-rule/original
Content-type: application/xml
```

```
<StorageRuleDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <storageCount>2</storageCount>
  <storage>VX-3</storage>
</StorageRuleDocument>
```

Negative rule example

Setting a simple rule on a item, dictating that the item's original shape should exist on at least two storages, and one of them must be storage VX-3, and it must not exist on storage VX-2.

```
PUT /item/VX-28/storage-rule/original
Content-type: application/xml
```

```
<StorageRuleDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <storageCount>2</storageCount>
  <storage>VX-3</storage>
  <not>
    <storage>VX-2</storage>
  </not>
</StorageRuleDocument>
```

Load balancing example

New in version 4.6.

The `pool` element can be used to specify the storages that files could be stored on. This can be used to spread files across multiple selected storages.

For example, to specify that a file should exist on at least two of storages VX-1, VX-2 and VX-3:


```
<StorageRuleDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <storageCount>2</storageCount>
  <pool>
    <storage>VX-1</storage>
    <storage>VX-2</storage>
    <storage>VX-3</storage>
  </pool>
</StorageRuleDocument>
```

Or to have one copy on S3 (storage VX-1 in this example) and one copy on a local storage:

```
<StorageRuleDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <storageCount>2</storageCount>
  <storage>VX-1</storage>
  <pool>
    <group>local-storage-pool</group>
  </pool>
</StorageRuleDocument>
```

Inherited rule example

New in version 4.2.2.

Storage rules on collections by default only applies to the items in the collection and does *not* apply for items that exist in any sub-collections.

To change so that a collection storage rule applies to all items in it and all items in any sub-collections, recursively, use:

```
<StorageRuleDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <storageCount>1</storageCount>
  <inherited>true</inherited>
  <storage>VX-1</storage>
</StorageRuleDocument>
```

5.4 Filenames

By default, Vidispine names new files according to **site-id-number****.***extension**, all in one folder. This pattern can be overridden. This section describes three very different ways.

5.4.1 Using a tree structure for files

Putting all files in the same directory of a storage can cause degraded performance on some file systems. By setting the configuration property `fileHierarchy`, the naming convention is changed to **site-id - number1 / number2 . extension**. The number set in `fileHierarchy` controls the size of **number2**. Example:

<code>fileHierarchy</code> not set, or 0	<code>fileHierarchy</code> =100	<code>fileHierarchy</code> =1000
VX-7.mp4	VX-0/07.mp4	VX-0/007.mp4
VX-47232.mp4	VX-472/32.mp4	VX-47/232.mp4

Note that the splitting into subdirectories is currently only done in one level, so no VX-4/72/32.mp4.

The configuration property may be changed at any time, but old files will not be renamed.

5.4.2 Storage name rules

A storage name rule dictates the filename that the file of a particular shape should have on a certain storage. Note that these rules doesn't make sure a file is actually located on a storage, it just says what filename a file should have **if** it is located on that storage. Storage name rules are often used together with *storage rules*

5.4.3 Naming files on storage

The default naming convention of can be overridden on a per-storage basis by associating a JavaScript script to the storage.

The script will be invoked whenever a file needs to be created on the storage.

Setting the script

The JavaScript is stored as metadata `filenameScript` to the storage. That is, the code is set using `PUT /storage/{storage-id}/metadata/filenameScript`.

If using curl, use `--data-binary` instead of `-d` to make sure all new-line characters are kept.

Input

In the execution context of the script, there is a variable named `context`, which has the following functions:

`context.getShape()`

Returns a `ShapeType` (see Vidispine XSDs) object.

For example, to get the essence version, use `context.getShape().getEssenceVersion()`. Can return `null`.

`context.getJobMetadata()`

Returns a `java.util.Map<String, String>`. Can be `null`.

`context.getItem()`

Returns an `ItemType`, which is the same output as `GET /item/{item-id}?content=metadata,shape,access,exte`. Can return `null`.

`context.getStorage()`

Returns a `StorageType`.

`context.getComponent()`

Returns a `ComponentType`. Can return `null`.

`context.getExtension()`

Returns the suggested extension for the file. Can return `null`.

`context.getFileId()`

Returns the file id of the file to be created.

`context.getTags()`

Returns a `java.util.Collection<String>` of the shape tags of the shape the file belongs to.

`context.getOriginalFilename()`

Returns the original filename that was used when item was imported.

`context.getOriginalComponentFilename()`

Returns the original filename that was used when component was created.

New in version 4.12.

`context.getChannel()`

Most of the time this will return null, except when you want to *split audio channels to separate files*.

New in version 4.1.

`context.getJobId()`

Returns the job id.

New in version 4.12.

`context.getJobType()`

Returns the job type.

New in version 4.12.

Output

The script should return (last value) the file name of the file.

Existing file names

If the suggested file name is already in use on the Storage, the script will be called again, up to 10 times. The new invocations will run in the same context as the previous, so it is possible to store information, e.g. sequence numbers, to not repeat the same file name.

Example

```
var l = "foobar-"+context.getStorage().getId()+"/"+context.getFileId();
if (context.getExtension() != null)
    l += "."+context.getExtension();
```

5.5 Image sequences

New in version 4.6.

Image sequences can be imported into Vidispine just like any other video file.

5.5.1 Overview

An image sequence is made up of multiple sequentially numbered images files. Typically each file represents a video frame.

All files in a sequence are represented using a single file in Vidispine. Such files have a type of `FILE_SEQUENCE`.

```
<FileDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <id>VX-5591787</id>
  <path>VX-5591787//.jpg</path>
  <uri>file:/srv/media/VX-5591787/*.jpg#file=0-49</uri>
```

```

<state>CLOSED</state>
<size>-1</size>
<timestamp>2016-06-23T14:50:58.129+02:00</timestamp>
<refreshFlag>1</refreshFlag>
<storage>VX-1</storage>
<metadata/>
<range start="0" count="50"/>
<type>FILE_SEQUENCE</type>
</FileDocument>

```

5.5.2 Importing image sequences

Image sequences can be imported using a *sequence URI*. For example, to import an image sequence whose sequence numbers are zero padded:

```
POST API/import?uri=file:///srv/data/take1/*.png#file=00000-15000
```

```

<JobDocument xmlns:ns0="http://xml.vidispine.com/schema/vidispine">
  <jobId>VX-127247</jobId>
  <user>admin</user>
  <started>2016-06-23T13:02:04.811Z</started>
  <status>READY</status>
  <type>PLACEHOLDER_IMPORT</type>
  <priority>MEDIUM</priority>
</JobDocument>

```

5.5.3 Detection of image sequences

To have image sequences detected on a storage, the storage must first be configured with one or more *sequence patterns*. Otherwise, individual files in the sequence will appear as separate files.

```

<StorageDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <id>VX-1879</id>
  <state>NONE</state>
  <type>LOCAL</type>
  <capacity>16851361792</capacity>
  <freeCapacity>16763961344</freeCapacity>
  <timestamp>2016-06-23T15:04:02.873+02:00</timestamp>
  <method>
    <id>VX-1829</id>
    <uri>file:///srv/media/</uri>
    <read>true</read>
    <write>true</write>
    <browse>true</browse>
    <lastSuccess>2016-06-23T15:04:02.878+02:00</lastSuccess>
    <type>NONE</type>
  </method>
  <sequence>
    <regex>.*-(\d+).png</regex>
  </sequence>
</StorageDocument>

```

Files that match the pattern and that have the same sequence key will appear as a single file with type `FILE_SEQUENCE`. These files can then be imported directly from the storage just like any other files.

```
POST /storage/file/VX-46264/import
Content-Type: application/xml

<MetadataDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <timespan start="-INF" end="+INF">
    <!-- any metadata to add to the item -->
  </timespan>
</MetadataDocument>
```

5.5.4 Sequence URIs

Any URI containing a file fragment is considered as a sequence URI, that is, as a URI that identifies multiple files in a sequence. A sequence URI should contain a wildcard character that identifies the location of the sequence number.

Syntax: file=[wildcard:][start[-end]][, ...]

- The default wildcard character is *. If the wildcard character is already present in the file name or path, then another wildcard character should be selected and specified in the file fragment.
- The default starting index is 0.
- The ending index is inclusive.
- When importing sequences using the API, only the last range in the file fragment may be open. That is, file=0-10, 40- is supported, but file=0-10, 40-, 10-20 is not.

Example:

- file:///srv/media/inside-tardis/*.jpg#file=00000-90000
- file:///srv/media/inside-tardis/X.jpg#file=X:00000-90000
- http://media.example.com/?id=take1&num=*#file=0-

5.5.5 Sequence patterns

The sequence pattern element contains a <regex>, and a optional <numGroup>.

The value of the <regex> should be a valid java regex string with some restrictions:

- There needs to be a \d+, which would match multiple digits. The matching digits will be used as the sequence number. The other parts will become the sequence key, which will be used to identify the sequence.

Important: A sequence number can only contain one or multiple digits. Only numbers and zero padded numbers are supported

- \d+ needs to be in a capturing groups, if there are other groups. And in this case, <numGroup> needs to be set.

The value of <numGroup> is the index of the sequence number capturing group.

Some Examples:

```
<StorageDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <id>VX-1879</id>
  ...
  <sequence>
    <regex>.*-(\d+).png</regex>
```

```
<numGroup>1</numGroup>
</sequence>
</StorageDocument>
```

```
<StorageDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <id>VX-1879</id>
  ...
  <sequence>
    <regex>(.*)-(\d+).png</regex>
    <numGroup>2</numGroup>
  </sequence>
</StorageDocument>
```

5.6 URI's, URL's, and Special Characters

5.6.1 File paths

There are a number of characters that have special uses in various file systems.

Characters not allowed in path segments (directory names, file names)

- U+0000 - U+001F (including TAB, CR, NL)
- U+002F (/)
- U+005C (\)

While technically possible to use in path segments on various file systems, it is not possible to use these characters in Vidispine path names.

Characters not supported on certain platforms

- U+007F (DEL)
- U+003F (?)
- U+002A (*)
- U+0024 (\$)
- U+003A (:)
- Paths that are MS-DOS device names (LPT1, etc)
- U+D800 - U+10FFFF

These characters may or may not work, depending on operating system and Java version. It is strongly suggested that they are not used.

5.6.2 API calls

In calls to the Vidispine API, the following rules apply:

- Path segments are encoded using [RFC3986](http://www.ietf.org/rfc/rfc3986.txt) (<http://www.ietf.org/rfc/rfc3986.txt>).

- Non-ASCII characters are encoded in UTF-8, and do not have to be percent encoded.
- Percent encoding. Particularly space is encoded as %20 (not +, so Java's URLEncoder is not the right tool!)
- Non-ASCII characters are encoded in UTF-8, and do not have to be percent encoded
- Percent encoding. Particularly space is encoded as %20 (not +, so Java's URLEncoder is not the right tool!)
- Query parameter values are encoded using [RFC2396](http://www.ietf.org/rfc/rfc2396.txt) (<http://www.ietf.org/rfc/rfc2396.txt>)
 - Non-ASCII characters need to be percent encoded.
 - Space can be encoded as + (or %20).
- Non-ASCII characters need to be percent encoded
- Space can be encoded as + (or %20)
- URIs in XML documents need to be quoted according to XML, e.g. & for &.

Note: As a consequence, paths that are used as query parameters (e.g. the URL parameter in imports), need first to be encoded as a URI, then encoded as a URL query parameter.

Example 1

Path: /tmp/my movie.dv

As a URI: file:/tmp/my%20movie.dv

As a URL parameter for import: http://localhost:8080/API/import?URL=file%3A%2Ftmp%2Fmy%2520movie.dv (see below)

Note that the space has to be quoted twice. First to %20 in the URI, then the percent sign in %20 have to be quoted to %2520.

Example 2

Path: /tmp/tête-à-tête.dv

As a URI: file:/t%C3%A0te-%C3%A0-t%C3%A0te.dv (UTF-8 is used for the special characters, then percent encoded) (Optionally: file:/tête-à-tête.dv)

As a URL parameter for import: http://localhost:8080/API/import?URL=t%25C3%25A0te-%25C3%25A0-t%25C3%

Code example

The following Java code, using Jersey's UriBuilder, shows how to generate valid API calls:

```
String path = "/tmp/tête-à-tête.dv";
URI uri = new File(path).toURI();
URI callUri = UriBuilder.fromUri("http://localhost:8080/API/import").queryParam("uri",
→ "{uri}").build(uri);
```

Warning: In previous versions of Vidispine, the following call was accepted: `http://localhost:8080/API/import?URL=file:/tmp/my+movie.dv`. However, this is not valid, as the actual value of the parameter is then `file:/tmp/my movie.dv`, which is not a valid URI. (However, `http://localhost:8080/API/import?URL=file:/tmp/my%2520movie.dv` is valid.)

See also:


- How to write VS URI's
- [The URLEncode and URLDecode Page \(http://www.albionresearch.com/misc/urlencode.php\)](http://www.albionresearch.com/misc/urlencode.php)

JOBS AND TASK DEFINITIONS

6.1 Jobs

Jobs make up the long running tasks in Vidispine. They are created in response to requests that would otherwise not be able to respond in time, such as import, export and transcode requests.

The actions performed by a job is determined by its type. Bound to the type are a number of steps, or tasks, defined by the *task definitions*. The tasks form a graph, and typically execute in sequence, but it is also possible for tasks to start in parallel. This happens for example when importing and transcoding a growing file. The transfer step will initiate the transfer and then trigger the transcode step to start once enough data (the header) from the file has been transferred.

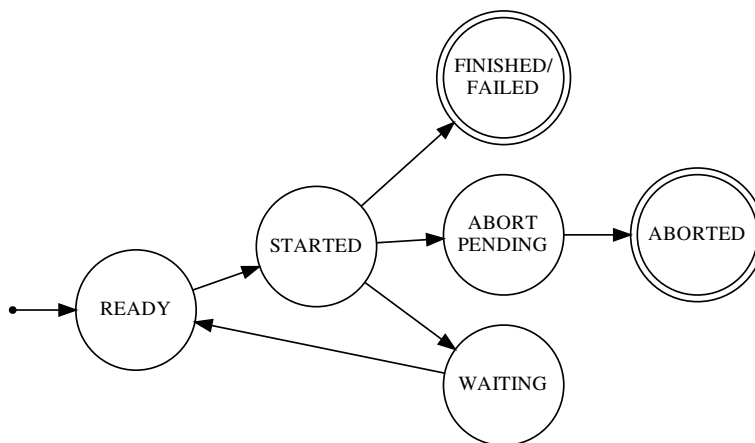

The states of a job are illustrated above. See below for a full description of the *states* and of the *job step states*.

6.1.1 Creating jobs

Create jobs by making requests to other RESTful resources:

Job type	Relevant documentation
Import jobs	<i>Imports (Also Importing a file from a storage)</i>
Export jobs	<i>Exports</i>
Thumbnail jobs	<i>Thumbnail settings</i>
Shape update/Essence version jobs	<i>Shapes</i>
File actions	<i>Files</i>
Sequence rendering	<i>Item sequences</i>
Item list job	<i>Listing items in batch</i>
Shape analyze	<i>Shape analysis</i>

6.1.2 Concurrency

The number of jobs that execute in parallel is determined by the `concurrentJobs` configuration property.

Job pools

New in version 4.2.2.

Using job pools it is possible to limit the number of concurrent low priority jobs, to make sure that higher priority jobs are able to start even if there are a large number of low priority jobs running. Job pools are configured using the *job pool configuration resource*.

```
PUT /configuration/job-pool
Content-Type: application/xml

<JobPoolListDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <pool>
    <priorityThreshold>HIGH</priorityThreshold>
    <size>2</size>
  </pool>
  <pool>
    <priorityThreshold>LOWEST</priorityThreshold>
    <size>3</size>
  </pool>
</JobPoolListDocument>
```

This configuration will allow at most 3 jobs with a priority of LOWEST to MEDIUM to execute at the same time. It will also allow up to 5 concurrent HIGH/HIGHEST priority jobs, as the second pool will contain jobs with a priority of LOWEST or higher (the priority threshold is the lower bound and pools have no upper priority bound.)

If there is no job pool with a priority threshold that matches low priority jobs then such jobs will *not* be started. For example, to only let jobs with a priority of MEDIUM or higher to execute:

```
<JobPoolListDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <pool>
    <priorityThreshold>MEDIUM</priorityThreshold>
    <size>3</size>
  </pool>
</JobPoolListDocument>
```

Note that the max concurrent job setting will only have an effect if it is lower than the size of all pools combined.

If no pools have been defined then `<concurrentJobs>` controls the number of concurrent jobs. This is the same setting as the `concurrentJobs` configuration property. So by default the job pool configuration will look like:

```
<JobPoolListDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <concurrentJobs>3</concurrentJobs>
</JobPoolListDocument>
```

6.1.3 Job problems

Jobs will enter the state WAITING if a recoverable problem has occurred. Depending on the problem the system might resolve itself or require manual assistance, for example if the system is out of storage space.

A system with no job problems will report:

```
GET /job/problem HTTP/1.1
Content-Type: application/xml

<JobProblemListDocument xmlns="http://xml.vidispine.com/schema/vidispine"/>
```

A system where the transcoder is unreachable for some reason may report:

```
GET /job/problem HTTP/1.1
Content-Type: application/xml

<JobProblemListDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <problem>
    <id>31532534</id>
    <type>TranscoderOffline</type>
    <job>VX-172716</job>
  </problem>
</JobProblemListDocument>
```

There can be multiple jobs waiting for a problem to be resolved, for example, in case of transcoder or storage problems. For JavaScript problems there will however be one problem per job, as the problem condition is defined by a step specific for each job.

6.1.4 Job tasks

The action performed by a task can be implemented either as a method in an EJB or as a JavaScript. Using JavaScript is recommended for all new applications.

```
POST /task-definition/ HTTP/1.1
Content-Type: application/xml

<TaskDefinitionListDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <task>
    <description>A custom JavaScript step</description>
    <script><![CDATA[
// This script does nothing but fail the job
job.fatalFail("Testing job failing");
]]></script>
    <step>10000</step>
    <dependency>
      <previous>>false</previous>
      <allPrevious>>true</allPrevious>
    </dependency>
    <jobType>PLACEHOLDER_IMPORT</jobType>
    <critical>>false</critical>
```

```
</task>
</TaskDefinitionListDocument>
```

Defining new tasks

See *JavaScript tasks* on how to create JavaScript tasks.

Task dependencies

The execution order is defined by the step numbers and dependencies of the steps. The dependency element defines which steps a specific step depend on. There is also the `parallelDependency` element that defines the dependencies that apply if the step is executing as a parallel step.

<code>allPrevious = true</code>	The step requires all previous step to finish, before it can start.
<code>previous = true</code>	The step requires the previous step to finish, before it can start
<code>step = N</code>	The step requires step number N to finish, before it can start

Visualizing tasks

In order to easily see the dependencies between steps for a particular job type, there is functionality to render the job definition as a graph. In order to render the graph, the [Graphviz](http://www.graphviz.org/) (<http://www.graphviz.org/>) package is required.

6.1.5 Custom job types

New in version 4.6.

It is possible to define custom job types. Each custom job type is defined with a name and an integer identifier. Both of these must be unique. Task definitions can then be added to the job type, in the same way as described above.

Example

First we create the job type:

```
POST /task-definition/jobtype/MYCOMPANY_CUSTOM_JOB_TYPE?id=25000 HTTP/1.1
```

```
<TaskDefinitionListDocument xmlns="http://xml.vidispine.com/schema/vidispine"/>
```

Then we can add task definitions to our new job type:

```
POST /task-definition/ HTTP/1.1
Content-Type: application/xml

<TaskDefinitionListDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <task>
    <description>A custom JavaScript step</description>
    <script><![CDATA[
      logger.log("My custom job is running!");
    ]]></script>
    <step>100</step>
    <dependency>
      <previous>>false</previous>
```

```

    <allPrevious>true</allPrevious>
  </dependency>
  <jobType>MY_CUSTOM_JOB_TYPE</jobType>
  <critical>false</critical>
</task>
</TaskDefinitionListDocument>

```

After this has been done, we can now run the job:

```
POST /job?type=MY_CUSTOM_JOB_TYPE
```

```

<JobDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <jobId>VX-29</jobId>
  <user>admin</user><started>2016-05-17T12:38:22.999Z</started>
  <type>MY_CUSTOM_JOB_TYPE</type>
  <status>READY</status>
  <priority>MEDIUM</priority>
</JobDocument>

```

6.2 JavaScript tasks

A JavaScript task is created by including the JavaScript in the task definition document. To evaluate the script Vidispine uses [Rhino](https://developer.mozilla.org/en-US/docs/Rhino) (<https://developer.mozilla.org/en-US/docs/Rhino>). A number of global variables are defined for the script to use, see *Common JavaScript functions*.

In addition for task definitions, there is *the job object*.

6.2.1 The job object

The `job` object contains methods for reading and writing metadata for the job that is executing, and also for some job control.

- `job.getId()`
Gets the id of the job that is executing.
New in version 4.2.2.
- `job.log(description)`
Logs a message related to the current job step.
New in version 4.2.2.
- `job.getData(key)`
Gets the data for the given key.
- `job.setData(key, value)`
Sets the data for the given key.
- `job.deleteData(key)`
Removes the given key from the job data.
New in version 4.9.
- `job.fail(errorMessage)`
Fails the current step, but the step will be retried (up to five times).

`job.fatalFail (errorMessage)`
Fails the current step and job.

`job.getUser ()`
Gets the user of the job. It replaces the old way of getting the user name using `job.getData ("username")`.
New in version 4.14.1.

`job.getKeys ()`
Returns all the keys from the job data.
New in version 4.16.

`job.containsKey (key)`
Checks if the job data contains the key.
New in version 4.16.

`job.getDataOrDefault (key, value)`
Returns the value from the job data or the given default value.
New in version 4.16.

6.2.2 Pausing job execution

New in version 4.0.

A JavaScript job step can pause the execution of the job by calling `job.wait ()`. This will set the job in the *WAITING job state*. To determine if the job execution can be resumed, the script is run again every minute with the variable `checkProblem` set to true. If the job should keep waiting, then `job.wait ()` should be called again.

Note: (New in 4.1.5.). Before version 4.1.5, `job.fail` should be used to signal that the job should keep waiting. Since 4.1.5, both `job.fail` and `job.wait` can be used.

`job.wait (reason)`
Sets the job in *WAITING* state.

Arguments

- **reason** (*string*) – An explanation of what the job is waiting for.

Example

```
if (checkProblem) {
  if (/* condition is fulfilled */ ...) {
    return;
  }
  // Call job.wait() to indicate that the job should wait more
  // See note above
  job.wait("condition still not fulfilled");
} else {
  // run step as normal
  ....
  if (/* condition is not fulfilled */ ...) {
```

```

    job.wait("waiting for condition");
    return;
  }

  // continue job execution
  ....
}

```

6.2.3 Vidinet job execution

New in version 4.11.

Jobs can be submitted to Vidinet services, for execution or for cost estimates, using the `vidinet` functions on the job object.

`job.vidinetJob` (*type, instruction, settings*)

Submits a job to Vidinet and sets the job in `VIDINET_JOB` state.

Arguments

- **type** (*string*) – The type of Vidinet resource to use, for example, `AURORA`.
- **instruction** (*string*) – The job instruction.
- **settings** (*object*) – A set of key/value pairs related to the job.
 - **item** - The id of the item that the job relates to.
 - **shape** - The id of the shape that the job relates to. Optional. Overrides `tag`.
 - **tag** - The shape of the item that the job relates to. Default is `original`.
 - **resource** - The specific Vidinet resource to submit the job to.

`job.vidinetCost` (*type, instruction, settings*)

Request a cost estimate from Vidinet.

Arguments

- **type** (*string*) – The type of Vidinet resource to use, for example, `AURORA`.
- **instruction** (*string*) – The job instruction.
- **settings** (*object*) – A set of key/value pairs related to the job.
 - **item** - The id of the item that the job relates to.
 - **shape** - The id of the shape that the job relates to. Optional. Overrides `tag`.
 - **tag** - The shape of the item that the job relates to. Default is `original`.
 - **resource** - The specific Vidinet resource to submit the job to.

Returns A `Future<CostEstimateType>` (<https://docs.oracle.com/javase/7/docs/api/java/util/concurrent/Future.html>) that can be used to retrieve the estimate.

Example

To submit a job to a Vidinet service that is not natively supported:

```

var item = ...;
var instruction = "...";

job.vidinetJob("TEST", instruction, {
    item: itemId
});

```

In case a cost estimate is wanted before submitting the job to Vidinet:

```

var item = ...;
var instruction = "...";
var settings = {
    item: itemId
};

if ("true".equals(job.getData("estimate"))) {
    var estimate = job.vidinetCost("TEST", instruction, settings);
    var result = estimate.get(); // blocking call

    var cost = result.getService().get(0).getCost();
    job.setData("app_estimated_cost", cost.getAmount());
} else {
    job.vidinetJob("TEST", instruction, settings);
}

```

6.2.4 Example: Update item metadata on import

Start by adding a new task to the import job with the script to execute.

Note: If using curl, use `--data-binary` instead of `-d` to make sure all new-line characters are kept in the script.

```

POST /task-definition/
Content-Type: application/xml

<TaskDefinitionListDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <task>
    <description>Updating item metadata using a JavaScript task</description>
    <script><![CDATA[
...
]]></script>
    <step>10000</step>
    <dependency>
      <previous>>false</previous>
      <allPrevious>>true</allPrevious>
    </dependency>
    <jobType>PLACEHOLDER_IMPORT</jobType>
    <critical>>false</critical>
  </task>
</TaskDefinitionListDocument>

```

```

// Retrieve the id of the item that is being imported
var itemId = job.getData("itemId");
var shapeId = job.getData("originalShapeId");

```



```

// Retrieve the shape information
var shape = api.path("item/"+itemId+"/shape/"+shapeId).get();
var video = shape.videoComponent.length;
var audio = shape.audioComponent.length;

// Build a document with the metadata to set
var metadata = {
  "timespan": [
    {
      "start": "-INF",
      "end": "+INF",
      "field": [
        {
          "name": "title",
          "value": [
            {
              "value": "Item with "+video+" video and "+audio+" audio tracks"
            }
          ]
        }
      ]
    }
  ]
};

// Update the item metadata
var result = api.path("item/"+itemId+"/metadata").input(metadata).put();
var metadata = result.item[0].metadata;

```

6.2.5 Example: Update item metadata on import using XML

Scripts can also use ECMAScript for XML (E4X) to easily create and parse XML documents. Using E4X the above script could be written as below. Note that the XML responses from Vidispine will automatically be parsed into E4X XML objects instead of being returned as strings.

```

// Set the default XML namespace so that the Vidispine namespace does not have
// to be specified when retrieving properties or when building the metadata document
default xml namespace = "http://xml.vidispine.com/schema/vidispine";

// Retrieve the id of the item that is being imported
var itemId = job.getData("itemId");
var shapeId = job.getData("originalShapeId");

// Retrieve the shape information
var shape = api.path("item/"+itemId+"/shape/"+shapeId).dataType("xml").get();
var video = shape.videoComponent.length();
var audio = shape.audioComponent.length();

// Build a document with the metadata to set
var metadata = <MetadataDocument>
  <timespan start="-INF" end="+INF">
    <field>
      <name>title</name>
      <value>Item with {video} video and {audio} audio tracks</value>
    </field>
  </timespan>

```

```
</MetadataDocument>

// Update the item metadata
var result = api.path("item/"+itemId+"/metadata").input(metadata).put();
var metadata = result.item[0].metadata;
```

6.3 Task groups

New in version 4.4.

Task groups can be used to control the transcoders that a specific job should use. It may be expanded in the future to include not only jobs and transcoders, but also other types of tasks and resources.

- A task group identifies a set of jobs and the resources available to those jobs.
- Jobs are identified by a criteria on the group.
- A job can belong to multiple groups, but only a single group for each type of resource. If a job satisfies the criteria on multiple groups, then the job belongs to the group with the highest priority.
- A transcoder can belong to any number of groups.
- A job will only use resources from the group(s) that it belongs to.

6.3.1 Creating a task group

Task groups are referred to by name. Each group should specify a job criteria and a number of transcoders, and a priority if needed.

```
PUT /task-group/imports
Content-Type: application/xml

<TaskGroupDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <job>
    <type>PLACEHOLDER_IMPORT</type>
  </job>
  <transcoder>
    <id>VX-1</id>
  </transcoder>
  <transcoder>
    <id>VX-2</id>
  </transcoder>
  <priority>MEDIUM</priority>
</TaskGroupDocument>
```

6.3.2 Task group criteria

Task groups can have multiple criteria. A job must then satisfy them all to be considered being part of that group. The selections in a criteria form a logical OR.

For example, to restrict jobs that are either imports or exports, and from the admin or bulk-import user, to transcoder VX-1:

```
<TaskGroupDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <job>
    <type>PLACEHOLDER_IMPORT</type>
    <type>EXPORT</type>
  </job>
  <job>
    <user>admin</user>
    <user>bulk-import</user>
  </job>
  <transcoder>
    <id>VX-1</id>
  </transcoder>
</TaskGroupDocument>
```

This is evaluated as:

```
(type:PLACEHOLDER_IMPORT OR type:EXPORT)
AND
(user:admin OR user:bulk-import)
```

Job criteria

Jobs can be matched on:

- Priority - To include jobs with a certain priority.
- Type - To include jobs of a certain type.
- User - To include jobs created by a specific user.
- Group - To include jobs created by a user in a specific group.
- Data - To include jobs with certain data.

6.3.3 Task group priority

A job will use resources from the task group with the highest priority and a matching criteria. If two task groups have the same priority then the groups are ordered by name in alphabetical order, and the first one is picked.

6.3.4 Job problems

If a job cannot run because the transcoders available to it are offline, then a transcoder offline problem will be created. The problem will contain the name of the group and the job id(s).

This allows you to see which group/transcoder(s) a job is blocked on. For example:

```
GET /job/problem
```

```
<JobProblemListDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <problem>
    <id>35113</id>
    <type>TranscoderOffline</type>
    <job>VX-115770</job>
    <data>
      <key>taskGroup</key>
```

```
<value>imports</value>
</data>
</problem>
</JobProblemListDocument>
```

NOTIFICATIONS

Notifications are sent from the system when predefined events occur. An example of such an event could be a job that finishes. Examples of when this could be useful are:

- Getting a notification when a job finishes.
- Making sure the metadata input for a certain field is correct.

Notifications involve a quadruple:

1. The resource or entity to be notified about.
2. The event that should trigger the notification.
3. The action that should be taken when the notification is triggered.
4. Filters that further specifies the behavior of the trigger.

7.1 Resources

A number of different entity types support notifications. Below is a short description of the different entity types and what events can trigger a notification:

- **Items** – notifications can trigger on item delete/create, metadata changes, shape changes and access control changes.
- **Collections** – can trigger on creation/deletion, metadata changes and content changes.
- **Jobs** – can trigger on job create, update, finish, fail and stop.
- **Groups** – group notifications can trigger on group create, delete and modify.
- **Storages** – can trigger on storage create/delete, and on new files.
- **Files** – can trigger on group create, delete and modify.
- **Quota** – quota notifications can trigger on quota create, delete, and quota exceeded warnings.
- **Document** – can trigger on document create, delete and modify.

Changed in version 4.8: Document notifications were added.

7.2 Actions

An action is what will be done when a notification is triggered. The action can either be to:

- Perform a HTTP request.

- Invoke an EJB method.
- Send a JMS message.
- Execute a JavaScript.
- Send a message to Amazon SQS (New in 4.7.)

The data included in the request or message will be multivalued key-value data identifying the event that has occurred.

An action can be sent either synchronous or asynchronous. In the case of a synchronous action the message will be sent in the same thread as where the notification is triggered. And execution will only continue if the recipient acknowledges and approves the message. In the asynchronous case the message will be sent in another thread and execution will continue immediately.

For a full description of actions, refer to the API reference on *Actions*.

7.3 Triggers

A trigger is the event that will cause the notification to perform its action. Different triggers exist for different resources. The trigger used determines what output that can be expected. Below an overview of available triggers can be seen:

- Item triggers.
 - Shapes
 - Metadata
 - ACLs
- Collection triggers
- Group triggers
- Job triggers
- Storage triggers
- File triggers
- Quota triggers
- Document triggers.
- Deletion lock triggers.
- Placeholder (null) triggers.

The placeholder trigger is simply the lack of a trigger-type. For a full description of triggers, refer to the API reference on *Triggers*.

Changed in version 4.8: Document triggers were added.

7.4 Job filtering

7.4.1 Job types

Filter criteria can be added to job notifications in order to filter which type of jobs they trigger on.

7.4.2 Job metadata

Either by string comparison or regular expressions.

7.5 Filters

Filters can be used to specify the trigger further. For example in the case of metadata, the notification can be filtered to only trigger for certain values.

RESOURCES

Resources in Vidispine are components used for auxiliary storage or transformation. The two most commonly used resource type are the `thumbnail`, which is used to store thumbnails, and `transcoder`, which points to instances of the Vidispine transcoder.

8.1 Transcoders

When you import items the Vidispine transcoder will be used to detect the type of media that is being imported and, of course, to transcode the media to any formats that you have requested.

The common operations performed by the transcoder are:

- Media shape deduction
- Transcoding
- Sequence rendering
- Partial file extraction
- XMP extraction and rewrite

The Vidispine transcoder has a REST API that Vidispine uses to perform the above operations. This API is not described in this document, as it typically should not be accessed directly.

8.1.1 Adding a transcoder

Add a transcoder by creating a new `transcoder` resource. The resource document should contain information on how to reach the transcoder and what storages the transcoder has direct access to.

```
POST /resource/
Content-Type: application/xml

<?xml version="1.0"?>
<ResourceDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <transcoder>
    <url>http://transcoder.example.com:8888/</url>
    <directAccess>
      <filter>file:/srv/media/.*/</filter>
    </directAccess>
  </transcoder>
</ResourceDocument>
```

Vidispine checks the status of transcoders continuously in the background. As such, if the configuration is correct you will see that the transcoder shows up as online in a few seconds.

```
GET /resource/VX-7
```

```
<?xml version="1.0"?>
<ResourceDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <id>VX-7</id>
  <transcoder>
    <url>http://transcoder.example.com:8888/</url>
    <directAccess>
      <filter>file:/srv/media/.*</filter>
    </directAccess>
    <state>ONLINE</state>
  </transcoder>
</ResourceDocument>
```

The Vidispine installer will by default install and configure a transcoder in Vidispine for you, so this step is typically not needed.

8.1.2 Using multiple transcoders

Depending on your license, you may be allowed to use more than one transcoder. To do so, simply add additional transcoders as explained above. Vidispine will submit transcode jobs to the transcoder based on the current number of jobs being processed by the transcoder.

Vidispine will use the transcoder with the least amount of work. If a transcoder goes offline then any transcode job steps using that transcoder will fail and be retried using one of the online transcoders. If all transcoders are offline then jobs will *wait* for one to become available.

Changed in version 4.4: The `clusterName` property must be set if multiple Vidispine installations are to share a transcoder. Each installation must have a unique cluster name. This applies regardless if the installations have the same site name or not.

Warning: Do not connect multiple Vidispine installations to the same set of transcoders unless each installation has a distinct site name. If installations have the same site name then jobs from one installation may conflict with jobs from another.

Changed in version 4.4: This no longer applies; see above notice.

8.1.3 How transcoders perform jobs

A transcoder will perform a job as soon as it is received, and will not schedule jobs for later execution. Vidispine, that is, the user of the transcoder is responsible for scheduling which jobs a transcoder should execute and when they should be executed.

8.1.4 Transcoder job limit

New in version 4.12.

The `maxJob` setting can be used to limit the number of Vidispine jobs that may use a specific transcoder at the same time. If all transcoders are busy, jobs will be put on `WAITING` state, with a `TranscoderBusy` problem. The jobs will restart as soon as any qualified transcoder becomes available again.

```
<ResourceDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <id>VX-7</id>
  <transcoder>
    <url>http://transcoder.example.com:8888/</url>
    <maxJob>5</maxJob>
  </transcoder>
</ResourceDocument>
```

A Vidispine job typically triggers multiple transcoder jobs, e.g. shape deductions and transcodes, so in the above case there may still be more than 5 running jobs on a transcoder. They will however all belong to at most 5 jobs in Vidispine.

The above setting works for VSA transcoders as well. VSA users can also add `transcoder.maxJob` to one of the agent configuration files. For example:

```
$ cat /etc/vidispine/agent.conf.d/transcoder.conf
transcoder.maxJob=5
```

8.1.5 The transcoder's configuration file

The transcoder configuration file `config.xml` contains default settings for the transcoder and need typically not be modified, as the settings can instead be configured in Vidispine.

Modify the transcoder file

On a Linux system, copy the file `/opt/vidispine/transcoder/config.xml` to `/etc/transcoder-config.xml`. Then edit `/etc/transcoder-config.xml`. The file in `/etc` takes precedence over the file in `/opt/vidispine`.

Modify the transcoder resource

New in version 4.2.3.

On all operating systems, the transcoder configuration can be changed by adding configuration to the resource definition of the transcoder (*Adding a transcoder*).

Note that port of the transcoder cannot be changed in this fashion.

Modifying the transcoder configuration in this fashion takes precedence over the local configuration file and the global transcoder configuration, see below.

Modify all transcoders

It is also possible to change the configuration of all transcoders, by setting the configuration property `transcoderDefaultConfiguration` to the XML representation of the transcoder configuration.

Thumbnail settings

Note: The preferred way of changing the thumbnail and poster settings is by changing the appropriate values in the `TranscodePresetDocument` in a *shape tag*. For example, by changing the `thumbnailResolution` and `thumbnailPeriod` elements. The setting in shape tag have priority over the transcoder setting.

The `thumbnailResolution` element contains the default resolution of the thumbnails produced by the transcoder.

```
<a:thumbnailResolution>
  <a:width>320</a:width>
  <a:height>240</a:height>
</a:thumbnailResolution>
```

You can also change the thumbnailing frequency by changing `thumbnailPeriod`. For example, to thumbnail every 3 seconds:

```
<a:thumbnailPeriod>
  <a:samples>3</a:samples>
  <a:timeBase>
    <a:numerator>1</a:numerator>
    <a:denominator>1</a:denominator>
  </a:timeBase>
</a:thumbnailPeriod>
```

If the transcoder does not use a scene change detection plugin, the frequency defaults to once every 10 seconds.

StatsD settings

New in version 4.2.3.

To have the transcoder send metrics to a StatsD server you can either:

- Enable StatsD using the API, see *StatsD*
- Update the transcoder configuration with the address and port of the StatsD server:

```
<a:statsd>
  <a:destination>
    <a:address>127.0.0.1</a:address>
    <a:port>8125</a:port>
  </a:destination>
  <a:prefix>t1</a:prefix>
</a:statsd>
```

The `prefix` element configures the prefix to use for each metric. By default this is the `transcoder`.

Transcoder resources settings

Path to temporary storage

Since 4.2.5

Controls where temporary files are stored. Defaults to `/tmp` on UNIX-like systems, or `%TEMP%` on Windows.

```
<a:tempPath>/mnt/largetemparea<a:tempPath>
```

Number of decoding threads

Controls the number of decoding threads. Defaults to 4 for I-frame-only formats. The actual number of threads used depends on codec. (New in 4.2.3.) Since version 4.2.3, this setting is used with more formats than before.

```
<a:decoderOfferThreads>8<a:decoderOfferThreads>
```

Number of encoding threads

Controls the number of encoding threads. Defaults to automatic setting. The actual number of threads used depends on codec.

```
<a:encoderThreads>8<a:encoderThreads>
```

HTTP buffer sizes

New in version 4.5.

Controls the size of HTTP reads and writes of the transcoder. `dataBufferSize` controls the maximum number of read bytes in memory. Default is 100 MB. `dataBufferWriteSize` controls the maximum number of write bytes in memory. Default is 100 MB. `dataBufferFlushTime` controls the number of seconds written bytes are stored in memory before it is flushed. Default is 4 seconds.

For system that uses segment files and where the transcoder has enough memory, it is recommended to increase these numbers, up to 10 times.

Image processing

To control the memory and disk usage used by the transcoder for image processing, use the `<imagemagick>` element in the transcoder configuration. The most important settings are listed below, for a complete list, see <http://www.imagemagick.org/script/resources.php> (under environment variables, used without the `MAGICK_` prefix in the transcoder configuration).

Maximum heap usage

```
<a:imagemagick>
  <a:key>MEMORY_LIMIT</a:key>
  <a:value>1GB</a:value>
</a:imagemagick>
```

Temporary work area

```
<a:imagemagick>
  <a:key>TEMPORARY_PATH</a:key>
  <a:value>/var/tmp</a:value>
</a:imagemagick>
```

(New in 4.2.5.) The default value is the value set by the general transcoder temporary path, see above. It is recommended that the `tempPath` setting is used, rather than the `imagemagick` one.

8.1.6 Operations overview

Zeroconf transcoders

The following is done to remove the need to configure the transcoders directly:

- Vidispine pushes its own license to the transcoder, so that each transcoder does not need a license file of their own.
- The transcoder returns the IP address from where the license was pushed, that is, the IP address of the application server, removing the need for explicitly configuring the reverse address, that is, where the transcoder can reach Vidispine, in most cases.
- In addition, Vidispine generates temporary pre-authorized URIs that are used by the transcoder. This removes the need for entering any application server information in the transcoder configuration file.

Reverse address and NAT

The reverse address does not work if there is NAT or other port forwarding mechanisms between the application server and the transcoder. If so, the address to VS-EA can be overridden in the definition for the transcoder by setting the `<reverseAddress>` element.

```
<?xml version="1.0"?>
<ResourceDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <transcoder>
    <url>http://transcoder.example.com:8888/</url>
    <reverseAddress>vs.example.com</reverseAddress>
  </transcoder>
</ResourceDocument>
```

For GlassFish, a new HTTP listener (`noauth-listener`, default port is the standard API port + 9) is installed on GlassFish for communication from the transcoder to GlassFish. The rules for how the address to GlassFish is determined are as follows:

1. If the configuration property `apiNoauthUri` is set, it is used for all transcoders.
2. If the configuration property `apiNoauthPort` is set, it is used for together with the detected or manually set reverse address.
3. If the port for `noauth-listener` can be determined (GlassFish only), it is used with the reverse address.
4. If the port for `http-listener-1` can be determined (GlassFish only), it is used with the reverse address.

For JBoss, it is currently required that at least `apiNoauthPort` is set.

Transcoder's access to media

By default, the transcoder accesses non-file-schema media through the application server. This has several advantages:

- The same user is used for all file access.
- Possibility for support for extended file attributes and permissions.
- Support for other file systems (URI schemes).

Streaming the media puts some extra load on the application server. Some tuning might be necessary.

The transcoder resource in Vidispine can be set up to access files directly. By adding a `directAccess` element to the transcoder resource, Vidispine will let the transcoder access the media directly. If no `directAccess` elements are present, an implicit

```
<directAccess>
  <filter>file:.*</filter>
</directAccess>
```

is added. In order to tell Vidispine that all files should go via the application server, add an

```
<directAccess>
  <filter>NO_MATCH</filter> <!-- dummy regular expression that does not match_
↳anything -->
</directAccess>
```

Growing files

For all file systems that supports read-while-write, and for container formats that are built for streaming (e.g. MXF), growing file is supported when streamed through the application server. If growing files is required to local files with the file scheme, a `directAccess/NO_MATCH` element as per above must be added to the resource configuration.

8.2 Transcoder discovery

New in version 4.4.

Vidispine can automatically discover transcoders using either HTTP or DNS. This makes it possible to use [Consul](http://consul.io/) (<http://consul.io/>), [Amazon Route 53](http://aws.amazon.com/route53/) (<http://aws.amazon.com/route53/>) or any DNS or HTTP server to track the available transcoders, with custom health checks and rules to determine which transcoders should be used by Vidispine for example.

You could also configure Vidispine instances to read transcoders from another instance, as an easy way to manage a set of transcoders.

8.2.1 Adding a transcoder directory

To have Vidispine discover transcoders, add a transcoder resource to Vidispine with the type set to `DIRECTORY`.

```
POST /resource/
Content-Type: application/xml

<?xml version="1.0"?>
<ResourceDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <transcoder>
    <type>DIRECTORY</type>
    <url>http://service-user:oeHie2Ye@vs1.example.com:8080/API/resource/transcoder</
↳url>
  </transcoder>
</ResourceDocument>
```

Once the transcoders have been retrieved, they will show up as nested transcoders under the transcoder resource.

```
GET /resource/VX-24
```

```
<?xml version="1.0"?>
<ResourceDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <id>VX-24</id>
  <transcoder>
```

```
<type>DIRECTORY</type>
<url>http://service-user:oeHie2Ye@vs1.example.com:8080/API/resource/transcoder</
↪url>
  <state>ONLINE</state>
  <transcoder>
    <url>http://t1.transcoder.example.com:8888/</url>
    <version>4.4</version>
    <reverseAddressDetected>172.17.42.1</reverseAddressDetected>
    <state>ONLINE</state>
  </transcoder>
  <transcoder>
    <url>http://t2.transcoder.example.com:8888/</url>
    <state>OFFLINE</state>
  </transcoder>
</ResourceDocument>
```

Note: If the HTTP/DNS server is offline then the known set of transcoders will be kept and used until the server comes online again and the set of transcoders is updated.

8.2.2 Supported URIs

http:

Syntax `http://[{user} : {password} @] {host} / {path}`

Response `application/xml` - `ResourceListDocument`

The HTTP server should return a list with all available transcoders.

dns:

Syntax `dns://[{dnsServer} /] {domainName}`

Vidispine will perform a SRV lookup to retrieve the host and port of all available transcoders. SRV lookups will be done against:

- `{domainName}`
- `_transcoder._http.{domainName}`
- `_transcoder._https.{domainName}`

RFC 2782 names

If the domain name already has the format of a RFC 2782 style SRV resource record (`_service._protocol.name`), then a single SRV lookup will be done.

If the service or protocol name is `https` then HTTPS will be used instead of HTTP to connect to the discovered transcoders. For example, these SRV records would enable secure communication using HTTPS between Vidispine and transcoders:

- `_transcoder._https.example.com`
- `_https._tcp.transcoder.example.com`

Changed in version 4.15: Support for RFC 2782 style lookups and HTTPS was added.

8.3 External transcoders

Using the external transcoder support in Vidispine it is possible to use transcoders from other companies, or to perform transcodes in other ways. This is done using watch folders.

- With transcoders that support watch folders directly, it's simply a matter of configuring both Vidispine and the external transcoder to use the same watch folder.
- Transcoders that do *not* support watch folders can still be integrated with by writing a service that monitors the watch folder and sends transcode request to the external transcoder accordingly.

Important:

- It is not possible to transcode using the Vidispine transcoder and an external transcoder at the same time.
 - It is only possible to transcode using one external transcoder shape tag at the time.
-

Changed in version 4.5: Any method supported by Vidispine can now be specified as the source or destination, meaning that the watch folders no longer need to be local.

8.3.1 How it works

When starting an import or transcode job, Vidispine will check if the given shape tag is defined to be handled by an external transcoder. If it is, then the source file (e.g. the original essence of the item) will be copied to the transcoder's watch folder (e.g. `<source>` the external-transcoder *ResourceDocument*); then the job waits for one or more files to appear in the destination folder (e.g. `<destination>` in *ResourceDocument*), and perform the rest steps. Note: only the transcode step is handled by the external transcoder.

Settings

Filename pattern It is mandatory to define a filename pattern (a.k.a `<regex>`) in the external transcoder resource to control what files the job should look for. In order to support multiple transcodes at the same time, the regex will be prefixed using the file name of the essence automatically. That is:

If the original essence file name is `VX-100`, and the regex is `.*output.*`, then Vidispine will look for files matching `\QVX-100\E.*output.*`.

Timeout The output file must appear in the destination folder within this timeout, or the transcode step will be marked as failed. The default timeout is 30 seconds.

Interval How frequently the destination folder should be checked for new or updated files. The default interval is 5 seconds.

Checks How many times an output file must remain unchanged for the file to be considered completely written. By default files must remain unchanged for 3 checks.

Changed in version 4.4.2: The interval and checks settings were added. Files may now also continue growing past the timeout.

8.3.2 Adding an external transcoder

Add an external transcoder by creating an `externalTranscoder` resource using `POST /resource`.

```

POST /resource/externalTranscoder/
Content-Type: application/xml

<ResourceDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <externalTranscoder>
    <source>file:///mnt/external-transcoder/source/</source>
    <destination>file:///mnt/external-transcoder/destination/</destination>
    <shapeTag>external-format</shapeTag>
    <timeout>60000</timeout>
    <regex>.*demo.*</regex> <!-- Since Vidispine 4.0 -->
  </externalTranscoder>
</ResourceDocument>

```

8.3.3 Using an external transcoder

Before starting a transcode, make sure the shape tag in the example, has been defined in an external transcoder resource.

```

POST /shape-tag/external-format
Content-Type: application/xml

<TranscodePresetDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <format>mp4</format>
  <audio></audio>
  <video></video>
</TranscodePresetDocument>

```

The external transcoder is supported in AUTO_IMPORT and at the following requests

- `POST /import`
- `POST /import/raw`
- `POST /item/(item-id)/transcode`
- `POST /item/(item-id)/shape/(shape-id)/transcode`

8.4 Thumbnail resources

A thumbnail resource defines a location where the thumbnails will be stored. For details how the thumbnails are stored and for the supported location types see *How thumbnails are saved on disk*.

8.4.1 Adding a thumbnail resource

Add a thumbnail resource using `POST /resource`.

```

POST /resource
Content-Type: application/xml

<?xml version="1.0"?>
<ResourceDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <thumbnail>
    <path>file:///srv/thumbnails/</path>
  </thumbnail>
</ResourceDocument>

```

8.4.2 Reading thumbnails

The thumbnails in that directory will then be available from the API as described on *Thumbnail resource handling*. For example, all thumbnails can be listed using `GET /thumbnail/(resource-id)`.

```
GET /thumbnail/VX-2
```

```
<?xml version="1.0" encoding="UTF-8" standalone="yes"?>
<URIListDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <uri>VX-1</uri>
  <uri>VX-3</uri>
  <uri>VX-4</uri>
  <uri>VX-7</uri>
</URIListDocument>
```

However, you would typically not access thumbnails from that resource directly. Instead, fetch thumbnails for an item using `GET /item/(item-id)/thumbnailresource` or using the `thumbnail` content parameter.

```
GET /item/VX-7/thumbnailresource
```

```
<?xml version="1.0" encoding="UTF-8" standalone="yes"?>
<URIListDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <uri>http://localhost:8080/API/thumbnail/VX-1/VX-7;version=0</uri>
</URIListDocument>
```

```
GET http://localhost:8080/API/thumbnail/VX-1/VX-7;version=0
```

```
<?xml version="1.0" encoding="UTF-8" standalone="yes"?>
<URIListDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <uri>0@PAL</uri>
</URIListDocument>
```

8.4.3 Thumbnail resource permissions

New in version 4.6.

A thumbnail resource can be made read-only or read-protected, for example:

- When migrating thumbnails from one location to another; to have new thumbnails written to one resource but old thumbnails still read from another resource.
- As read-protected, in case the disk where thumbnails are stored needs to be taken offline. VS will then avoid serving thumbnails from that resource.

This is done using the `mode` element.

```
<?xml version="1.0"?>
<ResourceDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <thumbnail>
    <path>file:///srv/thumbnails/</path>
    <mode>NONE</mode>
  </thumbnail>
</ResourceDocument>
```

Allowed values are:

- `READ_WRITE` - full access (default)

- READ - read-only
- NONE - no access.

8.4.4 How thumbnails are saved on disk

The thumbnails can be stored either in a database form or as one file per thumbnails (New in 4.2.2.).

Thumbnails are stored in the resolution and format as requested when the thumbnails were created, and it's not possible to for example request a thumbnail as a PNG if it has previously been created as a JPEG.

Database

The thumbnail path as specified in the `ResourceDocument` should have the format

- path (e.g. `/srv/media/thumbnails/`), or
- file URI (e.g. `file:///src/media/thumbnails/`)

Thumbnails are stored in a separate directory and database - one for each item. Vidispine will automatically migrate the databases during runtime if necessary, so no special action is required when updating Vidispine to a newer version or when restoring an old thumbnail backup on a newer system.

One file per thumbnail

New in version 4.2.2.

The thumbnail path as specified in the `ResourceDocument` should have the format

- URI with the `direct+` prefix (e.g. `direct+file:///src/media/thumbnails/`)

All URIs supported as *Storage method URIs* are supported.

Using a tree structure for thumbnails

Putting all files in the same directory of a storage can cause degraded performance on some file systems.

By setting the configuration property `thumbnailHierarchy`, the naming convention for the thumbnails' folders is changed to `site-id - number1 / number2`. The number set in `thumbnailHierarchy` controls the size of `number2`.

The `thumbnailHierarchy` works in the same way as `fileHierarchy` does for files. See *Using a tree structure for files* for an example. The property works both for the database thumbnail storage and the direct thumbnail storage.

Warning: Changing the `thumbnailHierarchy` property **will cause old thumbnails to be lost**. If you need to change the value on a system in production, please contact Vidispine.

8.5 Vidispine Server Agent

The Vidispine Server Agent, *VSA*, is a daemon process running on servers connecting to a Vidispine Server, *VS*. *VSA* is composed of a *Vidispine Transcoder* and the *VSA* supervisor.

8.5.1 How to install VSA

Prerequisites

- A running VS instance, version 4.4 or newer
- A server running Ubuntu 14.04 or higher, 64-bit, or CentOS 6.5 or higher, 64-bit

Installation

Add the Vidispine repository according to the documentation on [repository](http://repo.vidispine.com/) (<http://repo.vidispine.com/>). Then you can install and start VSA. With Ubuntu/Debian:

```
$ sudo apt-get install vidispine-agent vidispine-agent-tools
```

With CentOS/RedHat:

```
$ sudo yum install vidispine-agent vidispine-agent-tools
```

After that, the agent can be connected to Vidispine server.

8.5.2 Connecting to Vidispine

The agent can then be connected either with or without establishing an SSH tunnel to Vidispine server. The latter should be used if an encrypted network connection has already been established to Vidispine server, or if the server and the agent runs within the same network.

- *Connecting with SSH tunnel*
- *Connecting without SSH tunnel*

Connecting with SSH tunnel

The configuration files are located in `/etc/vidispine/`. Configuration can be stored in either the file `agent.conf` in this directory, or in files in the subdirectory `agent.conf.d`. It is recommended that a file is created in the `agent.conf.d` directory. Specifically, there are two setting that has to be set: the connection to VS, and the unique name of the VSA server. The first one you will get from the Vidispine instance.

1. Enable the Vidispine VSA port, by adding this to the `server.yaml` file (change the port number as necessary). The server will need to restart for any changes to take effect.

```
vsaconnection:  
  bindPort: 8183
```

Note: This step is new in Vidispine 4.6.

2. On the Vidispine instance, install the `vidispine-tools` package and run

```
$ sudo vidispine-admin vsa-add-node
```

Note: In Vidispine 4.6, the command has changed to `vsa-add-node`. With the new `vsa-add-node` command, one VSA can connect to multiple `vidispine-servers`.

3. Fill in the user name, password and IP address. Enter the unique name, but you can leave the UUID empty.
4. Now, on the VSA server, add this information to `/etc/vidispine/agent.conf.d/connection`.
5. Start VSA:

```
$ sudo service vidispine-agent start
$ sudo service transcoder start
```

6. Wait 30 seconds. Now verify that it is connected:

```
$ sudo vidispine-agent-admin status
```

Agent, transcoder and Vidispine should all be ONLINE.

Connecting without SSH tunnel

New in version 4.6.

1. Create a file `/etc/vidispine/agent.conf.d/custom.conf` with content like:

```
userName=admin
password=KioqYWRtaW4=
directVSURI=http://172.17.0.7:8080/
vsaURI=http://172.17.0.8:8090/
```

- `userName`: Vidispine user name.
- `password`: Base64 encoded value of a `***` prefixed password. For example, the value should be the result of `echo -n ***admin | base64`, if the password is `admin`.
- `directVSURI`: the address VSA uses to connect to Vidispine server.
- `vsaURI`: the address that can be used by Vidispine server to connect to VSA

2. Restart VSA:

```
$ sudo service vidispine-agent restart
```

3. Wait 30 seconds. Now verify that it is connected:

```
$ sudo vidispine-agent-admin status
```

Agent, transcoder and Vidispine should all be ONLINE.

4. Also, the VSA should listed under the server:

```
$ curl -X GET -uadmin:admin http://localhost:8080/API/vxa
```

8.5.3 Adding a share

On the VSA, run the following command:

```
$ sudo vidispine-agent-admin add-local-share
```

This will add a share in VSA, and create a storage in VS. You can verify this by listing the storages (*Retrieve list of storages*). The storage is listed with a method that has a `vxa:` URI scheme. The UUID (server part) of the URI matches the UUID from `vidispine-agent-admin status`.

Warning: If the share is removed from the VSA, the storage will be automatically deleted from VS, including all file information (but not the files themselves). In order to keep the storage, e.g., if the storage is moved from one VSA to another, remove the `vxaid` metadata field from the storage.

Enable write access

When a new share is added, the storage method is marked as read-only. To enable writing to the share:

- set the `write` field of the method to `true`, and
- change the storage type to `LOCAL` (meaning it can be a target for all file operations)

Associate many VSAs to one storage

It is possible to have several VSA nodes serving one shared file system. This can be used for increasing transcoding capability or to generated redundancy.

1. Add the share individually on all VSAs (see above). This will generate as many storages as there are VSAs.
2. Now copy the storage methods from all but the first storage to the first storage.
3. On the first storage, remove the `vxaid` storage metadata (see above).
4. Remove all but the first storage.

8.5.4 VSA and S3 credentials

A VSA transcoder can be given *direct access* to S3 storages, meaning the agent will access the files directly without them being proxied by the main server. If the configuration property `useS3Proxy` is set to `true`, pre-signed urls will be used for agents to read S3 objects. If it is set to `false`, or if it is a `WRITE` operation, AWS credentials will be sent to agents.

Since 4.14, the type of AWS credentials being sent to the agents can be controlled by the configuration property `s3CredentialType`:

- `secretKey`: The access key and the secret access key configured in the S3 storage uri will be sent to the agent.
- `temporary`: The AWS Security Token Service (STS) will be used to generate temporary credentials to send to the agents. The duration of the credentials is controlled by `stsCredentialDuration`. You can set `stsRegion` to control in which region Vidispine server will call the AWS Security Token Service (STS) API.
- `none`: No credentials will be sent to the agent. The agent then needs to rely on a local `AwsCredentials.properties` file, or an IAM role on the instance to access S3 objects.

There is also a configuration entry called `s3CredentialType` available in the `agent.conf`, that can be used to configure this behavior on a per-agent basis.

The final *effective* credential type will be the **min** of `Server s3CredentialType` and `Agent s3CredentialType`. And the order of the values is `secretKey > temporary > none`.

For example, no credentials will be sent to the agent, if an agent has the following configuration:

```
s3CredentialType=none
```

and the server has:

```
<property lastChange="2014-07-14T14:55:15.432+02:00">
  <key>s3CredentialType</key>
  <value>temporary</value>
</property>
```

Note: For an older agent to work with 4.14 server, the credential type on the server side has to be set to either `secretKey` or `none`.

8.6 Vidinet services

Vidinet services can be registered as resources and then be used directly by Vidispine, if supported natively, or from custom JavaScript steps.

New in version 4.11.

8.6.1 Adding a service

Add a Vidinet service by creating a new `vidinet` *resource*. The resource document may differ for different services, so please refer to the `vidinet` dashboard (<http://www.vidinet.net/>) for more information on how the service should be defined.

```
POST /resource/
Content-Type: application/xml

<?xml version="1.0"?>
<ResourceDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <vidinet>
    <url>http://transcoder.example.com:8888/</url>
    <endpoint>http://transcoder.example.com:8888/</endpoint>
    <type>TRANSCODER</type>
  </vidinet>
</ResourceDocument>
```

Vidispine checks the status of services continuously in the background. As such, if the configuration is correct you will see that the transcoder shows up as `ONLINE` in a few seconds.

```
GET /resource/VX-8
```

```
<?xml version="1.0"?>
<ResourceDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <id>VX-8</id>
  <vidinet>
    <url>http://transcoder.example.com:8888/</url>
    <endpoint>http://transcoder.example.com:8888/</endpoint>
    <type>TRANSCODER</type>
    <state>ONLINE</state>
  </vidinet>
</ResourceDocument>
```


8.6.2 Import using Vidinet

New in version 4.12.

When importing files the import job uses the Vidispine transcoder to detect the type of media that is being imported, and if requested, to transcode the imported media.

To use Vidinet transcoder service instead of a local transcoder on import, specify the Vidinet TRANSCODER resource when initiating the import. For example:

```
POST /import?uri=file:///srv/testdata/sample.mov&tag=__mp4&resourceId=VX-8
```

After the file has been transferred to a storage, the file will be media checked and transcoded using Vidinet. Once a media check or transcode has been requested from Vidinet, the state of the job will change to VIDINET_JOB, and the job will no longer occupy a job slot, until Vidinet has completed and the job will resume.

Make sure that files are imported to or exist on a storage that is compatible with the Vidinet service in question. This is typically either an S3 bucket or an Azure blob storage, see the Vidinet service documentation for more detail.

8.6.3 Transcoding using Vidinet

If a Vidinet TRANSCODER resource is specified when initiating an item transcode, then the transcode will be performed using that Vidinet service. For example:

```
POST /item/VX-74/transcode?tag=__mp4&resourceId=VX-8
```

The transcode job will execute as normal, but the transcode will be handed off to Vidinet instead of being sent to a local transcoder. Once this happens the state of the job will change to VIDINET_JOB, and no longer occupy a job slot, until Vidinet has completed the transcode.

Cost estimation

To retrieve the estimated cost of performing the above transcode using Vidinet, the *cost API* can be used. Simply prefix the path with `cost/` and execute the request:

```
POST /cost/item/VX-74/transcode?tag=__mp4&resourceId=VX-8
```

```
<CostEstimateDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <id>dGVzdA==</id>
  <url>http://localhost:8080/API/cost/estimate/dGVzdA==</url>
</CostEstimateDocument>
```

The estimate may not be immediately available, in which case the estimate will be shown as pending.

```
GET http://localhost:8080/API/cost/estimate/dGVzdA==
```

```
<CostEstimateDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <id>dGVzdA==</id>
  <url>http://localhost:8080/API/cost/estimate/dGVzdA==</url>
  <state>PENDING</state>
  <service>
    <resource>VX-8</resource>
    <type>TRANSCODER</type>
    <state>ONLINE</state>
  </service>
</CostEstimateDocument>
```

Once the cost has been estimated:

```
GET http://localhost:8080/API/cost/estimate/dGVzdA==
```

```
<CostEstimateDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <id>dGVzdA==</id>
  <url>http://localhost:8080/API/cost/estimate/dGVzdA==</url>
  <state>FINISHED</state>
  <service>
    <resource>VX-8</resource>
    <type>TRANSCODER</type>
    <state>ONLINE</state>
    <cost unit="USD">1.2</cost>
  </service>
</CostEstimateDocument>
```

8.6.4 Quality control using Vidinet

Quality control using Vidinet services can be performed by specifying a Vidinet QC resource when starting a *shape analysis job*.

```
POST /item/VX-74/shape/VX-79/analyze?resourceId=VX-3&jobmetadata=auroraTemplate
  ↳%3DQuality%20Test
Content-Type: application/xml
```

```
<AnalyzeJobDocument xmlns="http://xml.vidispine.com/schema/vidispine"/>
```

```
<JobDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <jobId>VX-345</jobId>
  <user>admin</user>
  <started>2017-09-08T14:59:49.131Z</started>
  <status>READY</status>
  <type>ANALYZE</type>
  <priority>MEDIUM</priority>
</JobDocument>
```

Once the job has finished, the result of the analysis can be found in the *bulky metadata* of the shape.

A cost estimate can be retrieved, just like for transcodes, using the *cost API*.

8.6.5 Using Vidinet services from JavaScript

Vidinet services that are not natively supported can be used from JavaScript, for example by creating a *custom job* with one or more steps that interact with the Vidinet service using the *Vidinet JavaScript functions*.

For example:

```
POST /task-definition/jobtype/MYCOMPANY_CUSTOM_VIDINET_JOB?id=26000
```

```
PUT /task-definition/jobtype/MYCOMPANY_CUSTOM_VIDINET_JOB/step/100
Content-Type: application/xml
```

```
<TaskDefinitionDocument xmlns="http://xml.vidispine.com/schema/vidispine">
```

```

<description>A custom JavaScript step</description>
<script><![CDATA[
var item = ...;
var instruction = "...";

job.vidinetJob("TEST", instruction, {
  item: itemId
});
]]></script>
<step>100</step>
<dependency>
  <previous>>false</previous>
  <allPrevious>>true</allPrevious>
</dependency>
<jobType>MYCOMPANY_CUSTOM_VIDINET_JOB</jobType>
<critical>>false</critical>
</TaskDefinitionDocument>

```

For more information on how to execute jobs for a service in Vidinet, please refer to the Vidinet service documentation.

8.6.6 Transcoding using AWS Elemental MediaConvert

The AWS Elemental MediaConvert integration is currently in developer preview. This means that syntax may change somewhat for the final implementation.

New in version 4.15.

You can use Elemental MediaConvert to transcode your files using Vidinet. To start with you need to buy the service in Vidinet and add it to your Vidispine server instance. please refer to the Vidinet service documentation on how to do that.

```

<ResourceDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <id>VX-1</id>
  <vidinet>
    <url>vidinet://e1423727-...:....@42a73b4c-8974-4402-a237-17b80bd11350</url>
    <name>My AWS MediaConvert</name>
    <endpoint>https://services.vidinet.net</endpoint>
    <type>ELEMENTAL_MEDIA CONVERT</type>
    <state>ONLINE</state>
    <scheme>s3</scheme>
  </vidinet>
</ResourceDocument>

```

You then need a new shape-tag with the new mediaconvert element. To install the system default shape-tags that use Elastic MediaConvert you call:

```
PUT /API/init/preset-mediaconvert-templates
```

Once the vidinet resource is in place and a shape-tag contains the mediaconvert element you can use it as any other shape-tag for transcoding.

```

<TranscodePresetDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <description>
    BROADCAST, XDCAM, MXF, MPEG2 HD422, WAV, 16x9 DAR, 1920x1080p, 23.98 Hz, 50 Mbps
    ↔ CBR
  </description>
  <name>

```

```
__mediaconvert_Broadcast_Xdcam_Mxf_Mpeg2_Wav_16x9_1920x1080p_24Hz_50Mbps
</name>
<audio/>
<video/>
<mediaconvert>
  <outputSetting>
    { "Type": "SYSTEM", "Category": "BROADCAST-XDCAM", ... }
  </outputSetting>
</mediaconvert>
</TranscodePresetDocument>
```

Transcoding using this preset would then cause the transcode to be executed using the Vidinet Elemental MediaConvert service:

```
POST /item/VX-46/transcode?tag=__mediaconvert_Broadcast_Xdcam_Mxf_Mpeg2_Wav_16x9_
↳1920x1080p_24Hz_50Mbps
```

The following requirements apply when using MediaConvert:

- The input and output storages needs to be S3 buckets.
- The buckets must be accessible to the AWS Elemental MediaConvert service as detailed in the Vidinet service documentation.

TIMELINES AND SEQUENCES

9.1 Projects and sequences

9.1.1 Item sequences

An item can hold a number of sequences, and is then called a sequence item. All sequences will be considered equivalent by Vidispine, that is, that they represent the same logical sequence.

Sequences can also be *imported and exported* to and from common NLE formats.

The non-timed metadata of a sequence item will contain the following fields:

Field Name	Value
__sequence_size	The number of sequences that exist for an item.
__sequence	The format of a sequence that exist for an item.

9.1.2 Projects and project versions

A project is a special type of *collection* that contains a number of project versions. A project version is a collection that contains the *items* and *sequences* that together represent a specific version. As both project and project versions are ordinary collections it means that all existing collection operations can be used, for example editing project *metadata*.

Projects can also be *imported and exported* to and from common NLE formats.

Note: Projects and project versions are read-only and cannot be altered by manually adding or removing child items or collections.

For a project version it is possible to store the original document representing the project, the Final Cut Pro XML for example, as well as any additional representations, here called Project Version Definitions. Each representation is stored as binary data, and is identified by a format identifier (e.g. *finalcut*.)

Any string can be used as the format identifier, except the following which are reserved by Vidispine, but may be used as long as the content matches.

Identifier	Content	Description
<i>finalcut</i>	<i>application/final-cut-pro</i>	Final Cut Pro 7 XML
<i>finalcut-x</i>	<i>application/final-cut-pro-x</i>	Final Cut Pro X XML
<i>aaf</i>	<i>application/aaf</i>	AAF
<i>fabric</i>	<i>application/fabric</i>	Fabric CEMS
<i>vidispine</i>	<i>application/x-vidispine</i>	<i>SequenceType</i>

Example

For a project named “Unnamed project”:

```
<timespan start="-INF" end="+INF">
  <field>
    <name>__type</name>
    <value>project</value>
  </field>
  <field>
    <name>__project_name</name>
    <value>Unnamed Projekt</value>
  </field>
  ...
</timespan>
```

For a project version with a single Final Cut Pro representation:

```
<timespan start="-INF" end="+INF">
  <field>
    <name>__type</name>
    <value>projectVersion</value>
  </field>
  <field>
    <name>__project_version</name>
    <value>finalcut</value>
  </field>
  ...
</timespan>
```

Metadata

Projects and project version collections contains additional (non-timed) metadata that may be useful when searching for collection.

Field Name	Value
__type	project for project collections. projectVersion for project version collections.
__project_name	The name of the project.
__project_version	The format of the definitions that have been stored for a project version.

9.1.3 Project and sequence import and export

This page describes how to import and export *projects* and *sequences* from NLEs such as Final Cut Pro and Avid Media Composer.

Inspecting a project file

Before a project or sequence can be imported, the project file has to be inspected in order to find out which clips already exist in Vidispine as items, and which must first be imported.

The input should be an essence mappings document, which is also used for project and sequence import. It is required so that Vidispine can identify the items and files referenced by the input project file. The document can specify:

- The SHA-1 hash of a file. The response will then contain all items and shapes that reference that specific file.
- The item corresponding to a specific asset. Can be used after a previously unknown asset has been imported and the correct item is known. If the item has multiple shapes then the shape id must be specified as well.
- If a storage has been locally mounted on the client, then a storage mapping containing the id of the storage and the local path can be given. This will only be used if the input file references files by path.

Example

```
POST /collection/project/inspect?uri=file:///home/maria/sequence.xml&type=finalcut
Content-Type: application/xml
```

```
<?xml version="1.0" encoding="UTF-8" standalone="yes"?>
<EssenceMappingDocument xmlns="http://xml.vidispine.com/schema/vidispine">
</EssenceMappingDocument>
```

```
<?xml version="1.0" encoding="UTF-8" standalone="yes"?>
<ProjectFileDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <location>file:///home/maria/sequence.xml</location>
  <asset>
    <id>urn:uuid:8CED8AFE-1A67-4632-AB57-D5F5B1E0BC49</id>
    <name>Sequence 1</name>
    <type>sequence</type>
    <status>unknown</status>
  </asset>
  <asset>
    <id>urn:uuid:FCAD0878-7129-43DA-A8A0-696590EFE4DA</id>
    <name>Sample Clip B</name>
    <type>clip</type>
    <status>unknown</status>
    <file>
      <path>file://localhost/Users/maria/Sample%20Clip%20B.mov</path>
    </file>
  </asset>
  <asset>
    <id>urn:uuid:76BE320F-48E0-47A5-A076-227158C50024</id>
    <name>Clip A</name>
    <type>clip</type>
    <status>unknown</status>
    <file>
      <path>file://localhost/Users/maria/Movies/Vidispine/VX-1.mov</path>
    </file>
  </asset>
</ProjectFileDocument>
```

With the SHA-1 hash provided for all of the files:

```
POST /collection/project/inspect?uri=file:///home/maria/sequence.xml&type=finalcut
Content-Type: application/xml
```

```
<?xml version="1.0" encoding="UTF-8" standalone="yes"?>
<EssenceMappingDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <file path="file://localhost/Users/maria/Movies/Vidispine/VX-1.mov" hash=
↪"7b8d6fffe1ea468800578d6b7d4a09b012c461569"/>
  <file path="file://localhost/Users/maria/Sample%20Clip%20B.mov" hash=
↪"c7cfc97a9cf6634ad94766c0c4b0789cd86bcc33"/>
```

```
</EssenceMappingDocument>
```

```
<?xml version="1.0" encoding="UTF-8" standalone="yes"?>
<ProjectFileDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <location>file:///home/maria/sequence.xml</location>
  <asset>
    <id>urn:uuid:8CED8AFE-1A67-4632-AB57-D5F5B1E0BC49</id>
    <name>Sequence 1</name>
    <type>sequence</type>
    <status>unknown</status>
  </asset>
  <asset>
    <id>urn:uuid:FCAD0878-7129-43DA-A8A0-696590EFE4DA</id>
    <name>Sample Clip B</name>
    <type>clip</type>
    <status>unknown</status>
    <file>
      <path>file://localhost/Users/maria/Sample%20Clip%20B.mov</path>
    </file>
  </asset>
  <asset>
    <id>urn:uuid:76BE320F-48E0-47A5-A076-227158C50024</id>
    <name>Clip A</name>
    <type>clip</type>
    <item id="VX-1" match="file" permission="OWNER"/>
    <file>
      <path>file://localhost/Users/maria/Movies/Vidispine/VX-1.mov</path>
      <hash>7b8d6ffe1ea468800578d6b7d4a09b012c461569</hash>
    </file>
    <id>VX-1</id>
    <path>VX-1.mov</path>
    <uri>file:///mnt/storage/Vidispine/VX-1.mov</uri>
    <state>CLOSED</state>
    <size>30346173</size>
    <timestamp>2011-10-13T07:41:48.053+02:00</timestamp>
    <refreshFlag>727</refreshFlag>
    <storage>VX-1</storage>
    <item>
      <id>VX-1</id>
      <shape>
        <id>VX-1</id>
        <component>
          <id>VX-1</id>
        </component>
        <component>
          <id>VX-1</id>
        </component>
        <component>
          <id>VX-1</id>
        </component>
        <component>
          <id>VX-1</id>
        </component>
        <component>
          <id>VX-1</id>
        </component>
        <component>
          <id>VX-1</id>
        </component>
        <component>
          <id>VX-1</id>
        </component>
        <component>
          <id>VX-1</id>
        </component>
      </shape>
    </item>
  </asset>
</ProjectFileDocument>
```



```

    </file>
  </file>
</asset>
</ProjectFileDocument>

```

After the new asset has been imported into Vidispine:

```

<?xml version="1.0" encoding="UTF-8" standalone="yes"?>
<ProjectFileDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <location>file:///home/maria/sequence.xml</location>
  <asset>
    <id>urn:uuid:8CED8AFE-1A67-4632-AB57-D5F5B1E0BC49</id>
    <name>Sequence 1</name>
    <type>sequence</type>
    <status>unknown</status>
  </asset>
  <asset>
    <id>urn:uuid:FCAD0878-7129-43DA-A8A0-696590EFE4DA</id>
    <name>Sample Clip B</name>
    <type>clip</type>
    <item id="VX-2" match="file" permission="OWNER"/>
    <file>
      <path>file://localhost/Users/maria/Sample%20Clip%20B.mov</path>
      <hash>c7cfc97a9cf6634ad94766c0c4b0789cd86bcc33</hash>
      <file>
        <id>VX-2</id>
        <path>VX-2.mov</path>
        <uri>file:///mnt/storage/Vidispine/VX-2.mov</uri>
        <state>CLOSED</state>
        <size>30346173</size>
        <timestamp>2011-10-13T07:42:48.178+02:00</timestamp>
        <refreshFlag>727</refreshFlag>
        <storage>VX-1</storage>
        <item>
          <id>VX-2</id>
          <shape>
            <id>VX-2</id>
            <component>
              <id>VX-2</id>
            </component>
            <component>
              <id>VX-2</id>
            </component>
            <component>
              <id>VX-2</id>
            </component>
            <component>
              <id>VX-2</id>
            </component>
          </shape>
        </item>
      </file>
    </file>
  </asset>
  <asset>
    <id>urn:uuid:76BE320F-48E0-47A5-A076-227158C50024</id>
    <name>Clip A</name>
    <type>clip</type>
    <item id="VX-1" match="file" permission="OWNER"/>
    <file>
      <path>file://localhost/Users/maria/Movies/Vidispine/VX-1.mov</path>

```

```
<hash>7b8d6ffe1ea468800578d6b7d4a09b012c461569</hash>
<file>
  <id>VX-1</id>
  <path>VX-1.mov</path>
  <uri>file:///mnt/storage/Vidispine/VX-1.mov</uri>
  <state>CLOSED</state>
  <size>30346173</size>
  <timestamp>2011-10-13T07:41:48.053+02:00</timestamp>
  <refreshFlag>727</refreshFlag>
  <storage>VX-1</storage>
  <item>
    <id>VX-1</id>
    <shape>
      <id>VX-1</id>
      <component>
        <id>VX-1</id>
      </component>
      <component>
        <id>VX-1</id>
      </component>
      <component>
        <id>VX-1</id>
      </component>
      <component>
        <id>VX-1</id>
      </component>
      <component>
        <id>VX-1</id>
      </component>
      <component>
        <id>VX-1</id>
      </component>
      <component>
        <id>VX-1</id>
      </component>
    </shape>
  </item>
</file>
</file>
</asset>
</ProjectFileDocument>
```

9.2 Sequences definitions

9.2.1 SequenceDocument

SequenceDocument (XML complex type SequenceType) is a simple format for describing a sequence, with a model similar to sequences in the Final Cut Pro XML interchange format.

Structure

A sequence consists of a number of audio and/or video tracks where each track may consist of one or more segments (to make clips appear edge-to-edge in the generated timeline). Each segment has a position in the timeline (in and out) and references a specific interval and track of an item (item, sourceTrack (1-based), sourceIn and sourceOut.)

For video the `sourceTrack` element specifies the `n`th video track that should be included. For audio it specifies a specific channel in an audio track. For example, for media with two audio streams each with two audio channels, `sourceTrack=3` would specify the first channel in the second audio stream.

The elements in `/out` and `sourceIn / sourceOut` corresponds to the Final Cut Pro XML elements in `/out` and `start / end` respectively. See [Timing Values](#) (http://developer.apple.com/library/mac/#documentation/AppleApplications/Reference/FinalCutPro_XML/Topics/Topics.html#//apple_CH294-SW12) for more information.

Example

A sequence with a single video track with one second of video from the item with id VX-1.

```
<?xml version="1.0" encoding="UTF-8" standalone="yes"?>
<SequenceDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <track>
    <audio>false</audio>
    <segment>
      <item>VX-1</item>
      <sourceTrack>1</sourceTrack>
      <in>
        <samples>0</samples>
        <timeBase>
          <numerator>1</numerator>
          <denominator>25</denominator>
        </timeBase>
      </in>
      <out>
        <samples>25</samples>
        <timeBase>
          <numerator>1</numerator>
          <denominator>25</denominator>
        </timeBase>
      </out>
      <sourceIn>
        <samples>0</samples>
        <timeBase>
          <numerator>1</numerator>
          <denominator>25</denominator>
        </timeBase>
      </sourceIn>
      <sourceOut>
        <samples>25</samples>
        <timeBase>
          <numerator>1</numerator>
          <denominator>25</denominator>
        </timeBase>
      </sourceOut>
    </segment>
  </track>
</SequenceDocument>
```

If the item has 10 minutes of video and stereo audio, it could be included in a sequence like this:

```
<?xml version="1.0" encoding="UTF-8" standalone="yes"?>
<SequenceDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <track>
    <audio>false</audio>
    <segment>
      <item>VX-1</item>
      <sourceTrack>1</sourceTrack>
```

```
<in>
  <samples>0</samples>
  <timeBase>
    <numerator>1</numerator>
    <denominator>25</denominator>
  </timeBase>
</in>
<out>
  <samples>15000</samples>
  <timeBase>
    <numerator>1</numerator>
    <denominator>25</denominator>
  </timeBase>
</out>
<sourceIn>
  <samples>0</samples>
  <timeBase>
    <numerator>1</numerator>
    <denominator>25</denominator>
  </timeBase>
</sourceIn>
<sourceOut>
  <samples>15000</samples>
  <timeBase>
    <numerator>1</numerator>
    <denominator>25</denominator>
  </timeBase>
</sourceOut>
</segment>
</track>
<track>
  <audio>true</audio>
  <segment>
    <item>VX-1</item>
    <sourceTrack>1</sourceTrack>
    <in>
      <samples>0</samples>
      <timeBase>
        <numerator>1</numerator>
        <denominator>25</denominator>
      </timeBase>
    </in>
    <out>
      <samples>15000</samples>
      <timeBase>
        <numerator>1</numerator>
        <denominator>25</denominator>
      </timeBase>
    </out>
    <sourceIn>
      <samples>0</samples>
      <timeBase>
        <numerator>1</numerator>
        <denominator>25</denominator>
      </timeBase>
    </sourceIn>
    <sourceOut>
      <samples>15000</samples>
```

```

    <timeBase>
      <numerator>1</numerator>
      <denominator>25</denominator>
    </timeBase>
  </sourceOut>
</segment>
</track>
<track>
  <audio>true</audio>
  <segment>
    <item>VX-1</item>
    <sourceTrack>2</sourceTrack>
    <in>
      <samples>0</samples>
      <timeBase>
        <numerator>1</numerator>
        <denominator>25</denominator>
      </timeBase>
    </in>
    <out>
      <samples>15000</samples>
      <timeBase>
        <numerator>1</numerator>
        <denominator>25</denominator>
      </timeBase>
    </out>
    <sourceIn>
      <samples>0</samples>
      <timeBase>
        <numerator>1</numerator>
        <denominator>25</denominator>
      </timeBase>
    </sourceIn>
    <sourceOut>
      <samples>15000</samples>
      <timeBase>
        <numerator>1</numerator>
        <denominator>25</denominator>
      </timeBase>
    </sourceOut>
  </segment>
</track>
</SequenceDocument>

```

A two seconds long video track sequence made from the first second of video from items VX-1 and VX-2 using multiple segments on one track.

```

<?xml version="1.0" encoding="UTF-8" standalone="yes"?>
<SequenceDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <track>
    <audio>false</audio>
    <segment>
      <item>VX-1</item>
      <sourceTrack>1</sourceTrack>
      <in>
        <samples>0</samples>
        <timeBase>
          <numerator>1</numerator>

```

```
    <denominator>25</denominator>
  </timeBase>
</in>
<out>
  <samples>25</samples>
  <timeBase>
    <numerator>1</numerator>
    <denominator>25</denominator>
  </timeBase>
</out>
<sourceIn>
  <samples>0</samples>
  <timeBase>
    <numerator>1</numerator>
    <denominator>25</denominator>
  </timeBase>
</sourceIn>
<sourceOut>
  <samples>25</samples>
  <timeBase>
    <numerator>1</numerator>
    <denominator>25</denominator>
  </timeBase>
</sourceOut>
</segment>
<segment>
  <item>VX-2</item>
  <sourceTrack>1</sourceTrack>
  <in>
    <samples>25</samples>
    <timeBase>
      <numerator>1</numerator>
      <denominator>25</denominator>
    </timeBase>
  </in>
  <out>
    <samples>50</samples>
    <timeBase>
      <numerator>1</numerator>
      <denominator>25</denominator>
    </timeBase>
  </out>
  <sourceIn>
    <samples>0</samples>
    <timeBase>
      <numerator>1</numerator>
      <denominator>25</denominator>
    </timeBase>
  </sourceIn>
  <sourceOut>
    <samples>25</samples>
    <timeBase>
      <numerator>1</numerator>
      <denominator>25</denominator>
    </timeBase>
  </sourceOut>
</segment>
</track>
```

```
</SequenceDocument>
```

Effects

The table below describes the effects that can be added to segments in a sequence.

Effect	Parameter	Range	Description
crop	left	0.0–1.0	Percentage to crop from left side of the picture
	right	0.0–1.0	Percentage to crop from right side of the picture
	top	0.0–1.0	Percentage to crop from the top
	bottom	0.0–1.0	Percentage to crop from the bottom
position	vert	-1.0–1.0	Vertical offset in output in percentage.
	horiz	-1.0–1.0	Horizontal offset in output in percentage.
scale	scale	0.0–Inf	Horizontal and vertical scale.
rotation	rotation	Inf–Inf	Number of degrees to rotate picture, clockwise, around center.
opacity	opacity	0.0–100.0	The opacity, from fully transparent (0.0) to fully opaque (100.0).

Effects are added in the follow way:

```
<segment>
...
<effect name="scale">
  <parameter name="scale" value="50"/>
</effect>
</segment>
```

Effects can also be applied at specific key frames.

```
<segment>
...
<effect name="scale">
  <parameter name="scale">
    <point position="0" value="0"/>
    <point position="125" value="100"/>
  </parameter>
</effect>
</segment>
```

Rendering two different videos to one view by scaling and positioning them.

```
<track>
  <audio>>false</audio>
  <segment>
    <item>VX-1</item>
    <sourceTrack>1</sourceTrack>
    <in>
      <samples>0</samples>
      <timeBase>
        <numerator>1</numerator>
        <denominator>25</denominator>
      </timeBase>
    </in>
    <out>
      <samples>250</samples>
      <timeBase>
        <numerator>1</numerator>
```

```

        <denominator>25</denominator>
      </timeBase>
    </out>
    ...
    <effect name="position">
      <parameter name="horiz" value="-0.25"/>
      <parameter name="vert" value="0.25"/>
    </effect>
    <effect name="scale">
      <parameter name="scale" value="50"/>
    </effect>
  </segment>
</track>
<track>
  <audio>false</audio>
  <segment>
    <item>VX-2</item>
    <sourceTrack>1</sourceTrack>
    <in>
      <samples>0</samples>
      <timeBase>
        <numerator>1</numerator>
        <denominator>25</denominator>
      </timeBase>
    </in>
    <out>
      <samples>250</samples>
      <timeBase>
        <numerator>1</numerator>
        <denominator>25</denominator>
      </timeBase>
    </out>
    ...
    <effect name="position">
      <parameter name="horiz" value="0.25"/>
      <parameter name="vert" value="0.25"/>
    </effect>
    <effect name="scale">
      <parameter name="scale" value="50"/>
    </effect>
  </segment>
</track>

```

Transitions

The table below describes the transitions that can be added between segments in video tracks in a sequence. If a transition has a corresponding [SMPTE wipe code](http://www.w3.org/TR/2005/REC-SMIL2-20050107/smil-transitions.html#TransitionEffects-Appendix) (<http://www.w3.org/TR/2005/REC-SMIL2-20050107/smil-transitions.html#TransitionEffects-Appendix>), then either the transition name or wipe code can be used to select that transition.

Transition	SMPTE Wipe Code
Dissolves	
CrossDissolve	-
DitherDissolve	-
FadeInOutDissolve	-
Wipes	
BandWipe	-
CentreWipe	21 or 22
CheckerWipe	-
InsetWipe	3, 4, 5 or 6
Iris Wipes	
CrossIris	7
DiamondIris	102
OvalIris	119
RectangleIris	101
StarIris	128

Example

A sequence with two clips that are transitioned using a star wipe:

```
<?xml version="1.0" encoding="UTF-8" standalone="yes"?>
<SequenceDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <track>
    <audio>>false</audio>
    <segment>
      <item>VX-1</item>
      <sourceTrack>1</sourceTrack>
      <in>
        <samples>0</samples>
        <timeBase>
          <numerator>1</numerator>
          <denominator>25</denominator>
        </timeBase>
      </in>
      <out>
        <samples>15000</samples>
        <timeBase>
          <numerator>1</numerator>
          <denominator>25</denominator>
        </timeBase>
      </out>
      <sourceIn>
        <samples>0</samples>
        <timeBase>
          <numerator>1</numerator>
          <denominator>25</denominator>
        </timeBase>
      </sourceIn>
      <sourceOut>
        <samples>15000</samples>
        <timeBase>
          <numerator>1</numerator>
          <denominator>25</denominator>
        </timeBase>
      </sourceOut>
    </segment>
  </track>
</SequenceDocument>
```

```
</sourceOut>
</segment>
<segment>
  <item>VX-1</item>
  <sourceTrack>1</sourceTrack>
  <in>
    <samples>0</samples>
    <timeBase>
      <numerator>1</numerator>
      <denominator>25</denominator>
    </timeBase>
  </in>
  <out>
    <samples>15000</samples>
    <timeBase>
      <numerator>1</numerator>
      <denominator>25</denominator>
    </timeBase>
  </out>
  <sourceIn>
    <samples>15000</samples>
    <timeBase>
      <numerator>1</numerator>
      <denominator>25</denominator>
    </timeBase>
  </sourceIn>
  <sourceOut>
    <samples>30000</samples>
    <timeBase>
      <numerator>1</numerator>
      <denominator>25</denominator>
    </timeBase>
  </sourceOut>
</segment>
<transition>
  <in>
    <samples>14975</samples>
    <timeBase>
      <numerator>1</numerator>
      <denominator>25</denominator>
    </timeBase>
  </in>
  <out>
    <samples>15025</samples>
    <timeBase>
      <numerator>1</numerator>
      <denominator>25</denominator>
    </timeBase>
  </out>
  <transition>StarIris</transition>
</transition>
</track>
</SequenceDocument>
```

USERS, GROUPS, AND ACCESS CONTROL


The user management system in Vidispine consists of users, groups, and roles.

- Roles are special groups, which cannot be added or deleted via the API.
- Regular groups and users can be added or deleted via the API.
- Users can belong to any number of groups or roles.
- Groups can depend on any number of groups or roles, although cyclic dependencies are not allowed.
- Roles cannot depend on any group or role.

To manage users and groups, see the *Users* and *Groups and roles* sections in the API reference.

10.1 Example

The following figure illustrates how users, groups and roles relate.

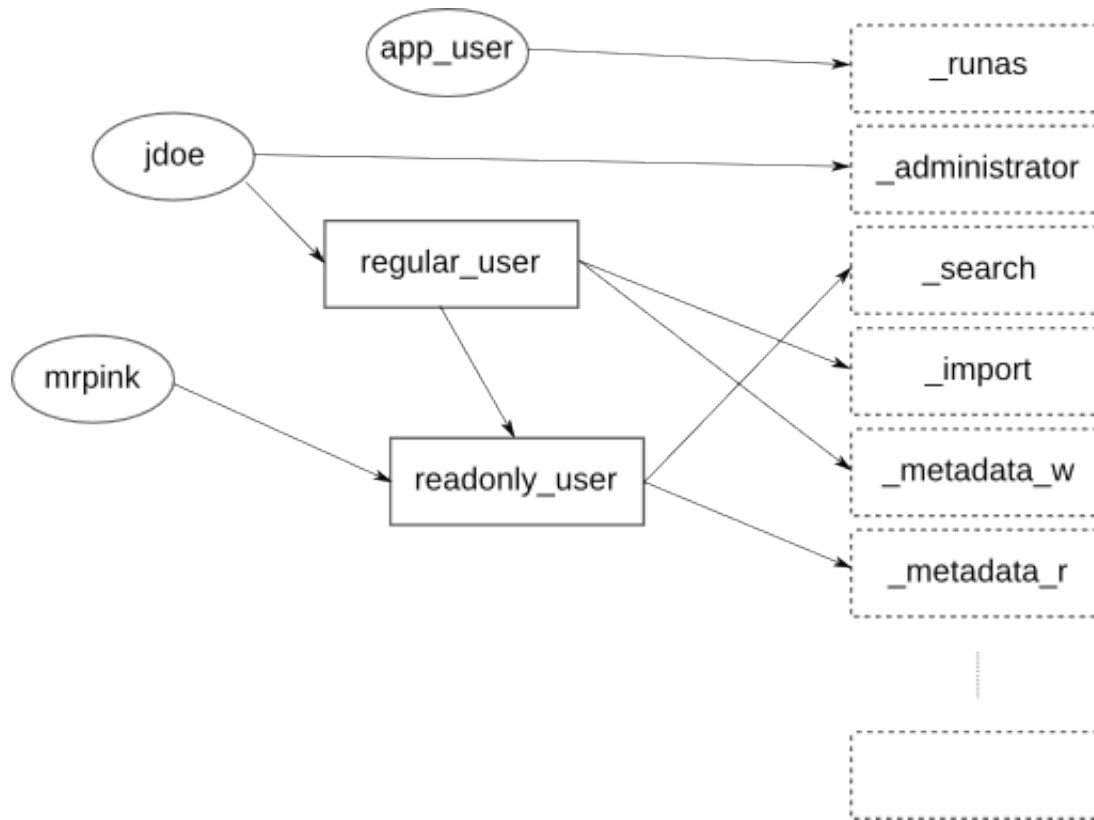

In the figure above, there are:

- Six roles: `_run_as`, `_administrator`, `_search`, `_import`, `_metadata_w`, and `metadata_r`.
- Two regular groups: `regular_user` and `readonly_user`.

The group `readonly_user` depends on the roles `_search` and `_metadata_r`. The second group, `regular_user` depends on the roles `_import` and `_metadata_w`, and also the group `readonly_user`.

In the last relation, `readonly_user` is called the **parent** group and `regular_user` is the **child** group. A user which belong to `regular_user` actually has all four roles.

- Three users: `app_user`, `jdoe`, and `mrpink`.

The user `app_user` has the role `_run_as`, `jdoe` has the roles `_administrator`, `_search`, `_import`, `_metadata_w` and `_metadata_r` and `mrpink` has the roles `_search` and `_metadata_r`.

To visualize the users and groups like above, see [User/group visualization](#).

10.2 Access control for items, libraries, collections

Items, libraries and collections have access control lists that determine what operations a user can perform. The entries in the list either corresponds to a specific user or to an entire group.

10.2.1 Overview

Vidispine will use the access controls on the item, library or collection to determine if a user has access to perform a specific operation or not.

All entities will have a OWNER access control that identifies the user that created the entity, and that grants full access to it. Below is an example access control list document showing the access that has been applied to a specific collection:

```
<AccessControlListDocument xmlns:ns0="http://xml.vidispine.com/schema/vidispine">
  <access id="VX-16610">
    <loc>http://vs.example.com:8080/API/collection/VX-16/access/VX-21</loc>
    <appliesTo>all</appliesTo>
    <permission>OWNER</permission>
    <user>admin</user>
  </access>
  <access id="VX-18037">
    <loc>http://vs.example.com:8080/API/collection/VX-16/access/VX-21</loc>
    <grantor>admin</grantor>
    <appliesTo>self</appliesTo>
    <appliesTo>collection</appliesTo>
    <appliesTo>item</appliesTo>
    <permission>READ</permission>
    <user>example-user</user>
  </access>
</AccessControlListDocument>
```

The first access entry is the OWNER access, which shows that the admin user has created the collection, and is thus the owner with full access.

The second access entry shows that admin has granted READ access to example-user. The `appliesTo` setting has been used to determine which entities the access control extends to. In this case, access has been granted to the collection itself, child collections and items, but not libraries. If the `appliesTo` element is not set, access is granted to self and all child entities.

Manage access controls using the *access control resource* on the entity in question. For example, to grant access to Users, but only allow them access to certain shapes:

```
POST /collection/VX-16/access
Content-Type: application/xml

<AccessControlDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <permission>READ</permission>
  <group>users</group>
</AccessControlDocument>
```

```
POST /collection/VX-16/access
Content-Type: application/xml

<AccessControlDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <permission>NONE</permission>
  <group>users</group>
  <operation>
    <shape>
      <tag>original</tag>
    </shape>
  </operation>
</AccessControlDocument>
```

To view the access controls that apply for an item, including any access controls inherited from parent collections or libraries, see *Viewing applied access controls*.

10.2.2 Access levels

The higher levels grants the permissions of the lower levels.

NONE Grants no permissions whatsoever.

READ Grants permission to read.

WRITE Grants permission to write.

ALL The highest level that grants permissions to perform operations such as item deletion.

OWNER A specific case of **ALL** that is given by the system. This level cannot be added or removed.

10.2.3 Priority

The access control lists are sorted in order to determine which entry that applies to a given operation. The rule of thumb here is that if there's a matching access control entry set on the item then that applies otherwise the item's ancestor collections and libraries are traversed. Then the collection or library that grants the **lowest** access will apply. If no matching access control entry can be found, access will be denied.

Furthermore an access control entry that is more specific take precedence over an entry that is less specific. If two entries are determined equally specific then the entry that grants the highest access applies. An example of this is that an entry that restricts access for an items entire metadata is considered less specific than one that only restricts access for a certain field in the metadata.

The above can be illustrated by the priority list below:

1. Controls with a high explicit priority take precedence over controls with lower explicit priority.
2. Controls directly on the item take precedence over controls on ancestor collections and libraries.
3. Controls that describe specific users take precedence over controls that describe groups.
4. Controls that are more specific take precedence over controls that are less specific.
5. If directly applied to an item:
 - Controls that grant more access take precedence over controls that give less access.
6. If applied to an ancestor collection or library:
 - Controls that grant less access take precedence over controls that give more access.

An explicit priority can be assigned by setting the `priority` element in the `AccessControlDocument` to the desired level. The default is 0. Note that only superusers can create access controls with an explicit priority as users would otherwise be able to gain access to entities that they shouldn't have.

10.2.4 Revoking access

The user that created an access control entry is also tracked. This is the *grantor*. It is also so that an entry is only valid if the grantor still has access to the entity. This means that access can be revoked by removing the original entry that granted access, or by disabling the grantor user without preserving access (see *Disable a user*).

For example, let's assume that user A is the owner and grants **READ** access to user B, that in turn grants **READ** access to user C, as shown in the figure. Users A, B and C now all have read access. If the access control granting **READ** access to user B then the user C will no longer have access.

10.2.5 Operation

There are different types of operations that can be restricted using access control lists. Parameters are optional and makes the access control entry more specific. If no operation is specified then the entry will be considered generic and apply to the entire item.

URIs

Operation	/item/ {item-id} /uri	
Parameters	type	The type of the URI to restrict.

Example

```
<AccessControlDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <permission>READ</permission>
  <user>testuser</user>
  <operation>
    <uri>
      <type>lowres</type>
    </uri>
  </operation>
</AccessControlDocument>
```

Shapes

Operation	/item/ {item-id} /shape	
Parameters	tag	Restrict access to shapes with this tag.

New in version 4.1.

Example

```
<AccessControlDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <permission>NONE</permission>
  <user>testuser</user>
  <operation>
    <shape>
      <tag>lowres</tag>
    </shape>
  </operation>
</AccessControlDocument>
```

Metadata

Operation	/item/ {item-id} /metadata	
Parameters	field	The name of the field to restrict.

Caution: Removal of fields are currently not restricted
 Currently fields can be removed without checking the specific access control entry.

Example

```
<AccessControlDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <permission>READ</permission>
  <user>testuser</user>
  <operation>
    <metadata>
      <field>title</field>
    </metadata>
  </operation>
</AccessControlDocument>
```

10.3 Access control for metadata fields

Metadata field access control lists can be used to control the usage of metadata fields and metadata field groups at a global level, i.e. they apply to all items. The default behavior for a field or a group without any access control list is to grant everyone full permissions.

In case of a conflict, i.e. one or more entries in the access control list for a certain field or group applies to the same user - the entry granting the highest level of permissions apply.

Note that metadata field access control lists are applied after any other access control list have been applied. So for example a metadata field access control list won't grant a user access to a certain field of an item's metadata if the user cannot access the item in the first place.

10.3.1 Permission levels

There are four levels of permission, higher levels of permissions include all other permissions. The semantics of each permission differs depending on if it is associated with a group or a field.

Per- mis- sion	Field	Group
NONE	Grants no permissions whatsoever.	Grants no permissions whatsoever.
READ	Determines if user can see the contents of a field.	Allows for the group to be retrieved and seen when it is listed. Also allows for the group to be associated with items.
WRITE	Allows a user to set the value of a field.	Allows fields to be added and removed from the group.
DELETE	Allows a user to delete a field from the metadata of an item.	Allows deletion of the group.

10.4 User authentication

Authentication of users in Vidispine can be performed in a number of ways depending on the requirements of the calling application.

1. By passing the user credentials to Vidispine on each request and letting Vidispine authenticate the user based on the credentials stored in the Vidispine database.

The default HTTP authentication method is HTTP basic authentication. To use a custom HTTP authentication method, have a look at *Apache Shiro Integration*.

2. Using Run-As: The application can itself authenticate the user and then connect to Vidispine using a service account with the Run-As privilege and with the Run-As option enabled, so that the request is then performed as the already authenticated user.
3. Creating a time-limited token using the API with one of the options above, see *Get an authentication token*. This token can then be used in subsequent calls as credential by specifying the HTTP header:

```
Authorization: token {token}
```

4. Using long-lived *access keys*. Access keys are used with HTTP basic authentication, just like with normal username and password credentials.

New in version 4.14.

10.4.1 Run-As option

The API supports the operation of having the calling application authenticate itself via a single password or a single certificate credential. The actual end-user can then be specified by the `RunAs` HTTP header. The calling application credential must have `_administrator` or `_runas` role. The actual end-user roles will be determined by the `RunAs` user's credentials.

A typical UI application scenario would be:

1. Have the user log in by providing user name and password.
2. Authenticate the user with `PUT /user/(username)/validate`.
3. Store the user name with the session.
4. Use the `RunAs` header with all communication to the Vidispine API.

10.4.2 Token authentication

The above scenario can also be achieved using short-lived authentication tokens.

1. Have the user log in by providing user name and password.
2. Request an authentication token using `GET /token` or `GET /user/(username)/token`.
3. Store the authentication token with the session.
4. Use the token to authenticate all communication to the Vidispine API.

The `GET /token` endpoint can be used when using access keys to authenticate, in case the username of the user is unknown.

10.4.3 Use access keys

Access keys can be seen as longed-lived authentication tokens, except that they do not expire. Multiple access keys can be created for a single user, and can be disabled so that they no longer can be used to successfully authenticate as that user. Deleting an access key will permanently disable it.

The only time the access key secret will be available is when the access key is first created.

To create an access key:

```
POST /user/stephen/key/
Accept: application/xml
```

```
<AccessKeyDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <id>VSIDEWKIL4R27GPSJ562</id>
  <secret>pWU1PFHqyJom2Wq+XaGIUVRQggx5jgnaLIY37/DT</secret>
  <status>ACTIVE</status>
  <created>2018-06-01T10:36:13.891+02:00</created>
</AccessKeyDocument>
```

The access key id and secret can be used to authenticate further requests:

```
GET /whoami
Authorization: Basic
↪V1NJREVS01MNF1yN0dQU0o1NjI6cFdVbFBGSHF5Sm9tM1dxK1hhR01VV1JRcWd4NWpnbmFMSVkozNy9EVA==
```

```
200 OK

stephen
```

10.4.4 Apache Shiro Integration

New in version 4.1.

As of Vidispine 4.1 requests can be forwarded to [Apache Shiro](http://shiro.apache.org/) (<http://shiro.apache.org/>) for authentication, making it possible to customize how **existing** users in Vidispine are authenticated. The Apache Shiro version that is bundled with Vidispine can be seen in the table below.

Vidispine version	Apache Shiro version
4.12	1.4.0
4.1	1.2.2

Custom configuration

On startup Vidispine will try to read a [Apache Shiro INI configuration](http://shiro.apache.org/configuration.html#Configuration-INIConfiguration) file from `$instanceRoot/[config/]shiro.ini`. The instance root folder typically is `/var/lib/vidispine/server`. In case you are starting Vidispine manually via commandline `shiro.ini` will be loaded from the current directory.

The default configuration file that can be used as a template can be seen below.

Note: The token authentication filter and the Vidispine realm *must* always be kept so that requests performed internally by Vidispine will still function.

```

[main]
vidispineRealm = com.vidispine.security.auth.DefaultVidispineRealm
tokenAuth = com.vidispine.security.auth.TokenAuthenticationFilter
deny = com.vidispine.security.auth.DenyFilter

securityManager.realms = $vidispineRealm
authcBasic.applicationName = vidispineRealm

[urls]
/** = noSessionCreation, tokenAuth[permissive], authcBasic

```

Installing a custom filter or realm

1. Make the JAR file containing your custom filter or realm available on the classpath. With the vidispine-server package, the JAR file should be copied to `/usr/share/vidispine/server/lib/ext/`.
2. Create a `shiro.ini` file based on the above template and modify it to your needs.
3. Start/Restart the Vidispine service.

Example: Static credentials

This is an example showing how to add a custom realm, in this case a `IniRealm` (<http://shiro.apache.org/configuration.html#Configuration-%5Cusers%5C>) that defines credentials for a static set of users directly in the configuration file.

```

[main]
vidispineRealm = com.vidispine.security.auth.DefaultVidispineRealm
tokenAuth = com.vidispine.security.auth.TokenAuthenticationFilter
deny = com.vidispine.security.auth.DenyFilter

securityManager.realms = $iniRealm, $vidispineRealm
authcBasic.applicationName = "vidispineRealm"

[urls]
/** = noSessionCreation, tokenAuth[permissive], authcBasic

[users]
admin=password

```

Testing the configuration:

```

GET /API/version HTTP/1.1
Authorization: Basic YWRtaW46cGFzc3dvcmQ=
User-Agent: curl/7.32.0
Host: localhost:8080
Accept: */*

HTTP/1.1 200 OK
...

```

```

GET /API/version HTTP/1.1
Authorization: Basic YWRtaW46YWRtaW4=
User-Agent: curl/7.32.0
Host: localhost:8080

```

```
Accept: */*

HTTP/1.1 200 OK
...
```

```
GET /API/version HTTP/1.1
Authorization: Basic YWRtaW46aW52YWxpZA==
User-Agent: curl/7.32.0
Host: localhost:8080
Accept: */*

HTTP/1.1 401 Unauthorized
...
```

Note: By default Apache Shiro will accept a request if at least one realm accepts the provided credentials, which is why the passwords `password` (accepted by `iniRealm` and `admin` (accepted by `vidispineRealm`) are both accepted.

Automatic creation of users

New in version 4.13.1.

When using a custom Shiro realm to authenticate users, it may be the case that the user exists in the custom realm, but not in Vidispine. The Shiro authentication listener `com.vidispine.security.auth.UserCreationListener`, can be used to have users automatically created/updated after a successful authentication attempt, to match the user information provided by that realm.

In the `shiro.ini`, add the user creation listener:

```
[main]
...
$userInfoProvider = com.example.CustomRealmUserInfoProvider
userCreationListener = com.vidispine.security.auth.UserCreationListener
userCreationListener.infoProvider = $userInfoProvider
securityManager.authenticator.authenticationListeners = $userCreationListener
```

The `com.vidispine.security.auth.UserCreationListener` requires a `com.vidispine.security.auth.spi.VidispineUserInfoProvider` that can return the Vidispine user information from the user account information from Shiro/the custom realm.

The implementation of the `VidispineUserInfoProvider`, `com.example.CustomRealmUserInfoProvider` in the example above, should be placed in a JAR file available on the classpath, typically in the `/usr/share/vidispine/server/lib/ext/` directory.

OAuth 2.0

New in version 4.4.

Version 4.4 contains a Shiro filter that can be used to authenticate Bearer tokens. To use, add the following to `shiro.ini`:

```
[main]
...
oauth2Auth = com.vidispine.security.auth.BearerAuthenticationFilter
...

[urls]
/** = noSessionCreation, tokenAuth[permissive], oauth2Auth[permissive], authcBasic
```

The validation of tokens can be done in three ways:

1. By checking the token against a static public key in an X.509 certificate.
2. By checking the token against public keys given by federation metadata.
3. By checking the token against a validation provider.

Example: static public key

To set a static public key, add the following to shiro.ini:

```
[main]
...
oauth2Auth = com.vidispine.security.auth.BearerAuthenticationFilter
oauth2Auth.x509Certificate = {x509-certificate}
oauth2Auth.expectedAudience = {expected-audience}
oauth2Auth.tokenUser = email # example
...

[urls]
/** = noSessionCreation, tokenAuth[permissive], oauth2Auth[permissive], authcBasic
```

Where {x509-certificate} is an X.509 certificate encoded with Base64, e.g. MII...==. Token validation includes these steps:

- Vidispine uses the certificate from {x509-certificate} to verify the token's signature.
- The JWT claim sub must be present in the token (it's value isn't used).
- The JWT claim aud must contain an entry matching the {expected-audience} value.

After successful token validation Vidispine reads the JWT claim defined by the tokenUser property and uses it as Vidispine user name.

Example: federation metadata

Federation metadata is similar to a static certificate, but multiple certificates can be used, and they are automatically downloaded regularly.

```
[main]
...
oauth2Auth = com.vidispine.security.auth.BearerAuthenticationFilter
oauth2Auth.federationMetadataURI = https://login.microsoftonline.com/common/
↳FederationMetadata/2007-06/FederationMetadata.xml
oauth2Auth.federationMetadataInterval = 86400
oauth2Auth.expectedAudience = https://graph.windows.net
oauth2Auth.tokenUser = unique_name
...
```

```
[urls]
/** = noSessionCreation, tokenAuth[permissive], oauth2Auth[permissive], authcBasic
```

Example: validation service

Here, The token is validated against validation server. The result is stored in cache for 10 minutes.

```
[main]
...
oauth2Auth = com.vidispine.security.auth.BearerAuthenticationFilter
oauth2Auth.validationEndpoint = https://www.googleapis.com/userinfo/v2/me
oauth2Auth.tokenUser = email
...

[urls]
/** = noSessionCreation, tokenAuth[permissive], oauth2Auth[permissive], authcBasic
```

In an OpenID Connect (OIDC) context token validation usually will take place against the OIDC userinfo endpoint. Depending on your OIDC server this may require tokens with the `oidc` scope that are available in the OIDC hybrid flow.

In the example above with Google, the `https://www.googleapis.com/auth/userinfo.email` scope is used.

Configure OAuth2 using the API

New in version 4.17.

You can update the OAuth2 configuration via the API. To enable/disable the API access, from the `shiro.ini` file, use the setting: `allowConfigUpdate true/false`. If there is no `shiro.ini` file present, the API access is enabled by default. Only users with the `_administrator` role can access the configuration from the API.

Example

```
[main]
...
oauth2Auth = com.vidispine.security.auth.BearerAuthenticationFilter
oauth2Auth.x509Certificate = {x509-certificate}
oauth2Auth.expectedAudience = {expected-audience}
oauth2Auth.tokenUser = sub
oauth2Auth.allowConfigUpdate = false
...

[urls]
/** = noSessionCreation, tokenAuth[permissive], oauth2Auth[permissive], authcBasic
```

Example

Get the current configuration.

```
GET /configuration/auth
Content-Type: application/xml

<OAuth2ConfigurationDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <federationMetadataInterval>86400</federationMetadataInterval>
  <tokenUser>unique_name</tokenUser>
</OAuth2ConfigurationDocument>
```

Example

Updating the configuration for static public key validation.

```
PUT /configuration/auth
Content-Type: application/xml

<OAuth2ConfigurationDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <x509Certificate>{x509certificate}</x509Certificate>
  <expectedAudience>{expected-audience}</expectedAudience>
  <tokenUser>email</tokenUser>
</OAuth2ConfigurationDocument>
```

Example

Updating the configuration for federation metadata.

```
PUT /configuration/auth
Content-Type: application/xml

<OAuth2ConfigurationDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <federationMetadataURI>https://login.microsoftonline.com/common/
  ↪FederationMetadata/2007-06/FederationMetadata.xml</federationMetadataURI>
  <federationMetadataInterval>86400</federationMetadataInterval>
  <expectedAudience>https://graph.windows.net</expectedAudience>
  <tokenUser>unique_name</tokenUser>
</OAuth2ConfigurationDocument>
```

Example

Updating the configuration for validation service.

```
PUT /configuration/auth
Content-Type: application/xml

<OAuth2ConfigurationDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <validationEndpoint>https://www.googleapis.com/userinfo/v2/me</validationEndpoint>
  <tokenUser>email</tokenUser>
</OAuth2ConfigurationDocument>
```

Example

Delete the current configuration.

```
DELETE /configuration/auth
Content-Type: application/xml
```

10.5 LDAP

Vidispine can authenticate users against an LDAP server and automatically synchronize users and groups from a directory at regular intervals if required.

10.5.1 User authentication

For users to be authenticated by an LDAP server, the server must first be configured in Vidispine.

1. An LDAP *resource* must be created, containing the connection details. There can currently only be one configured LDAP resource.
2. LDAP authentication must be enabled using the *ldapAuthentication* configuration property.

Users that are successfully authenticated will be added to Vidispine and will have the `_user` role by default.

Example: Enabling LDAP authentication

First, create the LDAP resource:

```
POST /resource
Content-Type: application/xml

<ResourceDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <ldap>
    <url>ldap://someserver:389</url>
    <useStartTLS>>false</useStartTLS>
    <userDN>cn=Users,dc=example,dc=com</userDN>
    <usernameAttribute>sAMAccountName</usernameAttribute>
    <userSearchFilter>(objectClass=user)</userSearchFilter>
    <bindDN>cn=Administrator,cn=Users,dc=example,dc=com</bindDN>
    <bindPassword>password</bindPassword>
  </ldap>
</ResourceDocument>
```

Then enable LDAP authentication:

```
PUT /configuration/properties
Content-Type: application/xml

<ConfigurationPropertyDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <key>ldapAuthentication</key>
  <value>>true</value>
</ConfigurationPropertyDocument>
```

Configuration

The elements in the LDAP resource are:

url The LDAP server(s) to connect to. Specify multiple servers to enable failover. Can be either `ldap://` or `ldaps://` (for SSL).

useStartTLS Enables/disables StartTLS. Will be ignored when connecting using SSL.

userDN The user search base.

userSearchFilter The user search filter. The default is `(objectClass=*)`. The search filter and username attribute together define the filter that is used in the user query:

```
(@(`userSearchFilter`)(`usernameAttribute`=username))
```

If a single entry is found then a second bind is made to authenticate the user.

usernameAttribute The attribute that contains a users username/login name. Must uniquely identify a user. The default is `sAMAccountName`.

realNameAttribute The attribute that contains a users real name. The default is `cn`.

cacheLifetime Passwords are cached to reduce the number of requests made to the server. This element specifies how long password should be cached (in milliseconds). The default is `1800000` (30 minutes).

usernameFormat Can be set to `lower` to force Vidispine to lower case all usernames read from the LDAP server. The bind properties can be set so that Vidispine authenticates using a bind request before searching for users or groups:

bindDN The DN of the entry to bind to before searching for a user.

bindPassword The password to provide in the bind request.

10.5.2 User and group synchronization

Vidispine can automatically synchronize users and groups, as well as user and group dependencies. Synchronization will be enabled if the `sync` element has been set.

Users from the directory that do not exist in Vidispine can be automatically created. If this should be enabled or not is typically a matter of:

- Licensing. If you are restricted to a certain number of users, then you may not want to create them in Vidispine if they are not using the system.
- Application needs. Access to an item can only be granted to a user that exists in Vidispine for example.

Caution: Password validation using `PUT /user/(username)/validate` will not work for imported users unless `type=raw`. This because a users password won't be available until the user has authenticated successfully at least once before. Validation should instead be performed using normal HTTP authentication.

Configuration

The `sync` element in the LDAP resource controls the synchronization:

sync If set then users and groups will periodically be updated from the LDAP server.

sync/interval The interval in milliseconds between synchronization attempts. The default is `1800000` (30 minutes).

sync/importOrganizationalUnits Indicates whether or not organizational units should be created as groups in Vidispine. Only units having users or groups will be added (as well as the parent units to these.)

sync/createUsers If new users should automatically be created. If `false`, then existing users will be updated by new/unknown users will be ignored.

sync/createGroups If new groups should automatically be created. If `false`, then existing groups will be updated by new/unknown groups will be ignored.

Old installations may still use the `import` element.

import Deprecated since version 4.0: The `import` element was previously used to enable synchronization. Use `sync` with `createUsers=true` and `createGroups=true` instead.

How groups are synchronized can be configured using the elements below.

groupDN The group search base. The default is the same as `userDN`.

groupSearchFilter The group search filter. The default is `(objectClass=group)`.

groupnameAttribute The attribute that contains a groups name. The default is `name`.

Subgroups are supported, that is, if the LDAP group query returns two groups, A and B, and B is listed as a member of A, then B will be added as a subgroup of A in Vidispine.

Examples

Importing all users from the **Users** organizational unit from an Active Directory server:

```
<ResourceDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <ldap>
    <url>ldap://example.com:389</url>
    <userDN>cn=Users,dc=example,dc=com</userDN>
    <usernameAttribute>sAMAccountName</usernameAttribute>
    <userSearchFilter>(objectClass=user)</userSearchFilter>
    <bindDN>cn=Administrator,cn=Users,dc=example,dc=com</bindDN>
    <bindPassword>{password}</bindPassword>
  </ldap>
</ResourceDocument>
```

Importing only members of a certain group:

```
<ResourceDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <ldap>
    ...
    <userSearchFilter>(& (objectClass=user) (memberOf=cn=mam,cn=Groups,dc=example,
↵dc=com))</userSearchFilter>
    <groupSearchFilter>(& (objectClass=group) (memberOf=cn=mam,cn=Groups,dc=example,
↵dc=com))</groupSearchFilter>
    ...
  </ldap>
</ResourceDocument>
```

Importing no groups, but creating groups to mirror the organizational unit tree structure.

```
<ResourceDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <ldap>
    ...
    <groupSearchFilter>(& (objectClass=group) (|))</groupSearchFilter>
    <import>
      <importOrganizationalUnits>true</true>
    </import>
  </ldap>
</ResourceDocument>
```

```
</ldap>
</ResourceDocument>
```

The user Joe (`cn=Joe,ou=Users,dn=example,dc=com`) would then be added to the **Users** group.

Trigger LDAP synchronization

This resource can be used to force a synchronization of users and groups, for example to verify that it is working properly.

POST `/resource/` (*type*) /
resource-id/**sync** Triggers a synchronization of users and groups.

If users and groups are already synchronizing, than this will have no effect.

Parameters

- **type** – Must be *ldap*.

For example:

```
HTTP POST /resource/ldap/VX-1/sync
200 OK
```

10.5.3 Troubleshooting

If you are having problems with the LDAP integration then the best place to start is to check the LDAP *self test*. The test will connect to the LDAP server and list the users and groups that are found using the current configuration.

```
GET /self-test/ldap
Content-Type: application/xml

<SelfTestDocument xmlns="http://xml.vidispine.com/schema/vidispine" name="ldap"
↳status="ok" took="1ms">
  <message>No LDAP resource has been defined</message>
</SelfTestDocument>
```

You can also use tools such as `ldapsearch` (<http://www.openldap.org/software/man.cgi?query=ldapsearch>) or `ldap.exe` to verify the configuration:

```
$ ldapsearch -h ad.example.com -D "CN=VS,OU=Users,DC=example,DC=com" -W -b "OU=Users,
↳DC=example,DC=com"
```

If the configuration is correct, but users are still not being authenticated properly, then set the following log levels, try to authenticate once more and then check the application server log file to see what is going on.

```
com.vidispine.security=FINEST
com.vidispine.authentication=FINEST
```

For example, this error would indicate that the `userDN` element is missing:

```
Caused by: com.sun.enterprise.security.auth.realm.BadRealmException: A search base DN
↳must be provided.
   at com.vidispine.security.auth.realm.MultiRealm.init(MultiRealm.java:89)
   at com.sun.enterprise.security.auth.realm.Realm.doInstantiate(Realm.java:233)
```

Users are not assigned to the correct groups

Users will only be added to LDAP groups that have a corresponding group in Vidispine. If LDAP import is enabled then groups will also be created. Verify that the name attribute of the group corresponds to the name of the group in Vidispine.

Note that if a group is removed from the directory then the users will still be a part of the group. This is because we currently do not track which groups are to be synchronized with the groups from the directory, except by name.

Users can only log in by entering their upper case username

What you can do is set `usernameFormat` to `lower` in the LDAP resource. Vidispine will then lower case all usernames read from the LDAP directory. Your users can then login by entering their username in lower case, or in any letter case if your application is lower casing usernames.

Disabled the user can still login

A user will be marked as disabled if:

- The user has been removed from the directory.
- If the user has been disabled (Active Directory only.)

If users should be disabled based on some other criteria then update the user search filter so that it excludes users accordingly. For example:

```
(&(objectClass=user) (!(userAccountControl:1.2.840.113556.1.4.803:=2)))
```

It's still not working

Contact us directly and we will try to figure out what's going on.

MULTI-SITE

11.1 Multi-site

Vidispine supports syncing between remote sites, this is handled via *site rules*. In order to start using the multi-site capabilities, the sites must first be set up so they know about each other.

11.1.1 Site names

Every site must have a name. Out of the box, a Vidispine instance will have the site name `VX`. The site name determines what prefix the ID:s in the system will get (e.g. `VX-1234`) The site name can be changed by setting the Java system property `com.vidispine.site`. It is important that every site in a multi site setup have different names.

11.1.2 Multi site setup

Before anything can be synced between sites, Vidispine must be told how to connect to the remote sites. This is done by adding a site definition for each remote site. How this is done in practice is described in the *reference section*.

It is important to note that all sites must know about *all* other sites in order for the syncing to work properly! It is also important that the clocks on the different servers are set correctly, since for some operations the timestamps of changes are important.

11.1.3 Site rules

To determine which entities to sync to remote sites, Vidispine uses site rules. Site rules can be defined for a number of different entity types, and the rules can also define what parts of the item should be synced.

Site rules can be set for individual entities or collectively for all entities of a specific type (e.g. you could set a site rule applying only to item `VX-100`, or a rule that applies to all items in the system).

Site rules can be added for the following entity types:

- **Items**
- **Collections** All child entities will also be synced.
- **Libraries** All child items will be synced.
- **Users** Will also sync any parent groups.
- **User groups** Any child groups and users will be synced with the group.

Depending on what entity type the rule is posted to, a number of different settings are available. For item, collection and library rules, the following settings are available:

- **metadata** Whether or not to sync metadata
- **access** Whether or not to sync ACLs for the entities. This also requires that the affected users and groups have been synced, otherwise this setting will have no effect.
- **shape** Determines whether or not to sync a shape containing this tag.
- **files** Whether or not to also sync files or just shape information.

User and group rules have no special settings.

Setting a site rule on an entity will cause it to be synced to the remote site specified in the rule, and any future changes will also be synced. A synced item will be synced *both ways*. So any changes made on the remote site will be synced back to the original site as well.

Example

The following XML would describe a site rule for an item to the site NY. Metadata is synced, ACLs are not synced, and any `web` and `editing` shapes will be synced along with the files:

```
<SiteRuleDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <site>NY</site>
  <metadata>true</metadata>
  <access>false</access>
  <shape>web</shape>
  <shape>editing</editing>
  <files>true</files>
</SiteRuleDocument>
```

11.1.4 Conflicts

When having a synced item on several sites, there is always the possibility of metadata conflicts occurring. In the Vidispine multi-site setup, it is handled as “last edit wins”. Meaning that the edit with the latest timestamp will win. This does not mean that the older change is lost however. A full history of all edits will still be available on all sites, and the old value can be manually brought back with a later edit.

MISCELLANEOUS TOPICS

12.1 Deletion lock

New in version 4.15.

Deletion lock is a mechanism to prevent entities from been moved or deleted. Entities that support deletion lock are collections, items and files.

12.1.1 Adding locks

Deletion locks can be added to collections, items and files. All locks must have an expiration time, and can have user defined *key-value metadata* that can be used to *filter locks* and to for example explain why a lock exists.

```
<DeletionLockDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <expiryTime>2019-10-09T18:49:41.650+02:00</expiryTime>
  <metadata>
    <field>
      <key>reason</key>
      <value>Locked for playout</value>
    </field>
  </metadata>
</DeletionLockDocument>
```

Deletion locks can also be used in *searches*, and support *notifications* so that you can easily take action once a lock has expired.

12.1.2 Lock expiration

All deletion locks must have an expiration time.

- Expired locks are treated as if they weren't present at all.
- Expired deletion locks on collections and items can be automatically removed if *autoRemoveExpiredDeletionLocks* is set to true.
- Expired file deletion locks need to be removed manually.

The `isExpired` attribute highlights locks that have expired:

```
<DeletionLockDocument xmlns="http://xml.vidispine.com/schema/vidispine" isExpired=
  ↪"true">
  <id>VX-1574</id>
  <user>admin</user>
```

```

<expiryTime>2018-09-09T18:49:41.650+02:00</expiryTime>
<modified>2018-10-12T14:27:03.175+02:00</modified>
<entityType>Item</entityType>
<entityId>VX-32140</entityId>
</DeletionLockDocument>

```

12.1.3 Working with multiple locks

An entity can have multiple deletion locks, but only zero or one *effective* deletion lock.

- An effective lock is a lock that hasn't expired, and has the maximum expiration time among all the explicit locks and inherited locks.
- An entity with an effective deletion lock can be copied, but not moved or deleted; either by any explicit API request, or Vidispine internally (storage-rule for example).

In the examples below, you will see that effective locks are shown as `isEffective="true"`.

12.1.4 Lock inheritance

Deletion locks will be automatically inherited from parent to child entities, i.e., from collection to sub-collections to items and then to files, with one exception:

- If there is any explicit lock set on a file, the file will not inherit any parent locks.

One use case of this behavior is that if the original asset needs to be kept for a longer period of time, but its copy can be removed earlier.

12.1.5 Transient metadata

An entity's effective lock id and expiration time are added to the entity's metadata as *transient fields*:

- `__deletion_lock_id` - The id of the effective lock on the entity (string-exact).
- `__deletion_lock_expiry` - The expiration time of the effective lock (date).

For example, an item with a deletion lock will have metadata:

```
GET /item/VX-132340/metadata
```

```

<MetadataListDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <item id="VX-132340">
    <metadata>
      <revision>VX-706676,VX-706677,VX-706678,VX-706671,VX-706672</revision>
      <timespan start="-INF" end="+INF">
        ...
        <field>
          <name>__deletion_lock_id</name>
          <value>VX-1559</value>
        </field>
        <field>
          <name>__deletion_lock_expiry</name>
          <value>2018-10-13T07:49:46.637Z</value>
        </field>
      </timespan>
    </metadata>
  </item>
</MetadataListDocument>

```



```
</item>
</MetadataListDocument>
```

The same applies for files:

```
GET /storage/file/VX-10725401/metadata
```

```
<SimpleMetadataDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <field>
    <key>__deletion_lock_expiry</key>
    <value>2019-10-09T16:49:41.65Z</value>
  </field>
  <field>
    <key>__deletion_lock_id</key>
    <value>VX-1561</value>
  </field>
</SimpleMetadataDocument>
```

12.1.6 Examples

Collection lock inheritance

Assuming one collection and one item:

- The item belongs to the collection.
- The collection has an explicit lock set.

```
POST /collection/VX-9129/deletion-lock
```

```
<DeletionLockDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <expiryTime>2019-10-09T18:49:41.650+02:00</expiryTime>
</DeletionLockDocument>
```

Both the collection and the item will get the deletion lock.

```
GET /collection/VX-9129/deletion-lock
```

```
<DeletionLockListDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <lock isEffective="true">
    <id>VX-1410</id>
    <user>admin</user>
    <expiryTime>2019-10-09T18:49:41.650+02:00</expiryTime>
    <modified>2018-10-11T15:04:24.125+02:00</modified>
    <entityType>Collection</entityType>
    <entityId>VX-9129</entityId>
    <metadata/>
  </lock>
</DeletionLockListDocument>
```

```
GET /item/VX-132271/deletion-lock
```

```
<DeletionLockListDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <lock isEffective="true" isInherited="true">
```

```

<id>VX-1410</id>
<user>admin</user>
<expiryTime>2019-10-09T18:49:41.650+02:00</expiryTime>
<modified>2018-10-11T15:04:24.125+02:00</modified>
<entityType>Collection</entityType>
<entityId>VX-9129</entityId>
<metadata/>
</lock>
</DeletionLockListDocument>

```

Effective locks

Assuming one collection and one item:

- Each of them have one explicit lock set.

```
POST /collection/VX-9129/deletion-lock
```

```

<DeletionLockDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <expiryTime>2019-10-09T18:49:41.650+02:00</expiryTime>
</DeletionLockDocument>

```

```
POST /item/VX-132271/deletion-lock
```

```

<DeletionLockDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <expiryTime>2019-09-09T18:49:41.650+02:00</expiryTime>
</DeletionLockDocument>

```

The item will inherit the lock from the collection. The effective lock of the item is the inherited one, since it has longer expiration time.

```
GET /item/VX-132271/deletion-lock
```

```

<DeletionLockListDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <lock>
    <id>VX-1411</id>
    <user>admin</user>
    <expiryTime>2019-09-09T18:49:41.650+02:00</expiryTime>
    <modified>2018-10-11T15:16:42.802+02:00</modified>
    <entityType>Item</entityType>
    <entityId>VX-132271</entityId>
    <metadata/>
  </lock>
  <lock isEffective="true" isInherited="true">
    <id>VX-1410</id>
    <user>admin</user>
    <expiryTime>2019-10-09T18:49:41.650+02:00</expiryTime>
    <modified>2018-10-11T15:04:24.125+02:00</modified>
    <entityType>Collection</entityType>
    <entityId>VX-9129</entityId>
    <metadata/>
  </lock>
</DeletionLockListDocument>

```

Explicit file locks

Assuming one item with one file in it:

- Both the item and the file have explicit locks set.

```
POST /item/VX-132164/deletion-lock
```

```
<DeletionLockDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <expiryTime>2019-10-09T18:49:41.650+02:00</expiryTime>
</DeletionLockDocument>
```

```
POST /file/VX-10725401/deletion-lock
```

```
<DeletionLockDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <expiryTime>2017-09-09T18:49:41.650+02:00</expiryTime>
</DeletionLockDocument>
```

The file will not inherit any lock from the item, since it has an explicit lock. In this case, the file lock has expired, so the file can be removed.

```
GET /item/VX-132164/deletion-lock
```

```
<DeletionLockListDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <lock isEffective="true">
    <id>VX-1412</id>
    <user>admin</user>
    <expiryTime>2019-09-09T18:49:41.650+02:00</expiryTime>
    <modified>2018-10-11T15:39:30.402+02:00</modified>
    <entityType>Item</entityType>
    <entityId>VX-132164</entityId>
    <metadata/>
  </lock>
</DeletionLockListDocument>
```

```
GET /storage/file/VX-10725401/deletion-lock
```

```
<DeletionLockListDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <lock isExpired="true">
    <id>VX-1413</id>
    <user>admin</user>
    <expiryTime>2017-09-09T18:49:41.650+02:00</expiryTime>
    <modified>2018-10-11T15:40:30.483+02:00</modified>
    <entityType>File</entityType>
    <entityId>VX-10725401</entityId>
    <metadata/>
  </lock>
</DeletionLockListDocument>
```

Search using deletion locks

The *deletion lock transient metadata fields* can be used in collection, item and file searches. For example, to find items that will expire in the coming week:

PUT [/search](#)

```
<ItemSearchDocument xmlns="http://xml.vidispine.com/schema/vidispine" version="1">
  <field>
    <name>__deletion_lock_expiry</name>
    <range>
      <value>NOW</value>
      <value>NOW+7DAYS</value>
    </range>
  </field>
</ItemSearchDocument>
```

MONITORING

To get better insight into the operations of jobs and services you can collect metrics into your favorite monitoring service. Metrics are exposed using JMX and **StatsD** (<https://github.com/etsy/statsd/>).

Transcoders on the other hand only expose metrics using StatsD.

New in version 4.2.3.

13.1 StatsD

By default metrics are *not* sent to a StatsD server. To enable it you have to update the metrics configuration. For example, to have metrics sent to a StatsD server on `localhost` listening on UDP port 8125, use:

```
PUT API/configuration/metrics
Content-Type: application/xml

<MetricsConfigurationDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <statsd/>
</MetricsConfigurationDocument>
```

Metrics sent to StatsD are by default prefixed with `vs..`. To have metrics sent with the prefix `vs1.`, for example if you have multiple instances running:

```
PUT API/configuration/metrics
Content-Type: application/xml

<MetricsConfigurationDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <statsd>
    <host>metrics.example.com</host>
    <port>6125</port>
    <prefix>vs1</prefix>
  </statsd>
</MetricsConfigurationDocument>
```

Here metrics are sent to an external StatsD server on the non-standard port 6125. Note that the `.` between the prefix and metric name is added automatically.

13.1.1 Filtering metrics

You can set inclusion and exclusion filters to restrict which metrics are sent to the StatsD server. The default is to include all and exclude none.

Inclusion/exclusion filters may have a leading or trailing wildcard. For example, to exclude all `storage.fs` metrics:

```
<MetricsConfigurationDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <statsd>
    <exclude>storage.fs.*</exclude>
  </statsd>
</MetricsConfigurationDocument>
```

13.1.2 Tagged metrics

Some metrics are tagged with additional information. These are sent to StatsD in the format:

```
<metricname>:<value>|<type>|#<tag>+
```

A `job.step.execution.time` metric might for example be sent as:

```
vs.job.step.execution.time:123|ms|#type:placeholder-import,step:100,sync
```

If your StatsD server does not support such tags then they can be disabled by setting `tags` to `false`:

```
<MetricsConfigurationDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <statsd>
    ...
    <tags>false</tags>
  </statsd>
</MetricsConfigurationDocument>
```

13.2 JMX

Each metric is exposed as an JMX MBean in the “metrics” domain. You can view the metrics using for example:

- A JMX client such as [VisualVM](http://visualvm.java.net/) (http://visualvm.java.net/) with the VisualVM-MBeans plugin, or JConsole.
- Programmatically using the Java JMX client interface.
- Over HTTP/JSON using a bridge such as [Jolokia](http://www.jolokia.org/) (http://www.jolokia.org/).

13.3 Metrics

Metrics are exposed as either meters, timers or gauges. The name of a metric is meant to be self-explanatory. Timers are suffixed with `time` and meters are named as past tense verbs, while gauges make up the rest.

The StatsD type used for each metric, and the statistics exposed over JXM for each type are:

Type	StatsD type	MBean attributes
Meter	c	The count, mean and 1/5/15-minute rates.
Gauge	g	The value.
Timer	ms	The count, min/max/mean/stddev, rates and percentiles.

13.3.1 Indexing

- Meters:
 - `reindex.{index}.started`

- `reindex.{index}.finished`
- `indexer.solr.request.failed`
- `indexer.elasticsearch.request.failed`

- **Timers:**

- `indexer.solr.update.time`
- `indexer.solr.delete.time`
- `indexer.solr.commit.time`
- `indexer.elasticsearch.update.time`
- `indexer.elasticsearch.delete.time`
- `indexer.{index}.index.time`
 - * With `index` being one of `item/collection/acl/file`.
- `indexer.library.update.time`

Time spend on updating auto-refreshing libraries in the system.

New in version 4.7.

13.3.2 Job

- **Meters:**

- `job.created`
- `job.started`
- `job.finished`
- `job.failed`
- `job.blocked`

- **Gauges:**

- `job.total.{state}`
 - * Where `state` is the name of a *job state*, lower cased and with `_` replaced with `-`. For example `finished-warning`.

- **Timers:**

- `job.{type}.step.{step}.{sync}.execution.time`
- `job.step.execution.time`
 - * Tagged with `type:{type}`, `step:{step}` and `sync/async`.

13.3.3 Solr

- **Meters:**

- `solr.request.failed`

- **Timers:**

- `solr.query.time`

- solr.update.time
- solr.commit.soft.time
- solr.commit.hard.time
- solr.optimize.time

13.3.4 Elasticsearch

- Meters:
 - elasticsearch.request.failed
- Timers:
 - elasticsearch.query.time
 - elasticsearch.update.time
 - elasticsearch.delete.time

13.3.5 Storage

- Meters:
 - storage.online
 - * Tagged with storage:{id}.
 - storage.offline
 - * Tagged with storage:{id}.
 - storage.method.online
 - * Tagged with storage:{id}.
 - storage.method.offline
 - * Tagged with storage:{id}.
 - storage.file.found
 - * Tagged with storage:{id}.
 - storage.file.changed
 - * Tagged with storage:{id}.
 - storage.file.deleted
 - * Tagged with storage:{id}.
 - storage.file.hashed
 - storage.file.checksum.bytes.read
 - storage.fs.stat
 - * The number of stat call made.
- Gauges:
 - storage.total.online
 - storage.total.offline

- storage.total.evacuating
- storage.total.evacuated
 - * The total number of storages with a specific state.

Changed in version 4.12: The storage and storage method state meters and gauges were added.

13.3.6 Resource

- Meters:
 - resource.{type}.online
 - * Tagged with resource:{id}.
 - resource.{type}.offline
 - * Tagged with resource:{id}.

Changed in version 4.12: The resource online/offline meters were added.

13.3.7 Agent

- Gauges:
 - agent.total.online
 - agent.total.offline
 - * The total number of agents with a specific state.

Changed in version 4.12: The agent state gauges were added.

13.3.8 Transfer

- Meters:
 - transfer.bytes.transferred
 - transfer.started
 - transfer.finished
 - transfer.finished-part
 - transfer.failed
 - transfer.blocked

13.3.9 Service

- Meters:
 - service.exception
- Gauges:
 - service.load.5
 - * The 5 minute load.

- `service.load.60`
 - * The 60 minute load.

13.3.10 Transcoder

- Gauges
 - `transcoder.{transcoder-id}.jobs.running`
 - `transcoder.{transcoder-id}.jobs.finished`
 - `transcoder.{transcoder-id}.jobs.failed`
 - `transcoder.{transcoder-id}.jobs.{transcoder-job-type}.running`
 - `transcoder.{transcoder-id}.jobs.{transcoder-job-type}.finished`
 - `transcoder.{transcoder-id}.jobs.{transcoder-job-type}.failed`
- Counters
 - `transcoder.{transcoder-id}.muxer.video.frames`
 - `transcoder.{transcoder-id}.encoder.{codec}.frames`
 - `transcoder.{transcoder-id}.decoder.{codec}.frames`
 - `transcoder.{transcoder-id}.io.{protocol}.{direction}.bytes`

13.3.11 Broker

- Gauges
 - `broker.queue.{queue}.size`

The size of a specific queue. Note that this metric is only present when using the embedded broker.

New in version 4.7.

13.3.12 Cluster

- Gauges
 - `cluster.size`

The number of members in the cluster.

New in version 4.12.

CONFIGURATION AND INTEGRATION

14.1 Search backend

Searching in Vidispine is implemented using either Solr or Elasticsearch (New in 4.10.) as the backend. This allows functionality such as boolean operators, faceted searching, term highlighting, search term suggestions, etc.

14.1.1 Solr

Solr is the default search backend. It supports all features and works with both standalone Solr and SolrCloud.

14.1.2 Elasticsearch

New in version 4.10.

Requirements

- Elasticsearch 5.6.x, 6.0.x, 6.1.x, and 6.2.x.
- The [analysis-icu](https://www.elastic.co/guide/en/elasticsearch/plugins/5.3/analysis-icu.html) (<https://www.elastic.co/guide/en/elasticsearch/plugins/5.3/analysis-icu.html>) plugin needs to be installed. If you are using [Amazon Elasticsearch Service](https://aws.amazon.com/elasticsearch-service/) (<https://aws.amazon.com/elasticsearch-service/>), this plugin is already installed.
- Make sure to configure the *search backend* and that either the search backend URL or the *elasticsearchPath* property is set properly.
- Run `vidispine elasticsearch init` to initialize Elasticsearch. If an Elasticsearch instance is initialized already, the initialization will not create a new index, unless the `--recreate` argument is used when initializing.
- Running `vidispine elasticsearch check` can be used to check if Elasticsearch is active already or should be initialized. (New in 4.13.)

Limitations

The search interface is the same compared to using Solr (both syntactically and semantically), except that:

- *Collection-item join* is not yet supported.
- The `noescape` option in the “version 1” search document is not supported.

14.2 System configuration

14.2.1 Indexing configuration

The indexing configuration contains the parameters that relate to search and indexing.

- Where Vidispine can reach Solr or ZooKeeper.
- When to commit or soft commit.
- The Solr query request parameters.
- The default field settings.

This configuration replaces the configuration properties listed under *Search and indexing*.

Example

Full text indexing could be disabled for all fields, unless explicitly specified for a field, using:

```
<IndexingConfigurationDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <solrPath>http://localhost:8088/solr</solrPath>
  <fieldDefault>
    <name>*</name>
    <fullText>>false</fullText>
  </fieldDefault>
</IndexingConfigurationDocument>
```

14.2.2 Metrics configuration

See *StatsD* on how to configure how metrics are sent to StatsD. The configuration resource is described at *Metrics settings*.

14.2.3 FTP pool configuration

New in version 4.2.4.

By default jobs that need to read or write to an FTP server will establish, use and end separate connections to the server. By configuring a FTP connection pool you can change so that the jobs share and reuse FTP connections. This can reduce the time it takes to transfer files over high latency connections.

For example, to create a connection pool with the default settings:

```
PUT /configuration/ftp-pool
Content-Type: application/xml

<FtpPoolConfigurationDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <pool/>
</FtpPoolConfigurationDocument/>
```

If no pool is specified then pooling will be disabled. Unless overridden, the pool will be unbounded, and connections will expire after 1 minute. That is, the above configuration is identical to:

```

PUT /configuration/ftp-pool
Content-Type: application/xml

<FtpPoolConfigurationDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <pool>
    <minSize>0</minSize>
    <maxSize>-1</maxSize>
    <evictionInterval>30000</evictionInterval>
    <minIdleTime>60000</minIdleTime>
  </pool>
</FtpPoolConfigurationDocument/>

```

The FTP pool configuration resource is described at *FTP pool configuration*.

14.2.4 Database purging

Vidispine supports mechanisms for purging old information in database tables. Especially four tables can grow quite large without purging enabled.

Updated method for purging configuration

New in version 4.14.2.

The preferred way of updating the database purging configuration is by create a DatabasePurgingConfigurationDocument, see *Database purging configuration*.

Change-log table

New in version 4.2.4.

The change-log table holds information about data that should be sent to other *sites*. If multi-site is disabled (*disableSiteCrunching*), this table grows forever.

To enable purging of the table, two configuration properties are used: *changeLogPurgingTime* and *changeLogForcePurgingTime*. The first one controls deletion of entries that have been processed, the other one controls deletion of entries regardless of state.

Sensible values are 43200 and 86400, corresponding to one and two months, respectively.

New in version 4.14.2.

Configuration can also be controlled via DatabasePurgingConfigurationDocument. For example:

```

<DatabasePurgingConfigurationDocument xmlns="http://xml.vidispine.com/schema/vidispine
↪">
  <changeLog>
    <age>43200</age>
    <forceAge>86400</forceAge>
  </changeLog>
</DatabasePurgingConfigurationDocument>

```

Audit trail table

New in version 4.2.4.

The audit trail table contains all API requests, see *Audit trails*.

To enable purging of the table, two configuration properties are used: *auditTrailPurgingTime* and *auditTrailPurgingDirectory*. Both must be set in order for purging to take place.

When purging is enabled, entries that are older than *auditTrailPurgingTime* minutes will be removed and put in a file inside the *auditTrailPurgingDirectory* folder.

A sensible value is 43200 or higher, corresponding to one month.

New in version 4.14.2.

Configuration can also be controlled via *DatabasePurgingConfigurationDocument*. For example:

```
<DatabasePurgingConfigurationDocument xmlns="http://xml.vidispine.com/schema/vidispine
↪">
  <auditTrail>
    <age>43200</age>
    <uri>s3://key:secret@archival-bucket/requests/</uri>
  </auditTrail>
</DatabasePurgingConfigurationDocument>
```

By setting the *compress* element in the configuration document, entries will be stored using *gzip* compression. The default value is *true*.

The entries are stored in batches. The number of entries per batch is controlled by the *batch* element in the configuration document. The default value is 10000 entries. If there are less than 10000 entries that fulfil the time criteria, the purging of the audit trail table will pause.

The directory can be a full URI, such as a S3 or FTP location.

Job table

New in version 4.3.

To enable purging of the table, two configuration properties are used: *jobPurgingTime* and *jobPurgingDirectory*. Both must be set in order for purging to take place.

When purging is enabled, entries that are older than *jobPurgingTime* minutes will be removed and put in a file inside the *jobPurgingDirectory* folder.

New in version 4.14.2.

Configuration can also be controlled via *DatabasePurgingConfigurationDocument*. For example:

```
<DatabasePurgingConfigurationDocument xmlns="http://xml.vidispine.com/schema/vidispine
↪">
  <job>
    <age>43200</age>
    <uri>s3://key:secret@archival-bucket/job/</uri>
  </transferLog>
</DatabasePurgingConfigurationDocument>
```

By setting the *compress* element in the configuration document, entries will be stored using *gzip* compression. The default value is *true*.

The directory can be a full URI, such as a S3 or FTP location.

Transfer log table

New in version 4.14.2.

Configuration is controlled via `DatabasePurgingConfigurationDocument`. For example:

```
<DatabasePurgingConfigurationDocument xmlns="http://xml.vidispine.com/schema/vidispine"
  >
  <transferLog>
    <age>1440</age>
    <uri>s3://key:secret@archival-bucket/transfers/</uri>
  </transferLog>
</DatabasePurgingConfigurationDocument>
```

Both the `age` and `uri` element has to be set. Entries than represents a finished transfer older than `age` minutes are exported to the destination.

The `forceAge` element controls exports of non-finished transfers - transfers that have disappeared for some reason. The default value of `forceAge` is the value of the `age` element.

By setting the `compress` element in the configuration document, entries will be stored using `gzip` compression. The default value is `true`.

The entries are stored in batches. The number of entries per batch is controlled by the `batch` element in the configuration document. The default value is 10000 entries. If there are less than 10000 entries that fulfil the time criteria, the purging of the transfer log table will pause.

14.2.5 CORS configuration

New in version 4.15.

Vidispine can be configured to emit [Cross-Origin Resource Sharing](https://www.w3.org/TR/cors/) ([https://www.w3.org/TR/cors/](https://developer.mozilla.org/en-US/docs/Web/HTTP/CORS/)) (<https://developer.mozilla.org/en-US/docs/Web/HTTP/CORS/>) headers.

The CORS configuration is set using the *CORS configuration resource*. The configuration document consists of a number of entries, each of them are checked for CORS evaluation. If an entry condition matches the incoming request, the CORS headers set in the entry are outputted, and no other entries are matched. For example:

```
PUT /configuration/cors
```

```
<CORSConfigurationDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <entry>
    <request/>
    <response>
      <allowOrigin>*</allowOrigin>
    </response>
  </entry>
</CORSConfigurationDocument>
```

The conditions in each entry can match HTTP method, the request path, the CORS origin, or any other header. For example:

```
<CORSConfigurationDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <entry>
    <request>
      <pathRegex>API.*item/.*</pathRegex>
      <headerRegex>
        <key>connection</key>
      </headerRegex>
    </request>
  </entry>
</CORSConfigurationDocument>
```

```
<value>.*aliv.*</value>
</headerRegex>
</request>
<response>
  <allowOrigin>*</allowOrigin>
  <allowMaxAge>86400</allowMaxAge>
</response>
</entry>
</CORSConfigurationDocument>
```

Semantics are as follows.

- Multiple methods can be set per entry. If one entry method matches the request method, the entry matches as far as for method. If no methods are set on the entry, the entry matches.
- Origins can be specified both exact or via regular expressions. If one entry origin matches the request origin, the entry matches as far as for origin. If no origins are set on the entry, the entry matches.
- Request paths can be specified via regular expressions. If one entry path matches the request path, the entry matches as far as for path. If no paths are set on the entry, the entry matches.
- Request headers can be specified via regular expressions. All specified headers for the entry must match the request. If the HTTP request does not contain a value for a specified header, the entry does not match. If the HTTP request contains multiple values for a specified header, it is sufficient that only one value matched the entry header condition.

When the entry matches, the entry may contain which origin that is allowed, the max age for the access, which methods that are allowed, which HTTP headers. The entry can also contain other, arbitrary, headers. If methods are not specified, the methods are automatically deduced from the API methods.

14.2.6 Configuration properties

Configuration properties are used in Vidispine to control system-wide parameters.

See also:

See *Create/modify configuration properties* for more information about how to configure properties.

General

apiUri

URI to Application Server. Used by transcoder(s), so need to be a proper host if transcoder(s) run on another machine.

Mandatory Yes

Example `http://localhost:8080/API/`

apiNoauthUri

URI to Application Server, to use to access the no-auth API. Used by transcoder(s), so need to be a proper host if transcoder(s) run on another machine.

Example `http://localhost:8080`

clusterName

Optional alphanumerical identifier for the Vidispine installation/cluster. Must be set (to a unique identifier) if multiple Vidispine installations are to share a common set of transcoders.

Example `ABPRD, ABDEV, BCPRD`

Since 4.4

disableSiteCrunching

Do not build site replication packages. Recommended to be set to `true` for systems not running site replication.

Default `true` since 4.2.6. Previous versions: `false`

Since 4.0.4

validatexml

Enable schema validation of the incoming and outgoing xml document.

Default `false`

Since 4.2.1

slaveLicenseProxy

Use a proxy for *Connection to Vidispine master license service*. Format is

- `http://IP:port/` or
- `socks://IP:port/`

Proxy authentication is not supported.

Default `none`

Since 4.2.5

defaultTranscoder

Default transcoder resource to use. Valid values are:

- `vidinet` - To use the first available transcoder from Vidinet.
- A resource id - To use the transcoder with that id.

Example `VX-1`

Default `none`

Since 4.13

Search and indexing

Deprecated since version 4.2: The Solr and ZooKeeper properties are deprecated. Use *Indexing configuration* instead.

solrPath

URI (**not path!**) to Solr.

Mandatory Yes (No for SolrCloud)

Example `http://localhost:8081/solr/`

elasticsearchPath

URI to Elasticsearch's RESTful interface.

Mandatory Yes (if using Elasticsearch). Optional if `url` has already been configured in *search backend*

Example `http://localhost:9200/`

Since 4.10

zkHost

For SolrCloud: A comma separated list of host:port pairs to the servers in the ZooKeeper ensemble.

Mandatory No (Yes for SolrCloud)

Example `localhost:3000,example.com:3001`

Since 4.1

solrCollection

For SolrCloud: The collection in Solr to be used by Vidispine.

Mandatory No (Yes for SolrCloud)

Example `collection1`

Since 4.1

solrQueryTimeout

The request timeout in milliseconds to use when querying Solr.

Default 60000

Since 4.1.1

solrPingAttempts

The number of times to ping a Solr node before aborting an active request.

Default 5

Since 4.1.1

solrPingTimeout

The request timeout in milliseconds to use when checking if a Solr node. is alive

Default 5000

Since 4.1.1

solrCommitInterval

The interval (in milliseconds) of Vidispine sending hard commit to Solr.

Default 10000

solrSoftCommitInterval

The interval (in milliseconds) of Vidispine sending soft commit to Solr.

Default -1 (disable)

solrAutoSoftCommit

If Vidispine should send soft commit to Solr automatically.

Default true

solrUpdateQueueSize

Number of documents Vidispine will send in batch to Solr.

Default 100

elasticsearchPath

URI (**not path!**) to Elasticsearch.

Mandatory No

Example `http://localhost:9200/`

indexFieldGroups

If metadata field groups should be indexed in Solr. Setting this to `false` can reduce the load and the size of the index if items have a large number of groups in the metadata, but will mean that no results will be available when *searching for field groups*.

Default `true`

indexCollectionItemOrder

If the order of an item in a collection should be indexed in Solr. Settings this to `false` can greatly reduce the number of fields created in Solr and improve performance on systems with a lot of collections. This affects *collection item retrieval*. See also *Ordering collections*.

Recommended to be set to `false` for applications not relying on that feature. Requires a clean Solr index and a full re-index to take effect.

Changed in version 4.4: This is now disabled by default.

Default `false`

Since 4.2.8

indexTimespans

If time coded metadata should be indexed in Solr. Setting this to `false` can reduce the load and the size of the index if items/collections have a large number of timespans in the metadata, but will mean that no time coded metadata can be found.

Default `true`

Since 4.2.13

maxSearchResults

Maximum number of search results allowed to be returned (see *Search items*).

Default 100

legacyTransientFieldTypes

This setting controls the datatype of the transient metadata fields. If `true` then all transient fields will be of type `string`. If `false` the `*_size` and `*_count` fields will be of type `integer`, and the rest will have type `string`.

Default `true`

skipLibraryIndexUpdates

If set to `true`, the auto-refreshing libraries won't be updated after item metadata changes.

Default `false`

Since 4.12.2

Metadata

disableMetadataSchema

If a metadata schema has been defined (see *Metadata schema*), allows metadata that does not comply to the schema.

Default `false`

Authentication

passwordHashAlgorithm

The hash algorithm used to hash all user passwords. Note that changing this will make it impossible to authenticate with any existing user.

Default MD5

ldapAuthentication

If set to `true`, *LDAP* authenticated will be enabled.

Default false

userTokenMaxInterval

Maximum token time for token created by regular user, in seconds.

Default 60

Since 4.2.2

userTokenDefaultInterval

Default token expiration time, in seconds.

Default 60

Since 4.2.2

userTokenRefreshInterval

Minimum time between token refreshments, in seconds.

Default 10

Since 4.2.2

Jobs and imports

concurrentJobs

Number of *jobs* that are allowed to be started.

Default 3

jobRetryCount

Number of retries for a job step before job continues with next step.

Default 5

jobExclusiveStepMaxWait

The maximum number of seconds that a job step will wait before executing if there's a job step running from another job for the same item or file. This exists to reduce the number of optimistic locking exceptions for job steps that are known to conflict.

Only applies to steps with the exclusive flag (0x0100000) set.

Default 1

Since 4.2.11

defaultIngestStorage

The default destination storage for imports and transcodes. Note that storages selected by storage rules will take priority over this.

Example VX-1

parseFileMetadata

If set to true, file metadata will be metadata parsed and inserted as *Item metadata*. Supported formats for this type of metadata include Office formats and PDF files.

Default false

maxFileMetadataLength

The max length of file content (in characters) that will be extracted as *Item metadata*. -1 means unlimited.

Default 100000

Since 4.14.6

parseXMP

If set to true, XMP metadata will be parsed and inserted as *Item metadata*.

Default false

xmpIgnoreElements

Contains comma-separated list of elements that are not read when parsing XMP data.

Default DocumentAncestors,Pantry,History

Since 4.0.10

simpleImageProcessor

If false, use ImageMagick (must be installed, see [Using ImageMagick for image handling](http://vidispine.tenderapp.com/kb/installation/using-imagemagick-for-image-handling) (<http://vidispine.tenderapp.com/kb/installation/using-imagemagick-for-image-handling>)). Otherwise, use built-in image handling.

Default true

disableThumbnailGeneration

Will disable thumbnail generation by default. Can be overridden on a per job basis.

Default false

Since 4.0.3

alwaysGenerateThumbnails

When true, thumbnails will be generated on import even if no transcoding takes place.

Default false

Since 4.0.3

disableThumbnailReindexing

When false, the thumbnail index will be rebuild when items are *reindexed*.

Default true

Since 4.14

mediaCheckInterval

The retry interval of media check (seconds).

Default 3

Since 4.1

Storage and file

groupImportableFiles

When true, auto-import will only import one file for each file prefix as an item. Other non-sidecar files with the same prefix will be ignored. Set to false to import all files.

Default true

keepMissingFiles

If set to false then missing files that do *not* belong to any items will be removed from the database instead of being marked as lost.

Can be overridden on a per storage basis using the *keepMissingFiles* storage metadata property.

Default false

Since 4.1

keepEmptyDirectories

Do not delete empty parent directories when deleting the last file in a directory, see *Parent directory management*.

Can be overridden on a per storage basis using the *keepEmptyDirectories* storage metadata property.

Default false

Since 4.2.5

storageActivationFile

Require a .storage file to be present in the storage method's URI for storage to register as online.

Default false

Since 4.17

fileHashAlgorithm

Hashing algorithm used. If changed, the `c_hash` column of the `t_file` table should probably be set to NULL.

Example SHA-1

enableTranscoderHashing

Off-load file hash calculation available transcoder.

Default false

Since 4.2.4

fileTempKeyDuration

Number of minutes a no-auth URI is valid (*Auto method types*).

New in version 4.16.

This property also controls the valid duration of a *VSA noauth URI*.

Example 10

useS3Proxy

When `true`, Vidispine will create S3 pre-signed URLs for reading during job.

Example false

Since 4.1

s3ProxyValidTime

The validate time (in minutes) of S3 pre-signed URL.

Example 60

Since 4.1

s3ConcurrentParts

The number of threads used for each S3 file upload.

Default 1

s3PartSize

The S3 chunk/part size. Note that multipart uploads are always performed regardless of file size. Each part that is uploaded will be larger than the previous part. To control the increase of the part size, use *s3PartSizeIncrease*.

Changed in version 4.11: Automatic adjustment of the part size was added.

Default 5242880

s3PartSizeIncrease

The size increase of each S3 part that is uploaded.

The default is chosen so that the maximum part size is 2 GB. With S3 supporting a maximum of 10000 parts, and the default part size being 5 MB, this gives a maximum object size of 3.5 TB.

Default Automatically selected based on the part size.

s3ConnectionTimeout

The timeout (in milliseconds) when establishing a connection to S3.

Default 50000

s3SocketTimeout

The timeout (in milliseconds) when reading from a connection to S3.

Default 50000

s3MaxErrorRetry

The maximum number of times to retry a failed S3 request.

Default 3

useAzureProxy

When `true`, Vidispine will create AZURE-SAS URLs for reading during job.

Example `false`

Since 4.1

azureSasValidTime

Specifies for how many minutes an AZURE-SAS URI will be valid. See *Get status of file in storage*.

Example `60`

Since 4.0.1

stornextFileMetadata

Specifies which fields that should be stored on the Vidispine file entity from StorNext metadata. See *StorNext Metadata*.

Default `location,class,existingCopies,targetCopies`

Since 4.2.3

useSegmentFiles

If `true`, files generated by the transcoder on storages that do not support partial modification are written as segment files on the storage, instead of local files on the application server. See *Temporary storages for transcoder output*.

Default `false`

Since 4.2.3

useMutableRangeWrites

If `true`, use a writing pattern that is more efficient for S3 writes. The only reason for not have this set to `true` is in a clustered set-up with transcoders directly connected to Vidispine Server, i.e., not via VSA.

Default `true`

s3CredentialType

Controls the type of S3 credentials being sent to a VSA. Allowed values are `none`, `temporary` and `secretkey`. For more explanation, please check *here*.

Default `temporary`

Since 4.14

stsCredentialDuration

The duration (in seconds) of any temporary AWS credentials generated for agents. The allowed range of values is [900,129600]

Default 129600

Since 4.14

stsRegion

To generate temporary credentials Vidispine server will use the AWS Security Token Service (STS). Set this parameter to the region where you want Vidispine server to call the STS API. A good choice is the same region as your Vidispine server is running in.

Default us-west-2

Since 4.14

stsAssumeRole

This is an optional configuration to use when generating credentials using the s3 scheme. The name of the role to use when generating assume role credentials to give direct access to a file using *Generate temporary credentials*.

Since 4.15

Archival

trustArchivedFiles

A file needs to have a replica (another file with the same hash) before it can be removed by the storage rules.

If set to true, then archived files will be treated as valid replicas.

Default false

glacierArchiveDescription

Format the archive description according to the defined pattern:

- {itemId} - Replaced by the item id.
- {fileId} - Replaced by the id of the archived file.
- {metadata-field:name} - Replaced by the value of the metadata field with the given name.
- {sourceId} - Replaced by the id of the source file.
- {sourcePath} - Replaced by the path of the source file.
- {sourceUri} - Replaced by the URI of the source file.
- {date} - Replaced by the archive date in ISO 8601 format.
- {dateString} - Replaced by the archive date, in format dow mon dd hh:mm:ss zzz yyyy.

Example: `Item:{itemId},file:{fileId},path:{sourcePath},Archive date:{date},Title:{metadata-field:title}`

Since 4.8

Default my archive {dateString}

File system

Tip: Since 4.1.1, several of the `stat` system calls that was made by the JRE has been migrated into call in the JNI code. This can be enabled using the `localFSTimeData` option. On systems where local file systems are sensitive to stat loads, it is recommended to enable this option, and possibly the `statsPerSecond` option.

`fileHierarchy`

See *Using a tree structure for files*.

Example 0

`fileSequenceStart`

The starting number for file sequences.

Example 0, 0001

Default 1

Since 4.10

Changed in version 4.10: The starting number was changed from 0 to 1.

`thumbnailHierarchy`

See *Using a tree structure for thumbnails*.

Example 0

Warning: Changing this property **will cause old thumbnails to be lost**. If you need to change the value on a system in production, please contact Vidispine.

`statsPerSecond`

Limit the total number of stats done on local file system. See also per-storage metadata (*Storages*).

Since 4.1.1

`localFSTimeData`

Use JNI methods for retrieving file modification time. See below.

Default `false`

`firstLastModifiedAsCreationTime`

Use the first reading of modification time as the creation time. Can be used on file systems which do not have the notion of creation time.

Default `false`

`disableATime`

Do not record atime. Used in conjunction with `localFSTimeData`.

Default `false`

Since 4.2.5

Transfers

`signiantManagerHost`

Hostname of Signiant manager. See *Signiant Integration*

signiantManagerUser

Username for Signiant manager. See *Signiant Integration*

signiantManagerPassword

Password for Signiant manager. See *Signiant Integration*

enableTranscoderTransfer

Off-load file-to-file transfers of non-growing files to available transcoder.

Default false

Since 4.2.4

storageRuleDisableArchiveSources

If `true`, archived files will not be used as sources for storage rule transfers.

Default false

Since 4.14

Library

libraryUpdateInterval

Default library update interval in the system (seconds).

Default 60

Since 4.1

libraryExpireTime

Default library expire time in the system (seconds).

Default 86400

Since 4.1

useLucene

If Lucene should be used directly when updating auto-refreshing libraries. This is faster than using Solr when there are a large amount of auto-refreshing libraries, but only works with the default Solr configuration that is shipped with Vidispine.

Default false

Since 4.0

Growing files

fileGrowingTimeout

The max time a file can keep growing (seconds).

Default 36000

Since 4.1

fileNotGrowingTimeout

A file is considered as not growing if it has not been changed during this period (seconds).

Default 600

Since 4.1

Services

itemDeleteInterval

The running interval (seconds) of `ItemDeleteCruncher` during the “idle” period (no item to delete).

Default 60

Since 4.1

itemDeleteIntervalShort

The running interval (seconds) of `ItemDeleteCruncher` during the “busy” period (there are items to be deleted).

Default 5

Since 4.1

itemDeleteExecutionTime

Max running time (seconds) of `ItemDeleteCruncher` thread, after that it goes to sleep.

Default 5

Since 4.1

fileHashExecutionTime

Max running time (seconds) of a file hashing thread, after that it goes to sleep.

Default 10

Since 4.1

Broker

compressDocumentMessages

If JMS messages containing XML should be compressed or not. If `true` then the `JMS_SUN_COMPRESS` (<http://docs.oracle.com/cd/E19798-01/821-1796/aeqdf/index.html>) property will be set on JMS messages so that compression/decompression is performed by the OpenMQ client.

Works only with OpenMQ.

Since 4.2.2

Default `true`

Database management

auditTrailPurgingTime

Remove all audit trail entries older than the specified time (in minutes) and put them in XML format in files inside the directory described by `auditTrailPurgingDirectory`. See *Audit trail table*.

Since 4.2.4

Default not set

auditTrailPurgingDirectory

Since 4.2.4

Default not set

changeLogPurgingTime

Remove all processed change-log entries older than the specified time (in minutes). See *Change-log table*.

Since 4.2.4

Default not set

changeLogForcePurgingTime

Remove all change-log entries (processed or unprocessed) older than the specified time (in minutes).

Since 4.2.4

Default not set

jobPurgingTime

Remove all job entries older than the specified time (in minutes) and put them in XML format in files inside the directory described by `jobPurgingDirectory`. See *Job table*.

Since 4.3

Default not set

jobPurgingDirectory

Since 4.3

Default not set

disableSequenceChecker

Since 4.6.1

Default false

On start-up, Vidispine checks the sequences for all tables, which can be a lengthy process. On a database which is known to be in a consistent state, setting `disableSequenceChecker` to `true` will cause this step to be skipped.

Transcoding

maxTranscoderUnavailableTime

When a transcoding job has started, and transcoder connection becomes available, wait for this time (seconds) for connection to be restored until job fails.

Since 4.4.1

Default 60 seconds

bulkyMetadataKeysToIgnore

Comma-separated list of bulky metadata keys to ignore from analysis results, e.g. `crop`,

Since 4.4.1

Default (none)

transcoderNonblockingStatusInterval

How frequently the transcode progress of a job will be updated, in milliseconds. A lower number may give a better user experience, but also a higher number of writes to the database.

Since 4.4.1

Default 5000

Vidispine Server Agent

syncVxaFileChanges

This determines whether items created from the VSA or VDA are re-created when the corresponding original file is changed. If the original file is deleted, the item would be removed.

Since 4.6

Default false

syncVxaDeletes

Similar to `syncVxaFileChanges` but this one only affects file deletions. When the original file on an agent storage is removed, the corresponding item in Vidispine would also be deleted.

Since 4.6

Default true

useVxaHash

If set to `true`, Vidispine agent will be used to compute the hash of the files.

Since 4.6

Default false

useVxaMimeType

If set to `true`, Vidispine agent will be used to detect the mime type of the files.

Since 4.6

Default false

Deletion lock

autoRemoveExpiredDeletionLocks

If set to `true`, expired deletion locks on collections and items will be removed automatically

Since 4.15

Default false

14.2.7 System properties

System properties are set as argument to the JVM. See *Setting JVM options*.

The following properties are used in Vidispine:

com.vidispine.site

The site id prefix for the *current site*.

Default VX

com.vidispine.license.dir

The directory containing the Vidispine license or slave license file.

Default `${com.sun.aas.instanceRoot}`

Since 4.3

com.vidispine.license.tmpdir

The directory where temporary license files may be stored.

Default `${com.sun.aas.instanceRoot}`

Since 4.3

com.vidispine.credentials.dir

The directory containing credentials files such as the `AwsCredentials.properties` file used with Amazon S3 and Glacier.

Default `${com.sun.aas.instanceRoot}`

Since 4.3

com.vidispine.log.dir

The directory containing the server log files.

Default `${com.sun.aas.instanceRoot}/logs`

Since 4.3

vidispine.identifier.format

If `full`, output *Long identifiers*.

Default Normal, short identifiers.

com.vidispine.xml.prefix

Controls namespace prefix mapping of XML written by Vidispine that is *not* part of API output, e.g. XML written to files. Comma-separated list of `{namespace}={prefix}` assignments. Namespaces without assignment get a `ns#` prefix.

Default Only `ns#` prefixes.

Example `http://www.smpte-ra.org/schemas/2067-2/2016=cc`

Since 4.14

14.3 External identifiers

External ids can be set on entities to provide an alternate way of accessing them. For example, instead of using the `id` `VX-100` to access a particular storage, a custom external id such as `example_storage` can be used.

An external id is defined as the triple (entity type, namespace, value) and must be unique. The namespace is defined as the tuple (name, regular expression), where the regular expression is used to determine which namespace a given external id belongs to. It is therefore preferred that the set of possible values of a regular expression for a namespace is disjoint from the set of values for another namespace. Further note that set of values must also be disjoint from any *ids generated by the system*.

Managed namespaces using the *namespace resource*.

14.3.1 Priority

If the sets of possible values for all namespaces are disjoint, then no conflict exists. However, if they do have values in common there is an ambiguity regarding which namespace a particular value belongs to. This ambiguity is solved by that all namespaces have a priority value. Upon retrieving the namespaces they will be sorted in ascending ordering according to the priority value (thus making a namespace with a smaller value more important than a namespace with a larger value).

Example

Given two namespaces, `N1`, matching alphanumeric strings, and `N2`, matching all strings, with `N1` being more important than `N2`, then `N1` will always match alphanumeric strings and `N2` will match all other strings.

Namespace	Pattern	Priority
N1	[a-zA-Z0-9]+	5
N2	.+	10

If the priority values were reversed so that N2 had the smaller priority value, it would match all strings and N1 would match no strings.

14.3.2 Example: The UUID namespace

In this example we will create a namespace for UUIDs and assign a UUID as an external identifier for an item.

First we create the namespace and simply name it “uuid”.

```
PUT /external-id/uuid
Content-Type: application/xml

<ExternalIdentifierNamespaceDocument xmlns="http://xml.vidispine.com/schema/vidispine"
  <pattern>[A-Fa-f0-9]{8}\-[A-Fa-f0-9]{4}\-[A-Fa-f0-9]{4}\-[A-Fa-f0-9]{4}\-[A-Fa-f0-9]{12}</pattern>
  <priority>10</priority>
</ExternalIdentifierNamespaceDocument>
```

Then we assign a UUID to the item VX-11.

```
PUT /item/VX-11/external-id/69e436fe-eaed-4061-a66b-7d7c4bf80b20
```

Retrieving the definition:

```
GET /item/69e436fe-eaed-4061-a66b-7d7c4bf80b20/external-id
```

```
<ExternalIdentifierListDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <id>
    <entityId>VX-11</entityId>
    <entityType>Item</entityType>
    <namespace>uuid</namespace>
    <externalId>69e436fe-eaed-4061-a66b-7d7c4bf80b20</externalId>
  </id>
</ExternalIdentifierListDocument>
```

14.4 License handling

Vidispine requires a valid license in order to run. The license controls how many items and storages may exist in the system, and controls which encoders and decoders are available when transcoding.

License keys can be obtained here: <http://www.vidispine.com/license>

14.4.1 How it works

The license is a physical file which must reside in the Java application server domain folder. The file is either called `License.lic` or `slaveAuth.lic` depending on if the licensing is standalone/master or a slave setup.

The Vidispine license is tied to your systems [MAC address\(es\)](http://en.wikipedia.org/wiki/Mac_address) (http://en.wikipedia.org/wiki/Mac_address). For Cloud-based systems with non-persistent MAC-address allocation (such as Microsoft Azure), a master-slave license setup can be used to ensure proper licensing of a Cloud based Vidispine instance.

Standalone Vidispine transcoder nodes are licensed through the API and do not need a local license file.

License types

Development/test/demo license This type of license allows for unlimited numbers of everything, for a certain period of time. All transcoded content will be watermarked.

Production license This type of license will allow for a certain number of users, assets, storages, transcoders and codecs according to what's purchased. Transcoded content will *not* be watermarked.

Deployment license When installing Vidispine using the installer, a non-MAC bound deployment license will be installed. This license will allow you to verify that your system was properly installed. The license will allow for 2 users, 100 assets, 1 transcoder, 1 storage area, and encoding/decoding of all codecs supported by Vidispine. All transcoded content will be watermarked.

License errors

If the license file is missing or if you have exceeded the license limits, a HTTP response [402 Payment Required](http://www.w3.org/Protocols/rfc2616/rfc2616-sec10.html#sec10.4.3) (<http://www.w3.org/Protocols/rfc2616/rfc2616-sec10.html#sec10.4.3>) will be returned. Details on what limit(s) have been exceeded can be found from `GET /version`.

The response will also display the version numbers for the various installed Vidispine components.

14.4.2 Master-slave licensing

(Also called Cloud licensing)

This license model was introduced in order to license Vidispine instances running in environments with non-persistent MAC-address allocation, such as on virtual hosts, Microsoft Azure etc. The model allows you to set up your own license master to sublicense your Vidispine instances, i.e. slaves. Vidispine also offers a hosted master license service for such environments.

Note: The terms *master* and *slave* only refer to how the licensing is policed and has no relation to the actual role of your Vidispine instance.

Vidispine hosted license service

Vidispine offers a redundant online master license service for licensing of Vidispine systems in environments with non-persistent MAC-addresses. All you need is a `slaveAuth.lic` file for your server - contact us at license@vidispine.com for further information.

Connection to Vidispine master license service

The connection to the Vidispine master license service is done via HTTP and is tolerant to temporary error and outages.

If your infrastructure does not allow outbound HTTP connections, a proxy service can be used see [slaveLicenseProxy](#). (New in 4.2.5.)

Configure your own master-slave setup

In order to set up your own license master, the master node(s) must reside on a server with a persistent MAC-address.

You need the following files:

1. A master license key (`License.lic`) to license your master node.
2. A slave license key (`Slave.lic`) to be installed on your master node (via the API) in order to allow slaves to connect to the master.
3. A slave connection string file (`slaveAuth.lic`) on the slave node(s) in order for the slave(s) to find the master.

The master and slave licenses are paired together by the property `MasterIdentifier`, which needs to be equal in both files. The slave license and the slave connection string files are paired together by the property `SlaveIdentifier`, which needs to be identical in both files.

Your master node needs to run the full Vidispine middleware (API) to enable the license master service.

Contact us at license@vidispine.com to obtain a master & slave license key pair.

Install master license on master node

Copy the master license key `License.lic` to your Java application server domain root folder on the master node.

License validity and status can be seen in the response from `GET /version`.

Install slave license on master node

Copy the slave license key `Slave.lic` (corresponding to the master key) to a convenient location on the master node, such as the Java application server domain root folder (do not rename the slave license file to `License.lic`, as this will overwrite the master node license file).

Make a `PUT /license/slave` request on the master node to install the slave license:.

Example

Using GlassFish, if the slave license is called `Slave.lic` and is located in the domain root, the request should be:

```
$ curl -X PUT -uadmin:admin http://localhost:8080/API/license/slave?path=Slave.lic
```

Install slave connection string file on slave (manual)

Create a file named `slaveAuth.lic` containing the `SlaveIdentifier` and IP-numbers of your master node(s). Copy the file to your Java application server domain root folder on the slave node.

The `SlaveIdentifier` property value must be equal to the `SlaveIdentifier` value in your slave license key installed on the master. The `MasterIP` property value must equal the IP numbers or DNS addresses of your master node(s).

Example

```
SlaveIdentifier=your-slave-id
MasterIP=http://192.168.0.1:8080/, http://my.other.server:8080/
```

Multiple IPs (comma separated) are supported for redundancy. A slave will automatically fail over to the secondary master if the primary master goes down, and vice versa.

License validity and status can be seen from `GET /version`.

Install or update slave connection string (via the API)

The slave connection string can also be installed using `PUT /API/auth/license/auth-info`. For example:

```
PUT /API/auth/license/auth-info
Content-Type: application/xml

<SlaveAuthInfoDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <masterHost>http://192.168.0.1:8080/</masterHost>
  <masterHost>http://my.other.server:8080/</masterHost>
  <slaveId>your-slave-id</slaveId>
</SlaveAuthInfoDocument>
```

License validity and status can be seen from `GET /version`.

14.4.3 Slave management and monitoring

See *Slave management and monitoring* on how to manage and monitor the connected slaves.

14.4.4 Redundancy and timeouts

A heartbeat request is performed from the slaves towards the master every 60 seconds. A slave will automatically fail over to the secondary master if the primary master goes down, and vice versa. If the slave does not receive a valid license from any master within 180 minutes, the slave goes into read-only-mode and its entry will be deleted from the list of slaves on the masters. A request to `GET /version` on the slave will report “License status invalid”. The slave will go back to normal operation as soon as any of the masters become available again.

14.5 Using JavaScript to extend operations

JavaScript can be used to add integration code in a number of places, such as job tasks, transcode presets, naming scripts, etc. This article describes functions and utilities that are common to all JavaScript invocations.

If a script is not working as expected, then it is also possible to *debug the script* using Eclipse.

14.5.1 Common JavaScript functions

A number of global variables are defined for the script to use. It is also possible to add custom global JavaScript objects and functions, as described in *Add generic JavaScript code*.

The `api` object

The `api` object can be used to perform a synchronous HTTP request to the Vidispine API. By default the request will be performed as the user that created the job that is running, unless overridden by the script using the `api.user()` function.

These functions all return a new `api` object with the parameters of the function added to it, and should thus be chained as shown in the example below.

`api.path` (*path*)

Adds the given path to the API URI.

`api.queryParam` (*key*, *value*)

Adds a query parameter to the API URI.

`api.header` (*key*, *value*)

Adds a header parameter to the API URI.

New in version 4.12.

`api.dataType` (*type*)

The type of data that should be returned from the server.

Arguments

- **type** (*string*) – Supported types are `text`, `json` and `xml`, or a media type such as `application/json`. The default is `json`, `xml`.

`api.input` (*input*[, *type*])

The data to be sent. The content type is optional if the input is a JavaScript or XML object, but mandatory if input is a string (such as a JSON or a XML string).

Arguments

- **type** (*string*) – Supported types are `text`, `json` and `xml`, or a media type such as `application/json`.

`api.user` (*username*[, *password*])

The user to authenticate as. If no password is specified then the request will be authenticated using token authentication.

`api.timeout` (*timeout*)

Sets the timeout of the request.

Arguments

- **timeout** (*int*) – The timeout in milliseconds.

New in version 4.0.3.

Once the request parameters have been specified the request can be performed using one of these four functions:

`api.get` ()

Performs a GET request.

`api.put` ()

Performs a PUT request.

`api.post` ()

Performs a POST request.

`api.delete` ()

Performs a DELETE request.

For example, to retrieve the metadata and shapes for a specific item:

```
item = api.path("item").path(itemId)
    .queryParam("content", "metadata,shape")
    .get();
```

Rich output

By adding `rich()` on the `api` chain, more information about the HTTP response is given. Without `rich`, the operation functions (`api.get()` et al.) only return the value returned by the API, and throws an exception if the API returns an error.

`api.rich()`

With `rich`, the functions returns a JavaScript object, with the following properties:

- `output` - The response, parsed as an object.
- `response` - The response as a string.
- `status` - The HTTP status code.
- `httpheader-*` - The various HTTP headers, with the HTTP header name in lower case, e.g. `httpheader-content-length`.

New in version 4.0.3.

API call information

To aid in troubleshooting API calls, this function can be used to get information about the call that is about to be made.

`api.getInfo()`

New in version 4.0.3.

Returns

A JavaScript object with properties:

- `uri` - The URI of the request.
- `queryParams` - A `javax.ws.rs.core.MultivaluedMap` containing all of the query parameters.
- `headerCount` - Number of headers set.
- `inputIsXML` - True if the input is an XML object.
- `inputIsJSON` - True if the input is a JSON object.
- `returnTypes` - The media types that have been set using `api.dataType()`.
- `user` - The name of the user performing the request.
- `passwordIsSet` - True if the password has been set.

Changed in version 4.12: The `headerCount` property was added.

The http object

New in version 4.0.3.

The `http` object is similar to the `api` object, but can be used to invoke other HTTP resources. The `http` object needs to be used with the `http.uri()` function, which takes one parameter, the URI to be used.

`http.uri(uri) : ()`

Arguments

- **uri** (*string*) – The URI of the resource.

Example:

```
var uri = api.path('version').getInfo().uri;
http.uri(uri).user('admin', 'admin').dataType('JSON').get().licenseInfo.licenceType
```

The shell object

The `shell` object is used to invoke shell commands.

`shell.exec(command[, arg, ...][, options])`

Executes the command with the given arguments.

Arguments

- **command** (*string*) – The name of the command to execute.
- **arg** (*string*) – Any arguments to pass to the command.
- **options** – A JavaScript object with fields:
 - `timeout` - An optional timeout in milliseconds.
 - `input` - Optional input to send to standard input.
 - `output` - Optional `java.io.OutputStream` to contain the output from the command. If this field is specified then `output` will not be included in the response.
 - `err` - Optional `java.io.OutputStream` to contain the error output from the command. If this field is specified then `output` will not be included in the response.

Returns

An object with fields:

- `exitcode` - The return code (an integer) from the command.
- `output` - Standard output as a string.
- `err` - Standard error as a string.

A step that checks a file for viruses might for example look something like:

```
var file = ...
var result = shell.exec("clamscan", file);
if (result.exitcode == 1) {
  job.failFatal("Virus(es) found");
}
```

The logger object

New in version 4.0.3.

The `logger` object outputs information to the log file of the application server. If the JavaScript object is concatenated to a string, the full representation may not be shown.

```
logger.log('information is '+info);
```

This can be fixed by using the `logger.json()` function:

```
logger.log('information is '+logger.json(info));
```

`logger.log(message)`

Logs the given message to the application server log file.

Arguments

- **message** – The message to log. If this is a JavaScript object then it will automatically be transformed into JSON format.

`logger.json(object)`

Converts the given JavaScript object into JSON.

The metadatahelper object

Available to all JavaScript method since 4.14. The `metadatahelper` object contains some convenient functions for generating a new metadata object.

`metadatahelper.createMetadata()`

Returns a new *MetadataType*.

`metadatahelper.createMetadataTimespan(start, end)`

Returns a new *MetadataType.Timespan*.

Arguments

- **start** (*string*) – The start timecode. :param **end**: The end timecode.

`metadatahelper.createMetadataGroup(name)`

Returns a new *MetadataGroupValueType*.

Arguments

- **name** (*string*) – The name of the group.

`metadatahelper.generateMetadataField(name, value)`

Returns a new *MetadataFieldValueType*.

Arguments

- **name** (*string*) – The name of the field. :param **value**: The field value.

`metadatahelper.metadataToStr(metadata)`

Translate a metadata object to a string.

Arguments

- **metadata** – *MetadataType*

`metadatahelper.log(obj)`

Write the value of `obj.toString()` to the server log.

The following example script

```
var metadata = metadatahelper.createMetadata();
var timespan = metadatahelper.createMetadataTimespan("0", "100");
var group = metadatahelper.createMetadataGroup("mrk_marker");
var field1 = metadatahelper.createMetadataField("mrk_color", "red");
group.getField().add(field1);
timespan.getGroup().add(group);
metadata.getTimespan().add(timespan);
```

will generate a metadata object like this:

```
<MetadataDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <timespan start="0" end="100">
    <group>
      <name>mrk_marker</name>
      <field>
        <name>mrk_color</name>
        <value>red</value>
      </field>
    </group>
  </timespan>
</MetadataDocument>
```

The notification object

New in version 4.17.

The notification can be used to trigger notifications. It is available to JavaScript job steps and from the *JavaScript test resource*.

`notification.send(notificationId, data)`

Trigger the notification with the given id with the specified data. Returns the notifications id.

The `data` parameter must be a JavaScript object with string keys and values that are either string or a list of strings.

Arguments

- **notificationId** (*string*) – The id of the notification to be used.
- **data** (*object*) – A JavaScript object with the key-value data to send.

Examples

For example, to trigger a notification with id VX-45:

```
notification.send("VX-45", {
  "hello": "world"
});
```

The notification id can also be an external id, and multiple values can also be provided:

```
notification.send("external-system", {
  "hello": "world",
  "items": ["VX-1", "VX-2"]
});
```

The data shape and delivery method and destination is decided by the notifications action. For example, if the notification VX-45 was a HTTP notification with a content-type set to `application/xml`, that notification endpoint would receive:

```
<SimpleMetadataDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <field>
    <key>hello</key>
    <value>world</value>
  </field>
</SimpleMetadataDocument>
```

14.5.2 Debugging JavaScript

New in version 4.0.3.

The JavaScript code can be debugged using Eclipse. The configuration property `debugJavaScript` controls if debugging is enabled or not. With this setting set to `true`, all JavaScript code will wait for a remote debugger to attach before continuing.

1. **Enable JavaScript debugging.** Set the configuration property `debugJavaScript` to `true`.
3. **Set up Eclipse.** To set up Eclipse for debugging, select *Run* → *Debug Configurations...* and create a new Remote JavaScript configuration. Use Mozilla Rhino as Connection, and port 59000. The port can be changed using the configuration property `debugJavaScriptPort`.

For Source Lookup Path, select a File System Directory, and point it to any existing directory. The directory does not have to contain the source files; it will be sent via the Mozilla Rhino connector.

3. **Execute a script.** Now, Eclipse is ready to connect. To test, **POST** (<http://www.w3.org/Protocols/rfc2616/rfc2616-sec9.html#sec9.5>) some JavaScript code to `API/javascript/test`, e.g. using `curl`:

```
$ curl -uadmin:admin -Hcontent-type:application/javascript \
localhost:8080/API/javascript/test -X POST --data-binary \
'var a=3;
var b=4;
a+b;'
```

If `debugJavaScript` is `true`, then the call will not return immediately.

4. **Connect the debugger.** In Eclipse, choose *Run* → *Debug Configurations...*, select the created configuration and choose *Debug*.

Eclipse should show a file named `testscript-xxxx.js` or similar in the source window. The first line includes the text `debugger;`. This is intentional and can be ignored; it is only added so that the debugger will actually start in suspended mode.

Also, when the script starts, a random line – typically the second or third – is selected. Single-step once and the first line should be selected and the actual debugging can start. After the script has completed, the API call returns.

14.5.3 Interfacing with the JavaScript engine manually

New in version 4.0.3.

In order to test functionality, the JavaScript engine can be called manually. For more information, see *JavaScript*.

14.5.4 Add generic JavaScript code

In order to avoid redundant code, it is possible to register JavaScript code in a “global library”. This is done using configuration properties of the form `javascript-{extension}`, where `extension` is any suffix.

When doing this, all code that is in the `javascript-` properties will be executed before the specific code. Multiple properties can be added, and will be parsed in lexical order. It is advised that only definitions (`function`) are made, and not direct statements, in order to avoid confusion.

Example

```
$ curl -uadmin:admin -Hcontent-type:text/plain \
localhost:8080/API/configuration/properties/javascript-1234 -X PUT --data-binary \
'function add(a,b) {
  return a+b;
}'
$ curl -uadmin:admin -Hcontent-type:application/javascript \
localhost:8080/API/javascript/test -X POST --data-binary \
'var a=3;
var b=4;
add(a,b);'
```

14.6 Archive Integration

Vidispine has no built in integration with any archive vendors. It is however possible to write your own integration scripts which Vidispine will then invoke when a file is to be archived.

14.6.1 Creating an archive storage

In order to get a working integration with an external archive, a special storage must be created with type `ARCHIVE`. For this integration to work, a script must be associated with the storage (described below).

Example

Creating an `ARCHIVE` storage:

```
POST /storage
```

```
<StorageDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <type>ARCHIVE</type>
  <capacity>1000000000</capacity>
  <archiveScript><![CDATA[
...
]]></archiveScript>
</StorageDocument>
```

Integrating with an archive using JavaScript

To enable integration, a JavaScript must be written which will perform the actual archive operation. In order to be as flexible as possible, this script can both make API calls to Vidispine (*The api object*), and invoke shell operations (*The*

shell object).

The script also has access to a `file` object. This object has the following functions defined:

`file.getMetadata(key)`

If the specified metadata key is set on the file, the value is returned, otherwise null.

`file.setMetadata(key, value)`

Sets the specified key-value pair as metadata on the file.

`file.getAllMetadata()`

Returns a map of all file metadata.

The script must as its last assignment define an object with the following properties:

- `archive` - A function invoked when an archive is to be performed.
- `restore` - A function invoked when a restore is to be performed.
- `remove` - A function invoked when a delete is to be performed.
- `restorePartial` - A function invoked when a partial restore is to be performed. This function is optional. If it is missing and a partial restore is requested, the `restore` function will be invoked.

Example

A simple archive script. This script only performs file system copies and removes.

```
function getFilePath(url) {
  if (url.indexOf('file:///') === 0) {
    url = url.substring(7);
  }
  if (url.indexOf('file:/') === 0) {
    url = url.substring(5);
  }
  if (url.indexOf('/C:/') === 0) {
    url = url.substring(1);
  }
  return url;
}

o = {
  "archive": function(uri, id, data) {
    var archivePath = getFilePath(data.archiveDir);
    var path = getFilePath(uri);
    var filename = uri.substring(uri.lastIndexOf('/')+1);

    logger.log('Running command "cp '+path+' '+archivePath);

    var result = shell.exec('cp', path, archivePath);
    if (result.exitcode > 0) {
      throw "Failed to copy file to archive: "+result.err;
    } else {
      file.setMetadata('uri', archivePath+filename);
    }
  },
  "restore": function(uri, id, data) {
    var path = getFilePath(uri);
    var loc = getFilePath(file.getMetadata('uri'));
  }
}
```

```

logger.log('Running command "cp '+loc+' '+path);

var result = shell.exec('cp', loc, path);
if (result.exitcode > 0) {
    throw "Failed to copy file from archive: "+result.err;
}
},
"remove": function(id, data) {
    var loc = getFilePath(file.getMetadata('uri'));

    logger.log('Running command "rm '+loc);

    var result = shell.exec('rm', loc);
    if (result.exitcode > 0) {
        throw "Failed to remove file: "+result.err;
    }
}
};

```

14.6.2 Amazon Glacier

New in version 4.1.1.

Vidispine can archive files on Amazon Glacier. There are two different ways this can be achieved:

- Creating a separate Glacier storage and move files from other storages there for archival.
- Using an S3 storage and transition objects to the Glacier storage class.

Creating a dedicated Glacier storage

To create a storage used solely for Glacier archiving, you need to create a storage with an XML document like this:

```

<StorageDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <type>ARCHIVE</type>
  <bean>GlacierBean</bean>
  <capacity>1000000000000000</capacity>
  <metadata>
    <field>
      <key>glacierVaultName</key>
      <value>{vault name}</value>
    </field>
    <field>
      <key>glacierEndpoint</key>
      <value>https://glacier.us-east-1.amazonaws.com/</value>
    </field>
  </metadata>
</StorageDocument>

```

Files can then be moved to this storage either using storage rules or by initiating a copy job (*Create a file move/copy job*). Restore jobs must be initiated using storage rules.

Note that restore jobs typically take several hours, and the restore job will be put in the WAITING state while the restore initiation is in progress. This is to allow other jobs to run during this time.

Transitioning files From S3 to Glacier

There is no way, using the AWS SDK, to directly initiate a transition to the Glacier storage class for a single object. Instead, [Object Lifecycle Management](http://docs.aws.amazon.com/AmazonS3/latest/dev/object-lifecycle-mgmt.html) (<http://docs.aws.amazon.com/AmazonS3/latest/dev/object-lifecycle-mgmt.html>) must be used. Vidispine will automatically detect when a transition to the Glacier class has happened, and put the file in the ARCHIVED state.

To restore a file so that it can be read directly, you can use the following request:

PUT {file-resource}/restore

Triggers a request to Glacier to initiate a restore.

Once the restore is complete, the file will be put in CLOSED state, and will be available for direct access.

The `expirationInDays` parameter has to be set and specifies how long the restored files should be available. Once it has expired, it will be removed from direct access and once again end up in the ARCHIVED state.

Query Parameters

- **extraData** – Additional parameters relevant for the restore, in the form of `key=value`. Specify multiple parameters using multiple query parameters.

expirationInDays={number-of-days} How long the restored files should be available.

Deprecated since version 4.9: Use the `expirationInDays` query parameter instead.
- **expirationInDays** – Required parameter. How long the restored files should be available.

New in version 4.9.
- **retrievalTier** – Optional parameter to set the [Glacier retrieval tier](http://docs.aws.amazon.com/AmazonS3/latest/dev/restoring-objects.html) (<http://docs.aws.amazon.com/AmazonS3/latest/dev/restoring-objects.html>) to use when restoring the file. Can be set to either `Expedited`, `Standard` or `Bulk`.

New in version 4.9.

Produces

- **text/plain** – Informational text.

Status Codes

- **400 Invalid Input** – Amazon rejects the restore request, a parameter value is invalid.
- **404 Not Found** – The file was not found.

14.6.3 Atempo Digital Archive Integration

New in version 4.12.

Vidispine can archive from and retrieve files to any storage location which has a corresponding agent set up in an Atempo Digital Archive environment. In such a setup, each archive location would be defined as a separate storage, and any agent would also have a corresponding storage.

To set up an Atempo archive storage, use the following storage XML:

```
<StorageDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <type>ARCHIVE</type>
  <bean>AtempoDigitalArchiveBean</bean>
  <capacity>1000000000000000</capacity>
  <metadata>
```

```

<field>
  <key>atempoWebServiceEndpoint</key>
  <value>http://atempo-lto/meta/C9ABD9AAD3883A8CFD3EEB922C90B3F3/721b786531/ADA/
↪WS</value>
</field>
<field>
  <key>atempoRootPath</key>
  <value>/</value>
</field>
<field>
  <key>atempoArchiveName</key>
  <value>AMM</value>
</field>
</metadata>
</StorageDocument>

```

And for each storage that has a corresponding agent, the storage XML should look like this (note the storage metadata);

```

<StorageDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <type>LOCAL</type>
  <autoDetect>true</autoDetect>
  <method>
    <uri>file:///mnt/storage/</uri>
    <read>true</read>
    <write>true</write>
    <browse>true</browse>
  </method>
  <metadata>
    <field>
      <key>atempoRootPath</key>
      <value>/mnt/atempo-agent1/</value>
    </field>
    <field>
      <key>atempoAgentName</key>
      <value>atempo-agent1</value>
    </field>
  </metadata>
</StorageDocument>

```

Now, to archive a file residing on the agent storage, all that is needed is to start a normal file copying job. The same mechanism is used to restore from the archive to the agent.

14.6.4 Front Porch Diva Integration

New in version 4.1.

Requirements

- StoragePlugin.jar

Installation

Deploy StoragePlugin.jar in GlassFish:

- Open the web administration console.

- Navigate to *Applications*.
- Click *Deploy...* and select the *StoragePlugin.jar* file.
- Make sure that *Type* is set to *EJB Jar* and that *Compatibility* is selected.
- Click *OK*.

Configuration

Set up a shared folder which is accessible by both Vidispine and DIVarchive manager.

POST the following document to `/API/storage`

```
<StorageDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <type>ARCHIVE</type>
  <capacity>1000000000000</capacity>
  <bean>DIVABean</bean>
  <metadata>
    <field>
      <!-- SSH host -->
      <!-- this is the hostname of the DIVA SSH service -->
      <key>hostname</key>
      <value>187.47.11.109</value>
    </field>
    <field>
      <!-- SSH username -->
      <!-- this is the username for the DIVA SSH service -->
      <key>username</key>
      <value>diva</value>
    </field>
    <field>
      <!-- SSH password -->
      <key>password</key>
      <value>diva</value>
    </field>
    <field>
      <!-- SSH port -->
      <key>port</key>
      <value>22</value>
    </field>
    <field>
      <!-- path to the shared folder on vidispine server -->
      <key>storagePath</key>
      <value>/shared/storage/</value>
    </field>
    <field>
      <!-- hostname or IP address for the DIVA manager -->
      <key>DIVAHostname</key>
      <value>187.47.11.109</value>
    </field>
    <field>
      <!-- TCP port for the DIVA manager -->
      <key>DIVAPort</key>
      <value>9065</value>
    </field>
    <field>
      <!-- Media name designates either a group of tape, or an array of disk
```

```

        declared in the configuration where the instance has to be created. -->
    <key>DIVAMediaName</key>
    <value>default</value>
</field>
<field>
    <!-- category -->
    <key>DIVACategory</key>
    <value>default</value>
</field>
<field>
    <!-- restore is not yet implemented -->
    <key>DIVARestoreDestination</key>
    <value></value>
</field>
<field>
    <!-- path to shared folder on DIVA server -->
    <key>DIVAFilePathRoot</key>
    <value>C:/shared/storage/</value>
</field>
<field>
    <!-- The value of this option is the name of the source/destination to be used
         by the specified command: archive, restore, copy... This server name
         must be a valid name as configured in the DIVA system. -->
    <key>DIVAServerName</key>
    <value>disk</value>
</field>
</metadata>

<method>
    <uri>file:///shared/storage/</uri>
    <read>true</read>
    <write>true</write>
    <browse>true</browse>
</method>
</StorageDocument>

```

Usage

To archive a file, copy it to the shared folder and wait for Vidispine to detect its presence. Once Vidispine has found the file, import it to trigger archiving.

Example using curl:

```
curl -X POST -uadmin:admin 'http://localhost:8080/API/storage/VX-4/file/VX-1/import' -
-Hcontent-type:application/xml -d '<MetadataDocument/>'
```

Archiving should begin shortly.

14.7 S3 Event Notifications

New in version 4.4.

Vidispine supports polling Amazon SQS for S3 events, to detected changes on the Amazon bucket. This makes it less expensive to detect file changes on S3 buckets.

14.7.1 Configure S3 notifications

1. Create an Amazon SQS queue. You could create the queue from either the [AWS Management Console](http://console.aws.amazon.com/) (<http://console.aws.amazon.com/>) or using the SQS SDK. Make sure that the S3 bucket is allowed to send messages to the queue, for example, using a policy like:

```
{
  "Version": "2012-10-17",
  "Statement": [
    {
      "Sid": "1",
      "Effect": "Allow",
      "Principal": {
        "AWS": "*"
      },
      "Action": [
        "sqs:*"
      ],
      "Resource": [
        "arn:aws:sqs:eu-west-1:12121221212:exampleQueue"
      ],
      "Condition": {
        "ArnLike": {
          "aws:SourceArn": [
            "arn:aws:s3:*:*:bucketname"
          ]
        }
      }
    }
  ]
}
```

Note:

- Use one queue per bucket. Don't send events from multiple buckets to the same queue, as this is not supported by Vidispine.
 - Vidispine will connect to the queue using the credentials from the S3 method URI, so that user must have access to both the bucket and SQS queue.
-

2. Configure the S3 bucket to send *ObjectCreated:** and *ObjectRemoved:** events to SQS. The notifications can be set up from the S3 bucket properties in the AWS Management Console, or using the S3 SDK.

14.7.2 Configure the storage

1. To have Vidispine poll a SQS queue instead of scanning a S3 bucket, set the storage method metadata *sqsName* and *sqsEndpoint* to enable this feature:

```
PUT /storage/VX-1/method/VX-2/metadata/sqsName
Content-Type: text/plain

s3-event-queue
```

```
PUT /storage/VX-1/method/VX-2/metadata/sqsEndpoint
Content-Type: text/plain
```



```
sqs.eu-west-1.amazonaws.com
```

```
GET /storage/VX-1
```

```
<?xml version="1.0" encoding="UTF-8" standalone="yes"?>
<StorageDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  ...
  <method>
    <uri>s3://bucketname/</uri>
    ...
    <metadata>
      <field>
        <key>sqsName</key>
        <value>s3-event-queue</value>
      </field>
      <field>
        <key>sqsEndpoint</key>
        <value>sqs.eu-west-1.amazonaws.com</value>
      </field>
    </metadata>
  </method>
  ...
</StorageDocument>
```

2. Then make sure that the storage metadata `refreshOnStart` is `true` (this is the default).

Due to the distributed nature of Amazon SQS, the messages come `unordered` (<http://docs.aws.amazon.com/AWSSimpleQueueService/latest/SQSDeveloperGuide/DistributedQueues.html>). On every start up, Vidispine will need to purge the queue and do a full scan of the storage, to sync the file list with database.

3. You can then set the storage to be scanned less often by setting `refreshInterval` to a larger number than default, for example 1 hour.

Every `refreshInterval`, Vidispine will perform a full scan, as a precaution of any possible inconsistency.

You can check the storage method status (`lastSuccess`, `lastFailure`, `failureMessage`) to determine if the configuration is correct or not. For example, if a non-existing queue is specified:

```
<failureMessage>
  Error polling SQS: The specified queue does not exist for this wsdl version. (...)
</failureMessage>
```

14.8 Signiant Integration

Vidispine can initiate transfers between storages using Signiant. Some configuration is needed in order for this to work. Once all required configuration is set, Signiant will automatically be used for transfers between configured storages.

14.8.1 General system configuration

The following configuration properties must be set:

`signiantManagerHost` The hostname of the Signiant manager.

signiantManagerUser The manager username.

signiantManagerPassword The manager password.

14.8.2 Storage configuration

The following metadata field must be set on the source and destination storage (*Key-value metadata*).

signiantAgent

The name of the agent connected to this storage. This can also be set to an agent group using the format `<group_name>!<organization_number>`.

Storage methods

Each Signiant enabled storage needs a `file:/` storage method. This will be used to determine the source and destination paths for transfers.

14.9 Aspera Integration

Vidispine can initiate transfers between storages using Aspera. For this to work, the source and destination storages must first be configured properly.

14.9.1 Source storage configuration

The following metadata fields must be set on the storage (*Key-value metadata*).

asperaRootPath The absolute path to the storage root

Example `/usr/local/aspera-storage/`

asperaWsdllLocation The URL to the FIMS WSDL file for the Transfer Service

Example `http://10.18.12.10:8080/FIMS/TransferService?wsdl>`

asperaStatusWsdllLocation The URL to the FIMS WSDL for the Transfer Status Service.

Example `http://10.18.12.10:8080/FIMS/TransferStatusService?wsdl>`

If performing a transfer from this storage, and the destination is an Aspera URL, then Aspera will be used for the transfer.

14.9.2 Destination storage configuration

asperaDestinationUri The Aspera URI corresponding to the root folder of this storage

Example `fasp://10.18.12.11:22/usr/local/aspera-destination?user=username&password=`

If a transfer is initiated to this storage, and the source storage is also configured for Aspera transfer, then Aspera will be used for the transfer.

14.10 Aspera FASP Integration

New in version 4.8.

Vidispine can initiate transfers between storages using Asperas FASP Manager. For this to work, firstly, Aspera FASP client must be installed with a server license in order to be able to transfer any files. Secondly, the source or destination storage must be configured properly.

14.10.1 Transfer type

Two different transfers are supported:

1. Transfer from a local storage (with a `file` URI method) to a FASP storage.
2. Transfer from a FASP storage to a local storage (with a `file` URI method).

14.10.2 Storage configuration

To specify that FASP can be used to transfer from/to a storage, a special Storage Method should be added:

URI `fasp://{user}:{password}/{host}[:{port}]/{any relative path from the Fasp root}?{query parameters}`

type `TRANSFER`

The following query parameters are supported:

targetrate The target/maximum rate of the transfer, in kbit/s.

The default value is: `targetrate = 10000`

minrate The minimum rate of the transfer, in kbit/s.

The default value is: `minrate = 0`

udp FASP uses UDP and TCP ports to transfer a file.

The default value is: `udp = 33001`

tcp FASP uses UDP and TCP ports to transfer a file.

The default value is: `tcp = 22`

overwrite `overwrite` handles if the transferred file have the exact same name as another file in the destination folder.

`overwrite` can be specified to `always` (always overwrite), `never` (never overwrite), `diff` (overwrite if the content is different), `older` (overwrite if the transferred file is newer) or `diffandolder`.

The default value is: `overwrite = diff`

Example

Assume that Vidispine and Aspera FASP client runs on the same server, and that you want to create a storage which can handle FASP transfers. Further assume that in FASP there is a user `usr` with password `passw` and the storage directory is at `/temp/`. Further, assume that FASP is running on port 2100.

Then the storage should look like:

```
<StorageDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <type>LOCAL</type>
  <method>
    <uri>file:///temp/</uri>
    <read>true</read>
    <write>true</write>
    <browse>true</browse>
    <type>NONE</type>
  </method>
  <method>
    <uri>fasp://usr:passw@localhost:2100/temp/?targetrate=5000&minrate=1000&udp=33002&
    ↪tcp=23&overwrite=always</uri>
    <type>TRANSFER</type>
  </method>
</StorageDocument>
```

14.11 FileCatalyst Integration

New in version 4.2.3.

Vidispine can initiate transfers between storages using FileCatalyst. For this to work, the source and/or destination storages must first be configured properly.

14.11.1 Transfer type

Three different transfers are supported:

1. Transfer between two storages listed in FileCatalyst Server.
2. Transfer from a local storage (with a `file` URI method) and a storage listed in FileCatalyst Server.
3. Transfer from a storage listed in FileCatalyst Server to a local storage.

14.11.2 Storage configuration

To specify that FileCatalyst can be used to transfer from/to a storage, a special Storage Method has to be added:

URI filecatalyst://{user}:{password}/{host}[:{port}]/{any relative path from the FileCatalyst root}

type TRANSFER

Example

Assume that Vidispine and FileCatalyst runs on the same server, and that you want to create a storage to handle `/srv/media/incoming`. Further assume that in FileCatalyst there is a user `fc` with password `s3cret` which has is FileCatalyst home root directory at `/srv/media`. Further, assume that FileCatalyst is running on port 2100.

Then the storage should look like:

```
<StorageDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <type>LOCAL</type>
  <method>
    <uri>file:///srv/media/incoming/</uri>
```

```

<read>true</read>
<write>true</write>
<browse>true</browse>
<type>NONE</type>
</method>
<method>
  <uri>filecatalyst://fc:s3cret@localhost:2100/incoming/</uri>  <!-- /srv/media +
↳incoming = /srv/media/incoming -->
  <type>TRANSFER</type>
</method>
</StorageDocument>

```

14.12 MXFserver Integration

The MXFserver plugin allows Vidispine to integrate with MXFserver. The plugin allows collections to be created in Vidispine, representing business units, sections, modules, episodes and projects (here called **entities**.) Items added to a project collection will automatically be added to the MXFserver project.

14.12.1 Set up

The plugin can also extend *LDAP* so that business units and sections are created for imported users.

A JDBC resource should be configured in your application server for connecting to the MXFserver MySQL database. The `databaseName` element can be used to specify the JNDI name of the JDBC resource (default=`jdbc/mxfserver`). Typical connection pool settings are:

General settings	
Datasource Classname	com.mysql.jdbc.jdbc2.optional.MysqlDataSource
Resource Type	javax.sql.DataSource

Additional properties	
Url	jdbc:mysql://<mxfserver-ip-address>:3307/system5
User	<username>
Password	<password>

Requirements

- The [MySQL JDBC driver](http://www.mysql.com/products/connector/) (<http://www.mysql.com/products/connector/>) , installed into GlassFish (`$GLASSFISH/lib`).

Installation

1. Configure the plugin by creating a MXFserver resource containing the MXFserver settings, by making a POST request to `API/resource/mxfserver` containing:

```

<?xml version="1.0" encoding="UTF-8" standalone="yes"?>
<ResourceDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <mxfserver>
    <url>http://192.168.38.200:11000/mxfserver/</url>
    <workspaceUrl>file:///mnt/mxfserver/</workspaceUrl>
    <mxfServerWorkspacePath>C:\storage\Workspaces\</mxfServerWorkspacePath>
  </mxfserver>
</ResourceDocument>

```

```
<mxfServerUserId>1</mxfServerUserId>
<mxfServerPathToStorage>C:\storage\Vidispine\</mxfServerPathToStorage>
<storageId>VX-1</storageId>
<db-host>192.168.38.200</db-host>
<db-port>3307</db-port>
<db-username>root</db-username>
<db-password>Mastermeta</db-password>
<atomShapes>atom</atomShapes>
<importShapes>hd,original</importShapes>
</mxfserver>
</ResourceDocument>
```

In the example above the (first) shape with the `hd` tag should be imported, if one exists, and the `original` shape should be used otherwise.

The elements are:

mxfServerWorkspacePath The path to the workspaces directory used by MXFserver.

mxfServerUserId The Vidispine MXFserver user id.

mxfServerPathToStorage The path to the Vidispine storage `storageId` as seen by MXFserver.

storageId The storage that contains the files that should be imported into MXFserver. Must be on the same file system as the MXFserver workspaces directory.

atomShapes Should contain the tags of the shapes that contain OP-Atoms, and for which QuickTime reference files will be created.

importShapes Contains the shapes that should be considered for import into a MXFserver project, ordered by priority.

2. Enable the plugin by setting the following configuration properties:

Property	Value	Note
<code>collectionPluginBean</code>	<code>MxfServerCommunicator</code>	
<code>ldap.import.plugins</code>	<code>MxfServerUserImportPlugin</code>	
<code>ldap.attr.businessUnit</code>	<code>Department</code>	
<code>ldap.attr.section</code>	<code>UoSCourse</code>	
<code>ldap.groupsAsFunctions</code>	<code>TRUE/FALSE</code>	(1)

- (a) If enabled then MXFserver functions will be created with the same names as the groups found in the directory.

3. To enable automatic import of new media added to projects, the MXFserver configuration file `Mxfserver.ini` needs to be updated with:

```
[API_OPTIONS]
notifyNewFilesHTTPLocation=http://[Vidispine server address]/MxfServerAPI/import
```

14.12.2 Usage

MXFserver entities are in Vidispine simply created as collections. A number of additional parameters are required, depending on the type of entity to create, as shown below. See *Collections* for more on how to manage collections.

Note that a collection will automatically be added as a child to the parent collection.

The query parameters are:

name={collection-name} The name of the collection and MXFserver entity.

type={entity-type} The type of MXFserver entity. Either businessUnit, section, programme, episode or project.

parent={parent-collection-id} The id of the parent collection/entity.

projectType={project-type} The type of MXFserver project.

projectBaseId={project-base-id} The project template to extend.

Example

Creating the MXFserver project hierarchy.

```
POST /API/collection/?name=NameOfBusinessUnit&type=businessUnit
```

```
POST /API/collection/?name=NameOfSection&type=section&parent=VX-1
```

```
POST /API/collection/?name=NameOfProgram&type=programme&parent=VX-2
```

```
POST /API/collection/?name=NameOfEpisode&type=episode&parent=VX-3
```

With a FCP (projectType=2) project based on the FCP7 template (projectBaseId=30).

```
POST /API/collection/?name=NameOfProject&type=project&parent=VX-4&projectType=2&
↳projectBaseId=30
```

Caution: Note that projects can be created at any level in the hierarchy. However, the MXFserver client only allows projects to be created if an episode has been selected. An episode must also be selected before the details of a project can be edited and saved, which if done would cause Vidispine to be out of sync with MXFserver (it's one way sync from VS to MXFserver only.)

14.13 EVS IP Director Integration

New in version 4.1.

It is possible to map data inside “log info” (<Log>) in a EVS metadata file to Vidispine metadata.

14.13.1 Example

Import the EVS metadata file as a sidecar file with your essence file:

```
POST /import?URL=/vidispine/demo.dv&sidecar=file:///path/to/evs.metadata.xml"
```

so a EVS metadata that looks like this:

```
<EVS_Metadata Revision="1">
  <General_Infos>
    ...
  </General_Infos>
  <Clips_Infos>
    <Clip>
      <XFile_Clip_Infos>
```

```

...
</XFile_Clip_Infos>
<Other_Clip_Infos>
...
  <Logs>
    <Log DBVersion="0" GUID="2b9de077-8e4d-4e48-ac8f-b2cdc05b0805" Version="2.0.
↪1">
      <Date>21-Apr-2013</Date>
      <TC>15:00:33:01 </TC>
      <DateUser>21-Apr-2013</DateUser>
      <TCUser>15:00:33:01 </TCUser>
      <TCTable>1</TCTable>
      <Description>Mål av: 11. Selakovic, Stefan</Description>
      <TapeID />
      <InterestLevel>0</InterestLevel>
      <Colour>0</Colour>
      <AvidColour>#000000</AvidColour>
      <Keywords>
        <Keyword Type="Keyword">Mål</Keyword>
        <Keyword Type="Keyword">HBK</Keyword>
        <Keyword Type="Participant">11. Selakovic, Stefan</Keyword>
      </Keywords>
      <AutomaticKeywords>
        <AutomaticKeyword Description="" Header="Attendance" Type="NUMBER">4011
↪</AutomaticKeyword>
        <AutomaticKeyword Description="" Header="Away Team" Type="TEXT">Kalmar_
↪FF</AutomaticKeyword>
        <AutomaticKeyword Description="" Header="HalfTimeScore" Type="TEXT">1-0
↪</AutomaticKeyword>
      </AutomaticKeywords>
    </Log>

  </Other_Clip_Infos>
</Clip>
</Clips_Infos>
</EVS_Metadata>

```

will be translated to Vidispine metadata like:

```

<?xml version="1.0"?>
<timespan start="1350826@PAL" end="1350851@PAL">
  <group uuid="a0c2d689-bee3-48ea-8708-5228e533382c" user="admin" timestamp="2013-11-
↪29T11:50:21.938+01:00" change="VX-8131">
    <name>EVS_Log</name>
    <field uuid="2eb192e7-1af8-4cde-9083-93e5c4c922bd" user="admin" timestamp="2013-
↪11-29T11:50:21.938+01:00" change="VX-8131">
      <name>EVS_AvidColour</name>
      <value uuid="2d060045-bd11-4d17-bba2-5327d51d3ee7" user="admin" timestamp="2013-
↪11-29T11:50:21.938+01:00" change="VX-8131">#000000</value>
    </field>
    <field uuid="9efabf9f-003d-437a-a459-3c1f9a4a306e" user="admin" timestamp="2013-
↪11-29T11:50:21.938+01:00" change="VX-8131">
      <name>EVS_Colour</name>
      <value uuid="014a932c-bfc3-4a36-a209-c4f9f3389b0b" user="admin" timestamp="2013-
↪11-29T11:50:21.938+01:00" change="VX-8131">0</value>
    </field>
    <field uuid="48323112-c06b-4ef3-855f-550f422f5d83" user="admin" timestamp="2013-
↪11-29T11:50:21.938+01:00" change="VX-8131">

```



```

    <name>EVS_InterestLevel</name>
    <value uuid="264c55a3-4679-439d-ac2a-dd63f7e57b93" user="admin" timestamp="2013-
↪11-29T11:50:21.938+01:00" change="VX-8131">0</value>
  </field>
  <field uuid="f035327f-c006-49cb-8ed3-2d4c78fd35e7" user="admin" timestamp="2013-
↪11-29T11:50:21.938+01:00" change="VX-8131">
    <name>EVS_TapeID</name>
    <value uuid="81cc0f37-cf8d-4b3c-9641-a94367aa4ald" user="admin" timestamp="2013-
↪11-29T11:50:21.938+01:00" change="VX-8131"/>
  </field>
  <field uuid="ba4bc026-5900-4215-be94-515b4568379a" user="admin" timestamp="2013-
↪11-29T11:50:21.938+01:00" change="VX-8131">
    <name>EVS_Description</name>
    <value uuid="ed800484-c646-46b7-8530-e6487f2dc637" user="admin" timestamp="2013-
↪11-29T11:50:21.938+01:00" change="VX-8131">Mål av: 11. Selakovic, Stefan</value>
  </field>
  <field uuid="3742dfef-a100-4980-9db5-d3281342b9a8" user="admin" timestamp="2013-
↪11-29T11:50:21.938+01:00" change="VX-8131">
    <name>EVS_TCTable</name>
    <value uuid="06490341-dae1-42d7-a81a-abea7015bcb3" user="admin" timestamp="2013-
↪11-29T11:50:21.938+01:00" change="VX-8131">1</value>
  </field>
  <field uuid="09f4af36-05f2-43f5-a063-ddc680ef18f4" user="admin" timestamp="2013-
↪11-29T11:50:21.938+01:00" change="VX-8131">
    <name>EVS_TCUser</name>
    <value uuid="5e38b2cd-3d06-4a5a-8358-b6da51a58637" user="admin" timestamp="2013-
↪11-29T11:50:21.938+01:00" change="VX-8131">15:00:33:01 </value>
  </field>
  <field uuid="48df81fc-4ba3-4ad8-847f-22521a0ae89b" user="admin" timestamp="2013-
↪11-29T11:50:21.938+01:00" change="VX-8131">
    <name>EVS_Date</name>
    <value uuid="bfc7b8e1-aa98-4f32-ad50-30e899c67834" user="admin" timestamp="2013-
↪11-29T11:50:21.938+01:00" change="VX-8131">21-Apr-2013</value>
  </field>
  <field uuid="b397b900-d869-4457-9351-e08fb53a5670" user="admin" timestamp="2013-
↪11-29T11:50:21.938+01:00" change="VX-8131">
    <name>EVS_TC</name>
    <value uuid="45a6e2f3-2111-45ee-aa38-4373d710bc29" user="admin" timestamp="2013-
↪11-29T11:50:21.938+01:00" change="VX-8131">15:00:33:01 </value>
  </field>
  <field uuid="87993aa8-6c61-49c8-a834-fb73649db7b7" user="admin" timestamp="2013-
↪11-29T11:50:21.938+01:00" change="VX-8131">
    <name>EVS_DateUser</name>
    <value uuid="ea2b8cdd-4e91-4468-bbe7-00342f194ecd" user="admin" timestamp="2013-
↪11-29T11:50:21.938+01:00" change="VX-8131">21-Apr-2013</value>
  </field>
  <group uuid="d6db1d19-4bb5-41cc-a01b-faaa41eadf13" user="admin" timestamp="2013-
↪11-29T11:50:21.938+01:00" change="VX-8131">
    <name>EVS_Keywords</name>
    <field uuid="26755143-ad34-45b5-a68f-e0d6407beb5a" user="admin" timestamp="2013-
↪11-29T11:50:21.938+01:00" change="VX-8131">
      <name>EVS_Keyword</name>
      <value uuid="eb83876d-0852-4b82-912d-4468324ff5e7" user="admin" timestamp=
↪"2013-11-29T11:50:21.938+01:00" change="VX-8131">11. Selakovic, Stefan</value>
    </field>
    <field uuid="1b8f7603-3623-4ae7-9b18-ac363973c2ae" user="admin" timestamp="2013-
↪11-29T11:50:21.938+01:00" change="VX-8131">
      <name>EVS_Keyword</name>

```

```

    <value uuid="812085e9-175e-44f0-a74e-b27dec67dd33" user="admin" timestamp=
↪"2013-11-29T11:50:21.938+01:00" change="VX-8131">HBK</value>
    </field>
    <field uuid="acb9a9b6-06d1-4e9a-8838-ab7efac97b59" user="admin" timestamp="2013-
↪11-29T11:50:21.938+01:00" change="VX-8131">
        <name>EVS_Keyword</name>
        <value uuid="bd148e7d-f7d3-446d-8147-6af9cee23127" user="admin" timestamp=
↪"2013-11-29T11:50:21.938+01:00" change="VX-8131">Mål</value>
        </field>
    </group>
</group>
</timespan>

<timespan start="-INF" end="+INF">
    <group uuid="90cf23d4-2555-48b5-a38c-f284076f8cdd" user="admin" timestamp="2013-11-
↪29T11:50:23.783+01:00" change="VX-8131">
        <name>EVS_MatchData</name>
        <field uuid="868c16d8-22cf-41d8-a2fe-bccc4221d686" user="admin" timestamp="2013-
↪11-29T11:50:23.783+01:00" change="VX-8131">
            <name>EVS_HalfTimeScore</name>
            <value uuid="ad12c72c-2030-41e9-81e0-7605869f501d" user="admin" timestamp="2013-
↪11-29T11:50:23.783+01:00" change="VX-8131">1-0</value>
            </field>

            <field uuid="374c7c03-b54c-46fe-81ea-b52eef353fc2" user="admin" timestamp="2013-
↪11-29T11:50:23.783+01:00" change="VX-8131">
                <name>EVS_AwayTeam</name>
                <value uuid="4082bbfd-e875-445f-9baa-beec03cb6e5e" user="admin" timestamp="2013-
↪11-29T11:50:23.783+01:00" change="VX-8131">Kalmar FF</value>
                </field>
                <field uuid="a97e745a-fcbb-42a3-b0f2-fc73b27ae7b9" user="admin" timestamp="2013-
↪11-29T11:50:23.783+01:00" change="VX-8131">
                    <name>EVS_Attendance</name>
                    <value uuid="e17dd5e3-f85c-4477-afc1-170c1d7f3d71" user="admin" timestamp="2013-
↪11-29T11:50:23.783+01:00" change="VX-8131">4011</value>
                    </field>
                </group>
            </timespan>

```

Please note that the values in <AutomaticKeyword>s will be mapped as global metadata (with timespan: (-INF, +INF)), so it is a good place to store the metadata of the whole essence file.

14.14 StorNext Integration

New in version 4.2.3.

In version 4.2.3, beta support for Quantum StorNext file information is added. With this support, storage information from StorNext is added to the file information. StorNext version 5 and higher is supported, and the Web Services API and the http protocol must be enabled.

14.14.1 Storage configuration

In order for StorNext information to be retrieved, a special Storage Method has to be added:

URI `stornext://{user}:{password}/{host}:{port}/{StorNext path}`

type HSM

Here, user and password are the StorNext web services API credentials. (webservice, webservice by default on StorNext). Host and port is the StorNext endpoint (typically port 81). StorNext path is the base path prefixed to the file path when the StorNext API is queried. Typically, this is the same path as for the `file` method.

Example

Below is an example of a storage configuration where StorNext and Vidispine runs on the same machine, with the StorNext filesystem on `/stornext/snfs`.

```
<StorageDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <type>LOCAL</type>
  <method>
    <uri>file:///stornext/snfs/</uri>
    <read>true</read>
    <write>true</write>
    <browse>true</browse>
    <type>NONE</type>
  </method>
  <method>
    <uri>stornext://webservice:webservice@localhost:81/stornext/snfs/</uri>
    <type>HSM</type>
  </method>
</StorageDocument>
```

14.14.2 StorNext Metadata

When the StorNext endpoint is set up, Vidispine file archive status and metadata is updated.

- The file is marked as ARCHIVED if and only if StorNext location is exactly TAPE.
- The StorNext metadata fields `location`, `class`, `existingCopies`, and `targetCopies` are set on the file. This can be changed by modifying the configuration property `stornextFileMetadata`. It should be a comma separated list of StorNext metadata fields.

14.15 Cerify integration

The Cerify plugin allows Vidispine to integrate with Cerify from Tektronix. The plugin allows video files to be analyzed by Cerify during their import. RAW_IMPORT (New in 4.0.), PLACEHOLDER_IMPORT (New in 4.0.3.), ESSENCE_VERSION (New in 4.0.3.) and AUTO_IMPORT (New in 4.2.8.) are supported.

14.15.1 Installation

1. Configure Cerify. The minimum configuration required is the creation of a `MediaLocation` with a path that is shared between Cerify and Vidispine storage, and the creation of a `Profile`. The profile may be empty.
2. Configure the plugin by creating a Cerify resource containing the Cerify settings, by making a POST request to `API/resource/cerify` containing:

```
<?xml version="1.0" encoding="UTF-8" standalone="yes"?>
<ResourceDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <cerify>
    <address>http://cerifyserver.example.com:80/CeriTalk?wsdl</address>
    <mediaLocation>
      <name>Name of Media Location</name>
      <storageMethod>VX-6</storageMethod>
    </mediaLocation>
    <cleanup>>false</cleanup>
  </cerify>
</ResourceDocument>
```

The elements are:

address The URL of the Cerify web service.

mediaLocation One or many media locations. If many media locations are configured, the storage method where the file is stored will determine which one to use.

name The name of the media location. A media location with this name must be configured in Cerify.

storageMethod The storage method that contains the files that should be analyzed by Cerify. Must be on a file system accessible by Cerify through the path configured in the corresponding media location.

cleanup If set to true, jobs and media sets will be removed from Cerify after completion.

- Update the task definition document by inserting a Cerify step at the appropriate position by making a POST request to `API/task-definition` containing something similar to:

```
<TaskDefinitionListDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <task>
    <description>Executing Cerify job</description>
    <extradata>f</extradata>
    <flags>12</flags>
    <bean>CerifyJobBean</bean>
    <method>analyzeFile</method>
    <step>250</step>
    <dependency>
      <step>0</step>
      <previous>>false</previous>
      <allPrevious>>true</allPrevious>
    </dependency>
    <parallelDependency>
      <step>0</step>
      <previous>>false</previous>
      <allPrevious>>false</allPrevious>
    </parallelDependency>
    <jobType>RAW_IMPORT</jobType>
    <cleanup>>false</cleanup>
    <critical>>true</critical>
  </task>
</TaskDefinitionListDocument>
```

Note: for `ESSENCE_VERSION`, the Cerify job step should run after step 400; for `AUTO_IMPORT`, the Cerify step should run after step 200.

14.15.2 Usage

The Cerify profile to use when analyzing a file is specified using the `jobmetadata` query parameter.

Import a file and let Cerify analyze it using the Cerify profile named mpeg2 PAL :

```
curl -X POST -u admin:admin --data-binary @test_file.mpg 'http://127.0.0.1:8080/API/
↳import/raw?throttle=false&jobmetadata=cerifyProfile%3Dmpeg2%20PAL'
```

(New in 4.2.8.) For AUTO_IMPORT job, the job metadata can be set in the AutoImportRuleDocument. For example:

```
<AutoImportRuleDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <tag>mp4</tag>
  <jobmetadata>
    <field>
      <key>cerifyProfile</key>
      <value>Vidispine test profile</value>
    </field>
  </jobmetadata>
</AutoImportRuleDocument>
```

When the file is being analyzed by Cerify there will be progress information available in the job. The metadata key is cerifyProgress and the value will be an integer between 0 and 100.

New in version 4.2.8.

Use the cerifyPriority job metadata field to set the Cerify job priority (LOW, MEDIUM, HIGH). For example:

```
curl -X POST -u admin:admin --data-binary @test_file.mpg 'http://127.0.0.1:8080/API/
↳import/raw?throttle=false&jobmetadata=cerifyProfile%3Dmpeg2%20PAL&
↳jobmetadata=cerifyPriority%3DHIGH'
```

14.15.3 Output

Upon completion the results from Cerify is added to the shape as bulky metadata. The following fields are available. Note that cerify_alerts might not always be present and its absence means that Cerify did not detect any problem with the file.

```
<URIListDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <uri>cerify_alert</uri>
  <uri>cerify_jobinfo</uri>
  <uri>cerify_streaminfo</uri>
</URIListDocument>
```

The element cerify_alerts contains all alerts produced by Cerify. Example:

```
<field start="466@3082500:128557" end="466@3082500:128557">
  <key>cerify_alert</key>
  <maps>
    <map>
      <entry key="alertFrame">http://10.185.0.7:80/ViewFrame.do?&jobmediafile=115&
↳frame=467&audio=false&small=true</entry>
      <entry key="alertId">22015</entry>
      <entry key="details">In Main profile / Main level, the maximum permitted value_
↳of f_code[0][1] in a frame picture is 5. In the current picture it has been set to_
↳7. Stream position: 0x7cf812 (dec. 8189970), bit 7 Bitstream context: [VSQ|PCX]</
↳entry>
      <entry key="level">error</entry>
      <entry key="location">00:00:15;16 frame 467</entry>
      <entry key="title">Invalid f_code</entry>
      <entry key="trackId">-1</entry>
```

```

    <entry key="type">video</entry>
    <entry key="url">http://10.185.0.7:80/protected/AlertDetails.do?job=107&
→jobmediafile=115&frame=467&alertid=1383&trackId=-1</entry>
  </map>
</maps>
</field>

```

cerify_streaminfo contains general information about the analyzed file, such as peak volume level, frame rate, etc.

See the following documents for more complete examples of metadata documents produced by this plugin:

- cerify_alert.xml
- cerify_jobinfo.xml
- cerify_streaminfo.xml

14.16 FIMS implementation

Vidispine implements the [FIMS 1.0.7 Transform specification](http://wiki.amwa.tv/ebu/index.php/SPECIFICATIONS) (http://wiki.amwa.tv/ebu/index.php/SPECIFICATIONS). Apart from the mandatory features, Vidispine also supports the following optional features:

- *Notifications* - Vidispine will send HTTP callbacks for events such as job success and job failure.
- *Job priorities* - Jobs can be assigned one of five priorities.

The services are available at the following location: <http://localhost:8080/FIMS/TransformMediaService>

14.16.1 Codecs and formats

Vidispine currently supports a subset of the container formats and codecs defined by EBU. For a full list of formats, see:

- [Container formats specified by EBU](http://www.ebu.ch/metadata/cs/web/ebu_ContainerFormatCS_p.xml.htm) (http://www.ebu.ch/metadata/cs/web/ebu_ContainerFormatCS_p.xml.htm).
- [Video codecs specified by EBU](http://www.ebu.ch/metadata/cs/web/ebu_VideoCompressionCodeCS_p.xml.htm) (http://www.ebu.ch/metadata/cs/web/ebu_VideoCompressionCodeCS_p.xml.htm).
- [Audio codecs specified by EBU](http://www.ebu.ch/metadata/cs/web/ebu_AudioCompressionCodeCS_p.xml.htm) (http://www.ebu.ch/metadata/cs/web/ebu_AudioCompressionCodeCS_p.xml.htm).

Container formats

The following container formats are supported in Vidispine.

ID	Name
7.1.2, 7.2.2.2	MP4
7.2.3	DV
7.2.4	AVI
7.2.11	MOV
7.2.19	MKV
7.2.15	FLV
7.2.7, 7.2.8	ASF/WMV
7.3.1, 7.3.1.3	JPG
7.3.8	PNG

Video codecs

The following video codecs are supported in Vidispine.

ID	Name
2	MPEG-2
5	MJPEG
6	JPG
9	H264
10	VC-1
20	DVVIDEO
28	VP8

Audio codecs

The following audio codecs are supported in Vidispine.

ID	Name
7.3, 8.4	MP3
7.2	MP2
8	AAC
11	PCM_S16LE
19	WMAv1

14.17 CloudConvert Integration

New in version 4.6.

Vidispine supports using [CloudConvert](https://cloudconvert.com/) (<https://cloudconvert.com/>) as an alternative to the Vidispine transcoder.

Important:

- It is not possible to transcode using the Vidispine transcoder and CloudConvert at the same time.
 - Thumbnails and posters will not be generated during the transcode of video using CloudConvert
-

14.17.1 How to use

1. Create a CloudConvert resource on Vidispine, containing your CloudConvert API key:

```
POST /resource/cloudconvert
```

```
<ResourceDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <cloudconvert>
    <apiKey>your-api-key</apiKey>
  </cloudconvert>
</ResourceDocument>
```

2. Start the jobs with job metadata useCloudConvert=true.

```
POST /item/(item-id)/transcode?jobmetadata=useCloudConvert=true
```

14.17.2 Source file access

By default, Vidispine will upload the source file to CloudConvert. However, it's also possible to let CloudConvert fetch them directly.

Firstly, make sure the source files are publicly available:

- If the files are on S3 or Azure, set the configuration property `useS3Proxy` or `useAzureProxy` to `true`;
- If not, a public address of the Vidispine server is needed in the CloudConvert resource:

```
<ResourceDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <cloudconvert>
    <apiKey>your-api-key</apiKey>
    <publicAddress>http://public-address:8080</publicAddress>
  </cloudconvert>
</ResourceDocument>
```

Otherwise, the address from the configuration property `apiNoauthUri` will be used.

Then, set the job metadata `cloudConvertInputMethod=download` or add the global setting in the CloudConvert resource:

```
<ResourceDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <cloudconvert>
    <apiKey>your-api-key</apiKey>
    <publicAddress>http://public-address:8080</publicAddress>
    <inputMethod>download</inputMethod>
  </cloudconvert>
</ResourceDocument>
```

14.17.3 Conversion parameters

When transcoding, CloudConvert specific options can be specified in the `<muxerSetting>` of the `shape` tag. For example:

```
<TranscodePresetDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <format>jpg</format>
  <video>
    <codec>jpg</codec>
  </video>
  <audio/>
  <muxerSetting>
    <key>converteroptions[resize]</key>
    <value>300x300</value>
  </muxerSetting>
  <muxerSetting>
    <key>converteroptions[quality]</key>
    <value>80</value>
  </muxerSetting>
</TranscodePresetDocument>
```

14.17.4 CloudConvert callback

After a job has been started, Vidispine will always try to poll CloudConvert for the job status. In order for Vidispine to receive notifications (<https://cloudconvert.com/api/conversions#callback>) from CloudConvert, the `publicAddress`

of the Vidispine server should be set:

```
<ResourceDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <cloudconvert>
    <apiKey>your-api-key</apiKey>
    <publicAddress>http://public-address:8080</publicAddress>
  </cloudconvert>
</ResourceDocument>
```

If not set, then the `apiNoauthUri` will be used. The one resource that must be accessible to CloudConvert is the `callback` resource.

14.17.5 Enable CloudConvert using JavaScript

JavaScript can be used to determine if CloudConvert should be used in a job. The script will be evaluated if the job metadata `useCloudConvert` is not set. CloudConvert will be used only if the script returns a string `true`.

```
<ResourceDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <cloudconvert>
    <apiKey>your-api-key</apiKey>
    <script><![CDATA[
      ...
    ]]></script>
  </cloudconvert>
</ResourceDocument>
```

The available objects are: `job` and the *commonly available objects*

14.18 EIDR Integration

New in version 4.14.

Vidispine support importing and synchronizing EIDR-metadata into the Vidispine metadata model. It keeps your metadata up to date with the EIDR records and allows transforming EIDR metadata into Vidispine metadata.

Read more about EIDR [here](http://eidr.org/). (<http://eidr.org/>)

14.18.1 Setup

Create an EIDR resource:

```
POST /resource/eidr HTTP/1.1
Content-Type: application/xml

<ResourceDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <eidr>
    <url>https://resolve.eidr.org/EIDR</url>
    <include>eidr_base</include>
    <include>eidr_credits</include>
  </eidr>
</ResourceDocument>
```

Make sure the url is pointing to the EIDR web API endpoint. `resolve.eidr.org` is the public endpoint, you can also set it to the sandbox endpoints for testing purposes.

If you have a registered account, you can provide credentials, by including all of the three elements `userId`, `partyId`, `password`. The `passwordShadow` is built by hashing the password with md5 and encoding the resulting bits with base64:

```
passwordHash = base64( md5(raw-password) )
```

```
POST /resource/eidr HTTP/1.1
Content-Type: application/xml

<ResourceDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <eidr>
    <url>https://resolve.eidr.org/EIDR</url>
    <include>eidr_base</include>
    <include>eidr_credits</include>
    <userId>userId</userId>
    <partyId>partyID</partyId>
    <password>passwordShadow</password>
  </eidr>
</ResourceDocument>
```

`include` are projections that transform EIDR metadata to Vidispine compatible metadata documents. Provided includes are:

include	Description
<code>eidr_base</code>	Titles, release date, origin etc.
<code>eidr_credits</code>	Directors and actors

`include` defaults to `eidr_base` if none is given.

It's possible to customize what data is included by creating your own incoming xslt projections, the projection should result in a valid standalone metadata document that could be used for placing metadata on an item. See [Metadata projections](#) and [Metadata projections](#) for how to add new projections.

14.18.2 EIDR synchronization

In the following reference, `{eidr-content-resource}` is one of the following:

- `/item/{item-id}`
- `/library/{library-id}`

Synchronize

Synchronizes `item(s)` metadata that are out of date, an item is considered out of date if the EIDR record has changed or if the included projections have changed.

Important: For an item to be able to synchronize it needs the metadata field `eidr_id` with the value of an EIDR id.

```
PUT /item/{item-id}/metadata HTTP/1.1
Content-Type: application/xml

<MetadataDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <timespan start="-INF" end="+INF">
    <field>
      <name>eidr_id</name>
    </field>
  </timespan>
</MetadataDocument>
```

```

    <value>10.5240/116F-AC63-B1B0-C538-CF6C-D</value>
  </field>
</timespan>
</MetadataDocument>

```

Caution: It's ill-advised to synchronize a large library manually as the operation isn't asynchronous.

PUT {eidr-content-resource}/eidr/sync

Returns a list of synchronized items with the metadata that was written to the item.

Query Parameters

- **eidrResource** – If set, the resource identified by this id will be used instead of first found EIDR resource.
- **forceSync** –
 - `false` - (default)
 - `true` - force metadata write to item.

Produces

- `application/xml`, `application/json` –
 - `MetadataListDocument`

Role

- `_metadata_write`
- `_library_read`, for library

14.18.3 Troubleshooting

You can test your custom include projection by using *Add a metadata change set* and put a FullMetadata xml from EIDR in the body. [Example of a FullMetadata xml](https://resolve.eidr.org/EIDR/object/10.5240/5D7B-C695-C27F-E175-8455-K/?type=Full&followAlias=true) (https://resolve.eidr.org/EIDR/object/10.5240/5D7B-C695-C27F-E175-8455-K/?type=Full&followAlias=true)

TROUBLESHOOTING AND OBTAINING INFORMATION

15.1 Self test

New in version 4.0.

The Vidispine self test will generate a brief report about the system infrastructure for simple troubleshooting.

Note: (New in 4.2.) The Self test has moved from `APIInoauth` to `API`.

15.1.1 Tests

The tests are:

- `api` - The API test. Verifies both `api` and `apinoauth` resources.
- `solr` - Verifies the Solr configuration.
- `database` - Verifies that the database can be reached.
- `transcoder` - Verifies that the transcoder can be reached.
- `jms` - Verifies that the JMS queues are well configured.
- `tools` - Verify the existence of various external tools.
- `simplejob` - Verifies that the transcoder can execute a simple transcode job.
- `thumbnail` - Verifies the thumbnail configuration.
- `dbstats` - Returns some statistics from the database schema.
- `ldap` - Verifies the LDAP configuration.
- `fileaccesstest` - Verifies write access of application server files.

15.1.2 Test results

There are four possible outcomes of a test:

OK Vidispine is well configured and running properly.

Warning Some configuration is not valid.

Failed There are tools missing, which could lead to failures of some functions.

Critical Important configuration or tools are missing or invalid, Vidispine will not run properly.

15.1.3 Running the test

Running the tests can take a while, depending on the size of the system. The `dbstats` is typically the slowest as it examines the number of rows in the database among other things. Hence, it sometimes can be beneficial to only run certain specific tests.

Use the *selftest resource* to execute the tests. For example:

```
GET API/selftest
```

```
<SelfTestDocument xmlns="http://xml.vidispine.com/schema/vidispine" status="failed"
↳took="38170ms">
  <test name="api" status="warning" took="408ms">
    <test name="adminApi" status="warning">
      <message>API is 4.2</message>
      <message>Transcoder VX-1 is ERROR: Could not connect</message>
      <message>Transcoder VX-2 is 4.1.4-gea8cc32-12511</message>
    </test>
    <test name="apiNoAuth" status="ok">
      <message>Base uri: http://localhost:8089/</message>
    </test>
  </test>
  ...
</SelfTestDocument>
```

15.2 Error log report

The error log report is used to collect information about the Vidispine installation, and contains information about certain jobs or items. A log report should always be included if you encounter an issue that you wish to report to us .

15.2.1 Usage

This tool is located at [your server]:8080/LogReport. After filling in all the information, press *Extract and collect logs* and wait while the system extract the needed logs; this might take a while. Then press on ‘Save report’ and save the created .zip-file on your computer. Then send this file to your Vidispine reseller.

Required fields

Error report information This is where you describe your problem. Be specific on what the problem is, what you did when it appeared.

Time span What time did the error occurred? Set start time and end time

Credentials Your Vidispine user-name and password

Optional fields Fill in this information if any is applicable on the particular problem you are having..

Job-ID The id of the job that failed, if applicable to the issue.

Item-ID The id of the item that the issue relates to, if applicable.

Storage-ID The id of the storage that the issue relates to, if applicable.

User Name of the Vidispine user that was used when this problem occurred.

15.2.2 Programmatically retrieving log files

New in version 3.3.

If your application has a custom form for reporting issues then you can instead collect the log files using the *Vidispine logs resource*.

For example, to retrieve a log report for a specific job:

```
GET API/vidispine-logs?job=VX-32&comment=Incorrect%20aspect%20ratio%20of%20transcoded  
→%20image  
Accept: application/zip
```

```
200 OK  
Content-Type: application/zip  
Transfer-Encoding: chunked  
...
```


STANDALONE VIDISPINE

New in version 4.3.

The standalone Vidispine server is an application that can be used to run Vidispine without the need of an application server such as GlassFish or JBoss. The application embeds Jetty and OpenEJB, which makes it possible to run Vidispine in an application server or as a standalone service.

The goal is to:

- Make installing, configuring and upgrading VS easier.
- Give us full control of the libraries used with VS.

The differences compared to running Vidispine on GlassFish:

- Solr will NOT run in the same JVM as Vidispine.
- ActiveMQ is used instead of the broker (OpenMQ/HornetQ) used by the application server. ActiveMQ can be run embedded or standalone.

Here's what you need to know:

16.1 Installing distribution-specific packages

Use our packages for your distribution to install Vidispine.

16.1.1 Install the packages

You can either install the packages from our repository, or download and install the packages from our download page.

Note: Vidispine requires Java 8 which may not be available in the official repositories of older distributions. Install an thirdparty repository providing Java 8 or upgrade to a newer distribution.

Install from official repository

1. To install Vidispine directly from our repository, head over to the [repository](http://repo.vidispine.com/) (<http://repo.vidispine.com/>) page and follow the instructions.

Install downloaded packages

1. Download the latest release from our [download page](http://www.vidispine.com/partner/my-software) (<http://www.vidispine.com/partner/my-software>).
2. Untar the downloaded package.

```
$ tar -xvzf vidispine-X.Y.tar.gz
$ cd vidispine-X-Y
```

3. Install the packages for your distribution:

CentOS:

```
$ yum install vidispine-*el6*.rpm transcoder-*el6*.rpm
```

Ubuntu:

```
$ dpkg -i vidispine-*.deb transcoder-*.deb
$ apt-get install -f
```

This will install Vidispine, Java and any additional dependencies required by Vidispine. There are also optional dependencies that can be installed manually:

- Graphviz - if you wish to *visualize users* or *jobs*.

16.1.2 Initialize the database

1. Create and give Vidispine access to an empty database:

```
$ psql -c "CREATE USER vidispine PASSWORD 'vidispine';"
$ psql -c "CREATE DATABASE vidispine OWNER vidispine";
```

On MySQL, make sure to use UTF-8:

```
CREATE DATABASE vidispine CHARSET utf8 COLLATE utf8_bin;
```

On Microsoft SQL Server create the database with a case-sensitive collation. As Vidispine consequently is using unicode (NVARCHAR) columns you do not need to care about the character set or codepage.

```
CREATE DATABASE vidispine COLLATE Latin1_General_CS_AS
```

Snapshot isolation must be enabled for Vidispine to operate properly. Execute these commands directly after creating the database:

```
ALTER DATABASE vidispine SET ALLOW_SNAPSHOT_ISOLATION ON
GO
ALTER DATABASE vidispine SET READ_COMMITTED_SNAPSHOT ON
GO
```

Ensure that TCP/IP is enabled for your server.

2. Modify the configuration file accordingly:

```
$ vi /etc/vidispine/server.yaml
```

PostgreSQL:

```

database:
  driverClass: org.postgresql.Driver
  url: jdbc:postgresql://localhost/vidispine
  user: vidispine
  password: vidispine

```

MySQL:

```

database:
  driverClass: com.mysql.jdbc.Driver
  url: jdbc:mysql://localhost/vidispine
  user: vidispine
  password: vidispine

```

Microsoft SQL Server:

```

database:
  driverClass: com.microsoft.sqlserver.jdbc.SQLServerDriver
  url: jdbc:sqlserver://localhost:1433;instanceName=SQLEXPRESS;
  ↪databaseName=vidispine
  user: vidispine
  password: vidispine

```

3. Initialize and migrate the database:

```

$ vidispine db ping # verify connection
$ vidispine db check # verify if tables exists (they shouldn't)
$ vidispine db init
$ vidispine db migrate
$ vidispine db check # should succeed

```

Note: The `/usr/bin/vidispine` command is simply an alias to `java -jar /usr/share/vidispine/server/vidispine-server.jar` that is provided by the `vidispine-server` package.

16.1.3 Start the services**1. If you're on CentOS 6 or Ubuntu:**

```

$ /etc/init.d/solr start
$ /etc/init.d/transcoder start
$ /etc/init.d/vidispine start

```

On systems using `systemd`:

```

$ systemctl start solr transcoder vidispine

```

2. Wait for Vidispine to start and then run `APIinit` to create the system metadata fields and the admin user.

```

$ # wait for 8080 to become available, and then
$ curl -X POST localhost:8080/APIinit

```

Note: APIinit is a migration step that must be run manually. It will be made part of the migration command in the future.

- To verify that Vidispine is running, access <http://localhost:8080/API/version> using curl or HTTPie (<https://github.com/jakubroztocil/httpie>), or directly in your browser. The default admin password is admin.

```
$ curl -X GET "localhost:8080/API/version" -uadmin:admin
```

Troubleshooting

- If the Vidispine service fails, then check the syslog or journal for errors:

```
$ less /var/log/syslog
```

```
$ journalctl -xn
```

- If the service dies, or never becomes available for some reason, then check the server log:

```
$ less /var/log/vidispine/server.log
```

- If the service fails to start with a “UnsupportedClassVersionError: Unsupported major.minor version 51.0”, then make sure that the default system Java version is 7+ and not 6 or lower.

```
$ sudo update-alternatives --config java
```

16.1.4 Configure Vidispine

Finally, you will need to *configure Vidispine*.

16.2 Quick setup

Before using Vidispine, make sure to create and configure a storage and thumbnail location, and to configure the transcoder.

- Create a *storage*.

```
POST API/storage
Content-Type: application/xml

<StorageDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <type>LOCAL</type>
  <method>
    <uri>file:///path/to/files/</uri>
    <read>true</read>
    <write>true</write>
    <browse>true</browse>
    <type>NONE</type>
  </method>
  <autoDetect>true</autoDetect>
</StorageDocument>
```

2. Create a *thumbnail resource*.

```
POST API/resource/thumbnail
Content-Type: application/xml

<ResourceDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <thumbnail>
    <path>file:///path/to/thumbnails/</path>
  </thumbnail>
</ResourceDocument>
```

3. Configure a *transcoder*. For example, with Vidispine and the transcoder on the same server:

```
POST API/resource/transcoder
Content-Type: application/xml

<ResourceDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <transcoder>
    <url>http://localhost:8888/</url>
  </transcoder>
</ResourceDocument>
```

Tip: Use curl, HTTPie (<https://github.com/jakubroztocil/httpie>) or the HTTP client of your choosing to make the requests. For example, using HTTPie:

```
$ http post "localhost:8080/API/storage" @storage.xml
$ http post "localhost:8080/API/resource/thumbnail" @thumbnail.xml
$ http post "localhost:8080/API/resource/transcoder" @transcoder.xml
```

16.3 Service configuration

16.3.1 The vidispine service user

The post-installation script in the packages will create the `vidispine` user and group if they do not exist.

If you want to make sure that the `vidispine` user has a specific UID and GID, then create the `vidispine` user and group manually *before* installing any packages.

16.3.2 Service dependencies

If you're running all components on the same server, then it can be beneficial to make sure that the transcoder and Solr is started before Vidispine. Note that this is only possible on systems running `systemd`.

```
$ vi /etc/systemd/system/vidispine.service.d/local.conf
[Unit]
Wants=transcoder.service solr.service

$ systemctl daemon-reload
$ systemctl enable vidispine
```

16.3.3 Setting JVM options

On Debian, edit the `/etc/default/vidispine` file:

```
$ vi /etc/default/vidispine
JAVA_OPTS="-Xmx8192m -XX:MaxPermSize=512m"
```

Or on CentOS 6, the file `/etc/sysconfig/vidispine`:

```
$ vi /etc/sysconfig/vidispine
JAVA_OPTS="-Xmx8192m -XX:MaxPermSize=512m"
```

On systems running `systemd`, create a file such as `/etc/systemd/system/vidispine.service.d/local.conf` and override the default `JAVA_OPTS`:

```
$ vi /etc/systemd/system/vidispine.service.d/local.conf
[Service]
Environment="JAVA_OPTS=-Xmx8192m -XX:MaxPermSize=512m"
```

16.4 Clustering

A cluster can be created by installing Vidispine on multiple servers and configuring all instances to connect to the same database.

The one setting that should be set is the `bindAddress`, which an instance will bind to and publish to the other members of the cluster.

```
cluster:
  bindAddress: vs1.example.com
```

You can also change the address that is published, for example if there's a firewall with port forwarding rules set up in front of each server.

```
cluster:
  bindAddress: vs1.example.com
  bindPort: 7800
  bindPortRange: 0
  externalAddress: fw.example.com
  externalPort: 7801
```

Note: For this to work you also need to use an external ActiveMQ instance, so make sure that the embedded broker is disabled and that the configuration points to your ActiveMQ instance:

```
broker:
  url: tcp://activemq.example.com:61616
  #embeddedBroker: broker:(tcp://localhost:61616)
```

16.4.1 Quick cluster setup

It is also possible to create a cluster on a single machine by starting multiple server processes each with a different configuration file.

```
$ cp server.yaml instanceA.yaml instanceB.yaml
$ vi instanceA.yaml instanceB.yaml
```

Make sure that all instances have distinct ports. Then start the instances that are to be part of the cluster:

```
$ java -jar vidispine-server.jar server instanceA.yaml 2>&1 1>instanceA.log &
$ java -jar vidispine-server.jar server instanceB.yaml 2>&1 1>instanceB.log &
```

Tail the log and you should see that the processes have found each other and have formed a cluster.

```
INFO [2015-05-27 13:06:27,652] [403] org.infinispan.remoting.transport.jgroups.
↪JGroupsTransport: ISPN000094: Received new cluster view: [di2-37999|1] [di2-37999,
↪di2-55654]
```

16.5 Upgrading

16.5.1 Upgrading Vidispine

1. Install the latest server and transcoder packages.
2. Use the check command to verify that the configuration file is still valid.

```
$ vidispine check
$ vidispine db check
```

3. Make sure that the server is stopped. On CentOS 6 or Ubuntu:

```
$ /etc/init.d/vidispine stop
```

On systems using systemd:

```
$ systemctl stop vidispine
```

4. Migrate the database:

```
$ vidispine db migrate
```

Before migrating you can verify the pending migrations using the `--dry-run` flag.

```
$ vidispine db migrate --dry-run
```

Note: The dry-run output is for informational use only. Do not execute any SQL statements in the output directly.

5. Start all Vidispine services.
6. Wait for Vidispine to start and then run `APIinit` to create any new system metadata fields or task definitions.

```
$ # wait for 8080 to become available, and then
$ curl -X POST localhost:8080/APIinit
```

16.5.2 Upgrading from GlassFish

To move from GlassFish to the standalone server application:

1. Make sure that GlassFish is stopped.
2. Install the server and transcoder packages as described in the *installation guide*.
3. Modify the server configuration to match the GlassFish configuration.
 - Use the same database settings.
 - Add any custom JVM settings to the *service configuration*.
4. Migrate the database.
5. Start the `vidispine`, `solr` and `transcoder` services.
6. Run `APIinit`.

Once all steps have been performed and Vidispine is up and running:

1. Re-index items, collections and files to populate Solr.
2. Remove GlassFish.

Upgrading without re-indexing

It is also possible to avoid the re-index step by moving the existing Solr index to the new location used by the `solr` service.

1. Make sure that no application is using Vidispine.
2. Disable all services except the indexing service to make sure that all pending index updates are sent to Solr and removed from the JMS queue.

```
$ http put "localhost:8080/API/vidispine-service/disable"  
$ http put "localhost:8080/API/vidispine-service/service/IndexCruncher/enable"
```

Then wait until all messages on the JMS queue “IndexQueue” have been processed by watching:

```
$ /opt/glassfish3/mq/bin/imqcmd list dst
```

3. Stop GlassFish.
4. Make sure that the `vidispine-solr` package is installed and that the `solr` service is *not* running.

```
$ /etc/init.d/solr/stop
```

```
$ systemctl stop solr
```

5. Move the Solr index to the new location.

```
$ mv /opt/glassfish3/glassfish/solrhome/solr/collection1/data/ /var/lib/vidispine/  
↪solr/collection1/data
```

6. Start Solr and verify that the new index is in used by checking the document count from the Solr admin page at <http://localhost:8983/solr/#/collection1>.

16.6 Server configuration

Dropwizard 1.0 is used to start and configure Jetty and to parse and validate the command line and configuration file. This is only mentioned here as the Dropwizard Configuration Reference lists and explains the base settings that can be used in the configuration file.

- [Dropwizard 1.0 Configuration Reference](http://dropwizard.github.io/dropwizard/1.0.0/docs/manual/configuration.html) (<http://dropwizard.github.io/dropwizard/1.0.0/docs/manual/configuration.html>)

Changed in version 4.7: The Dropwizard version was updated from 0.7.1 to 1.0.

16.6.1 Environment variables

Environment variables can be used in the YAML configuration file.

For example:

```
database:
  driverClass: org.postgresql.Driver
  url: jdbc:postgresql://${DATABASE_HOST}/${DATABASE_NAME}
  user: ${DATABASE_USER}
  password: ${DATABASE_PASSWORD}
```

16.6.2 Additional settings

In addition, the following properties are supported:

database

New in version 4.6.

- `type`: If this is a master/read-write or read-only database. Either `master` (default), `read_only_replica`, `read_only_snapshot`.

api

New in version 4.6.

- `requestLogging`: If *request logging* is enabled. Default is `true`.
- `searchHistory`: If *search history* is updated with new searches. Default is `true`.
- `openApi2Compatible`: Allows query parameters to be used even when matrix parameters are expected. Default is `false`.

secrets

New in version 4.7.

The location of external private keys and credentials. Used to authenticate against storages and other endpoints. See *Storage credentials* for more information. Example:

```
secrets:
  keyStore:
    path: /env/vidispine/server.keystore
    password: changeit
  vault:
    address: http://vault.example.com:8200
    token: 2262e94c-39c3-b9a8-605d-f0450dfc558b
    keyPrefix: secret/
  file:
    path: /etc/secrets/
```

Java KeyStore

Java *Keystore* (<https://en.wikipedia.org/wiki/Keystore>) containing private keys.

- **keyStore:**
 - **path:** The path to the Java keystore.
 - **password:** The key store password.

Vault

A *Hashicorp Vault* (<https://www.vaultproject.io/>) server storing private keys and credentials. Private keys will be read from the `private_key` field. Usernames and passwords from the `username` and `password` fields respectively.

- **vault:**
 - **address:** The HTTP URL to the Vault server.
 - **token:** The Vault access token.
 - **keyPrefix:** Optional prefix to use with all aliases.

Local file system

Read private keys and credentials from files on the local file system.

Private keys will be read from the file with the same name as the private key alias. Usernames and passwords will be read from the files `username` and `password` from the directory with the same name as the *alias*.

- **file:**
 - **path:** The directory containing secret files.

broker

Configures how to connect to ActiveMQ.

- **user:** The user to authenticate as.
- **password:** The password to authenticate using.
- **url:** Default is “tcp://localhost:61616”.
- **embeddedBroker:** The *broker URI* (<http://activemq.apache.org/broker-uri.html>) to use to start an embedded broker. For example “broker:(tcp://localhost:61616)”. Default is “” (no embedded broker).

Note: If you are using embedded ActiveMQ with KahanDB, the KahanDB journal log could keep growing if there are expired messages in the queue “ActiveMQ.DLQ”.

To fix this, you will need to enable jmx in the [broker URI](http://activemq.apache.org/broker-uri.html) (<http://activemq.apache.org/broker-uri.html>), and purge the queue manually using [activemq-admin](http://activemq.apache.org/activemq-command-line-tools-reference.html) (<http://activemq.apache.org/activemq-command-line-tools-reference.html>).

```
embeddedBroker: broker: (tcp://localhost:61616)?usekahadb=true&kahadb.directory=/path/
↳to/db/&persistent=true&useJmx=true
```

```
./activemq-admin -Dactivemq.jmx.url=service:jmx:rmi:///jndi/rmi://localhost:1099/
↳jmxrmi purge ActiveMQ.DLQ
```

Or setup a standalone ActiveMQ instance, and set `processExpired="false"`

<http://activemq.apache.org/message-redelivery-and-dlq-handling.html>

ejbPool

These settings configures the stateless container in OpenEJB. They are explained in more detail at <http://tomee.apache.org/containers-and-resources.html>.

- `maxSize`: The maximum number of beans in the stateless bean pool. Default is 10.
- `idleTimeout`:
- `strictPooling`: If the pool may NOT grow larger than `maxSize`. Default is false.

cluster

- `bindAddress`: The address to bind on, as an IP address or hostname. Default is 127.0.0.1.
- `bindPort`: The port to bind on. Default is 7800.
- `bindPortRange`: The range of ports to try in case `bindPort` is taken. Default is 30.
- `externalAddress`: The address to publish to members in the cluster. Default is `bindAddress`.
- `externalPort`: The port to publish to members in the cluster. Default is the port that was bound on.

services

New in version 4.9.

Background tasks, such as jobs and storage polling, are executed in the background by internal services in Vidispine.

The services that are allowed to run on this server instance can be configured using the `enabled` or `disabled` settings. These are mutually exclusive, meaning that you cannot specify both services to enable and disable at the same time.

- `services`:
 - `enabled`: The services that are allowed to run on this instance. All other services will not be allowed to run.
 - `disabled`: The services that are not allowed to run on this instance. All other services will be allowed to run.

The following values are supported:

- `all`: All services in the system.
- `job`: The services that execute Vidispine jobs.
- The name of a specific *Vidispine service*.

For example, an instance that should only serve API requests could be configured using:

```
services:  
  disabled: all
```

search

New in version 4.10.

Configure the backend that will be used for searching.

- `backend`:
 - `solr`: (default) Use Solr as the search backend.
 - `elasticsearch`: Use Elasticsearch as the search backend.
- `url`: The URL to Elasticsearch's RESTful interface.
- `user`: The username used to connect to Elasticsearch.
- `password`: The password used to connect to Elasticsearch.

For example, to use Elasticsearch as the search backend:

```
search:  
  backend: elasticsearch  
  url: http://localhost:9200/
```

Changed in version 4.13: The Solr endpoint can now be configured using the search url field.

New in version 4.14.

The `elasticsearch` backend can be configured to support two-way SSL, if [client authentication](https://www.elastic.co/guide/en/elasticsearch/reference/current/security-settings.html#http-tls-ssl-settings) (<https://www.elastic.co/guide/en/elasticsearch/reference/current/security-settings.html#http-tls-ssl-settings>) is enabled on the Elasticsearch cluster.

```
search:  
  backend: elasticsearch  
  url: https://localhost:9200/  
  clientAuth:  
    keyStore: /path/to/your/keystore.pfx  
    keyStoreType: PKCS12  
    keyStorePassword: vidispine  
    alias: key-alias
```

- `keyStore`: Path to the KeyStore file.
- `keyStoreType`: The KeyStore type.
- `keyStorePassword`: The password of the KeyStore.
- `alias`: Alias of the KeyStore entry to use (Optional).

httpClient

New in version 4.15.

These settings configure how HTTP requests are made. This includes requests made to for example:

- Storages using HTTP/HTTPS
- HTTP notification endpoints
- Transcoders
- Vidinet

TLS

Configure the server certificates to trust (the trust store) and the client certificates and keys to use (the key store) when using TLS client authentication.

Note that, if no `tls` field is present in the configuration file, then by default all server certificates will be trusted. However, if a `tls` fields is defined then the defaults defined in the configuration reference apply (`trustSelfSignedCertificates=false` for example).

- `tls`: The TLS settings. See the [Dropwizard HTTP client TLS configuration](https://www.dropwizard.io/1.2.0/docs/manual/configuration.html#man-configuration-clients-http-tls) (<https://www.dropwizard.io/1.2.0/docs/manual/configuration.html#man-configuration-clients-http-tls>) for a list of available properties.

For example:

```
httpClient:
  tls:
    keyStorePath: /etc/vidispine/keystore.jks
    keyStorePassword: ueLom50h
    trustStorePath: /etc/vidispine/truststore.jks
```

16.7 Package reference

16.7.1 Packages

The packages provided by Vidispine are:

vidispine-server The Vidispine server application.

vidispine-solr The latest supported version of Apache Solr, bundled with the Solr config and schema used by Vidispine.

transcoder The Vidispine transcoder.

16.7.2 Optional packages

vidispine-tools Optional command line tools.

vidispine-server-matrixstore3.1 Must be installed to be able to connect to MatrixStore 3.1. The MatrixStore 3.1 SDK is NOT compatible with MatrixStore 3.2.

vsctl Optional command line tool.

16.7.3 Files

The key files used by Vidispine:

/etc/vidispine/server.yaml The server configuration file.

/etc/vidispine/License.lic Your Vidispine license.

/etc/vidispine/slaveAuth.lic Your slave license file when using master/slave licensing.

/usr/share/vidispine/server/lib/ext/ The location of any custom JAR files.

/var/lib/vidispine/activemq/ The default location of the ActiveMQ data files when running an embedded broker.

/var/lib/vidispine/solr/ The location of the Solr cores.

/var/log/vidispine/server.log The Vidispine server log file.

/var/log/vidispine/transcoder.log The Vidispine transcoder log file.

New in version 4.5: The lib/ext directory was added.

See also:

See our [knowledge base articles](http://support.vidispine.com/support/home) (<http://support.vidispine.com/support/home>) for how to install Vidispine onto an application server.

17.1 Access controls

17.1.1 Managing access controls

In the following reference, {*access-entity*} is one of the following:

- `/item`
- `/collection`
- `/library`

Retrieve access control list for an entity

GET {*access-entity*}/ (*entity-id*) /**access/**

Retrieves the entire access control list for the specified entity.

Produces

- `application/xml`, `application/json` – [AccessControlListDocument](#)
- `text/plain` – CRLF-delimited list of ids

Role `_accesscontrol_read`

Add a new entry access control entry

POST {*access-entity*}/ (*entity-id*) /**access/**

Adds a new access control entry for the specified entity.

Query Parameters

- **allowDuplicate** – Set to `false` in order to avoid adding a duplicate access control, default is `true`.

New in version 4.8.

Accepts

- `application/xml`, `application/json` – [AccessControlDocument](#)

Produces

- `application/xml`, `application/json` – [AccessControlDocument](#)
- `text/plain` – The id of the created entry.

Role `_accesscontrol_write`

Example

```
POST /item/VX-123/access/
Content-Type: application/xml

<AccessControlDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <permission>READ</permission>
  <group>testGroup</group>
  <operation>
    <uri/>
  </operation>
</AccessControlDocument>
```

Retrieve a specific access control entry

GET `{access-entity}/(entity-id)/access/`
access-id Retrieves the desired access control entry.

Status Codes

- **404 Not found** – No entry with that id exists in that entity.

Produces

- **application/xml**, **application/json** – An `AccessControlDocument` containing the requested access control entry.
- **text/plain** – The id of the entry.

Role `_accesscontrol_read`

Delete a specific access control entry

DELETE `{access-entity}/(entity-id)/access/`
access-id Removes the desired access control entry.

Status Codes

- **200 OK** – The entry was successfully removed.
- **404 Not found** – No entry with that id exists in that entity.

Role `_accesscontrol_write`

Add access control entries to all items

POST `/item/access/`
Adds access control entries to all known items.

Accepts

- **application/xml**, **application/json** – `AccessControlDocument`

Role `_administrator`

Remove all access control entries from all items

DELETE `/item/access/`

Deletes all access control entries from all known items.

Role `_administrator`

Change the owner of an entity

PUT `{access-entity}/(entity-id)/access/owner/`

username Change the owner of the specified entity to the specified user.

Produces

- `application/xml`, `application/json` – [AccessControlDocument](#)

Role `_administrator`

New in version 4.10.

17.1.2 Managing access controls in bulk

Add multiple new entry access control entries

POST `{access-entity}/(entity-id)/access/bulk`

Adds multiple new access control entries to the specified entity.

Accepts

- `application/xml`, `application/json` – [AccessControlListDocument](#)

Produces

- `application/xml`, `application/json` – [AccessControlListDocument](#)
- `text/plain` – The ids of the created entries.

Role `_accesscontrol_write`

Example

```
POST /item/VX-123/access/bulk
```

```
Content-Type: application/xml
```

```
<AccessControlListDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <access>
    <permission>READ</permission>
    <group>testGroup</group>
    <operation>
      <uri/>
    </operation>
  </access>
  <access>
    <permission>READ</permission>
    <user>testUser</user>
  </access>
</AccessControlListDocument>
```

```
<AccessControlListDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <access id="VX-1043">
    <loc>http://localhost:8080/API/item/VX-123/access/VX-1043</loc>
    <grantor>admin</grantor>
    <appliesTo>all</appliesTo>
    <permission>READ</permission>
    <group>testGroup</group>
    <operation>
      <uri/>
    </operation>
  </access>
  <access id="VX-1044">
    <loc>http://localhost:8080/API/item/VX-123/access/VX-1044</loc>
    <grantor>admin</grantor>
    <appliesTo>all</appliesTo>
    <permission>READ</permission>
    <user>testUser</user>
  </access>
</AccessControlListDocument>
```

Delete multiple access control entries

DELETE {access-entity}/(item-id)/access/bulk

Deletes multiple access control entries by id.

Accepts

- application/xml, application/json – AccessControlListDocument

Role _accesscontrol_write

Example

```
DELETE /item/VX-123/access/bulk
Content-Type: application/xml

<AccessControlListDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <access id="VX-1043"/>
  <access id="VX-1044"/>
</AccessControlListDocument>
```

```
200 OK
```

17.1.3 Default access controls

Each user can specify what access control that will be applied to an imported item. The user importing the item will always be granted OWNER permissions.

List the default access controls for the current user

GET /import/access/

Lists the access control list that will be applied on imported items.

Produces

- `application/xml`, `application/json` – An `ImportAccessControlListDocument`

Role `_import`

Example

```
GET /import/access
```

```
<ImportAccessControlListDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <group>
    <name>mygroup</name>
    <permission>READ</permission>
  </group>
</ImportAccessControlListDocument>
```

Add a group to the default access control list

PUT `/import/access/group/` (*group-name*)

Sets the permissions for a certain group.

Query Parameters

- **permission** – The level of permissions to grant the group.

Role `_import`

Example

```
PUT /import/access/group/mygroup?permission=READ
```

```
200 OK
```

Remove a group from the default access control list

DELETE `/import/access/group/` (*group-name*)

Removes the specified group from the default access control list.

Role `_import`

Example

```
DELETE import/access/group/mygroup
```

```
200 OK
```

17.1.4 Viewing applied access controls

To review all access control entries that affects an item an `AccessControlMergedDocument` can be retrieved.

Retrieve a list of applied access control entries

GET `{access-entity}/(entity-id)/merged-access/`
Retrieves the access control entries that affects an item.

There are two modes of operation, either retrieving the access on the item for all users or querying for the access of a specific user. In the former case no parameters are specified and in the latter all parameters must be supplied.

The entries will be listed according to priority for every user. If the access is given through a group or a collection, the names and ids of those will be given.

If the effective access is different from the permission given by the access entry due to one or more grantors being disabled, the disabled grantors that the permission is derived from are listed in the 'originalDisabledGrantors' field. The effective access may also be different for other reasons, for example if the grantor's access has been revoked.

Query Parameters

- **username** – The name of the user to check.
- **permission** – The lowest required permission level.
- **type** – The type of operation to check for.
- **extradata** – Any possible extradata.

Produces

- **application/xml, application/json** – An [AccessControlMergedDocument](#) containing all access control that affects the entity.

Role `_accesscontrol_read`

Example: retrieving all entries

```
GET /item/VX-250/merged-access
```

```
<AccessControlMergedDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <access priority="1" id="VX-3111" username="admin">
    <permission>ALL</permission>
    <type>GENERIC</type>
  </access>
  <access priority="2" id="VX-24112" username="admin">
    <permission>WRITE</permission>
    <type>GENERIC</type>
    <collection>VX-10</collection>
  </access>
  <access priority="3" id="VX-4119" username="admin">
    <permission>ALL</permission>
    <type>GENERIC</type>
    <collection>VX-23</collection>
  </access>
  <access priority="4" id="VX-2221" username="admin">
    <permission>ALL</permission>
    <type>GENERIC</type>
    <collection>VX-12</collection>
  </access>
  <access priority="5" id="VX-2205" username="admin">
    <permission>ALL</permission>
    <type>GENERIC</type>
  </access>
</AccessControlMergedDocument>
```

```

    <collection>VX-10</collection>
  </access>
  <access priority="1" id="VX-24090" username="test">
    <permission>READ</permission>
    <type>METADATA</type>
    <group>mygroup</group>
  </access>
</AccessControlMergedDocument>

```

Example: querying about specific access

Checking if the user admin has full access to the metadata of item VX-250. Notice that the access provided by VX-24112 does not match, but it is less prioritized than the access of VX-3111 and thus the user has full access to the metadata.

```
GET /item/VX-250/merged-access?username=admin&permission=ALL&type=METADATA
```

```

<AccessControlMergedDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <query>
    <username>admin</username>
    <permission>ALL</permission>
    <type>METADATA</type>
    <item>VX-250</item>
  </query>
  <access priority="1" matches="true" id="VX-3111">
    <permission>ALL</permission>
    <type>GENERIC</type>
  </access>
  <access priority="2" matches="false" id="VX-24112">
    <permission>WRITE</permission>
    <type>GENERIC</type>
    <collection>VX-10</collection>
  </access>
  <access priority="3" matches="true" id="VX-4119">
    <permission>ALL</permission>
    <type>GENERIC</type>
    <collection>VX-23</collection>
  </access>
  <access priority="4" matches="true" id="VX-2221">
    <permission>ALL</permission>
    <type>GENERIC</type>
    <collection>VX-12</collection>
  </access>
  <access priority="5" matches="true" id="VX-2205">
    <permission>ALL</permission>
    <type>GENERIC</type>
    <collection>VX-10</collection>
  </access>
</AccessControlMergedDocument>

```

Retrieve a list of applied access control entries that affects groups

```
GET {access-entity}/(entity-id)/merged-access/group
```

Lists groups that have access to an entity.

Even though a user belongs to a group that has access to an entity, the user may not have access due to other access control entries that take precedence.

Groups without users will not appear, unless the group belongs to an inheritance hierarchy that has users.

Query Parameters

- **full** –
 - `true` - Return all access controls that apply for a group. Also include additional information about the access controls in the response.
 - `false` (default) - Return a single access entry with the permission that applies for each group and type.

New in version 4.2.3.

Produces

- **application/xml**, **application/json** – An [AccessControlMergedGroupDocument](#).

Role `_accesscontrol_read`

Example

```
GET /item/VX-1000/merged-access/group
```

```
<AccessControlMergedGroupDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <access>
    <group>groupA</group>
    <permission>READ</permission>
    <type>GENERIC</type>
  </access>
  <access>
    <group>_transcoder</group>
    <permission>WRITE</permission>
    <type>GENERIC</type>
  </access>
  <access>
    <group>_special_all</group>
    <permission>WRITE</permission>
    <type>GENERIC</type>
  </access>
  <access>
    <group>groupD</group>
    <permission>READ</permission>
    <type>GENERIC</type>
  </access>
  <access>
    <group>groupC</group>
    <permission>READ</permission>
    <type>GENERIC</type>
  </access>
  <access>
    <group>groupB</group>
    <permission>READ</permission>
    <type>GENERIC</type>
  </access>
</AccessControlMergedGroupDocument>
```

```
</access>
</AccessControlMergedGroupDocument>
```

17.1.5 Access visualization

In order to easily see the access control that apply for an entity there is a functionality to render the access control inheritance as a graph. In order to render the graph, the [Graphviz](http://www.graphviz.org/) (<http://www.graphviz.org/>) package is required.

Get access graph

GET `{access-entity}/(entity-id)/access/graph`

Shows the entity and any ancestor collections or libraries and the access controls on each. The access-entity can be item or collection (library is not implemented).

Query Parameters

- **type** –
 - `ancestor` - Show the entity and ancestor entities in a hierarchy.
 - `grant` - Show users and how permissions have been granted.
- **users** – If the user and group hierarchy should be shown as a subgraph for the relevant users/groups.
- **groups** – If groups should be shown as nodes in the grant graph.

Produces

- `image/png` –

Role `_administrator`

Get access graph as dot file

GET `{access-entity}/(entity-id)/access/graph/dot`

Shows the entity and any ancestor collections or libraries and the access controls on each. The access-entity can be item or collection (library is not implemented).

Query Parameters

- **type** –
 - `ancestor` - Show the entity and ancestor entities in a hierarchy.
 - `grant` - Show users and how permissions have been granted.
- **users** – If the user and group hierarchy should be shown as a subgraph for the relevant users/groups.
- **groups** – If groups should be shown as nodes in the grant graph.

Produces

- `text/plain`, `text/vnd.graphviz` –

Role `_administrator`

17.2 Audit trails

The audit log records all requests made to the API, excluding the request data, for later use. It is typically used for troubleshooting, to be able to determine what happened when, and for examining actions taken by users or other services.

17.2.1 Examining the log

Retrieving log content

GET /log

Retrieves log entries according to the specified filtering criteria. The path can be seen as having an implicit wildcard in the end, unless it is disabled with the `wildcard` parameter. For example `/item/VX-123` will match `/item/VX-123/shape` but not `/item/VX-124`.

Query Parameters

- **path** – Optional string, matches path in log lines, default is `/`.
- **first** – Optional integer, number of first row to return, default is `0`.
- **rows** – Optional integer, number of rows to return, default is `100`. Cannot be greater than `1000`.
- **starttime** – Optional ISO 8601 time, for lower limit of rows to return.
- **endtime** – Optional ISO 8601 time, for upper limit of rows to return.
- **wildcard** –
 - `false` - Do not treat do truncation at end of path.
 - `true` - Treat end of path to have a `*` wildcard.
- **username** – Optional string, only return rows that the specified user invoked. Default is all rows.
- **method** – Optional string, only return rows with the specified method, e.g. `GET`. Default is all rows.
- **performCount** –
 - `false` (default) - Do not return a total number of rows matching criteria.
 - `true` - Return a total number of rows matching criteria (except first and count).
- **sort** –
 - `asc` - Order by timestamp ascending.
 - `desc` (default) - Order by timestamp descending.

Produces

- `application/xml`, `application/json` – [AuditLogDocument](#)

Role `_administrator`

Example

```
GET /log?path=/item/VX-10&method=GET&username=admin&performCount=true
```

```
<AuditLogDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <count>13</count>
  <entry timestamp="2010-11-26T15:46:25.328+01:00">
    <username>admin</username>
    <method>GET</method>
    <path>/item/VX-10/uri</path>
    <queryParameters>methodType=AUTO</queryParameters>
    <matrixParameters/>
  </entry>
  <entry timestamp="2010-11-26T15:46:20.053+01:00">
    <username>admin</username>
    <method>GET</method>
    <path>/item/VX-10/uri</path>
    <queryParameters/>
    <matrixParameters/>
  </entry>
  <entry timestamp="2010-11-26T15:28:03.674+01:00">
    <username>admin</username>
    <method>GET</method>
    <path>/item/VX-10</path>
    <queryParameters>content=shape</queryParameters>
    <matrixParameters/>
  </entry>
  <entry timestamp="2010-11-26T15:26:49.031+01:00">
    <username>admin</username>
    <method>GET</method>
    <path>/item/VX-10</path>
    <queryParameters>content=shape</queryParameters>
    <matrixParameters/>
  </entry>
  <entry timestamp="2010-11-26T15:16:53.508+01:00">
    <username>admin</username>
    <method>GET</method>
    <path>/item/VX-10</path>
    <queryParameters>content=shape</queryParameters>
    <matrixParameters/>
  </entry>
</AuditLogDocument>
```

Exporting log content

```
GET /log/export
```

Is very similar to the method above, but instead of delivering the entire document at once it is streamed. Therefore there is no restriction on the maximum number of rows that can be retrieved.

Query Parameters

- **path** – Optional string, matches path in log lines, default is /.
- **first** – Optional integer, number of first row to return, default is 0.
- **rows** – Optional integer, number of rows to return, default is 100.
- **starttime** – Optional ISO 8601 time, for lower limit of rows to return.

- **endtime** – Optional ISO 8601 time, for upper limit of rows to return.
- **wildcard** –
 - `false` - Do not treat do truncation at end of path.
 - `true` - Treat end of path to have a `*` wildcard.
- **username** – Optional string, only return rows that the specified user invoked. Default is all rows.
- **method** – Optional string, only return rows with the specified method, e.g. `GET`. Default is all rows.
- **sort** –
 - `asc` - Order by timestamp ascending.
 - `desc` (default) - Order by timestamp descending.

Produces

- **application/xml** – [AuditLogDocument](#)

Role `_administrator`

17.3 Collections

A collection is an ordered logical set of items, libraries and other collections.

Tip: Access to collections and their item and collection content can be set using *access control lists*.

17.3.1 Managing collections

Retrieve a list of all collections

GET `/collection`

Retrieves a list of all known collections.

Matrix Parameters

- **first** – Integer, from resulting list of items, start return list from specified offset. Default is 1, start return list from beginning.
- **cursor** – New in version 4.16.
 - `*` - The initial cursor.
 - `string-from-search` - Cursor string returned from the search results.

If set, the `cursorMark` (https://lucene.apache.org/solr/guide/6_6/pagination-of-results.html#fetching-a-large-number-of-sorted-results-cursors) / `search after` (<https://www.elastic.co/guide/en/elasticsearch/reference/6.3/search-request-search-after.html#search-request-search-after>) features from Solr/Elasticsearch would be used to improve the `deep paging` (https://lucene.apache.org/solr/guide/6_6/pagination-of-results.html#performance-problems-with-deep-paging) performance during a search.

When `cursor` is used, The value of `first` will be ignored.

Only metadata searches in the `generic` interval supports `cursor`.

- **number** – Integer, the number of entities to fetch. Default 100.

Query Parameters

- **count** –
 - `true` (default) - Return hits in result.
 - `false` - Do not return hits in result, in order to produce results faster.
- **content** – Optional comma-separated list of addition content to retrieve. Possible values are: `metadata`, `merged-access`, `external`.
- **interval** – Comma-separated list
 - `time-span` - Filter out metadata, return only metadata for specified *time span*.
 - `generic` - Return all non-timed metadata.
 - `all` (default) - Return all metadata, same as `interval=generic`, `-INF`+`INF`
- **field** – Comma-separated list.
 - `field-name` - Return specified field.
 - `field-name ":" new-name` - Return specified field, renamed to a new name in return value.
 - `"-" field-name` - Exclude specified field.
 - (default) - Return all fields.
- **group** – Comma-separated list.
 - `group-name` - Return specified group.
 - `group-name +` - Return specified group and subgroups.
New in version 4.1.
 - `group-name : new-name` - Return specified group, renamed to a new name in return value.
 - `- group-name` - Exclude specified group.
 - (default) - Return all groups.
- **track** – Comma separated list.
 - `track-type track-number` - Return metadata for specified track. Example of track is `A2`.
 - `track-type t1 - t2` - Return metadata for specified track interval, e.g. `A2-4`.
 - `track-type *` - Return metadata for all tracks of specified type, e.g. `A*`.
 - `generic` - Return all non-tracked metadata.
 - `all` (default) - All metadata, with or without track specification, are returned.
- **language** – Comma separated list.
 - `language-tag` - Return metadata for specific language, e.g. `en_US`. Wildcards may be used, e.g. `*_CA` for both Canadian French and Canadian English.
 - `none` - Return all metadata without language specification.
 - `all` (default) - Return all metadata, with or without language specification.

- **sampleRate** – Convert all outgoing *time instants* to specified rate. *NB! Time codes* which cannot be expressed in an integer number of samples will be returned as a decimal number, with risk of losing precision.
- **conflict** –
 - `yes` (default) - Include all metadata conflicts, unresolved.
 - `no` - Return conflicts resolved according to field rules.
- **include** – A list of keys. Includes additional *field specific data*. Additionally, if set to `type` the type definition of the field will be retrieved.
- **defaultValue** –
 - `true` - For unset fields, return *default values*.
 - `false` (default) - Do not return default values.
- **includeTransientMetadata** –
 - `true` (default) - Include *transient metadata*.
 - `false` - Do not include transient metadata in response.
- **includeValues** – Return the value enumeration for each metadata field.
- **terse** –
 - `yes` - Return metadata in *terse format*.
 - `no` (default) - Return metadata in verbose format.
- **revision** – Optional revision, specifying which metadata to display. Only used if requesting a single item or collection.
- **mergedType** – The type of operation to check for.
- **mergedPermission** – The lowest required permission level.
- **mergedExtradata** – Any possible extradata.

Produces

- `application/xml`, `application/json` – [CollectionListDocument](#)
- `text/plain` – CRLF-delimited list of ids

Role `_collection_read`

Create a collection

POST `/collection`

Generates a new collection and returns the id associated with that collection.

Query Parameters

- **name** – Optional name of the collection.
- **externalId** – An external identifier to assign to the collection.
- **settings** – Pre-configured *import settings*.

Produces

- `application/xml`, `application/json` – [CollectionDocument](#)
- `text/plain` – CRLF-delimited list of ids

Status Codes

- **400** – If the external id is already in use.

Role `_collection_write`

POST /collection

Generates a new collection and returns the id associated with that collection.

This resource accepts a collection document that can contain both metadata that should be set for the collection and the entities that it should contain.

New in version 4.8.

Query Parameters

- **name** – Optional name of the collection.
- **externalId** – An external identifier to assign to the collection.
- **settings** – Pre-configured *import settings*.

Accepts

- `application/xml`, `application/json` – [CollectionDocument](#)

Produces

- `application/xml`, `application/json` – [CollectionDocument](#)
- `text/plain` – CRLF-delimited list of ids

Status Codes

- **400** – If the external id is already in use.

Role `_collection_write`

Delete a collection**DELETE /collection/ (collection-id)**

Delete specified collection.

Note that the actual items and libraries that are contained within the collection are not modified.

Status Codes

- **200 OK** – The collection is deleted.
- **404 Not found** – Could not find the collection.

Role `_collection_write`

Delete multiple collections

New in version 4.8.

DELETE /collection

Delete multiple collections.

Note that the actual items and libraries that are contained within the collection are not modified.

Query Parameters

- **id** – Comma-separated list of collection ids or external ids. Must not be empty.

Status Codes

- **200 OK** – The collections are deleted.
- **404 Not found** – Could not find the collection.

Role `_collection_write`

Example

```
DELETE /collection?id=VX-32,VX-56
```

Rename a collection

PUT `/collection/ (collection-id) /rename`

Renames the collection with the *Identifiers* `collection-id`.

Query Parameters

- **name** – Mandatory, new name of the collection.

Role `_collection_write`

17.3.2 Collection content

Retrieve the contents of a collection

GET `/collection/ (collection-id)`

Return the ids of the objects contained within the collection, that has the id `collection-id`.

Query Parameters

- **content** – Optional comma-separated list of addition content to retrieve. Possible values are: `metadata`, `merged-access`, `external`.
- **interval** – Comma-separated list
 - `time-span` - Filter out metadata, return only metadata for specified *time span*.
 - `generic` - Return all non-timed metadata.
 - `all` (default) - Return all metadata, same as `interval=generic,-INF+INF`
- **field** – Comma-separated list.
 - `field-name` - Return specified field.
 - `field-name ":" new-name` - Return specified field, renamed to a new name in return value.
 - `"-" field-name` - Exclude specified field.
 - (default) - Return all fields.
- **group** – Comma-separated list.
 - `group-name` - Return specified group.
 - `group-name +` - Return specified group and subgroups.

New in version 4.1.

- *group-name* : *new-name* - Return specified group, renamed to a new name in return value.
- - *group-name* - Exclude specified group.
- (default) - Return all groups.
- **track** – Comma separated list.
 - *track-type track-number* - Return metadata for specified track. Example of track is A2.
 - *track-type t1 - t2* - Return metadata for specified track interval, e.g. A2-4.
 - *track-type ** - Return metadata for all tracks of specified type, e.g. A*.
 - *generic* - Return all non-tracked metadata.
 - *all* (default) - All metadata, with or without track specification, are returned.
- **language** – Comma separated list.
 - *language-tag* - Return metadata for specific language, e.g. en_US. Wildcards may be used, e.g. *_CA for both Canadian French and Canadian English.
 - *none* - Return all metadata without language specification.
 - *all* (default) - Return all metadata, with or without language specification.
- **sampleRate** – Convert all outgoing *time instants* to specified rate. *NB! Time codes* which cannot be expressed in an integer number of samples will be returned as a decimal number, with risk of losing precision.
- **conflict** –
 - *yes* (default) - Include all metadata conflicts, unresolved.
 - *no* - Return conflicts resolved according to field rules.
- **include** – A list of keys. Includes additional *field specific data*. Additionally, if set to *type* the type definition of the field will be retrieved.
- **defaultValue** –
 - *true* - For unset fields, return *default values*.
 - *false* (default) - Do not return default values.
- **includeTransientMetadata** –
 - *true* (default) - Include *transient metadata*.
 - *false* - Do not include transient metadata in response.
- **includeValues** – Return the value enumeration for each metadata field.
- **terse** –
 - *yes* - Return metadata in *terse format*.
 - *no* (default) - Return metadata in verbose format.
- **revision** – Optional revision, specifying which metadata to display. Only used if requesting a single item or collection.
- **mergedType** – The type of operation to check for.
- **mergedPermission** – The lowest required permission level.
- **mergedExtradata** – Any possible extradata.

- **children** – Comma-separated list of types to include in the result. Default is to return everything.

- `collection` - Return collections contained in this collection
- `item` - Return items contained in this collection
- `library` - Return libraries contained in this collection

New in version 4.16.6.

Status Codes

- **404 Not found** – Could not find the collection.

Produces

- `application/xml`, `application/json` – `CollectionDocument`
- `text/plain` – CRLF-delimited list of ids

Role `_collection_read`

Retrieve the items of a collection

GET `/collection/ (collection-id) /item`

Retrieves only the items of the collection.

Changed in version 4.4: Queries on collection items will now return items in creation order by default. See [indexCollectionItemOrder](#) on how to revert back to using the insert/custom collection item ordering.

Content Parameters See *Retrieving item information*

Query Parameters

- **result** –
 - `list` (default) - Return a list of items.
 - `library` - Create a library with the matching items.
- **q** – XML/JSON, `ItemSearchDocument`. Only with `GET` (<http://www.w3.org/Protocols/rfc2616/rfc2616-sec9.html#sec9.3>).
- **count** –
 - `true` (default) - Return hits in result.
 - `false` - Do not return hits in result, in order to produce results faster.
- **p** – Comma separated list of *paths* specifying the content to include. Overrides the content and filter parameters.
New in version 4.5.
- **content** – Comma-separated list of the types of content to retrieve, possible values are `metadata`, `uri`, `shape`, `poster`, `thumbnail`, `access`, `merged-access`, `external`.
- **interval** – Comma-separated list
 - `time-span` - Filter out metadata, return only metadata for specified *time span*.
 - `generic` - Return all non-timed metadata.
 - `all` (default) - Return all metadata, same as `interval=generic, -INF-+INF`

- **field** – Comma-separated list.
 - *field-name* - Return specified field.
 - *field-name* ":" *new-name* - Return specified field, renamed to a new name in return value.
 - "-" *field-name* - Exclude specified field.
 - (default) - Return all fields.
- **group** – Comma-separated list.
 - *group-name* - Return specified group.
 - *group-name* + - Return specified group and subgroups.
 - New in version 4.1.
 - *group-name* : *new-name* - Return specified group, renamed to a new name in return value.
 - - *group-name* - Exclude specified group.
 - (default) - Return all groups.
- **language** – Comma separated list.
 - *language-tag* - Return metadata for specific language, e.g. en_US. Wildcards may be used, e.g. *_CA for both Canadian French and Canadian English.
 - none - Return all metadata without language specification.
 - all (default) - Return all metadata, with or without language specification.
- **sampleRate** – Convert all outgoing *time instants* to specified rate. *NB! Time codes* which cannot be expressed in an integer number of samples will be returned as a decimal number, with risk of losing precision.
- **track** – Comma separated list.
 - *track-type track-number* - Return metadata for specified track. Example of track is A2.
 - *track-type t1 - t2* - Return metadata for specified track interval, e.g. A2-4.
 - *track-type ** - Return metadata for all tracks of specified type, e.g. A*.
 - generic - Return all non-tracked metadata.
 - all (default) - All metadata, with or without track specification, are returned.
- **include** – A list of keys. Includes additional *field specific data*. Additionally, if set to *type* the type definition of the field will be retrieved.
- **includeValues** – Return the value enumeration for each metadata field.
- **conflict** –
 - yes (default) - Include all metadata conflicts, unresolved.
 - no - Return conflicts resolved according to field rules.
- **terse** –
 - yes - Return metadata in *terse format*.
 - no (default) - Return metadata in verbose format.
- **defaultValue** –
 - true - For unset fields, return *default values*.

- `false` (default) - Do not return default values.
 - **includeTransientMetadata** -
 - `true` (default) - Include *transient metadata*.
 - `false` - Do not include transient metadata in response.
 - **revision** - Optional revision, specifying which metadata to display. Only used if requesting a single item or collection.
 - **mergedType** - The type of operation to check for.
 - **mergedPermission** - The lowest required permission level.
 - **mergedExtradata** - Any possible extradata.
 - **uriType** - Optional comma-separated list of format types (container format) to return.
 - **scheme** - URI scheme to return.
 - **storageType** - Only return URIs for files from storages of this *type*.
 - **methodType** - Optional *type of access method*.
 - `AUTO` - Gives an APIInoauth URI to the media. Access to file is tunneled through Vidispine.
 - `AZURE_SAS` - If the storage schema is `azure://` you can get direct access to the media. The resulting URI will not tunnel through Vidispine but rather point directly to the media location at the azure storage.
 - **methodMetadata** - Optional *metadata* used with storage method.
 - **tag** - A *URI parameter*: Optional comma-separated list of *shape tags* to return.
 - **version** - Optional integer, specifying which essence version to return for shapes. If special value `all`, display all versions. If special value `latest` (default), display latest version of shapes.
 - **closedFiles** - A *URI parameter*:
 - `true` (default) - Return only URIs that point to closed files.
 - `false` - Return all URIs.
 - **url** -
 - `true` - Return list of URLs.
 - `false` (default) - Return list of ids.
 - **noauth-url** -
 - `true` Return URIs that do not need authentication.
 - `false` (default) Return normal URIs
 - **baseURI** - Which base URI to use for the thumbnail URLs.
 - **save** -
 - `true` - Returns a 303 See Other, with a `Location` header containing an URI to fetch the search result
 - `false` (default) - Returns a regular search result
- New in version 4.7.

Matrix Parameters

- **library** – Restricts search to within library, *Identifiers*. Default is `*`, all items.
- **first** – Integer, from resulting list of items, start return list from specified offset. Default is 1, start return list from beginning.
- **cursor** – New in version 4.16.
 - `*` - The initial cursor.
 - `string-from-search` - Cursor string returned from the search results.

If set, the `cursorMark` (https://lucene.apache.org/solr/guide/6_6/pagination-of-results.html#fetching-a-large-number-of-sorted-results-cursors) / `search after` (<https://www.elastic.co/guide/en/elasticsearch/reference/6.3/search-request-search-after.html#search-request-search-after>) features from Solr/Elasticsearch would be used to improve the `deep paging` (https://lucene.apache.org/solr/guide/6_6/pagination-of-results.html#performance-problems-with-deep-paging) performance during a search.

When `cursor` is used, The value of `first` will be ignored.

Only metadata searches in the `generic` interval supports `cursor`.

- **number** – Integer, the number of entities to fetch. Default 100.
- **libraryId** – If set, the library identified by this id will be used instead of creating a new library.
- **autoRefresh** – When creating a library, make it *self-refresh*. Defaults to `false`.
- **updateMode** – When creating a library, use this *update mode*. Defaults to `MERGE`.
- **updateFrequency** – When creating a library, use this *update frequency*. Defaults to no periodic updates.
- **storage** – Optional list of storage ids. Return only files from specific storages. Can be specified multiple times.
 - New in version 4.13.
- **storageGroup** – Optional storage group id. Return only files from storages specified in the storage group.
 - New in version 4.13.
- **starttc** –
 - `true` - Interval is given relative to start timecode of item.
 - `false` (default) - Interval is 0-based.

Produces

- `application/xml`, `application/json` – [ItemListDocument](#)
- `text/plain` – CRLF-delimited list of ids or URLs
- `application/xml`, `application/json` – [ItemListDocument](#)
- `text/plain` – CRLF-delimited list of ids or URLs.

Status Codes

- **404 Not found** – Could not find the collection.

Role `_collection_read`

Retrieve the ancestors of a collection

GET `/collection/ (collection-id) /ancestor`
Retrieves the ids of all ancestors of the collection.

Produces

- `application/xml`, `application/json` – `URIListDocument`
- `text/plain` – CRLF-delimited list of ids

Role `_collection_read`

Search for items within a collection

New in version 4.0.

PUT `/collection/ (collection-id) /item`
Performs a search among the items in the specified collection.

Note: Searching can also be performed by using the HTTP method `PUT` (<http://www.w3.org/Protocols/rfc2616/rfc2616-sec9.html#sec9.6>) using the same syntax, except for the parameter `q` is omitted and the `ItemSearchDocument` is sent in the body of the request.

Tip: There is a limit on how many items that can be returned for each call to this method. To get all items, iterate the calls, or even better in a batch scenario, use *Listing items in batch*.

Changed in version 4.4: Queries on collection items will now return items in creation order by default. See *indexCollectionItemOrder* on how to revert back to using the insert/custom collection item ordering.

Content Parameters See *Retrieving item information*

Query Parameters

- **result** –
 - `list` (default) - Return a list of items.
 - `library` - Create a library with the matching items.
- **q** – XML/JSON, `ItemSearchDocument`. Only with `GET` (<http://www.w3.org/Protocols/rfc2616/rfc2616-sec9.html#sec9.3>).
- **count** –
 - `true` (default) - Return hits in result.
 - `false` - Do not return hits in result, in order to produce results faster.
- **p** – Comma separated list of *paths* specifying the content to include. Overrides the content and filter parameters.

New in version 4.5.

- **content** – Comma-separated list of the types of content to retrieve, possible values are `metadata`, `uri`, `shape`, `poster`, `thumbnail`, `access`, `merged-access`, `external`.
- **interval** – Comma-separated list

- *time-span* - Filter out metadata, return only metadata for specified *time span*.
- *generic* - Return all non-timed metadata.
- *all* (default) - Return all metadata, same as `interval=generic,-INF-+INF`
- **field** – Comma-separated list.
 - *field-name* - Return specified field.
 - *field-name* ":" *new-name* - Return specified field, renamed to a new name in return value.
 - "-" *field-name* - Exclude specified field.
 - (default) - Return all fields.
- **group** – Comma-separated list.
 - *group-name* - Return specified group.
 - *group-name* + - Return specified group and subgroups.
 - New in version 4.1.
 - *group-name* : *new-name* - Return specified group, renamed to a new name in return value.
 - - *group-name* - Exclude specified group.
 - (default) - Return all groups.
- **language** – Comma separated list.
 - *language-tag* - Return metadata for specific language, e.g. `en_US`. Wildcards may be used, e.g. `*_CA` for both Canadian French and Canadian English.
 - *none* - Return all metadata without language specification.
 - *all* (default) - Return all metadata, with or without language specification.
- **sampleRate** – Convert all outgoing *time instants* to specified rate. *NB!* *Time codes* which cannot be expressed in an integer number of samples will be returned as a decimal number, with risk of losing precision.
- **track** – Comma separated list.
 - *track-type track-number* - Return metadata for specified track. Example of track is `A2`.
 - *track-type t1 - t2* - Return metadata for specified track interval, e.g. `A2-4`.
 - *track-type ** - Return metadata for all tracks of specified type, e.g. `A*`.
 - *generic* - Return all non-tracked metadata.
 - *all* (default) - All metadata, with or without track specification, are returned.
- **include** – A list of keys. Includes additional *field specific data*. Additionally, if set to *type* the type definition of the field will be retrieved.
- **includeValues** – Return the value enumeration for each metadata field.
- **conflict** –
 - *yes* (default) - Include all metadata conflicts, unresolved.
 - *no* - Return conflicts resolved according to field rules.
- **terse** –
 - *yes* - Return metadata in *terse format*.

- `no` (default) - Return metadata in verbose format.
- **defaultValue** -
 - `true` - For unset fields, return *default values*.
 - `false` (default) - Do not return default values.
- **includeTransientMetadata** -
 - `true` (default) - Include *transient metadata*.
 - `false` - Do not include transient metadata in response.
- **revision** - Optional revision, specifying which metadata to display. Only used if requesting a single item or collection.
- **mergedType** - The type of operation to check for.
- **mergedPermission** - The lowest required permission level.
- **mergedExtradata** - Any possible extradata.
- **uriType** - Optional comma-separated list of format types (container format) to return.
- **scheme** - URI scheme to return.
- **storageType** - Only return URIs for files from storages of this *type*.
- **methodType** - Optional *type of access method*.
 - `AUTO` - Gives an APIInoauth URI to the media. Access to file is tunneled through Vidispine.
 - `AZURE_SAS` - If the storage schema is `azure://` you can get direct access to the media. The resulting URI will not tunnel through Vidispine but rather point directly to the media location at the azure storage.
- **methodMetadata** - Optional *metadata* used with storage method.
- **tag** - A *URI parameter*: Optional comma-separated list of *shape tags* to return.
- **version** - Optional integer, specifying which essence version to return for shapes. If special value `all`, display all versions. If special value `latest` (default), display latest version of shapes.
- **closedFiles** - A *URI parameter*:
 - `true` (default) - Return only URIs that point to closed files.
 - `false` - Return all URIs.
- **url** -
 - `true` - Return list of URLs.
 - `false` (default) - Return list of ids.
- **noauth-url** -
 - `true` Return URIs that do not need authentication.
 - `false` (default) Return normal URIs
- **baseURI** - Which base URI to use for the thumbnail URLs.
- **save** -

- `true` - Returns a 303 See Other, with a `Location` header containing an URI to fetch the search result
- `false` (default) - Returns a regular search result

New in version 4.7.

Matrix Parameters

- **library** – Restricts search to within library, *Identifiers*. Default is `*`, all items.
- **first** – Integer, from resulting list of items, start return list from specified offset. Default is 1, start return list from beginning.
- **cursor** – New in version 4.16.
 - `*` - The initial cursor.
 - `string-from-search` - Cursor string returned from the search results.

If set, the `cursorMark` (https://lucene.apache.org/solr/guide/6_6/pagination-of-results.html#fetching-a-large-number-of-sorted-results-cursors) / `search after` (<https://www.elastic.co/guide/en/elasticsearch/reference/6.3/search-request-search-after.html#search-request-search-after>) features from Solr/Elasticsearch would be used to improve the `deep paging` (https://lucene.apache.org/solr/guide/6_6/pagination-of-results.html#performance-problems-with-deep-paging) performance during a search.

When `cursor` is used, The value of `first` will be ignored.

Only metadata searches in the `generic` interval supports `cursor`.

- **number** – Integer, the number of entities to fetch. Default 100.
- **libraryId** – If set, the library identified by this id will be used instead of creating a new library.
- **autoRefresh** – When creating a library, make it *self-refresh*. Defaults to `false`.
- **updateMode** – When creating a library, use this *update mode*. Defaults to `MERGE`.
- **updateFrequency** – When creating a library, use this *update frequency*. Defaults to no periodic updates.
- **storage** – Optional list of storage ids. Return only files from specific storages. Can be specified multiple times.

New in version 4.13.
- **storageGroup** – Optional storage group id. Return only files from storages specified in the storage group.

New in version 4.13.
- **starttc** –
 - `true` - Interval is given relative to start timecode of item.
 - `false` (default) - Interval is 0-based.

Produces

- `application/xml`, `application/json` – `ItemListDocument`
- `text/plain` – CRLF-delimited list of ids or URLs

Accepts

- `application/xml`, `application/json` – `ItemSearchDocument`

Status Codes

- **400 Bad request** – Either the `ItemSearchDocument` or a parameter was invalid.

Role `_collection_read`

Example

```
GET /collection/VX-76/item
Accept: application/xml
```

```
<ItemListDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <item id="VX-45"/>
  <item id="VX-46"/>
  <item id="VX-47"/>
  <item id="VX-62"/>
</ItemListDocument>
```

Add an item, library or collection to a collection

PUT `/collection/ (collection-id) /`

id Adds an item, library or collection with the id *id*, to the collection with the id *collection-id*. If *id* is already present within the collection, this is a no-op, except if the query parameter *metadata* is used. In that case, *metadata* is updated for the specified entity.

Query Parameters

- **type** –
 - `collection` - The object identified by *id* is a collection.
 - `item` (default) - The object identified by *id* is an item.
 - `library` - The object identified by *id* is a library.
- **addItem** –
 - `true` - Library items will be added individually. Only has any effect when `type=library`.
 - `false` - Library will be added to collection, not specific items.
- **metadata** –
 - `key = value` - Set or add metadata field to the relation between the collection and entity. Can be used multiple times to add several fields. The key cannot be empty or start with a minus sign. To delete a field enter the same key with a minus sign at the beginning.

Note that `=` is part of the query parameter, and has to be encoded (`%3d`).

New in version 4.7.

Status Codes

- **200 OK** – The collection, item or library was added, or already existed within the collection.
- **400 Bad request** – Cannot add a collection to itself, the type was given an invalid value or a metadata key is not specified.
- **404 Not found** – Could not find the collection, item or library.

Role `_collection_write`

Example

```
PUT /collection/vx-1000/vx*10?type=library?metadata=addedBy=admin&metadata=dateAdded=Feb
```

```
HTTP/1.1 200 OK
```

Remove an item, library or collection from a collection

DELETE `/collection/ (collection-id) /`

id Attempts to remove specific content with the id, *id*, from a collection with the id *collection-id*.

Note that the object corresponding to the *id* is not altered.

Query Parameters

- **type** –
 - `collection` - The object identified by *id* is a collection.
 - `item` (default) - The object identified by *id* is an item.
 - `library` - The object identified by *id* is a library.

Status Codes

- **200 OK** – The item/library is removed from the collection.
- **400 Bad request** – The type was given an invalid value.
- **404 Not found** – Could not find the collection or the item/library.

Role `_collection_write`

Update a collection

New in version 4.7.

PUT `/collection/ (collection-id)`

Updates the content of the collection with the id *collection-id* as specified in the document. It is also possible to change the name of the collection and metadata of the collection-entity relations.

Either all or no entities must have a mode specified. If no entities have a mode specified and the document contains an entity that does not exist in the collection, then the entity will be added.

When no entities have a mode specified the entities will get the same position as they are ordered in the document.

Query Parameters

- **clear** –
 - `true` (default) - All entities that are in the collection but not specified in the document will be removed. Only has any effect when no entities have a mode specified.
 - `false` - All entities in the document will be appended to the collection. If an entity already exist in the collection then the position is determined by the document. Only has any effect when no entities have a mode specified.

Accepts

- **application/xml**, **application/json** – `CollectionDocument` that contains the entity ids.

Produces

- **application/xml**, **application/json** – `CollectionDocument` containing the collection name and the entities in order.

Status Codes

- **200 OK** – All operations in the document was successfully completed.
- **404 Not found** – Could not find one of the entities.
- **400 Invalid input** – Invalid type specified, all or none entities have not a mode specified or an entity is specified twice in the document.

Role `_collection_write`

Example: Modify an entire collection

Here is an example where the name of the collection is changed and some entities are added, removed and repositioned. First `GET /collection/(collection-id)` is used to get the content. The content is then modified and applied with `PUT /collection/(collection-id)?clear=true`.

```
GET /collection/VX-1000
```

```
<CollectionDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <loc>http://localhost:8080/API/collection/VX-1000/</loc>
  <id>VX-1000</id>
  <name>Old name</name>
  <content>
    <id>VX-1</id>
    <uri>http://localhost:8080/API/item/VX-1</uri>
    <type>item</type>
    <metadata/>
  </content>
  <content>
    <id>VX-2</id>
    <uri>http://localhost:8080/API/item/VX-2</uri>
    <type>item</type>
    <metadata/>
  </content>
  <content>
    <id>VX-3</id>
    <uri>http://localhost:8080/API/item/VX-3</uri>
    <type>item</type>
    <metadata>
      <field>
        <key>AddedBy</key>
        <value>foo</value>
      </field>
    </metadata>
  </content>
  <content>
    <id>VX*20</id>
    <uri>http://localhost:8080/API/library/VX*20</uri>
```

```

    <type>library</type>
  </metadata/>
</content>
<content>
  <id>VX-100</id>
  <uri>http://localhost:8080/API/collection/VX-100</uri>
  <type>collection</type>
  <metadata>
    <field>
      <key>AddedBy</key>
      <value>Admin</value>
    </field>
  </metadata>
</content>
<content>
  <id>VX-200</id>
  <uri>http://localhost:8080/API/collection/VX-200</uri>
  <type>collection</type>
  <metadata/>
</content>
<content>
  <id>VX-300</id>
  <uri>http://localhost:8080/API/collection/VX-300</uri>
  <type>collection</type>
  <metadata/>
</content>
</CollectionDocument>

```

PUT /collection/VX-1000?clear=true

Content-Type: application/xml

```

<CollectionDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <loc>http://localhost:8080/API/collection/VX-1000/</loc>
  <id>VX-1000</id>
  <!-- Change the name to "New name" -->
  <name>New name</name>

  <!-- Swap the positions of item VX-1 and item VX-2 -->
  <content>
    <id>VX-2</id>
    <uri>http://localhost:8080/API/item/VX-2</uri>
    <type>item</type>
    <metadata/>
  </content>
  <content>
    <id>VX-1</id>
    <uri>http://localhost:8080/API/item/VX-1</uri>
    <type>item</type>
    <metadata/>
  </content>

  <!-- Change value on the key "AddedBy" to "bar" in the metadata field of item VX-3 -
  ↪-->
  <content>
    <id>VX-3</id>
    <uri>http://localhost:8080/API/item/VX-3</uri>
    <type>item</type>
    <metadata>

```

```

    <field>
      <key>AddedBy</key>
      <value>bar</value>
    </field>
  </metadata>
</content>

<!-- Add library V*10. If addItem=true then the items in the library
will be added instead of the library. addItem is by default false
and only has effect on libraries. -->

<content addItem="false">
  <id>VX*10</id>
  <uri>http://localhost:8080/API/library/VX*10</uri>
  <type>library</type>
  <metadata/>
</content>
<content>
  <id>VX*20</id>
  <uri>http://localhost:8080/API/library/VX*20</uri>
  <type>library</type>
  <metadata/>
</content>

<!-- Remove the metadata from VX-100 -->
<content>
  <id>VX-100</id>
  <uri>http://localhost:8080/API/collection/VX-100</uri>
  <type>collection</type>
</content>

<content>
  <id>VX-200</id>
  <uri>http://localhost:8080/API/collection/VX-200</uri>
  <type>collection</type>
  <metadata/>
</content>

<!-- Collection VX-300 will be removed since clear=true and the
collection VX-300 is not specified here in the document -->
</CollectionDocument>

```

```

<CollectionDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <content>
    <id>VX-2</id>
    <type>item</type>
    <uri>http://localhost:8080/API/item/VX-2</uri>
    <metadata/>
  </content>
  <content>
    <id>VX-1</id>
    <type>item</type>
    <uri>http://localhost:8080/API/item/VX-1</uri>
    <metadata/>
  </content>
  <content>
    <id>VX-3</id>
    <type>item</type>

```

```

<uri>http://localhost:8080/API/item/VX-3</uri>
<metadata>
  <field>
    <key>AddedBy</key>
    <value>bar</value>
  </field>
</metadata>
</content>
<content>
  <id>VX*10</id>
  <type>library</type>
  <uri>http://localhost:8080/API/library/VX*10</uri>
  <metadata/>
</content>
<content>
  <id>VX*20</id>
  <type>library</type>
  <uri>http://localhost:8080/API/library/VX*20</uri>
  <metadata/>
</content>
<content>
  <id>VX-100</id>
  <type>collection</type>
  <uri>http://localhost:8080/API/collection/VX-100</uri>
</content>
<content>
  <id>VX-200</id>
  <type>collection</type>
  <uri>http://localhost:8080/API/collection/VX-200</uri>
  <metadata/>
</content>
<id>VX-1000</id>
<name>New name</name>
</CollectionDocument>

```

Example: Specify each change of a collection

To state each change, instead of using a document with all entities, a content mode can be specified to each content. The different modes are “add”, “remove” and “move”. The following example is a continuation of the previous example.

```

PUT /collection/VX-1000
Content-Type: application/xml

<CollectionDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <loc>http://localhost:8080/API/collection/VX-1000/</loc>
  <id>VX-1000</id>
  <!-- Change the name of the collection to "Final name" -->
  <name>Final name</name>

  <!-- Remove item VX-3 -->
  <content mode="remove">
    <id>VX-3</id>
    <type>item</type>
  </content>

  <!-- Add library VX*30 after library VX*20 with metadata-->

```

```

<content mode="add" after="VX*20">
  <id>VX*30</id>
  <type>library</type>
  <metadata>
    <field>
      <key>AddedBy</key>
      <value>User</value>
    </field>
  </metadata>
</content>

<!-- Add the all items from library VX*10 (which are VX-97 and VX-98)
after item VX-2 -->
<content mode="add" addItems="true" after="VX-2">
  <id>VX*10</id>
  <type>library</type>
</content>

<!-- Move library VX*20 before VX*10, metadata won't be updated for specified_
entity when mode="move" -->
<content mode="move" before=VX*10>
  <id>VX*20</id>
  <type>library</type>
</content>

<!-- Note that first we added library VX*30 after library VX*20 then
we moved library VX*20 before VX*10:
[VX*10, VX*20] -> [VX*10, VX*20, VX*30] -> [VX*20, VX*10, VX*30] -->
</CollectionDocument>

```

```

<CollectionDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <id>VX-1000</id>
  <name>Final name</name>
  <content>
    <id>VX-2</id>
    <type>item</type>
    <uri>http://localhost:8080/API/item/VX-2</uri>
  </content>
  <content>
    <id>VX-97</id>
    <type>item</type>
    <uri>http://localhost:8080/API/item/VX-97</uri>
  </content>
  <content>
    <id>VX-98</id>
    <type>item</type>
    <uri>http://localhost:8080/API/item/VX-98</uri>
  </content>
  <content>
    <id>VX-1</id>
    <type>item</type>
    <uri>http://localhost:8080/API/item/VX-1</uri>
  </content>
  <content>
    <id>VX*20</id>
    <type>library</type>
    <uri>http://localhost:8080/API/library/VX*20</uri>
  </content>

```

```

<content>
  <id>VX*10</id>
  <type>library</type>
  <uri>http://localhost:8080/API/library/VX*10</uri>
</content>
<content>
  <id>VX*30</id>
  <type>library</type>
  <uri>http://localhost:8080/API/library/VX*30</uri>
  <metadata>
    <field>
      <key>AddedBy</key>
      <value>User</value>
    </field>
  </metadata>
</content>
<content>
  <id>VX-100</id>
  <type>collection</type>
  <uri>http://localhost:8080/API/collection/VX-100</uri>
</content>
<content>
  <id>VX-200</id>
  <type>collection</type>
  <uri>http://localhost:8080/API/collection/VX-200</uri>
</content>
</CollectionDocument>

```

17.3.3 Collection metadata

Metadata can be set on collections, just like with items.

See *Metadata*.

17.3.4 Searching for collections

Searching collections behaves much like *Search*.

Search for collections

PUT /collection

Searches for collections that matches the query.

Matrix Parameters

- **first** – Integer. The index of the first collection. Default is 1.
- **cursor** – New in version 4.16.
 - * - The initial cursor.
 - string-from-search - Cursor string returned from the search results.

If set, the `cursorMark` (https://lucene.apache.org/solr/guide/6_6/pagination-of-results.html#fetching-a-large-number-of-sorted-results-cursors) / search after

(<https://www.elastic.co/guide/en/elasticsearch/reference/6.3/search-request-search-after.html#search-request-search-after>) features from Solr/Elasticsearch would be used to improve the [deep paging](https://lucene.apache.org/solr/guide/6_6/pagination-of-results.html#performance-problems-with-deep-paging) (https://lucene.apache.org/solr/guide/6_6/pagination-of-results.html#performance-problems-with-deep-paging) performance during a search.

When `cursor` is used, The value of `first` will be ignored.

Only metadata searches in the `generic` interval supports `cursor`.

- **number** – Integer. The number of collections to retrieve. Default is 100.

Query Parameters

- **count** –
 - `true` (default) - Return hits in result.
 - `false` - Do not return hits in result, in order to produce results faster.
- **content** – Optional comma-separated list of addition content to retrieve. Possible values are: `metadata`, `merged-access`, `external`.
- **interval** – Comma-separated list
 - `time-span` - Filter out metadata, return only metadata for specified *time span*.
 - `generic` - Return all non-timed metadata.
 - `all` (default) - Return all metadata, same as `interval=generic,-INF-+INF`
- **field** – Comma-separated list.
 - `field-name` - Return specified field.
 - `field-name ":" new-name` - Return specified field, renamed to a new name in return value.
 - `- field-name` - Exclude specified field.
 - (default) - Return all fields.
- **group** – Comma-separated list.
 - `group-name` - Return specified group.
 - `group-name +` - Return specified group and subgroups.
New in version 4.1.
 - `group-name : new-name` - Return specified group, renamed to a new name in return value.
 - `- group-name` - Exclude specified group.
 - (default) - Return all groups.
- **track** – Comma separated list.
 - `track-type track-number` - Return metadata for specified track. Example of track is `A2`.
 - `track-type t1 - t2` - Return metadata for specified track interval, e.g. `A2-4`.
 - `track-type *` - Return metadata for all tracks of specified type, e.g. `A*`.
 - `generic` - Return all non-tracked metadata.
 - `all` (default) - All metadata, with or without track specification, are returned.
- **language** – Comma separated list.

- *language-tag* - Return metadata for specific language, e.g. `en_US`. Wildcards may be used, e.g. `*_CA` for both Canadian French and Canadian English.
- `none` - Return all metadata without language specification.
- `all` (default) - Return all metadata, with or without language specification.
- **sampleRate** - Convert all outgoing *time instants* to specified rate. *NB!* *Time codes* which cannot be expressed in an integer number of samples will be returned as a decimal number, with risk of losing precision.
- **conflict** -
 - `yes` (default) - Include all metadata conflicts, unresolved.
 - `no` - Return conflicts resolved according to field rules.
- **include** - A list of keys. Includes additional *field specific data*. Additionally, if set to `type` the type definition of the field will be retrieved.
- **defaultValue** -
 - `true` - For unset fields, return *default values*.
 - `false` (default) - Do not return default values.
- **includeTransientMetadata** -
 - `true` (default) - Include *transient metadata*.
 - `false` - Do not include transient metadata in response.
- **includeValues** - Return the value enumeration for each metadata field.
- **terse** -
 - `yes` - Return metadata in *terse format*.
 - `no` (default) - Return metadata in verbose format.
- **revision** - Optional revision, specifying which metadata to display. Only used if requesting a single item or collection.
- **mergedType** - The type of operation to check for.
- **mergedPermission** - The lowest required permission level.
- **mergedExtradata** - Any possible extradata.

Accepts

- `application/xml`, `application/json` - [ItemSearchDocument](#)

Produces

- `application/xml`, `application/json` - [CollectionListDocument](#)

Role `_collection_read`

Retrieve search history

New in version 4.0.3.

GET `/collection/history`

Retrieves a list of searches made by a particular user, include “Collection search ” and “Item and collection search”. The results are ordered according to timestamp, with the latest searches being first. Duplicate queries will not be retrieved.

Query Parameters

- **start** – Optional. If set, only searches made after this date will be retrieved.
- **maxResults** – The maximum number of searches that will be retrieved. The value must be between 1 and 50, default is 10.
- **username** – The name of the user that has performed the searched. If not specified, the user performing the request will be selected.

Status Codes

- **400 Bad request** – The request was malformed.

Produces

- **application/xml, application/json** – [SearchHistoryDocument](#)

Role `_item_search`

17.3.5 Ordering collections

Collections will return their elements in the same order for every request.

Changed in version 4.4: Queries on collection items will now return items in creation order by default. See [indexCollectionItemOrder](#) on how to revert back to using the insert/custom collection item ordering.

Reordering collection elements

POST `/collection/ (collection-id) /order`

Changes the order of the elements. Note that the reordering elements are parsed and applied in the sequence that they are supplied.

Accepts

- **application/xml, application/json** – [CollectionReorderDocument](#) containing the changes to the order.

Produces

- **application/xml, application/json** – [CollectionDocument](#) containing the elements in their new order.
- **text/plain** – CRLF-delimited list of ids

Role `_collection_write`

Example

Starting with an unordered collection of items, we will sort it according to item id. At the start it contains items [VX-7, VX-8, VX-5, VX-6].

```
GET /collection/VX-1
```

```
<CollectionDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <loc>http://localhost:8080/API/collection/VX-1/VX-1</loc>
  <id>VX-1</id>
  <content>
    <id>VX-7</id>
```

```

    <uri>http://localhost:8080/API/item/VX-7</uri>
    <type>item</type>
  </content>
  <content>
    <id>VX-8</id>
    <uri>http://localhost:8080/API/item/VX-8</uri>
    <type>item</type>
  </content>
  <content>
    <id>VX-5</id>
    <uri>http://localhost:8080/API/item/VX-5</uri>
    <type>item</type>
  </content>
  <content>
    <id>VX-6</id>
    <uri>http://localhost:8080/API/item/VX-6</uri>
    <type>item</type>
  </content>
</CollectionDocument>

```

POST **/collection/VX-1/order**
Content-Type: application/xml

```

<CollectionReorderDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <!-- Find the current first element and put VX-5 first -->
  <item id="VX-5" before="VX-7"/>

  <!-- Add the other elements after VX-5 in sequence -->
  <item id="VX-6" after="VX-5"/>
  <item id="VX-7" after="VX-6"/>
  <item id="VX-8" after="VX-7"/>
</CollectionReorderDocument>

```

```

<CollectionDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <id>VX-1</id>
  <content>
    <id>VX-5</id>
    <uri>http://localhost:8080/API/item/VX-5</uri>
    <type>item</type>
  </content>
  <content>
    <id>VX-6</id>
    <uri>http://localhost:8080/API/item/VX-6</uri>
    <type>item</type>
  </content>
  <content>
    <id>VX-7</id>
    <uri>http://localhost:8080/API/item/VX-7</uri>
    <type>item</type>
  </content>
  <content>
    <id>VX-8</id>
    <uri>http://localhost:8080/API/item/VX-8</uri>
    <type>item</type>
  </content>
</CollectionDocument>

```

17.3.6 Folder mapped collections

It is possible to map a Vidispine collection to a folder on the file system. This means that any files of items part of the collection will be stored in a sub-folder with the same name as the collection. For a collection marked as mapped to a folder, some additional rules are enforced when it comes to collection relationships:

- A folder mapped collection can have at most one folder mapped parent collection.
- An item can have at most one folder mapped parent collection.

That is, the same rule that applies to files on a traditional file system.

Note: Adding an item to a folder mapped collection will not move the item files to the corresponding folder immediately as the file movement is done asynchronously in the background.

Mark a collection as folder mapped

PUT `/collection/ (collection-id) /map-to-folder`

Marks collection `collection-id` as mapped to folder. Files in child items will be moved to the corresponding folder in the storages.

Role `_collection_write`

Un-mark a collection as folder mapped

DELETE `/collection/ (collection-id) /map-to-folder`

Marks collection `collection-id` as *not* mapped to folder. Files in child items will be moved to the root directory in the storages.

Role `_collection_write`

Report that the folder name has changed on disk

PUT `/collection/ (collection-id) /folder-name`

If the folder name has been changed by a user or an external program, it can be reported to Vidispine with this command. The affected file entities in the database will then be updated with the new path, and the collection name will be changed.

Query Parameters

- **name** – The new name of the folder (required).

Produces

- **text/plain** – “OK”

Role `_collection_write`

17.4 Deletion Locks

New in version 4.15.

In the following reference, `{storage-resource}` is one of the following:

- `/storage/{storage-id}`

- /storage

In the following reference, {file-resource} is one of the following:

- {storage-resource}/file/{file-id}
- {storage-resource}/file/path/{path}
- {storage-resource}/file/uri/{uri}

In the following reference, {lock-entity} is one of the following:

- /collection
- /collection/(collection-id)
- /item
- /item/(item-id)
- {storage-resource}/file
- {file-resource}

17.4.1 Get Deletion Locks

Retrieve a list of locks

GET /deletion-lock

Retrieves a list of deletion locks.

Query Parameters

- **onlyEffective** –
 - `true` - Only return the effective lock of the entity.
 - `false` (default) - Return all deletion locks applied on the entity.
- **metadata** – Filter out only the locks that has metadata according to the filter criteria.
 - `key = value` - Multiple query parameters can be specified.

Note that = is part of the query parameter, and has to be encoded (%3d).

- **username** – Comma separated user names. Filter only locks created by the specified user(s).
- **range** – Filter out locks whose expiry time is within the specified range. The range format is [d..d], (d..d), [d..d), (d..d], (*..d], [d..*), or (*..*). d is a date and time in the ISO 8601 format.
- **entityTypes** – Comma separated string to only return locks set explicitly on the specified entityType(s).

Default is all. Allowed values are: item, collection, file.

Matrix Parameters

- **first** – Return locks starting from the specified offset. Default is 1, the first lock.
- **number** – Return at most the specified number of locks. Default is 100.

Produces

- `application/xml`, `application/json` – [DeletionLockListDocument](#)

Role `_deletion_lock_read`

```
GET /deletion-lock?user=testuser
    &metadata=workflow=production
    &metadata=group=movie
    &expiry=[*..2020-10-05T16:42:34.693%2B02:00]
```

Retrieve a specific lock

GET `/deletion-lock/` (*lock-id*)

Returns a specific lock.

Produces

- `application/xml`, `application/json` – XML/JSON, schema `DeletionLock-Document`

Role `_deletion_lock_read`

Retrieve a list of locks of the entity

GET `{lock-entity}/deletion-lock`

Retrieves a list of deletion locks on the entity.

Query Parameters

- **onlyEffective** –
 - `true` - Only return the effective lock of the entity.
 - `false` (default) - Return all deletion locks applied on the entity.
- **metadata** – Filter out only the locks that has metadata according to the filter criteria.
 - `key = value` - Multiple query parameters can be specified.Note that `=` is part of the query parameter, and has to be encoded (`%3d`).
- **username** – Comma separated user names. Filter only locks created by the specified user(s).
- **range** – Filter out locks whose expiry time is within the specified range. The range format is `[d..d]`, `(d..d)`, `[d..d)`, `(d..d]`, `(*..d]`, `[d..*)`, or `(*..*)`. `d` is a date and time in the ISO 8601 format.

Matrix Parameters

- **first** – Return locks starting from the specified offset. Default is 1, the first lock.
- **number** – Return at most the specified number of locks. Default is 100.

Produces

- `application/xml`, `application/json` – `DeletionLockListDocument`

Role `_deletion_lock_read`

Retrieve a specific lock of the entity

GET `{lock-entity}/deletion-lock/ (lock-id)`

Returns a specific lock.

Produces

- `application/xml`, `application/json` – XML/JSON, schema `DeletionLockDocument`

Role `_deletion_lock_read`

17.4.2 Managing Deletion Locks

Create a lock

POST `{lock-entity}/deletion-lock`

Creates new deletion lock based on the information in the `DeletionLockDocument`.

Accepts

- `application/xml`, `application/json` – `DeletionLockDocument`

Produces

- `application/xml`, `application/json` – `DeletionLockDocument`

Role `_deletion_lock_write`

Example

```
POST /deletion-lock
```

```
<?xml version="1.0" encoding="UTF-8" standalone="yes"?>
<DeletionLockDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <expiryTime>2021-09-12T10:40:14.546+02:00</expiryTime>
  <metadata>
    <field>
      <key>workflow</key>
      <value>production</value>
    </field>
  </metadata>
</DeletionLockDocument>
```

Update a lock

PUT `/deletion-lock/ (lock-id)`

Updates a lock based on the information in the `DeletionLockDocument`.

Accepts

- `application/xml`, `application/json` – `DeletionLockDocument`

Produces

- `application/xml`, `application/json` – `DeletionLockDocument`

Role `_deletion_lock_write`

Update a lock

PUT `{lock-entity}/deletion-lock/ (lock-id)`

Updates a lock based on the information in the [DeletionLockDocument](#).

Accepts

- `application/xml`, `application/json` – [DeletionLockDocument](#)

Produces

- `application/xml`, `application/json` – [DeletionLockDocument](#)

Role `_deletion_lock_write`

Delete a lock

DELETE `/deletion-lock/ (lock-id)`

DELETE `{lock-entity}/deletion-lock/ (lock-id)`

Delete a lock that was explicitly set on this entity.

Role `_deletion_lock_write`

17.5 Configuration

The configuration resource contains the system wide configuration that would typically be tuned by an administrator or set once when installing Vidispine and your application on a new system.

See also:

See [Configuration properties](#) for more information about the available configuration properties.

17.5.1 Configuration resources

GET `/configuration`

Returns the available configuration resource endpoints.

Produces

- `application/xml`, `application/json` – [URIListDocument](#) containing the names of the endpoints.
- `text/plain` – CRLF-delimited list of names

17.5.2 Indexing settings

Get the indexing configuration

GET `/configuration/indexing`

Returns the current indexing configuration.

Produces

- `application/xml`, `application/json` – [IndexingConfigurationDocument](#)

Role `_administrator`

Update the indexing configuration

PUT `/configuration/indexing`

Updates the indexing configuration.

Status Codes

- **200 OK** – The configuration was updated successfully.

Accepts

- `application/xml`, `application/json` – [IndexingConfigurationDocument](#)

Role `_administrator`

17.5.3 Metrics settings

See *Monitoring* for examples.

Get the metrics configuration

GET `/configuration/metrics`

Returns the current metrics configuration.

Produces

- `application/xml`, `application/json` – [MetricsConfigurationDocument](#)

Role `_administrator`

Update the metrics configuration

PUT `/configuration/metrics`

Updates the metrics configuration.

Status Codes

- **200 OK** – The configuration was updated successfully.

Accepts

- `application/xml`, `application/json` – [MetricsConfigurationDocument](#)

Role `_administrator`

17.5.4 Path alias configuration

See *Content paths* for information on paths and aliases.

Get the path alias configuration

GET `/configuration/path-alias`

Returns the current path alias configuration.

Produces

- `application/xml`, `application/json` – [PathAliasConfigurationDocument](#)

Role _administrator

Example

```
GET /configuration/path-alias
```

```
<PathAliasConfigurationDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <alias>v(name)=metadata.timespan[start=-INF][end=+INF].field[name=$name].value.value
  ↪</alias>
</PathAliasConfigurationDocument>
```

Update the path alias configuration

PUT /configuration/path-alias

Updates the path alias configuration.

Status Codes

- **200 OK** – The configuration was updated successfully.

Accepts

- **application/xml**, **application/json** – PathAliasConfigurationDocument

Role _administrator

Example

```
PUT /configuration/path-alias
```

```
Content-Type: application/xml
```

```
<PathAliasConfigurationDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <alias>v(name)=metadata.timespan[start=-INF][end=+INF].field[name=$name].value.value
  ↪</alias>
  <alias>detail(tag)=shape[tag=$tag].containerComponent.format,shape[tag=$tag].
  ↪videoComponent.[codec,duration]</alias>
</PathAliasConfigurationDocument>
```

```
200 OK
```

17.5.5 Job pool configuration

Get the job pool configuration

GET /configuration/job-pool

Returns the current job pool configuration.

New in version 4.2.2.

Produces

- **application/xml**, **application/json** – JobPoolListDocument

Role _administrator

Example

```
GET /configuration/job-pool
```

```
<JobPoolListDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <maxConcurrent>3</maxConcurrent>
</JobPoolListDocument>
```

Update the job pool configuration

PUT /configuration/job-pool

Updates the job pool configuration.

New in version 4.2.2.

Accepts

- application/xml, application/json – JobPoolListDocument

Role _administrator

Example

```
PUT /configuration/job-pool
Content-Type: application/xml
```

```
<JobPoolListDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <maxConcurrent>5</maxConcurrent>
  <pool>
    <priorityThreshold>HIGH</priorityThreshold>
    <size>2</size>
  </pool>
  <pool>
    <priorityThreshold>MEDIUM</priorityThreshold>
    <size>3</size>
  </pool>
</JobPoolListDocument>
```

Delete all job pools

DELETE /configuration/job-pool

Deletes all job pools.

Note that the max concurrent jobs setting will *not* be affected.

New in version 4.2.2.

Role _administrator

Example

```
GET /configuration/job-pool
```

```
<JobPoolListDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <maxConcurrent>5</maxConcurrent>
  <pool>
    <priorityThreshold>HIGH</priorityThreshold>
    <size>2</size>
  </pool>
  <pool>
    <priorityThreshold>MEDIUM</priorityThreshold>
    <size>3</size>
  </pool>
</JobPoolListDocument>
```

```
DELETE /configuration/job-pool
```

```
GET /configuration/job-pool
```

```
<JobPoolListDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <maxConcurrent>5</maxConcurrent>
</JobPoolListDocument>
```

Delete a specific job pool

DELETE /configuration/job-pool/ (*priority*)

Deletes the job pool with the given priority threshold.

New in version 4.2.2.

Role _administrator

Example

```
GET /configuration/job-pool
```

```
<JobPoolListDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <maxConcurrent>5</maxConcurrent>
  <pool>
    <priorityThreshold>HIGH</priorityThreshold>
    <size>2</size>
  </pool>
  <pool>
    <priorityThreshold>MEDIUM</priorityThreshold>
    <size>3</size>
  </pool>
</JobPoolListDocument>
```

```
DELETE /configuration/job-pool/MEDIUM
```

```
GET /configuration/job-pool
```

```
<JobPoolListDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <maxConcurrent>5</maxConcurrent>
  <pool>
```

```
<priorityThreshold>HIGH</priorityThreshold>
<size>2</size>
</pool>
</JobPoolListDocument>
```

17.5.6 FTP pool configuration

Get the FTP pool configuration

GET /configuration/ftp-pool

Returns the current FTP connection pool configuration.

New in version 4.2.4.

Produces

- `application/xml`, `application/json` – `FtpPoolConfigurationDocument`

Role `_administrator`

Example

```
GET /configuration/ftp-pool
```

```
<FtpPoolConfigurationDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <pool/>
</FtpPoolConfigurationDocument>
```

Update the job pool configuration

PUT /configuration/ftp-pool

Updates the FTP connection pool configuration.

New in version 4.2.4.

Accepts

- `application/xml`, `application/json` – `FtpPoolConfigurationDocument`

Role `_administrator`

Example

```
PUT /configuration/ftp-pool
```

Content-Type: application/xml

```
<FtpPoolConfigurationDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <pool>
    <minSize>0</minSize>
    <maxSize>-1</maxSize>
    <evictionInterval>30000</evictionInterval>
    <minIdleTime>60000</minIdleTime>
  </pool>
</FtpPoolConfigurationDocument>
```

```
</pool>
</FtpPoolConfigurationDocument>
```

Delete the FTP pool

DELETE /configuration/ftp-pool

Deletes the FTP connection pool.

New in version 4.2.4.

Role _administrator

Example

```
GET /configuration/ftp-pool
```

```
<FtpPoolConfigurationDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <pool/>
</FtpPoolConfigurationDocument>
```

```
DELETE /configuration/ftp-pool
```

```
GET /configuration/ftp-pool
```

```
<FtpPoolConfigurationDocument xmlns="http://xml.vidispine.com/schema/vidispine"/>
```

17.5.7 LogReport configuration

Get the LogReport configuration

GET /configuration/logreport

Returns the current LogReport configuration.

Produces

- `application/xml`, `application/json` – `LogReportConfigurationDocument`

Role _administrator

Update the LogReport configuration

PUT /configuration/logreport

Updates the LogReport configuration.

Status Codes

- **200 OK** – The configuration was updated successfully.

Accepts

- `application/xml`, `application/json` – `LogReportConfigurationDocument`

Role _administrator

17.5.8 CORS configuration

New in version 4.15.

See *CORS configuration* for examples.

Get the CORS configuration

GET `/configuration/cors`

Returns the current CORS configuration.

Produces

- `application/xml`, `application/json` – `CORSConfigurationDocument`

Role `_administrator`

Update the CORS configuration

PUT `/configuration/cors`

Updates the CORS configuration.

Status Codes

- **200 OK** – The configuration was updated successfully.

Accepts

- `application/xml`, `application/json` – `CORSConfigurationDocument`

Role `_administrator`

17.5.9 Database purging configuration

Get the database purging configuration

GET `/configuration/purging`

Returns the current database purging configuration.

Produces

- `application/xml`, `application/json` – `DatabasePurgingConfigurationDocument`

Role `_administrator`

Update the database purging configuration

PUT `/configuration/purging`

Updates the database purging configuration. Note that if a category element is missing, e.g. `auditTrail`, that category is left unchanged. To remove a particular category, use an empty element, `<auditTrail/>`.

Status Codes

- **200 OK** – The configuration was updated successfully.

Accepts

- `application/xml`, `application/json` – DatabasePurgingConfigurationDocument

Role `_administrator`

Example

```
PUT /configuration/purging
Content-Type: application/xml

<DatabasePurgingConfigurationDocument xmlns="http://xml.vidispine.com/schema/vidispine"
  <auditTrail>
    <age>1440</age>
    <uri>ftp://user:password@myhost/logs/</uri>
    <compress>true</compress>
  </auditTrail>
</DatabasePurgingConfigurationDocument>
```

Remove the database purging configuration

DELETE `/configuration/purging`

Removes all database purging configuration.

Status Codes

- **200 OK** – The configuration was updated successfully.

Role `_administrator`

17.5.10 OAuth2 configuration

New in version 4.17.

See *Configure OAuth2 using the API* for examples.

Get the OAuth2 configuration

GET `/configuration/auth`

Returns the current OAuth2 configuration.

Produces

- `application/xml`, `application/json` – OAuth2ConfigurationDocument

Role `_administrator`

Update the OAuth2 configuration

PUT `/configuration/auth`

Updates the OAuth2 configuration.

Status Codes

- **200 OK** – The configuration was updated successfully.

Accepts

- `application/xml`, `application/json` – `OAuth2ConfigurationDocument`

Produces

- `application/xml`, `application/json` – `OAuth2ConfigurationDocument`

Role `_administrator`

Delete the OAuth2 configuration**DELETE** `/configuration/auth`

Deletes and resets the current OAuth2 configuration.

Role `_administrator`

17.5.11 Configuration properties**Get list of configuration properties****GET** `/configuration/properties`

Returns a document containing all configuration properties set in the system.

Produces

- `application/xml`, `application/json` – `ConfigurationPropertyListDocument`

Role `_administrator`

Example

```
GET /configuration/properties
```

```
<ConfigurationPropertyListDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <property lastChange="2014-06-03T15:18:49.608+02:00">
    <key>apiuri</key>
    <value>http://vs.example.com:8080/API</value>
  </property>
</ConfigurationPropertyListDocument>
```

Get a single configuration property**GET** `/configuration/properties/` (*key*)

Returns a document or string containing all current setting for a configuration property.

Status Codes

- **200 OK** – The value is returned
- **404 Not found** – The configuration property is not set

Produces

- `application/xml`, `application/json` – `ConfigurationPropertyDocument`
- `text/plain` – String value

Role _administrator

Example

```
GET /configuration/properties/apiuri
```

```
Accept: application/xml
```

```
<ConfigurationPropertyDocument xmlns="http://xml.vidispine.com/schema/vidispine"
↳lastChange="2014-06-03T15:18:49.608+02:00">
  <key>apiuri</key>
  <value>http://vs.example.com:8080/API</value>
</ConfigurationPropertyDocument>
```

```
GET /configuration/properties/apiuri
```

```
Accept: text/plain
```

```
http://vs.example.com:8080/API
```

Create/modify configuration property

PUT /configuration/properties

Creates or updates a configuration property.

Status Codes

- **200 OK** – The configuration property was created/modified successfully.

Accepts

- **application/xml**, **application/json** – ConfigurationPropertyDocument

Role _administrator

Example

```
PUT /configuration/properties
```

```
<ConfigurationPropertyDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <key>apiuri</key>
  <value>http://127.0.0.1:18080/API</value>
</ConfigurationPropertyDocument>
```

Create/modify multiple configuration properties

New in version 4.17.

POST /configuration/properties

Creates or updates multiple configuration properties at once, using a ConfigurationPropertyListDocument.

Status Codes

- **200 OK** – The configuration properties were created/modified successfully.

Accepts

- `application/xml`, `application/json` – `ConfigurationPropertyListDocument`

Role `_administrator`

Example

POST `/configuration/properties`

```
<ConfigurationPropertyListDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <property>
    <key>apiuri</key>
    <value>http://vidispine.example.com:8080/API/</value>
  </property>
  <property>
    <key>noauthuri</key>
    <value>http://noauth.example.com:8080/</value>
  </property>
</ConfigurationPropertyListDocument>
```

Create/modify configuration property

PUT `/configuration/properties/` (*key*)

Creates or updates a configuration property.

Status Codes

- **200 OK** – The configuration property was created/modified successfully.

Accepts

- `text/plain` – String value

Role `_administrator`

Example

PUT `/configuration/properties/apiuri`

`http://127.0.0.1:18080/API/`

Remove a configuration property

DELETE `/configuration/properties/` (*key*)

Removes a configuration property.

Status Codes

- **200 OK** – The configuration property was successfully deleted

Role `_administrator`

Example

```
DELETE /configuration/properties/example_property
```

```
200 OK
```

17.6 Export locations

New in version 4.0.

It is possible to pre-define named export locations. When starting an export job, the location name can be passed as a parameter, the files will then be exported to the URI associated with the export location.

17.6.1 Managing export locations

Listing available export locations

GET /`export-location`

List all defined export locations.

Produces

- `application/xml`, `application/json` – `ExportLocationListDocument`

Role `_export`

Creating/updating an export location

PUT /`export-location/`(*location-name*)

Create a new export location, or if there already is one with that name, update it.

Accepts

- `application/xml`, `application/json` – `ExportLocationDocument`

Produces

- `application/xml`, `application/json` – `ExportLocationDocument`

Role `_export`

Example

Creating a new export location:

```
PUT /export-location/External_FTP
Content-Type: application/xml

<ExportLocationDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <uri>ftp://user:password@10.2.23.25/export/</uri>
</ExportLocationDocument>
```

Get information about an export location

GET `/export-location/` (*location-name*)

Return information about the export location with the specified name.

Produces

- `application/xml`, `application/json` – `ExportLocationDocument`

Role `_export`

Deleting an export location

DELETE `/export-location/` (*location-name*)

Delete the export location with the specified name.

Role `_export`

17.6.2 Export location script

Get the export location script

GET `/export-location/` (*location-name*) `/script`

Retrieves the script on an export location.

Status Codes

- **404 Not found** – If the location has no script.

Produces

- `text/plain` –

Role `_export`

Update the export location script

PUT `/export-location/` (*location-name*) `/script`

Updates the script of an existing export location.

Accepts

- `text/plain` –

Produces

- `text/plain` – The script that was set.

Role `_export`

17.7 External identifiers

17.7.1 Managing external id namespaces

Retrieve all known namespaces

GET /external-id

Retrieves all known external id namespaces.

Produces

- `application/xml`, `application/json` – ExternalIdentifierNamespaceListDocument

Role `_administrator`

Example

```
GET /external-id
```

```
<ExternalIdentifierNamespaceListDocument xmlns="http://xml.vidispine.com/schema/
↳vidispine">
  <namespace>
    <name>uuid</name>
    <pattern>[A-Fa-f0-9]{8}\-[A-Fa-f0-9]{4}\-[A-Fa-f0-9]{4}\-[A-Fa-f0-9]{4}\-[A-Fa-f0-
↳9]{12}</pattern>
  </namespace>
</ExternalIdentifierNamespaceListDocument>
```

Retrieve a specific namespace

GET /external-id/(namespace-id)

Retrieves the namespace with the specified name.

Produces

- `application/xml`, `application/json` – ExternalIdentifierNamespaceDocument

Role `_administrator`

Example

```
GET /external-id/uuid
```

```
<ExternalIdentifierNamespaceDocument xmlns="http://xml.vidispine.com/schema/vidispine
↳">
  <name>uuid</name>
  <pattern>[A-Fa-f0-9]{8}\-[A-Fa-f0-9]{4}\-[A-Fa-f0-9]{4}\-[A-Fa-f0-9]{4}\-[A-Fa-f0-9]
↳{12}</pattern>
</ExternalIdentifierNamespaceDocument>
```

Create or modify a namespace

PUT /external-id/(namespace-id)

Creates or modifies a namespace with the specified name.

Accepts

- `application/xml`, `application/json` – `ExternalIdentifierNamespaceDocument`

Role `_administrator`

Example

```
PUT /external-id/uuid
Content-Type: application/xml

<ExternalIdentifierNamespaceDocument xmlns="http://xml.vidispine.com/schema/vidispine
↪">
  <pattern>[A-Fa-f0-9]{8}\-[A-Fa-f0-9]{4}\-[A-Fa-f0-9]{4}\-[A-Fa-f0-9]{4}\-[A-Fa-f0-
↪9]{12}</pattern>
</ExternalIdentifierNamespaceDocument>
```

```
200 OK
```

Delete a namespace and all external ids in that namespace

DELETE `/external-id/` (*namespace-id*)

Deletes the specified namespace together with all external ids that exist in that namespace.

Role `_administrator`

Example

```
DELETE /external-id/uuid
```

```
200 OK
```

17.7.2 Managing external ids

The current supported resources can be seen in the table below. These are referred to as `{external-id-resource}` in the definitions below.

Type	Path
Item	<code>/item/{item-id}/external-id</code>
Collection	<code>/collection/{collection-id}/external-id</code> (New in 4.5.)
Library	<code>/library/{library-id}/external-id</code> (New in 4.5.)
Job	<code>/job/{job-id}/external-id</code>
Notification	<code>.../notification/{notification-id}/external-id</code>
Storage	<code>/storage/{storage-id}/external-id</code>
Metadata-field	<code>/metadata-field/{field-name}/external-id</code>
Field-group	<code>/metadata-field/field-group/{field-group-name}/external-id</code>
Quota rule	<code>/quota/{rule-id}/external-id</code>

Retrieve all external ids for an entity

GET {external-id-resource}

Retrieves all external ids that are assigned to a particular entity.

Produces

- `application/xml`, `application/json` – ExternalIdentifierListDocument

Role `_external_id_read`

Example

```
GET /storage/VX-1/external-id
```

```
<ExternalIdentifierListDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <id>
    <entityId>VX-1</entityId>
    <entityType>Storage</entityType>
    <namespace>uuid</namespace>
    <externalId>38eebf93-2ab7-463b-ba3a-b6217bb5bca9</externalId>
  </id>
</ExternalIdentifierListDocument>
```

```
GET /storage/38eebf93-2ab7-463b-ba3a-b6217bb5bca9/external-id
```

```
<ExternalIdentifierListDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <id>
    <entityId>VX-1</entityId>
    <entityType>Storage</entityType>
    <namespace>uuid</namespace>
    <externalId>38eebf93-2ab7-463b-ba3a-b6217bb5bca9</externalId>
  </id>
</ExternalIdentifierListDocument>
```

Create a new external id

PUT {external-id-resource}/(external-id)

Creates a new external id for the specified entity.

Role `_external_id_write`

Example

```
PUT /storage/VX-1/external-id/38eebf93-2ab7-463b-ba3a-b6217bb5bca9
```

```
200 OK
```

```
PUT /storage/VX-1/external-id/38eebf93-2ab7-463b-ba3a-b6217bb5bca9
```



```
400 An invalid parameter was entered
Context: external-id
Reason: That external id is already in use by VX-1.
```

Clear all external ids for an entity

DELETE {external-id-resource}

Clears all external identifiers that are registered with an entity.

Role _external_id_write

Example

```
DELETE /storage/VX-1/external-id
```

```
200 OK
```

```
GET /storage/38eebf93-2ab7-463b-ba3a-b6217bb5bca9/external-id
```

```
404 A resource could not be found
Type: external-id
ID: uuid_38eebf93-2ab7-463b-ba3a-b6217bb5bca9
```

Remove an external id

New in version 4.6.1.

DELETE /external-id/id/ (*external-id*)

Removes the external identifier from all entities.

Role _external_id_write

DELETE {external-id-resource}/ (*external-id*)

Removes the external identifier from a specific entity.

Role _external_id_write

Example

```
DELETE /external-id/id/38eebf93-2ab7-463b-ba3a-b6217bb5bca9
```

```
200 OK
```

```
GET /storage/38eebf93-2ab7-463b-ba3a-b6217bb5bca9/external-id
```

```
404 A resource could not be found
Type: external-id
ID: uuid_38eebf93-2ab7-463b-ba3a-b6217bb5bca9
```

17.8 Groups and roles

17.8.1 Managing groups

List groups/roles

GET `/group`

Returns list of all groups.

Query Parameters

- **first** – Start returning groups from specified number. Default is 1, the beginning of the list.
- **number** – Return at most specified number of groups. Default is no limit.
- **role** – Set to true to only return roles, false to only return regular groups. Default is to return all.

New in version 4.16.

Produces

- **application/xml**, **application/json** – `GroupListDocument`
- **text/plain** – CRLF-delimited list of group URIs

Role `_group_read`

Get group/role

GET `/group/ (group-name)`

Returns information about the specified group.

Produces

- **application/xml**, **application/json** – `GroupDocument`
- **text/plain** – The URI to the group.

Role `_group_read`

Get role status

GET `/group/ (group-name) /role`

Returns the role status of the specified group.

Produces

- **text/plain** – 1 if group is a role, 0 if group is a regular group

Role `_group_read`

Create a new group

PUT `/group/ (group-name)`

Creates a new group with the specified name.

Status Codes

- **200 OK** – Group created.
- **409 Conflict** – A group with that name already exists.

Role `_group_write`

Create or update a group

PUT `/group/` (*group-name*)

Creates or updates the group with the specified name. Also any specified parent and child associations, users, metadata and description will be added.

Query Parameters

- **clear** –
 - `true` - Remove any existing groups and users not in the given document.
 - `false` (default) - Existing groups and users not in the request document will be kept as is.

Status Codes

- **200 OK** – Group created.

Accepts

- `application/xml`, `application/json` – GroupDocument

Role `_group_write`

Delete a group

DELETE `/group/` (*group-name*)

Deletes the group with the specified name.

Role `_group_write`

Delete multiple groups

New in version 4.8.

DELETE `/group`

Deletes the groups with the specified names.

Query Parameters

- **name** – Comma-separated list of group names. Must not be empty.

Role `_group_write`

Example

```
DELETE /group?name=teachers,students,guests
```

Search groups

PUT /group

Simple search of fields `groupname`, `description` and `metadata`.

Query Parameters

- **number** – Return at most specified number of groups. Default is 10.
- **role** – Set to true to only return roles, false to only return regular groups. Default is to return all.

Accepts

- `application/xml`, `application/json` – `GroupSearchDocument`

Produces

- `application/xml`, `application/json` – `GroupListDocument`
- `text/plain` – CRLF-delimited list of group names

Example

```
PUT /group
Content-Type: application/xml

<GroupSearchDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <field>
    <name>groupname</name>
    <value>vidi</value>
  </field>
  <field>
    <name>key</name>
    <value>value</value>
  </field>
</GroupSearchDocument>
```

Note that keywords `groupname` and `description` are reserved to do search on `groupname` and `description` fields

The boolean operators AND and OR are supported:

```
<GroupSearchDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <field>
    <name>groupname</name>
    <value>vidi</value>
  </field>
  <field>
    <name>description</name>
    <value>vidispine</value>
  </field>
  <operator operation="OR">
    <field>
      <name>key1</name>
      <value>value1</value>
    </field>
    <field>
      <name>key2</name>
      <value>value2</value>
    </field>
  </operator>
</GroupSearchDocument>
```

```

    </field>
  </operator>
</GroupSearchDocument>

```

17.8.2 Group information

Get group description

GET `/group/ (group-name) /description`

Returns the descriptive text about the specified group.

Produces

- **text/plain** – Group description

Role `_group_read`

Change the description of a group

PUT `/group/ (group-name) /description`

Changes the description of a group.

Accepts

- **text/plain** – The new description.

Role `_group_write`

17.8.3 Group-to-group relations

Get parent groups to a group

GET `/group/ (group-name) /parents`

Returns groups that the specified group belongs to.

Query Parameters

- **traverse** –
 - `true` - Return all ancestors.
 - `false` (default) - Return only direct parents.

Produces

- **application/xml**, **application/json** – `GroupListDocument`
- **text/plain** – CRLF-delimited list of URIs to the groups

Role `_group_read`

Get child groups to a group

GET `/group/ (group-name) /children`

Returns groups that belongs to the specified group.

Query Parameters

- **traverse** –
 - `true` - Return all descendants.
 - `false` (default) - Return only direct children.

Produces

- **application/xml**, **application/json** – `GroupListDocument`
- **text/plain** – CRLF-delimited list of URIs to the groups

Role `_group_read`

Add a group to another group

PUT `/group/ (group-name) /group/ child-groupname` Creates parent-child relation between the two specified groups.

Role `_group_write`

Remove a group from another group

DELETE `/group/ (group-name) /group/ child-groupname` Removes the parent-child relation between the two specified groups.

Role `_group_write`

17.8.4 Group-to-user relations

Users belonging to group

GET `/group/ (group-name) /users`
Returns all users belonging to the group/role, directly or indirectly.

Query Parameters

- **traverse** –
 - `true` - Return all users, including users in child groups.
 - `false` (default) - Return only direct users.

Produces

- **application/xml**, **application/json** – `UserListDocument`
- **text/plain** – CRLF-delimited list of *Tabbed tuples* of user name, user real name

Role `_group_read`

Add a user to a group

PUT `/group/ (group-name) /user/ username` Adds the specified user to the specified group.

Role `_group_write`

Remove a user from a group

DELETE `/group/ (group-name) /user/`

username Removes the specified user from the specified group.

Role `_group_write`

17.9 Imports

17.9.1 Importing an item

An item can be imported in two ways, either through supplying a URI or sending the data in the request body.

There is also a third automatic way, using *Automatic import*.

Import using a URI

POST `/import`

Starts a *job* that imports the file, located at the given URI, and creates an item. Note that thumbnails and poster frames are only generated if a transcode takes place.

Query Parameters

- **uri** – A URI to the file that will be imported. Make sure to *percent encode* the URI.
- **URL** – A URL to the file that will be imported. (Deprecated since 4.2.)
- **tag** – An optional list of *shape tags* to use for transcoding.
- **original** – An optional tag, if specified it should be one of the tags specified in the tag parameter. Specifies that the original shape tag will be reset to the shape created to this tag.
- **no-transcode** –
 - `true` - Will disable transcoding even if the `tags` parameter is set. Rather, the specified tag will be used to determine cropping, scaling etc. of thumbnails.
 - `false` (default) - Normal transcode.
- **createThumbnails** –
 - `true` (default) - Generate thumbnails as per defined by shape tag.
 - `false` - Disable thumbnail generation.
- **thumbnailService** – An optional identifier to which thumbnail resource that should be used.
- **createPosters** – An optional list of *time codes* to use for creating posters.
- **overrideFastStart** –
 - `true` (default) - Use transcoder's estimate of the duration for allocating header space in MOV files and similar files.
 - `false` - Do not use the transcoder's estimate of the duration.
- **requireFastStart** –
 - `true` (default) - Try to put the index tables (header) in front of the file.
 - `false` - Put header at end of file.

- **fastStartLength** – Optional estimated duration of the clip in seconds.
- **storageId** – Optional identifier of storage where essence file is to be stored.
- **resourceId** – The transcoder resource to use to execute the transcode.
New in version 4.12.
- **growing** –
 - `true` - Specifies that the input file is still written to, so enables growing file support.
 - `false` (default) - No growing file handling of import file.
- **xmpfile** – An optional URI to a sidecar XMP metadata file.
- **sidecar** – Optional URIs or file ids of any sidecar files to import to the item. (New in 4.0.)
- **settings** – Pre-configured *import settings*.
- **notification** – The *placeholder job notification* to use for this job. (Optional)
- **notificationData** – Any additional data to include for *notifications* on this job. (Optional)
- **priority** – The priority to assign to the job. Default is `MEDIUM`.
- **jobmetadata** – Additional *information* for the job task.
- **importTag** – An optional list of shape tags that the created shape will be associated with. Default value is `original`. (New in 4.12.)

Accepts

- **application/xml**, **application/json** – *MetadataDocument*, initial metadata that is given to the imported item.

Produces

- **application/xml**, **application/json** – A *JobDocument* that describes the import job.

Role `_import`

Example

```
POST /import?uri=http://example.com/video.avi HTTP/1.1
Accept: application/xml
Content-type: application/xml
```

```
<MetadataDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <timespan end="+INF" start="-INF">
    <field>
      <name>title</name>
      <value>This is an imported item!</value>
    </field>
  </timespan>
</MetadataDocument>
```

```
<JobDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <jobId>VX-80</jobId>
  <status>READY</status>
```



```
<type>PLACEHOLDER_IMPORT</type>
</JobDocument>
```

Import using the request body

POST /import/raw

Starts a job that reads the raw data from the request body, generates a file, and imports the file.

Query Parameters

- **tag** – An optional list of *shape tags* to use for transcoding.
- **original** – An optional tag, if specified it should be one of the tags specified in the tag parameter. Specifies that the original shape tag will be reset to the shape created to this tag.
- **no-transcode** –
 - `true` - Will disable transcoding even if the `tags` parameter is set. Rather, the specified tag will be used to determine cropping, scaling etc. of thumbnails.
 - `false` (default) - Normal transcode.
- **createThumbnails** –
 - `true` (default) - Generate thumbnails as per defined by shape tag.
 - `false` - Disable thumbnail generation.
- **thumbnailService** – An optional identifier to which thumbnail resource that should be used.
- **createPosters** – An optional list of *time codes* to use for creating posters.
- **transferId** – An id to assign the transfer to be able to refer to it. Mandatory for chunked and passkey imports.
- **transferPriority** – An integer between 1 and 1000 that indicates what priority the transfer should be given in relation to other transfers (optional). A transfer with a high priority value is considered more important than a transfer with a low priority value.
- **storageId** – Optional identifier of storage where essence file is to be stored.
- **resourceId** – The transcoder resource to use to execute the transcode.
New in version 4.12.
- **overrideFastStart** –
 - `true` (default) - Use transcoder's estimate of the duration for allocating header space in MOV files and similar files.
 - `false` - Do not use the transcoder's estimate of the duration.
- **requireFastStart** –
 - `true` (default) - Try to put the index tables (header) in front of the file.
 - `false` - Put header at end of file.
- **fastStartLength** – Optional estimated duration of the clip in seconds.
- **notification** – The *placeholder job notification* to use for this job. (Optional)
- **notificationData** – Any additional data to include for *notifications* on this job. (Optional)

- **priority** – The priority to assign to the job. Default is `MEDIUM`.
- **jobmetadata** – Additional *information* for the job task.
- **filename** – The filename to be stored as original filename. Optional.
- **settings** – Pre-configured *import settings*.
- **ids** – A comma-delimited list of external ids to assign to the item.
- **importTag** – An optional list of shape tags that the created shape will be associated with. Default value is `original`. (New in 4.12.)

Status Codes

- **400** – If the amount of data received does not match the given Content-Length header. New in version 4.2.3.

Request Headers

- **index** – Offset (in bytes) of the full file for where the first byte of this transfer is located.
- **size** – The total size of the full file.

Accepts

- **application/octet-stream** – The raw data.

Produces

- **application/xml**, **application/json** – A `JobDocument` that describes the import job, or no content if the transfer is not finished.

Role `_import`

Semantics

There are two modes of operation for this type of import. The most simple is to transfer the entire file and then the header parameters can be ignored. The other is to transfer the file over multiple requests, then the header parameters are required. If the latter mode is used, then the job will not start until the entire file is transferred.

Note that thumbnails and poster frames are only generated if a transcode takes place.

Tip: *Managing transfers*

Transfers can be managed, see *Transfers*.

Example: transferring the entire file

```
POST /import/raw HTTP/1.1
Content-Type: application/octet-stream

<the entire file data>
```

Example: transferring a file using multiple requests

Assume a file that is 1000 bytes. This file can be sent using three requests, where one request sends data [800, 1000], another sends data [0, 300] and the last request sends data [300, 800].

```
POST /import/raw?transferId=mytransfer HTTP/1.1
Content-Type: application/octet-stream
size: 1000
index: 800

<200 bytes of file data, starting at byte 800>
```

```
POST /import/raw?transferId=mytransfer HTTP/1.1
Content-Type: application/octet-stream
size: 1000
index: 0

<300 bytes of file data, starting at byte 0>
```

```
POST /import/raw?transferId=mytransfer HTTP/1.1
Content-Type: application/octet-stream
size: 1000
index: 300

<500 bytes of file data, starting at byte 300>
```

The last request that finishes will start the job and receive the corresponding job document.

Import using a passkey

POST /import/raw-passkey

Create a job and generates a passkey that can later be used to import an item without being authenticated.

Query Parameters

- **tag** – An optional list of *shape tags* to use for transcoding.
- **original** – An optional tag, if specified it should be one of the tags specified in the tag parameter. Specifies that the original shape tag will be reset to the shape created to this tag.
- **no-transcode** –
 - `true` - Will disable transcoding even if the `tags` parameter is set. Rather, the specified tag will be used to determine cropping, scaling etc. of thumbnails.
 - `false` (default) - Normal transcode.
- **createThumbnails** –
 - `true` (default) - Generate thumbnails as per defined by shape tag.
 - `false` - Disable thumbnail generation.
- **thumbnailService** – An optional identifier to which thumbnail resource that should be used.
- **createPosters** – An optional list of *time codes* to use for creating posters.
- **transferId** – An id to assign the transfer to be able to refer to it. Mandatory for chunked and passkey imports.

- **transferPriority** – An integer between 1 and 1000 that indicates what priority the transfer should be given in relation to other transfers (optional). A transfer with a high priority value is considered more important than a transfer with a low priority value.
- **storageId** – Optional identifier of storage where essence file is to be stored.
- **overrideFastStart** –
 - `true` (default) - Use transcoder’s estimate of the duration for allocating header space in MOV files and similar files.
 - `false` - Do not use the transcoder’s estimate of the duration.
- **requireFastStart** –
 - `true` (default) - Try to put the index tables (header) in front of the file.
 - `false` - Put header at end of file.
- **fastStartLength** – Optional estimated duration of the clip in seconds.
- **filename** – The filename to be stored as original filename. Optional.
- **notification** – The *placeholder job notification* to use for this job. (Optional)
- **notificationData** – Any additional data to include for *notifications* on this job. (Optional)
- **priority** – The priority to assign to the job. Default is `MEDIUM`.
- **jobmetadata** – Additional *information* for the job task.
- **settings** – Pre-configured *import settings*.
- **resourceId** – The transcoder resource to use to execute the transcode.
New in version 4.14.
- **ids** – A comma-delimited list of external ids to assign to the item.
- **importTag** – An optional list of shape tags that the created shape will be associated with. Default value is `original`. (New in 4.12.)

Status Codes

- **400** – If the amount of data received does not match the given Content-Length header.
New in version 4.2.3.

Accepts

- `application/xml`, `application/json` – `MetadataDocument`, initial metadata that is given to the imported item.

Produces

- `application/xml`, `application/json` – A `JobDocument` that describes the import job.

Role `_import`

Example

```
POST /import/raw-passkey?transferId=mytransfer HTTP/1.1
Accept: application/xml
Content-type: application/xml
```

```
<MetadataDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <timespan end="+INF" start="-INF">
    <field>
      <name>title</name>
      <value>This is an imported item!</value>
    </field>
  </timespan>
</MetadataDocument>
```

```
<JobDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <jobId>VX-102</jobId>
  <status>WAITING</status>
  <type>RAW_IMPORT</type>
  <data>
    <key>passkey</key>
    <value>91df2b2fe74957cc7331d59a59a88cdc14df460dbb4d62c20287399b30092134</
↪value>
  </data>
</JobDocument>
```

Importing without authentication

Note: Note that this request uses `http://server:port/APIInoauth/...` instead of the usual `http://server:port/API/...`

POST /APIInoauth/import/raw

Imports the item and starts the job.

Query Parameters

- **tag** – An optional list of *shape tags* to use for transcoding.
- **original** – An optional tag, if specified it should be one of the tags specified in the tag parameter. Specifies that the original shape tag will be reset to the shape created to this tag.
- **createThumbnails** –
 - `true` (default) - Generate thumbnails as per defined by shape tag.
 - `false` - Disable thumbnail generation.
- **thumbnailService** – An optional identifier to which thumbnail resource that should be used.
- **createPosters** – An optional list of *time codes* to use for creating posters.
- **transferId** – An id to assign the transfer to be able to refer to it. Mandatory for chunked and passkey imports.
- **transferPriority** – An integer between 1 and 1000 that indicates what priority the transfer should be given in relation to other transfers (optional). A transfer with a high priority value is considered more important than a transfer with a low priority value.
- **storageId** – Optional identifier of storage where essence file is to be stored.

- **overrideFastStart** –
 - `true` (default) - Use transcoder’s estimate of the duration for allocating header space in MOV files and similar files.
 - `false` - Do not use the transcoder’s estimate of the duration.
- **requireFastStart** –
 - `true` (default) - Try to put the index tables (header) in front of the file.
 - `false` - Put header at end of file.
- **fastStartLength** – Optional estimated duration of the clip in seconds.
- **filename** – The filename to be stored as original filename. Optional.
- **notification** – The *placeholder job notification* to use for this job. (Optional)
- **notificationData** – Any additional data to include for *notifications* on this job. (Optional)
- **priority** – The priority to assign to the job. Default is `MEDIUM`.
- **jobmetadata** – Additional *information* for the job task.
- **settings** – Pre-configured *import settings*.

Status Codes

- **400** – If the amount of data received does not match the given Content-Length header.
New in version 4.2.3.

Accepts

- **application/octet-stream, multipart/form-data** – The raw essence data. If sent as multipart form data, the file should then be sent in the `file` parameter.

Produces

- **application/xml, application/json** – A `JobDocument` that describes the import job.

Role `_import`

Example

```
POST /import/raw?transferId=mytransfer&
↳passkey=91df2b2fe74957cc7331d59a59a88cdc14df460dbb4d62c20287399b30092134
Accept: application/xml
Content-type: application/octet-stream

<file data>
```

```
<JobDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <jobId>VX-102</jobId>
  <user>admin</user>
  <started>2010-08-11T09:57:29.575+02:00</started>
  <status>READY</status>
  <type>RAW_IMPORT</type>
  <priority>MEDIUM</priority>
</JobDocument>
```

Import an IMF package using a URI

New in version 4.12.

POST /import/imp

Starts a job that reads the asset map of an IMP (IMF package), and then imports the IMP. Essence files whose UUID is already managed by Vidispine Server are not copied. For more information about jobs, see *Jobs*. Note that thumbnails and poster frames are only generated if a transcode takes place.

Query Parameters

- **uri** – A URI to the asset map that will be imported. Tracks referenced by the asset map should be located in the same folder.
- **tag** – An optional list of *shape tags* to use for transcoding.
- **original** – An optional tag, if specified it should be one of the tags specified in the tag parameter. Specifies that the original shape tag will be reset to the shape created to this tag.
- **no-transcode** –
 - `true` - Will disable transcoding even if the `tags` parameter is set. Rather, the specified tag will be used to determine cropping, scaling etc. of thumbnails.
 - `false` (default) - Normal transcode.
- **createThumbnails** –
 - `true` (default) - Generate thumbnails as per defined by shape tag.
 - `false` - Disable thumbnail generation.
- **thumbnailService** – An optional identifier to which thumbnail resource that should be used.
- **createPosters** – An optional list of *time codes* to use for creating posters.
- **overrideFastStart** –
 - `true` (default) - Use transcoder's estimate of the duration for allocating header space in MOV files and similar files.
 - `false` - Do not use the transcoder's estimate of the duration.
- **requireFastStart** –
 - `true` (default) - Try to put the index tables (header) in front of the file.
 - `false` - Put header at end of file.
- **fastStartLength** – Optional estimated duration of the clip in seconds.
- **storageId** – Optional identifier of storage where essence file is to be stored.
- **growing** –
 - `true` - Specifies that the input file is still written to, so enables growing file support.
 - `false` (default) - No growing file handling of import file.
- **xmpfile** – An optional URI to a sidecar XMP metadata file.
- **sidecar** – Optional URIs or file ids of any sidecar files to import to the item. (New in 4.0.)
- **settings** – Pre-configured *import settings*.
- **notification** – The *placeholder job notification* to use for this job. (Optional)

- **notificationData** – Any additional data to include for *notifications* on this job. (Optional)
- **priority** – The priority to assign to the job. Default is `MEDIUM`.
- **jobmetadata** – Additional *information* for the job task.
- **importTag** – An optional list of shape tags that the created shape will be associated with. Default value is `original`. (New in 4.12.)
- **resourceId** – The transcoder resource to use to execute the transcode. New in version 4.12.
- **noCPLreimport** – If true, do not allow reimport of CPL with same id.

Accepts

- **application/xml**, **application/json** – `MetadataDocument`, initial metadata that is given to the imported item.

Produces

- **application/xml**, **application/json** – A `JobDocument` that describes the import job.

Role `_import`

The **importtag** query parameter either be a list of shapes, or on the format `uuid=tag`. The IMF import job accepts certain special **jobMetadata** parameters:

imfDisallowImportOfCPLWithoutShapeTag If set to true, do not accept imports of CPLs which do not match any importtags (see above).

imfDisallowImportOfIMPWithMissingMedia If set to true, do not accept imports of CPLs which contains references to media not in the CPL and not already in Vidispine.

Find destination storage

New in version 4.15.

GET `/import/storage`

Find where imported content would be stored according to current storage rules.

Query Parameters

- **item** – Optional item id
- **tag** – Optional shape tag
- **jobmetadata** – Additional *information* for the job task.

Produces

- **application/xml**, **application/json** – `StorageDocument`

Role `_import`

17.9.2 Placeholder imports

A placeholder import is an import where the item and a shape are created before any file is transferred. Once all the specified files have been transferred, an import job will start.

Create a placeholder item

POST /import/placeholder

Creates an empty item and a shape with components matching the given parameters.

Query Parameters

- **container** – Integer, the number of files that contain container components.
- **audio** – Integer, the number of files that contain audio components.
- **video** – Integer, the number of files that contain video components.
- **binary** – Integer, the number of files that contain binary components.
- **type** – Optional string.
 - `image-sequence` - Image sequence.
 - `dpx` - DPX sequence.

Deprecated since version 4.6: Import image sequences using URIs with file fragments instead.
- **frameDuration** – Optional *duration* for each image in the sequence (optional).
- **settings** – Pre-configured *import settings*.
- **importTag** – An optional list of shape tags that the created shape will be associated with. Default value is `original`. (New in 4.12.)

Accepts

- **application/xml**, **application/json** – *MetadataDocument*, initial metadata that is given to the imported item.

Produces

- **text/plain** – The id of the item
- **application/xml**, **application/json** – *ItemDocument*

Role `_import`

Import to a placeholder item

POST /import/placeholder/{item-id}/{container, audio, video, binary}

Imports the file and extracts component data based on what type is specified (container, audio, video, binary). No transcoding will take place until all files have been imported.

Query Parameters

- **uri** – A URI to the file that will be imported. Make sure to *percent encode* the URI. Must be specified unless `fileId` is specified.
- **fileId** – The id of the file that contains the essence. Must be specified unless `uri` is specified.
- **allowReimport** –
 - `true` - Import the file to this shape even if the file is already importing or is already part of another item.
 - `false` (default) Reject the request if the file with the given id has already been imported or is currently importing.

- **tag** – An optional list of *shape tags* to use for transcoding.
- **original** – An optional tag, if specified it should be one of the tags specified in the tag parameter. Specifies that the original shape tag will be reset to the shape created to this tag.
- **no-transcode** –
 - `true` - Will disable transcoding even if the `tags` parameter is set. Rather, the specified tag will be used to determine cropping, scaling etc. of thumbnails.
 - `false` (default) - Normal transcode.
- **createThumbnails** –
 - `true` (default) - Generate thumbnails as per defined by shape tag.
 - `false` - Disable thumbnail generation.
- **thumbnailService** – An optional identifier to which thumbnail resource that should be used.
- **createPosters** – An optional list of *time codes* to use for creating posters.
- **storageId** – Optional identifier of storage where essence file is to be stored.
- **resourceId** – The transcoder resource to use to execute the transcode.
New in version 4.12.
- **overrideFastStart** –
 - `true` (default) - Use transcoder's estimate of the duration for allocating header space in MOV files and similar files.
 - `false` - Do not use the transcoder's estimate of the duration.
- **requireFastStart** –
 - `true` (default) - Try to put the index tables (header) in front of the file.
 - `false` - Put header at end of file.
- **fastStartLength** – Optional estimated duration of the clip in seconds.
- **growing** –
 - `true` - Specifies that the input file is still written to, so enables growing file support.
 - `false` (default) - No growing file handling of import file.
- **notification** – The *placeholder job notification* to use for this job. (Optional)
- **notificationData** – Any additional data to include for *notifications* on this job. (Optional)
- **priority** – The priority to assign to the job. Default is `MEDIUM`.
- **jobmetadata** – Additional *information* for the job task.
- **settings** – Pre-configured *import settings*.
- **index** – The component index (track) of new component.
- **shapeId** – Optional shape id for which shape to receive the content. (New in 4.12.)

Produces

- **application/xml**, **application/json** – A `JobDocument` that describes the import job.

Role `_import`**Import to a placeholder item using the request body****POST** `/import/placeholder/ (item-id) / [container, audio, video, binary] / raw`

Imports the file and extracts component data based on what type is specified (container, audio, video, binary). No transcoding will take place until all files have been imported.

Changed in version 4.15: The type of job that is created from this request has changed from THUMB-NAIL/TRANSCODE to PLACEHOLDER_IMPORT.

Query Parameters

- **tag** – An optional list of *shape tags* to use for transcoding.
- **original** – An optional tag, if specified it should be one of the tags specified in the tag parameter. Specifies that the original shape tag will be reset to the shape created to this tag.
- **no-transcode** –
 - `true` - Will disable transcoding even if the `tags` parameter is set. Rather, the specified tag will be used to determine cropping, scaling etc. of thumbnails.
 - `false` (default) - Normal transcode.
- **createThumbnails** –
 - `true` (default) - Generate thumbnails as per defined by shape tag.
 - `false` - Disable thumbnail generation.
- **thumbnailService** – An optional identifier to which thumbnail resource that should be used.
- **createPosters** – An optional list of *time codes* to use for creating posters.
- **transferId** – An id to assign the transfer to be able to refer to it. Mandatory for chunked and passkey imports.
- **transferPriority** – An integer between 1 and 1000 that indicates what priority the transfer should be given in relation to other transfers (optional). A transfer with a high priority value is considered more important than a transfer with a low priority value.
- **storageId** – Optional identifier of storage where essence file is to be stored.
- **resourceId** – The transcoder resource to use to execute the transcode.
New in version 4.14.
- **overrideFastStart** –
 - `true` (default) - Use transcoder's estimate of the duration for allocating header space in MOV files and similar files.
 - `false` - Do not use the transcoder's estimate of the duration.
- **requireFastStart** –
 - `true` (default) - Try to put the index tables (header) in front of the file.
 - `false` - Put header at end of file.
- **fastStartLength** – Optional estimated duration of the clip in seconds.
- **filename** – The filename to be stored as original filename. Optional.

- **notification** – The *placeholder job notification* to use for this job. (Optional)
- **notificationData** – Any additional data to include for *notifications* on this job. (Optional)
- **priority** – The priority to assign to the job. Default is `MEDIUM`.
- **jobmetadata** – Additional *information* for the job task.
- **shapeId** – Optional shape id for which shape to receive the content. (New in 4.12.)
- **index** – Optional index (order) of the component. (New in 4.12.)

Status Codes

- **400** – If the amount of data received does not match the given Content-Length header.
New in version 4.2.3.

Request Headers

- **index** – Offset (in bytes) of the full file for where the first byte of this transfer is located.
- **size** – The total size of the full file.

Accepts

- **application/octet-stream** – The raw data.

Produces

- **application/xml**, **application/json** – A `JobDocument` that describes the import job, or no content if the transfer is not finished.

Role `_import`

Example

Creating a placeholder item that consists of one file.

```
POST /import/placeholder?container=1
Content-Type: application/xml

<MetadataDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <timespan end="+INF" start="-INF">
    <field>
      <name>title</name>
      <value>My placeholder import!</value>
    </field>
  </timespan>
</MetadataDocument>
```

VX-1134

```
POST /import/placeholder/VX-1134/container?tag=lowres&uri=http://example.com/video.avi
Content-Type: application/xml

<JobDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <jobId>VX-1299</jobId>
  <user>admin</user>
  <started>2010-05-07T16:12:10.023+02:00</started>
  <status>READY</status>
```

```
<type>PLACEHOLDER_IMPORT</type>
<priority>MEDIUM</priority>
</JobDocument>
```

Import to a placeholder item in bulk

POST `/import/placeholder/` (*item-id*)

Imports the files and extracts component data based on what type is specified (container, audio, video, binary). No transcoding will take place until all files have been imported.

Query Parameters

- **tag** – An optional list of *shape tags* to use for transcoding.
- **original** – An optional tag, if specified it should be one of the tags specified in the tag parameter. Specifies that the original shape tag will be reset to the shape created to this tag.
- **no-transcode** –
 - `true` - Will disable transcoding even if the `tags` parameter is set. Rather, the specified tag will be used to determine cropping, scaling etc. of thumbnails.
 - `false` (default) - Normal transcode.
- **overrideFastStart** –
 - `true` (default) - Use transcoder's estimate of the duration for allocating header space in MOV files and similar files.
 - `false` - Do not use the transcoder's estimate of the duration.
- **requireFastStart** –
 - `true` (default) - Try to put the index tables (header) in front of the file.
 - `false` - Put header at end of file.
- **fastStartLength** – Optional estimated duration of the clip in seconds.
- **storageId** – Optional identifier of storage where essence file is to be stored.
- **resourceId** – The transcoder resource to use to execute the transcode.
New in version 4.12.
- **growing** –
 - `true` - Specifies that the input file is still written to, so enables growing file support.
 - `false` (default) - No growing file handling of import file.
- **settings** – Pre-configured *import settings*.
- **shapeId** – Optional shape id for which shape to receive the content. (New in 4.16.)
- **notification** – The *placeholder job notification* to use for this job. (Optional)
- **notificationData** – Any additional data to include for *notifications* on this job. (Optional)
- **priority** – The priority to assign to the job. Default is `MEDIUM`.
- **jobmetadata** – Additional *information* for the job task.
- **index** – The starting component index (track) of the first component.

- **importTag** – An optional list of shape tags that the created shape will be associated with. Default value is `original`. (New in 4.12.)

Accepts

- **application/xml**, **application/json** – A `PlaceholderImportRequestDocument` describing the files to import.

Produces

- **application/xml**, **application/json** – A `JobDocument` that describes the import job.

Role `_import`

Create passkey for placeholder item

POST `/import/placeholder/ (item-id) /raw-passkey`

Creates a new passkey for a specific placeholder item, that can be used to perform imports to this item without requiring authentication.

Query Parameters

- **shapeId** – Optional shape id for which shape to receive the content. (New in 4.12.)

Produces

- **application/xml**, **application/json** – `URIListDocument`

Example

```
POST /import/placeholder/VX-25182/raw-passkey
```

```
<URIListDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <uri>a8c87f5fa49344ba0bc3575616e047da426991add6b23d7f7c7b05a21a4a083</uri>
</URIListDocument>
```

Adopt stand-alone files

POST `/import/placeholder/ (item-id) / [container, audio, video, binary] /adopt/ file-id` Adopt the file as a component in a placeholder item.

Changed in version 4.12: Support for audio and video components was added.

Query Parameters

- **index** – Optional index (order) of the component. (New in 4.12.)
- **shapeId** – Optional shape id for which shape to receive the content. (New in 4.12.)

Role `_import`

17.9.3 Importing sidecar files

Sidecar files can be imported and saved as metadata of an item using a sidecar import job. The supported sidecar file formats are:

- EVS (.evs)
- SCC (.scc)
- SRT (.srt)
- STL (.stl)
- XMP (.xmp)
- Vidispine metadata (.xml)

Note that this may be a lossy operation, that is, that only parts of the data from the sidecar file is saved in the item metadata, and that it may not be possible to recreate the original sidecar file from the item metadata.

Changed in version 4.7: Support for SCC subtitles was added.

Import a sidecar file

POST `/import/sidecar/` (*item-id*)

Starts a job that imports the sidecar file, located at the given URL, to the specified item.

Query Parameters

- **sidecar** – Either the file id of the sidecar file or a URL for locating it.
- **notification** – The *placeholder job notification* to use for this job. (Optional)
- **notificationData** – Any additional data to include for *notifications* on this job. (Optional)
- **priority** – The priority to assign to the job. Default is `MEDIUM`.
- **jobmetadata** – Additional *information* for the job task.

Produces

- **application/xml**, **application/json** – A `JobDocument` that describes the import job.

Role `_import`

POST `/import/sidecar/` (*item-id*) `/raw`

Starts a job that imports the sidecar file as HTTP request body. The sidecar file will be saved in one of the Vidispine storages.

Query Parameters

- **storageId** – The id of the storage that the sidecar file will be saved.
- **fileExtension** – The extension of the file that this sidecar data is from. Used to identify the sidecar media type. Example: `srt`.
- **notification** – The *placeholder job notification* to use for this job. (Optional)
- **notificationData** – Any additional data to include for *notifications* on this job. (Optional)
- **priority** – The priority to assign to the job. Default is `MEDIUM`.
- **jobmetadata** – Additional *information* for the job task.

Status Codes

- **400** – If the amount of data received does not match the given Content-Length header.
New in version 4.2.3.

Accepts

- `application/octet-stream` – The raw data.

Produces

- `application/xml`, `application/json` – A `JobDocument` that describes the import job.

Role `_import`

17.10 Import settings

17.10.1 Managing import settings

Create a new settings profile

POST `/import/settings`

Creates a new settings profile with the given settings.

Accepts

- `application/xml`, `application/json` – An `ImportSettingsDocument` containing the settings profile.

Produces

- `application/xml`, `application/json` – An `ImportSettingsDocument` containing the the settings profile together with its id.

Role `_import`

Example

```
POST /import/settings
Content-Type: application/xml
```

```
<ImportSettingsDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <access>
    <permission>READ</permission>
    <user>myuser</user>
  </access>
</ImportSettingsDocument>
```

```
<ImportSettingsDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <id>VX-4</id>
  <access>
    <permission>READ</permission>
    <user>myuser</user>
  </access>
</ImportSettingsDocument>
```


List the ids of all profiles

GET /import/settings

Retrieves a list of all profiles.

Produces

- **application/xml**, **application/json** – A `URIListDocument` containing the ids of all profiles.
- **text/plain** – CRLF-delimited list of ids

Role `_import`

Example

```
GET /import/settings
```

```
<URIListDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <uri>VX-1</uri>
  <uri>VX-2</uri>
  <uri>VX-3</uri>
  <uri>VX-4</uri>
</URIListDocument>
```

Retrieve a specific settings profile

GET /import/settings/ (*settings-id*)

Retrieves the settings specified by a certain profile.

Produces

- **application/xml**, **application/json** – An `ImportSettingsDocument` containing the settings of the profile.

Role `_import`

Example

```
GET /import/settings/VX-4
```

```
<ImportSettingsDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <id>VX-4</id>
  <access>
    <permission>READ</permission>
    <user>myuser</user>
  </access>
</ImportSettingsDocument>
```

Change the settings of a profile

PUT /import/settings/ (*settings-id*)

Changes the settings of the specified profile.

Accepts

- `application/xml`, `application/json` – An `ImportSettingsDocument` with the new settings.

Role `_import`

Example

```
PUT /import/settings/VX-4
Content-Type: application/xml

<ImportSettingsDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <access>
    <permission>WRITE</permission>
    <user>myuser</user>
  </access>
</ImportSettingsDocument>
```

```
200 OK
```

Delete a profile

DELETE `/import/settings/` (*settings-id*)

Deletes the profile with specified id.

Role `_import`

Example

```
DELETE /import/settings/VX-4
```

```
200 OK
```

17.11 Items

17.11.1 Exports

An item export is the process of copying a file from storage to a location accessible by the system.

Create export jobs

Start an export job for a single item

POST `/item/` (*item-id*) `/export`

Creates a new export job that will copy a file to a remote location.

A shape tag can be specified to decide which shape that will be exported.

If the URI ends with a “/” the URI is assumed to describe a folder and the file will retain its existing filename. Otherwise it is assumed that the URI describes a file and that filename will be used.

Query Parameters

- **uri** – A URI to the destination of the file.
- **locationName** – The name of an *export location*. (New in 4.0.)
- **metadata** –
 - `true` - Metadata will also be exported to side-car XML file.
 - `false` (default) - No metadata is exported.
- **projection** – Defines the projection to use when exporting the metadata (optional).
- **notification** – The *placeholder job notification* to use for this job. (Optional)
- **notificationData** – Any additional data to include for *notifications* on this job. (Optional)
- **priority** – The priority to assign to the job. Default is `MEDIUM`.
- **jobmetadata** – Additional *information* for the job task.
- **useOriginalFilename** – If set to true, the file(s) will be exported with their original filename if available.
- **useOriginalComponentFilename** – If set to true, the file(s) will be exported with their original component filename if available. (New in 4.12.)
- **tag** – Finds a shape with the specified tag and uses that for export. If not specified, the system will attempt to use the original shape.
- **start** – Defines a start *time code* for the media (optional).
- **end** – Defines an end *time code* for the media (optional).
- **template** – Optional export template to use.
- **allowMissing** –
 - `true` (default) - Job will be started and the missing files will be ignored.
 - `false` - Job will fail if there are missing files and the files could not be generated by transcoding. A shape tag should be specified.
- **track** – Comma-separated list of item track ids. Can include wildcards, e.g. `A*`. Can also contain component ids. Default is `*`, all tracks/components. (New in 4.12.)
- **version** –
 - *essence-version-id* - Return shapes for a specified version.
 - `all` - Return shapes for all versions.
 - `latest` (default) - Return shapes for the latest version.
 - `latest-per-shapetag` - Return shapes with the highest essence version number per shape tag.

New in version 4.12.

Produces

- `application/xml`, `application/json` – [JobDocument](#)

Role `_export`

Note: *FTP active mode*

New in version 4.1.2.

For FTP exports, active mode can be forced by adding `?passive=false` to the FTP URL. To set the client side ports used in active mode, set the configuration property `ftpActiveModePortRange`, the value should be a range, e.g. 42100-42200. To set the client IP used in active mode, set the configuration property `ftpActiveModeIp`.

Note: *XMP rewrite*

New in version 4.1.4.

By using the `jobmetadata` query parameter with `rewriteXMP=false` (remember to URL encode the `=`), any XMP metadata in the source file will *not* be updated with the XMP metadata of the item.

Example

Create a new export job that transfers the file of a shape with the tag `flv`.

```
POST /item/VX-250/export?tag=flv&uri=file:/home/user/video/myvideo.flv
```

```
<JobDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <jobId>VX-1293</jobId>
  <user>admin</user>
  <started>2010-05-07T14:05:51.826+02:00</started>
  <status>READY</status>
  <type>EXPORT</type>
  <priority>MEDIUM</priority>
</JobDocument>
```

Start an export job for a single item as an IMF package

New in version 4.12.

POST `/item/(item-id)/export/imp`

Creates a new export job that will create an IMF package as a remote location. URI must end with an `/` to denote a folder.

Query Parameters

- **uri** – A URI to the destination of the file.
- **locationName** – The name of an *export location*. (New in 4.0.)
- **metadata** –
 - `true` - Metadata will also be exported to side-car XML file.
 - `false` (default) - No metadata is exported.
- **projection** – Defines the projection to use when exporting the metadata (optional).
- **notification** – The *placeholder job notification* to use for this job. (Optional)
- **notificationData** – Any additional data to include for *notifications* on this job. (Optional)

- **priority** – The priority to assign to the job. Default is `MEDIUM`.
- **jobmetadata** – Additional *information* for the job task.
- **useOriginalFilename** – If set to true, the file(s) will be exported with their original filename if available.
- **useOriginalComponentFilename** – If set to true, the file(s) will be exported with their original component filename if available.
- **tag** – Finds a shape with the specified tag and uses that for export. If not specified, the system will attempt to use the original shape.
- **start** – Defines a start *Time codes* for the media (optional).
- **end** – Defines an end *Time codes* for the media (optional).
- **template** – Optional export template to use (see export-templates).
- **allowMissing** –
 - `true` (default) - Job will be started and the missing files will be ignored.
 - `false` - Job will fail if there are missing files and the files could not be generated by transcoding. A shape tag should be specified.
- **track** – Comma-separated list of item track ids to include as physical files. Can include wildcards, e.g. `A*`. Can also contain component ids. Default is `*`, all tracks/components.
- **cplTrack** – Comma-separated list of item track ids to include in the CPL. Can include wildcards, e.g. `A*`. Can also contain component ids. Default is the same as the track parameter.
- **version** –
 - `essence-version-id` - Return shapes for a specified version.
 - `all` - Return shapes for all versions.
 - `latest` (default) - Return shapes for the latest version.
 - `latest-per-shapetag` - Return shapes with the highest essence version number per shape tag.

Produces

- `application/xml`, `application/json` – `JobDocument`

Role `_export`

Start an export job for a single shape

New in version 4.1.2.

POST `/item/ (item-id) /shape/`

`shape-id/export` Creates a new export job that will copy a file from the specified shape to a remote location.

If the URI ends with a `/` the URI is assumed to describe a folder and the file will retain its existing filename. Otherwise it is assumed that the URI describes a file and that filename will be used.

Query Parameters

- **uri** – A URI to the destination of the file.
- **locationName** – The name of an *export location*. (New in 4.0.)

- **metadata** –
 - `true` - Metadata will also be exported to side-car XML file.
 - `false` (default) - No metadata is exported.
- **projection** – Defines the projection to use when exporting the metadata (optional).
- **notification** – The *placeholder job notification* to use for this job. (Optional)
- **notificationData** – Any additional data to include for *notifications* on this job. (Optional)
- **priority** – The priority to assign to the job. Default is `MEDIUM`.
- **jobmetadata** – Additional *information* for the job task.
- **useOriginalFilename** – If set to true, the file(s) will be exported with their original filename if available.
- **useOriginalComponentFilename** – If set to true, the file(s) will be exported with their original component filename if available. (New in 4.12.)
- **start** – Defines a start *time code* for the media (optional).
- **end** – Defines an end *time code* for the media (optional).
- **allowMissing** –
 - `true` (default) - Job will be started and the missing files will be ignored.
 - `false` - Job won't be started if there are missing files.
- **track** – Comma-separated list of item track ids. Can include wildcards, e.g. `A*`. Can also contain component ids. Default is `*`, all tracks/components. (New in 4.12.)

Produces

- `application/xml`, `application/json` – *JobDocument*

Role `_export`**Start an export job for a collection or a library****POST** `/collection/ (collection-id) /export`**POST** `/library/ (library-id) /export`

Creates a new export job that will copy all matching files in the collection/library to a remote location.

A shape tag can be specified to decide which shapes that will be exported. The files will retain their original names and the URI should therefore point to the folder where the files should be placed.

Query Parameters

- **uri** – A URI to the destination of the file.
- **locationName** – The name of an *export location*. (New in 4.0.)
- **metadata** –
 - `true` - Metadata will also be exported to side-car XML file.
 - `false` (default) - No metadata is exported.
- **projection** – Defines the projection to use when exporting the metadata (optional).
- **notification** – The *placeholder job notification* to use for this job. (Optional)

- **notificationData** – Any additional data to include for *notifications* on this job. (Optional)
- **priority** – The priority to assign to the job. Default is `MEDIUM`.
- **jobmetadata** – Additional *information* for the job task.
- **useOriginalFilename** – If set to true, the file(s) will be exported with their original filename if available.
- **useOriginalComponentFilename** – If set to true, the file(s) will be exported with their original component filename if available. (New in 4.12.)
- **tag** – Finds a shape with the specified tag and uses that for export. If not specified, the system will attempt to use the original shape.
- **all** –
 - `true` (default) - Fail the job if not all files from the selected shapes could be exported.
 - `false` - Don't export lost or unavailable files.
- **template** – Optional export template to use.
- **track** – Comma-separated list of item track ids. Can include wildcards, e.g. `A*`. Can also contain component ids. Default is `*`, all tracks/components. (New in 4.12.)
- **version** –
 - `essence-version-id` - Return shapes for a specified version.
 - `all` - Return shapes for all versions.
 - `latest` (default) - Return shapes for the latest version.
 - `latest-per-shapetag` - Return shapes with the highest essence version number per shape tag.
 New in version 4.12.

Produces

- `application/xml`, `application/json` – `JobDocument`
- `application/xml`, `application/json` – `JobDocument`

Role `_export`

Example

Create a new export job that transfers files in a certain collection that has shapes with the tag `flv`.

```
POST /collection/VX-10/export?tag=flv&uri=file:/home/user/video/
```

```
<JobDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <jobId>VX-1334</jobId>
  <user>admin</user>
  <started>2010-05-24T14:53:12.732+02:00</started>
  <status>READY</status>
  <type>EXPORT</type>
  <priority>MEDIUM</priority>
</JobDocument>
```

Start an export job of an shape to an IMF package

New in version 4.12.

POST `/item/ (item-id) /shape/`

`shape-id/export/imp` Creates a new export job that will create an IMF package as a remote location. URI must end with an “/” to denote a folder.

Query Parameters

- **uri** – A URI to the destination of the file.
- **locationName** – The name of an *export location*. (New in 4.0.)
- **metadata** –
 - `true` - Metadata will also be exported to side-car XML file.
 - `false` (default) - No metadata is exported.
- **projection** – Defines the projection to use when exporting the metadata (optional).
- **notification** – The *placeholder job notification* to use for this job. (Optional)
- **notificationData** – Any additional data to include for *notifications* on this job. (Optional)
- **priority** – The priority to assign to the job. Default is `MEDIUM`.
- **jobmetadata** – Additional *information* for the job task.
- **useOriginalFilename** – If set to true, the file(s) will be exported with their original filename if available.
- **useOriginalComponentFilename** – If set to true, the file(s) will be exported with their original component filename if available.
- **start** – Defines a start *Time codes* for the media (optional).
- **end** – Defines an end *Time codes* for the media (optional).
- **allowMissing** –
 - `true` (default) - Job will be started and the missing files will be ignored.
 - `false` - Job won't be started if there are missing files.
- **track** – Comma-separated list of item track ids. Can include wildcards, e.g. `A*`. Can also contain component ids. Default is `*`, all tracks/components.
- **cplTrack** – Comma-separated list of item track ids to include in the CPL. Can include wildcards, e.g. `A*`. Can also contain component ids. Default is the same as the track parameter.

Produces

- `application/xml`, `application/json` – `JobDocument`

Role `_export`

17.11.2 Items

Managing items

Retrieve a list of all items

GET /item

Returns a list of all items. This request is the same as performing an empty search.

Note that searching can also be performed by using the HTTP method `PUT` (<http://www.w3.org/Protocols/rfc2616/rfc2616-sec9.html#sec9.6>) using the same syntax, except for the parameter `q` is omitted and the `ItemSearchDocument` is sent in the body of the request.

Content Parameters See *Retrieving item information*

Query Parameters

- **result** –
 - `list` (default) - Return a list of items.
 - `library` - Create a library with the matching items.
- **q** – XML/JSON, `ItemSearchDocument`. Only with `GET` (<http://www.w3.org/Protocols/rfc2616/rfc2616-sec9.html#sec9.3>).
- **count** –
 - `true` (default) - Return hits in result.
 - `false` - Do not return hits in result, in order to produce results faster.
- **p** – Comma separated list of *paths* specifying the content to include. Overrides the content and filter parameters.
New in version 4.5.
- **content** – Comma-separated list of the types of content to retrieve, possible values are `metadata`, `uri`, `shape`, `poster`, `thumbnail`, `access`, `merged-access`, `external`.
- **interval** – Comma-separated list
 - *time-span* - Filter out metadata, return only metadata for specified *time span*.
 - `generic` - Return all non-timed metadata.
 - `all` (default) - Return all metadata, same as `interval=generic,-INF-+INF`
- **field** – Comma-separated list.
 - *field-name* - Return specified field.
 - *field-name* ":" *new-name* - Return specified field, renamed to a new name in return value.
 - "-" *field-name* - Exclude specified field.
 - (default) - Return all fields.
- **group** – Comma-separated list.
 - *group-name* - Return specified group.
 - *group-name* + - Return specified group and subgroups.
New in version 4.1.
 - *group-name* : *new-name* - Return specified group, renamed to a new name in return value.
 - - *group-name* - Exclude specified group.

- (default) - Return all groups.
- **language** – Comma separated list.
 - *language-tag* - Return metadata for specific language, e.g. `en_US`. Wildcards may be used, e.g. `*_CA` for both Canadian French and Canadian English.
 - `none` - Return all metadata without language specification.
 - `all` (default) - Return all metadata, with or without language specification.
- **sampleRate** – Convert all outgoing *time instants* to specified rate. *NB!* *Time codes* which cannot be expressed in an integer number of samples will be returned as a decimal number, with risk of losing precision.
- **track** – Comma separated list.
 - *track-type track-number* - Return metadata for specified track. Example of track is `A2`.
 - *track-type t1 - t2* - Return metadata for specified track interval, e.g. `A2-4`.
 - *track-type ** - Return metadata for all tracks of specified type, e.g. `A*`.
 - `generic` - Return all non-tracked metadata.
 - `all` (default) - All metadata, with or without track specification, are returned.
- **include** – A list of keys. Includes additional *field specific data*. Additionally, if set to `type` the type definition of the field will be retrieved.
- **includeValues** – Return the value enumeration for each metadata field.
- **conflict** –
 - `yes` (default) - Include all metadata conflicts, unresolved.
 - `no` - Return conflicts resolved according to field rules.
- **terse** –
 - `yes` - Return metadata in *terse format*.
 - `no` (default) - Return metadata in verbose format.
- **defaultValue** –
 - `true` - For unset fields, return *default values*.
 - `false` (default) - Do not return default values.
- **includeTransientMetadata** –
 - `true` (default) - Include *transient metadata*.
 - `false` - Do not include transient metadata in response.
- **revision** – Optional revision, specifying which metadata to display. Only used if requesting a single item or collection.
- **mergedType** – The type of operation to check for.
- **mergedPermission** – The lowest required permission level.
- **mergedExtradata** – Any possible extradata.
- **uriType** – Optional comma-separated list of format types (container format) to return.
- **scheme** – URI scheme to return.
- **storageType** – Only return URIs for files from storages of this *type*.

- **methodType** – Optional *type of access method*.
 - `AUTO` - Gives an APIInoauth URI to the media. Access to file is tunneled through Vidispine.
 - `AZURE_SAS` - If the storage schema is `azure://` you can get direct access to the media. The resulting URI will not tunnel through Vidispine but rather point directly to the media location at the azure storage.
- **methodMetadata** – Optional *metadata* used with storage method.
- **tag** – A *URI parameter*: Optional comma-separated list of *shape tags* to return.
- **version** – Optional integer, specifying which essence version to return for shapes. If special value `all`, display all versions. If special value `latest` (default), display latest version of shapes.
- **closedFiles** – A *URI parameter*:
 - `true` (default) - Return only URIs that point to closed files.
 - `false` - Return all URIs.
- **url** –
 - `true` - Return list of URLs.
 - `false` (default) - Return list of ids.
- **noauth-url** –
 - `true` Return URIs that do not need authentication.
 - `false` (default) Return normal URIs
- **baseURI** – Which base URI to use for the thumbnail URLs.
- **save** –
 - `true` - Returns a 303 See Other, with a `Location` header containing an URI to fetch the search result
 - `false` (default) - Returns a regular search result
 New in version 4.7.

Matrix Parameters

- **library** – Restricts search to within library, *Identifiers*. Default is `*`, all items.
- **first** – Integer, from resulting list of items, start return list from specified offset. Default is 1, start return list from beginning.
- **cursor** – New in version 4.16.
 - `*` - The initial cursor.
 - `string-from-search` - Cursor string returned from the search results.

If set, the `cursorMark` (https://lucene.apache.org/solr/guide/6_6/pagination-of-results.html#fetching-a-large-number-of-sorted-results-cursors) / `search after` (<https://www.elastic.co/guide/en/elasticsearch/reference/6.3/search-request-search-after.html#search-request-search-after>) features from Solr/Elasticsearch would be used to improve the `deep paging` (https://lucene.apache.org/solr/guide/6_6/pagination-of-results.html#performance-problems-with-deep-paging) performance during a search.

When `cursor` is used, The value of `first` will be ignored.

Only metadata searches in the `generic` interval supports `cursor`.

- **number** – Integer, the number of entities to fetch. Default 100.
- **libraryId** – If set, the library identified by this id will be used instead of creating a new library.
- **autoRefresh** – When creating a library, make it *self-refresh*. Defaults to `false`.
- **updateMode** – When creating a library, use this *update mode*. Defaults to `MERGE`.
- **updateFrequency** – When creating a library, use this *update frequency*. Defaults to no periodic updates.
- **storage** – Optional list of storage ids. Return only files from specific storages. Can be specified multiple times.

New in version 4.13.

- **storageGroup** – Optional storage group id. Return only files from storages specified in the storage group.

New in version 4.13.

- **starttc** –
 - `true` - Interval is given relative to start timecode of item.
 - `false` (default) - Interval is 0-based.

Produces

- **application/xml**, **application/json** – `ItemListDocument`
- **text/plain** – CRLF-delimited list of ids or URLs

Role `_item_search`

Tip: Additional content can be retrieved by using the syntax specified in *Retrieving item information*.

Get information about a single item

GET `/item/ (item-id)`

Returns information about a single item.

Query Parameters

- **p** – Comma separated list of *paths* specifying the content to include. Overrides the content and filter parameters.

New in version 4.5.

- **content** – Comma-separated list of the types of content to retrieve, possible values are `metadata`, `uri`, `shape`, `poster`, `thumbnail`, `access`, `merged-access`, `external`.
- **interval** – Comma-separated list
 - *time-span* - Filter out metadata, return only metadata for specified *time span*.
 - `generic` - Return all non-timed metadata.
 - `all` (default) - Return all metadata, same as `interval=generic,-INF-+INF`

- **field** – Comma-separated list.
 - *field-name* - Return specified field.
 - *field-name* ":" *new-name* - Return specified field, renamed to a new name in return value.
 - "-" *field-name* - Exclude specified field.
 - (default) - Return all fields.
- **group** – Comma-separated list.
 - *group-name* - Return specified group.
 - *group-name* + - Return specified group and subgroups.
 - New in version 4.1.
 - *group-name* : *new-name* - Return specified group, renamed to a new name in return value.
 - - *group-name* - Exclude specified group.
 - (default) - Return all groups.
- **language** – Comma separated list.
 - *language-tag* - Return metadata for specific language, e.g. en_US. Wildcards may be used, e.g. *_CA for both Canadian French and Canadian English.
 - none - Return all metadata without language specification.
 - all (default) - Return all metadata, with or without language specification.
- **sampleRate** – Convert all outgoing *time instants* to specified rate. *NB! Time codes* which cannot be expressed in an integer number of samples will be returned as a decimal number, with risk of losing precision.
- **track** – Comma separated list.
 - *track-type track-number* - Return metadata for specified track. Example of track is A2.
 - *track-type t1 - t2* - Return metadata for specified track interval, e.g. A2-4.
 - *track-type ** - Return metadata for all tracks of specified type, e.g. A*.
 - generic - Return all non-tracked metadata.
 - all (default) - All metadata, with or without track specification, are returned.
- **include** – A list of keys. Includes additional *field specific data*. Additionally, if set to *type* the type definition of the field will be retrieved.
- **includeValues** – Return the value enumeration for each metadata field.
- **conflict** –
 - yes (default) - Include all metadata conflicts, unresolved.
 - no - Return conflicts resolved according to field rules.
- **terse** –
 - yes - Return metadata in *terse format*.
 - no (default) - Return metadata in verbose format.
- **defaultValue** –
 - true - For unset fields, return *default values*.

- `false` (default) - Do not return default values.
- **includeTransientMetadata** -
 - `true` (default) - Include *transient metadata*.
 - `false` - Do not include transient metadata in response.
- **revision** - Optional revision, specifying which metadata to display. Only used if requesting a single item or collection.
- **mergedType** - The type of operation to check for.
- **mergedPermission** - The lowest required permission level.
- **mergedExtradata** - Any possible extradata.
- **uriType** - Optional comma-separated list of format types (container format) to return.
- **scheme** - URI scheme to return.
- **storageType** - Only return URIs for files from storages of this *type*.
- **methodType** - Optional *type of access method*.
 - `AUTO` - Gives an APIInoauth URI to the media. Access to file is tunneled through Vidispine.
 - `AZURE_SAS` - If the storage schema is `azure://` you can get direct access to the media. The resulting URI will not tunnel through Vidispine but rather point directly to the media location at the azure storage.
- **methodMetadata** - Optional *metadata* used with storage method.
- **tag** - A *URI parameter*: Optional comma-separated list of *shape tags* to return.
- **version** - Optional integer, specifying which essence version to return for shapes. If special value `all`, display all versions. If special value `latest` (default), display latest version of shapes.
- **closedFiles** - A *URI parameter*:
 - `true` (default) - Return only URIs that point to closed files.
 - `false` - Return all URIs.
- **noauth-url** -
 - `true` Return URIs that do not need authentication.
 - `false` (default) Return normal URIs
- **baseURI** - Which base URI to use for the thumbnail URLs.

Matrix Parameters

- **storage** - Optional list of storage ids. Return only files from specific storages. Can be specified multiple times.
New in version 4.13.
- **storageGroup** - Optional storage group id. Return only files from storages specified in the storage group.
New in version 4.13.
- **starttc** -
 - `true` - Interval is given relative to start timecode of item.

- `false` (default) - Interval is 0-based.

Produces

- `application/xml`, `application/json` – [ItemDocument](#)

Tip: Additional content can be retrieved by using the syntax specified in [Retrieving item information](#).

Delete a single item

Deleting an item means removing the item's id, its metadata, shapes, and physical files.

DELETE /item/ (*item-id*)

Marks the item as being deleted, meaning it will not be returned in search results. The actual removal from the database is done approximately once every minute. Also, all files associated with the item is marked as `TO_BE_DELETED`, meaning they will be deleted by the storage supervisor, but not sooner than all jobs involving the actual file has finished.

By specifying `keepShapeTagMedia` and/or `keepShapeTagStorage`, the files associated with the item is not deleted, but simply unassociated with the item.

If only `keepShapeTagMedia` is given, all files belonging to shapes of the item with any of the given shape tags are preserved.

If only `keepShapeTagStorage` is given, all files belonging to the item residing on the given storages are preserved. If both `keepShapeTagMedia` and `keepShapeTagStorage` is given, all files which *both* belongs to the specified shapes and storages are preserved.

New in version 4.3.2.

If any of `keepShapeTagMedia` or `keepShapeTagStorage` contains a value `*`, then no files will be removed.

Query Parameters

- **keepShapeTagMedia** – Optional comma-separated list of shape tags whose files will not be deleted.
- **keepShapeTagStorage** – Optional comma-separated list of storage ids whose files will not be deleted.

Delete multiple items

Deleting an item means removing the item's id, its metadata, shapes, and physical files.

New in version 4.8.

DELETE /item

Marks multiple items as being deleted, meaning they will not be returned in search results.

Query Parameters

- **id** – Comma-separated list of item ids or external ids. Must not be empty.
- **keepShapeTagMedia** – Optional comma-separated list of shape tags whose files will not be deleted.
- **keepShapeTagStorage** – Optional comma-separated list of storage ids whose files will not be deleted.

Search items

PUT /item

Performs an item search. If the `result` query parameter is set to `library` a new library is created, which can be used to further refine the search, using the `library` parameter.

Content Parameters See *Retrieving item information*

Query Parameters

- **result** –
 - `list` (default) - Return a list of items.
 - `library` - Create a library with the matching items.
- **q** – XML/JSON, `ItemSearchDocument`. Only with `GET` (<http://www.w3.org/Protocols/rfc2616/rfc2616-sec9.html#sec9.3>).
- **count** –
 - `true` (default) - Return hits in result.
 - `false` - Do not return hits in result, in order to produce results faster.
- **p** – Comma separated list of *paths* specifying the content to include. Overrides the content and filter parameters.
New in version 4.5.
- **content** – Comma-separated list of the types of content to retrieve, possible values are `metadata`, `uri`, `shape`, `poster`, `thumbnail`, `access`, `merged-access`, `external`.
- **interval** – Comma-separated list
 - *time-span* - Filter out metadata, return only metadata for specified *time span*.
 - `generic` - Return all non-timed metadata.
 - `all` (default) - Return all metadata, same as `interval=generic,-INF-+INF`
- **field** – Comma-separated list.
 - *field-name* - Return specified field.
 - *field-name* ":" *new-name* - Return specified field, renamed to a new name in return value.
 - "-" *field-name* - Exclude specified field.
 - (default) - Return all fields.
- **group** – Comma-separated list.
 - *group-name* - Return specified group.
 - *group-name* + - Return specified group and subgroups.
New in version 4.1.
 - *group-name* : *new-name* - Return specified group, renamed to a new name in return value.
 - - *group-name* - Exclude specified group.
 - (default) - Return all groups.
- **language** – Comma separated list.

- *language-tag* - Return metadata for specific language, e.g. *en_US*. Wildcards may be used, e.g. **_CA* for both Canadian French and Canadian English.
- *none* - Return all metadata without language specification.
- *all* (default) - Return all metadata, with or without language specification.
- **sampleRate** - Convert all outgoing *time instants* to specified rate. *NB!* *Time codes* which cannot be expressed in an integer number of samples will be returned as a decimal number, with risk of losing precision.
- **track** - Comma separated list.
 - *track-type track-number* - Return metadata for specified track. Example of track is *A2*.
 - *track-type t1 - t2* - Return metadata for specified track interval, e.g. *A2-4*.
 - *track-type ** - Return metadata for all tracks of specified type, e.g. *A**.
 - *generic* - Return all non-tracked metadata.
 - *all* (default) - All metadata, with or without track specification, are returned.
- **include** - A list of keys. Includes additional *field specific data*. Additionally, if set to *type* the type definition of the field will be retrieved.
- **includeValues** - Return the value enumeration for each metadata field.
- **conflict** -
 - *yes* (default) - Include all metadata conflicts, unresolved.
 - *no* - Return conflicts resolved according to field rules.
- **terse** -
 - *yes* - Return metadata in *terse format*.
 - *no* (default) - Return metadata in verbose format.
- **defaultValue** -
 - *true* - For unset fields, return *default values*.
 - *false* (default) - Do not return default values.
- **includeTransientMetadata** -
 - *true* (default) - Include *transient metadata*.
 - *false* - Do not include transient metadata in response.
- **revision** - Optional revision, specifying which metadata to display. Only used if requesting a single item or collection.
- **mergedType** - The type of operation to check for.
- **mergedPermission** - The lowest required permission level.
- **mergedExtradata** - Any possible extradata.
- **uriType** - Optional comma-separated list of format types (container format) to return.
- **scheme** - URI scheme to return.
- **storageType** - Only return URIs for files from storages of this *type*.
- **methodType** - Optional *type of access method*.

- `AUTO` - Gives an APIInoauth URI to the media. Access to file is tunneled through Vidispine.
 - `AZURE_SAS` - If the storage schema is `azure://` you can get direct access to the media. The resulting URI will not tunnel through Vidispine but rather point directly to the media location at the azure storage.
 - **methodMetadata** – Optional *metadata* used with storage method.
 - **tag** – A *URI parameter*: Optional comma-separated list of *shape tags* to return.
 - **version** – Optional integer, specifying which essence version to return for shapes. If special value `all`, display all versions. If special value `latest` (default), display latest version of shapes.
 - **closedFiles** – A *URI parameter*:
 - `true` (default) - Return only URIs that point to closed files.
 - `false` - Return all URIs.
 - **url** –
 - `true` - Return list of URLs.
 - `false` (default) - Return list of ids.
 - **noauth-url** –
 - `true` Return URIs that do not need authentication.
 - `false` (default) Return normal URIs
 - **baseURI** – Which base URI to use for the thumbnail URLs.
 - **save** –
 - `true` - Returns a 303 See Other, with a Location header containing an URI to fetch the search result
 - `false` (default) - Returns a regular search result
- New in version 4.7.

Matrix Parameters

- **library** – Restricts search to within library, *Identifiers*. Default is `*`, all items.
- **first** – Integer, from resulting list of items, start return list from specified offset. Default is 1, start return list from beginning.
- **cursor** – New in version 4.16.
 - `*` - The initial cursor.
 - `string-from-search` - Cursor string returned from the search results.

If set, the `cursorMark` (https://lucene.apache.org/solr/guide/6_6/pagination-of-results.html#fetching-a-large-number-of-sorted-results-cursors) / `search after` (<https://www.elastic.co/guide/en/elasticsearch/reference/6.3/search-request-search-after.html#search-request-search-after>) features from Solr/Elasticsearch would be used to improve the `deep paging` (https://lucene.apache.org/solr/guide/6_6/pagination-of-results.html#performance-problems-with-deep-paging) performance during a search.

When `cursor` is used, The value of `first` will be ignored.

Only metadata searches in the `generic` interval supports `cursor`.

- **number** – Integer, the number of entities to fetch. Default 100.
- **libraryId** – If set, the library identified by this id will be used instead of creating a new library.
- **autoRefresh** – When creating a library, make it *self-refresh*. Defaults to `false`.
- **updateMode** – When creating a library, use this *update mode*. Defaults to `MERGE`.
- **updateFrequency** – When creating a library, use this *update frequency*. Defaults to no periodic updates.
- **storage** – Optional list of storage ids. Return only files from specific storages. Can be specified multiple times.

New in version 4.13.

- **storageGroup** – Optional storage group id. Return only files from storages specified in the storage group.

New in version 4.13.

- **starttc** –
 - `true` - Interval is given relative to start timecode of item.
 - `false` (default) - Interval is 0-based.

Produces

- `application/xml`, `application/json` – `ItemListDocument`
- `text/plain` – CRLF-delimited list of ids or URLs

Accepts

- `application/xml`, `application/json` – `ItemSearchDocument`

Role `_item_search`

Tip: There is a limit on how many items that can be returned for each call to this method. To get all items, iterate the calls, or even better in a batch scenario, start a job using *Listing items in batch* to get all items at once.

Tip: Additional content can be retrieved by using the syntax specified in *Retrieving item information*.

Example

```
GET /item?result=library
Content-Type: application/xml

<ItemSearchDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <field>
    <name>product_category</name>
    <value>tv</value>
  </field>
</ItemSearchDocument>
```

```
<ItemListDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <library>VX*1233</library>
  <item>VY-1233</item>
  <item>VY-1234</item>
  <item>VX-7888</item>
</ItemListDocument>
```

```
PUT /item;library=VX*1233
Content-Type: application/xml
```

```
<ItemSearchDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <field>
    <name>created</name>
    <range>
      <value>2014-05-30T00:00:00+0200</value>
      <value>2014-06-03T07:30:00+0200</value>
    </range>
  </field>
</ItemSearchDocument>
```

```
<ItemListDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <library>VX*1234</library>
  <item>VY-1233</item>
  <item>VX-7888</item>
</ItemListDocument>
```

Search history

Retrieve search history

GET /item/history

Retrieves a list of searches made by a particular user, including “item search” and “Item and collection search”. The results are ordered according to timestamp, with the latest searches being first. Duplicate queries will not be retrieved.

Query Parameters

- **start** – Optional ISO8601 date. If set, only searches made after this date will be retrieved.
- **maxResults** – Integer, the maximum number of searches that will be retrieved. The value must be between 1 and 50, default is 10.
- **username** – The name of the user that has performed the searched. If not specified, the user performing the request will be selected.

Produces

- **application/xml**, **application/json** – [SearchHistoryDocument](#).

Role `_item_search`

Re-index item

PUT /item/(item-id)/re-index

Queues a single item for re-index.

Produces

- `text/plain` –

See *Re-indexing metadata* if you wish to reindex all items in the system.

Listing items in batch**Creating an item list job****POST /item/list**

Starts a new job that goes through all the items available to the user/group and outputs a file to the supplied URI.

If no user and no group is supplied, all items will be retrieved. The output format depends on the specified parameter, if set to XML an `ItemListDocument` will be produced. Furthermore if an XSLT is given the `ItemListDocument` will be transformed.

Query Parameters

- `destinationUri` – The URI to output the CSV file to.
- `username` – Filter items according to the access of the specified user.
- `groupname` – Filter items according to the access of the specified group.
- `field` – A comma-separated list of metadata fields to include in the result.
- `outputFormat` – Specifies the output format. Valid values are `xml` (default) and `csv`.
- `data` – Specifies any additional data that should be included with the metadata fields.
- `p` – Comma-separated list of *paths* specifying the content to include. Overrides the field and data parameters. Only supported for XML output.
New in version 4.5.
- `notification` – The *placeholder job notification* to use for this job. (Optional)
- `notificationData` – Any additional data to include for *notifications* on this job. (Optional)
- `priority` – The priority to assign to the job. Default is `MEDIUM`.
- `jobmetadata` – Additional *information* for the job task.

Accepts

- `application/xslt` – An optional XSLT capable of transforming `ItemListDocument`.

Produces

- `application/xml`, `application/json` – `JobDocument`.

Role `_administrator`

Example

```
POST /item/list?field=title,durationSeconds&username=admin&destinationUri=file:/home/
↳user/output.csv&outputFormat=csv
Content-Type: application/xml

<JobDocument xmlns="http://xml.vidispine.com/schema/vidispine">
```

```
<jobId>VX-64</jobId>
<user>admin</user>
<started>2010-11-29T11:12:55.768+01:00</started>
<status>READY</status>
<type>LIST_ITEMS</type>
<priority>MEDIUM</priority>
</JobDocument>
```

```
$ cat /home/user/output.csv
"itemId","format","fileSize","downloads","metadataField-title","metadataField-
↳durationSeconds"
"VX-22","mxf","10000000","1","","","180.0"
"VX-18","mp3,aac","5876698,4253659","0","","","212.242695"
"VX-12","flv","23939202","5","This is "the" title.", "142.124698"
"VX-8","flv","5684452","3","","","12.412487"
```

Parent collections

List collections that contain an item

GET `/item/{item-id}/collections`

Retrieves the ids of all collections that includes the item, and that the calling user has read access to.

Produces

- `application/xml`, `application/json` – `URIListDocument` containing the collection ids
- `text/plain` – CRLF-delimited list of ids

Role `_item_read`

Example

```
GET /item/VX-94/collections
```

```
<URIListDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <uri>VX-23</uri>
  <uri>VX-64</uri>
</URIListDocument>
```

Parent Libraries

List libraries that contain an item

New in version 4.16.1.

GET `/item/{item-id}/library`

Retrieves the ids of all libraries that includes the item, and that the calling user has read access to.

Note: This endpoint will not return any transient libraries.

Produces

- **application/xml**, **application/json** – `URIListDocument` containing the library ids
- **text/plain** – CRLF-delimited list of ids

Role `_item_read`

17.11.3 Retrieving item information

Item content can be retrieved from different resources, the query parameters used are the same for the different resources. Below a table of the different supported resources can be seen.

Name	BASE_PATH
Search	<code>/item, /search</code>
Specific items	<code>/item/{item-id}</code>
Libraries	<code>/library/{library-id}</code>
Collections	<code>/collection/{collection-id}/item</code>

Get item information

By using a content parameter, much information can be gathered in one single call to the API.

Get information

GET {item-content-resource}

Retrieves the types of content that are specified in `content`. If URIs are included then the parameters `type` or `tag` needs to be set.

Matrix Parameters

- **includeConstraintValue** – Optional comma separated value, specifying a list of fields whose “display value” should be retrieved from the *metadata dataset*. (New in 4.13.)
 - `all` (default) - Return the “display value” of all fields.
 - `none` - No “display value” will be returned. The fields will only have `id` set.
 - *comma separated field names* - Return the “display value” of the specified fields.

Query Parameters

- **p** – Comma separated list of *paths* specifying the content to include. Overrides the content and filter parameters.

New in version 4.5.

- **content** – Comma-separated list of the types of content to retrieve, possible values are `metadata`, `uri`, `shape`, `poster`, `thumbnail`, `access`, `merged-access`, `external`.
- **interval** – A metadata parameter, see *Get metadata*.
- **field** – A metadata parameter, see *Get metadata*.
- **group** – A metadata parameter, see *Get metadata*.
- **language** – A metadata parameter, see *Get metadata*.

- **sampleRate** – A metadata parameter, see *Get metadata*.
- **track** – A metadata parameter, see *Get metadata*.
- **terse** – A metadata parameter, see *Get metadata*.
- **include** – A metadata parameter, see *Get metadata*.
- **type** – A *URI parameter*: Optional comma-separated list of format types (container format) to return.
- **tag** – A *URI parameter*: Optional comma-separated list of *shape tags* to return.
- **scheme** – A *URI parameter*: Optional URI scheme to return, e.g. ftp.
- **closedFiles** – A *URI parameter*:
 - `true` (default) - Return only URIs that point to closed files.
 - `false` - Return all URIs.
- **noauth-url** – If `true`, thumbnail URIs that do not need authentication are returned. If `false` (default), normal thumbnail URIs are returned.
- **defaultValue** – A metadata parameter, see *Get metadata*.
- **methodType** – Optional type of storage method. When returning URIs, only use methods of this type. See *Storages*.
- **methodMetadata** – Optional metadata used with storage method. See *Storages*.
- **version** – Optional integer, specifying which essence version to return for shapes. If special value `all`, display all versions. If special value `latest` (default), display latest version of shapes. If special value `latest-per-shapetag`, display shapes with the highest essence version number per shape tag. (New in 4.12.)
- **revision** – Optional revision, specifying which metadata to display. Only used if requesting a single item or collection.

Produces

- `application/xml`, `application/json` – *ItemDocument*

Role `_metadata_read`

Role `_thumbnail_read`

Role `_item_uri`

Example

Retrieving terse metadata and thumbnails for an item.

```
GET /API/item/VX-123/?content=metadata,thumbnail&terse=yes
```

```
<ItemDocument id="VX-123">
  <thumbnails>
    <uri>http://example.com/API/thumbnail/VX-1/VX-123/0@1000000</uri>
    <uri>http://example.com/API/thumbnail/VX-1/VX-123/1000000@1000000</uri>
    <uri>http://example.com/API/thumbnail/VX-1/VX-123/2000000@1000000</uri>
  </thumbnails>
  <terse>
    <durationSeconds end="+INF" start="-INF">2.04</durationSeconds>
  </terse>
</ItemDocument>
```



```

<durationTimeCode end="+INF" start="-INF">2040000@1000000</durationTimeCode>
<field_A end="7" start="3">ABC</field_A>
<title end="+INF" start="-INF">This is an imported item!</title>
<user end="+INF" start="-INF">testUser</user>
</terse>
</ItemDocument>

```

Get item content in the search result

The parameters above can also be used when searching (*Search*). Note that only content the user has sufficient permissions for will be retrieved.

Example

Retrieving the URIs to all AVI containers that can be accessed either by HTTP or FTP for all items.

```
GET /API/item/?content=uri&type=avi&scheme=http,ftp
```

```

<ItemListDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <item id="VX-123">
    <files>
      <uri>ftp://example.com/VX-123_VX-2189.avi</uri>
    </files>
    <timespan start="-INF" end="+INF"/>
  </item>
  <item id="VX-124">
    <files/>
    <timespan start="-INF" end="+INF"/>
  </item>
  <item id="VX-125">
    <files>
      <uri>http://example.com/VX-125_VX-3180.avi</uri>
      <uri>ftp://example.com/VX-125_VX-3180.avi</uri>
    </files>
    <timespan start="-INF" end="+INF"/>
  </item>
</ItemListDocument>

```

Retrieving URIs to the content of an item

The URI retrieval method is a scaled-down version of the *Get information* method above.

Get item URI

```
GET /item/ (item-id) /uri
```

Retrieves the URI to any container contained in the item that matches the specified type or the files contained in a shape that matches the given tags.

Query Parameters

- **type** – Optional comma-separated list of format types (container format) to return.

- **tag** – Optional comma-separated list of *shape tags* to return.
- **scheme** – Optional URI scheme to return, e.g. ftp.
- **storageType** – Only return URIs for files from storages of this *type*.
- **methodType** – Optional *type of access method*.
 - AUTO - Gives an APIInoauth URI to the media. Access to file is tunneled through Vidispine.
 - AZURE_SAS - If the storage schema is azure:// you can get direct access to the media. The resulting URI will not tunnel through Vidispine but rather point directly to the media location at the azure storage.
- **methodMetadata** – Optional *metadata* used with storage method.
- **closedFiles** –
 - true (default) - Return only URIs that point to closed files.
 - false - Return all URIs.

Produces

- **application/xml, application/json** – URIListDocument

Role _item_uri

Example

```
GET /item/VX-123/uri?type=avi&tag=lowres
Accept: application/xml
```

```
<URIListDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <uri>http://example.com/VX-123_VX-5003.avi</uri>
  <uri>ftp://user:password@example.com/VX-123_VX-5003.avi</uri>
</URIListDocument>
```

17.11.4 Item locks

Items can be locked by users to temporarily prevent access from other users. This can be used to prevent users from working with stale and conflicting data. Locks should not be seen as an alternative to access control, as any user that has write access to an item can remove the locks.

If any user attempts to access an item that is locked by another user, HTTP status code **409 Conflict** (<http://www.w3.org/Protocols/rfc2616/rfc2616-sec10.html#sec10.4.10>) will be returned. For example:

```
HTTP/1.1 409 Operation would lead to conflict
Context: lock
ID: VX-123
Reason: That entity is locked by another user.
Value: the-name-of-the-other-user
```

Managing locks

All locks are associated with an expiration date and will be removed after they expire.

Create a lock

POST `/item/ (item-id) /lock`

Creates a new lock for the item with an expiration date. The expiration date is the sum of the timestamp and the duration. If no timestamp and no duration is given, the expiration date will be set to 24 hours forward in time.

Query Parameters

- **timestamp** – An ISO 8601 compatible timestamp (**optional**). Defaults to the current time.
- **duration** – An ISO 8601 compatible duration (**optional**). Defaults to zero.

Status Codes

- **200 OK** – The lock was created.
- **409 Conflict** – Some other user already holds a lock on that item.

Role `_lock_write`

Example

Create a lock for a specific timestamp:

```
POST /item/VX-123/lock?timestamp=2010-08-20T15:00:00+02:00
```

```
200 OK
```

Create a lock for 3 hours:

```
POST /item/VX-123/lock?duration=PT3H
```

```
200 OK
```

Retrieve information about a lock

GET `/item/ (item-id) /lock`

Retrieves information about the expiration date and which user that holds the lock.

Status Codes

- **404 Not Found** – Either the item or the lock could not be found.

Produces

- `application/xml`, `application/json` – `LockDocument`

Role `_lock_read`

Example

```
GET /item/VX-123/lock
```

```
<LockDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <id>VX-123</id>
  <user>admin</user>
  <expires>2010-08-20T15:00:00.000+02:00</expires>
</LockDocument>
```

Remove a lock

DELETE `/item/ (item-id) /lock`

Removes the lock for the item.

Status Codes

- **200 OK** – The lock was removed.

Role `_lock_write`

Example

```
DELETE /item/VX-123/lock
```

```
200 OK
```

Extend the expiration date of a lock

PUT `/item/ (item-id) /lock`

Sets a new expiration date for the lock. The expiration date is the sum of the timestamp and the duration. If no timestamp and no duration is given, the expiration date will be set to 24 hours forward in time.

Query Parameters

- **timestamp** – An ISO 8601 compatible timestamp. Defaults to the current time.
- **duration** – An ISO 8601 compatible duration. Defaults to zero.

Status Codes

- **200 OK** – The lock was extended.

Role `_lock_write`

Example

```
POST /item/VX-123/lock?timestamp=2010-08-20T16:00:00+02:00
```

```
200 OK
```

17.11.5 Item-to-item relations

This section describes relations between items. The relation can be used to find ancestors, derived items, or simply loosely related items.

Type of relations

Relations

- can be directional or undirectional. In a directional relation, one item is the source and another item is the target. In an undirectional relation, the two items are treated equally
- are manually built using the API or created automatically. An example of automatically built relations is the timeline conform method, which automatically creates directed relations
- have metadata as key-value pairs. One key-value pair which is always present is the `type` key, which describes the reason of the relationship.

Automatically generated relations

Item-to-item relations are automatically generated by timeline conform actions. These relations are directional from source item(s) to target item. The relations have the following tags:

- `key=conform`
- `conform-job= { conform-job }`

Managing item relations

Get list of item relations

GET `/item/ (id) /relation`

Returns a list of relations that matches the search criteria. Item id can be an *Identifiers*, that is libraries can be used.

Query Parameters

- **direction** –
 - U - Only return undirectional relations where `id` is part of.
 - S - Only return directional relations where `id` is the source item.
 - T - Only return directional relations where `id` is the target item.
 - D - Only return directional relations where `id` is the source or target item.
 - A (default) - Return all relations that `id` is a part of.

Status Codes

- **400** – An invalid direction has been specified.
- **404** – Could not find the item identified by `id`.

Produces

- `application/xml`, `application/json` – `ItemRelationListDocument`.
- `text/plain` – `CR LF` -delimited list of *Tabbed tuples* of relation `id`, relation URI, direction type (U, D), relation type, and source `id`, target `id`.

Role `_relation_read`

In addition, extra query parameters of the form `key=value` can be added, to only return relations that matches the key-value pair(s).

Generate a new item relation

POST `/item/ (id1) /relation/`

id2 Generates a new relation between the two items with the given ids, *id1* and *id2*, with the given parameters.

Query Parameters

- **direction** – Mandatory parameter.
 - U - Set the direction of the relation as undirectional.
 - S - Set the direction as *id1* being the source and *id2* being the target.
 - T - Set the direction as *id2* being the source and *id1* being the target.
- **allowDuplicate** – Optional parameter.
New in version 4.8.
 - true or false - True is default. Avoid adding duplicate relations by setting this to false.

Status Codes

- **400 Bad request** – Both *id1* and *id2* identifies the same item, or the direction is invalid.
- **404 Not found** – Could not find the item identified by *id1* or *id2*.

Produces

- `application/xml`, `application/json` – [ItemRelationDocument](#)

Role `_relation_write`

In addition, extra query parameters of the form `key=value` can be added, to set metadata of the item-to-item relation.

Generate multiple item relations

New in version 4.16.

POST `/relation`

Generates multiple relations at once. Since the *ItemRelationDocument* has a `source` and a `target` element, the direction can take the value U, if not set it generates a directional relation from `source` to `target`.

Query Parameters

- **allowDuplicate** – Optional parameter.
 - true or false - True is default. Avoid adding duplicate relations by setting this to false.

Status Codes

- **400 Bad request** – Both `source` and `target` identifies the same item, or the direction is invalid.
- **404 Not found** – Could not find the item identified by `source` or `target`.

Accepts

- `application/xml`, `application/json` – [ItemRelationListDocument](#)

Produces

- `application/xml`, `application/json` – `ItemRelationListDocument`

Role `_relation_write`

For example:

```
<?xml version="1.0"?>
<ItemRelationListDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <relation>
    <direction>
      <source>VX-1</source>
      <target>VX-2</target>
    </direction>
  </relation>
  <relation>
    <direction>
      <source>VX-1</source>
      <target>VX-3</target>
    </direction>
  </relation>
  <relation>
    <direction type="U">
      <source>VX-4</source>
      <target>VX-5</target>
    </direction>
  </relation>
</ItemRelationListDocument>
```

Retrieve a specific item relation

GET `/relation/ (relation-id)`

Retrieves the relation with the id `relation-id`.

Status Codes

- **404 Not found** – Could not find the relation identified by `relation-id`.

Produces

- `application/xml`, `application/json` – `ItemRelationDocument`.

Role `_relation_read`

Update an item relation

PUT `/relation/ (relation-id)`

Updates the relation metadata for a relation with the id `relation-id`.

Query Parameters

- **direction** – Optional parameter.
 - U - Set the direction of the relation as undirectional.
 - S - Set the direction as `id1` being the source and `id2` being the target.
 - T - Set the direction as `id2` being the source and `id1` being the target.

Status Codes

- **404 Not found** – Could not find the relation identified by `relation-id`.

Produces

- `application/xml`, `application/json` – The updated item described as an [Item-RelationDocument](#).

Role `_relation_write`

Query parameters of the form `key=value` are used to modify the metadata of the relation.

Delete an item relation

DELETE `/relation/ (relation-id)`

Deletes the relation with the id `relation-id`.

Status Codes

- **200 OK** – The item relation is deleted.
- **404 Not found** – Could not find the relation identified by `relation-id`.

Role `_relation_write`

Delete all item relations

DELETE `/item/ (id) /relation`

New in version 4.8.

Deletes the relations with the specified direction or all relations.

Query Parameters

- **direction** – Optional parameter.
 - `A` - This is the default value. Deletes all relations `id1` is involved in.
 - `U` - Deletes only the relations with the direction as undirectional.
 - `S` - Deletes only the relations where `id1` is the source and `id2` is the target.
 - `T` - Deletes only the relations where `id2` is the source and `id1` is the target.

Status Codes

- **200 OK** – The item relation is deleted.

Role `_relation_write`

Delete all relations between two items

DELETE `/item/ (id) /relation/`

`id2` New in version 4.8.

Deletes the relations with the specified direction or all relations between `id1` and `id2`.

Query Parameters

- **direction** – Optional parameter.
 - `A` - This is the default value. Deletes all relations between `id1` and `id2`.

- U - Deletes only the relations with the direction as undirectional.
- S - Deletes only the relations where `id1` is the source and `id2` is the target.
- T - Deletes only the relations where `id2` is the source and `id1` is the target.

Status Codes

- **200 OK** – The item relation is deleted.

Role `_relation_write`

17.11.6 Item sequences

Sequence operations

List the available sequences

GET `/item/ (id) /sequence`

Retrieves the sequences that have been stored for a specific item.

Status Codes

- **404 Not found** – Could not find the item

Produces

- `application/xml`, `application/json` – [SequenceListDocument](#)

Role `_sequence_read`

Create/update a sequence

PUT `/item/ (id) /sequence/`

format Creates or updates the sequence in the given format.

Query Parameters

- **pauseFrame** – When a rendering job is started, this parameter determines which frame the job will pause at. The job will resume when the sequence is updated.

Status Codes

- **404 Not found** – Could not find the item

Accepts

- `application/octet-stream` – The sequence definition

Produces

- `application/xml`, `application/json` – [ItemDocument](#) with the id of the sequence

Role `_sequence_write`

Retrieve a sequence

GET `/item/ (id) /sequence/`

format Retrieves the definition of the sequence in the given format.

Status Codes

- **404 Not found** – Could not find the item

Produces

- ***/*** – Media type based on the format.

Role `_sequence_read`

Remove a sequence

DELETE `/item/ (id) /sequence/`

format Removes a specific sequence from an item.

Status Codes

- **404 Not found** – Could not find the item
- **404 Not found** – Could not find the sequence

Role `_sequence_write`

Conform metadata

POST `/item/ (id) /sequence/conform-metadata`

Updates the item metadata with the metadata from the items listed in the sequence. The metadata will be selected based on the intervals.

Role `_metadata_write`

Rendering a sequence

A sequence can be rendered which creates a new shape that for example can be used as a preview of the sequence. The shape tag that is provided must have a transcode preset the specifies at least:

- The container format.
- The audio codec and bitrate (optional for PCM.)
- The video codec and bitrate.

The transcoder can render a subset of the effects (both normal and key framed) and transitions that are available in Final Cut and Avid Media Composer. They are:

- Effects
 - Crop
 - Position
 - Scale
 - Rotate
 - Opacity

- Transitions
 - Dissolves
 - * Cross dissolve
 - * Dither dissolve
 - * Fade in fade out dissolve
 - Wipes
 - * Band wipe
 - * Centre wipe
 - * Checker wipe
 - * Inset wipe
 - Iris wipes
 - * Cross iris
 - * Diamond iris
 - * Oval iris
 - * Rectangle iris
 - * Star iris

Render a standalone sequence

POST /sequence/render

Creates a new job that renders the given sequence. A new item will be created containing a shape with the rendered result once the job is finished.

Query Parameters

- **tag** – The shape tag specifying the format of the rendered sequence.
- **sourceTag** – The shape tag specifying the shapes to use as input.
- **original** – An optional tag, if specified it should be one of the tags specified in the tag parameter. Specifies that the original shape tag will be reset to the shape created to this tag.
- **destinationItem** – An item id, to which the new new shape will be associated.
New in version 4.4.
- **resourceId** – The transcoder resource to use to execute the transcode.
New in version 4.16.
- **notification** – The *placeholder job notification* to use for this job. (Optional)
- **notificationData** – Any additional data to include for *notifications* on this job. (Optional)
- **priority** – The priority to assign to the job. Default is `MEDIUM`.
- **jobmetadata** – Additional *information* for the job task.

Status Codes

- **404 Not found** – Could not find the item

Accepts

- `application/xml`, `application/json` – `SequenceRenderRequestDocument`

Produces

- `application/xml`, `application/json` – `JobDocument`

Role `_job_write`

Rendering a sequence on an item

New in version 4.1.1.

POST `/item/{id}/sequence/render`

Creates a new job that renders the sequence for the given item. The item will contain a new shape with the rendered result once the job is finished.

Query Parameters

- **tag** – The shape tag specifying the format of the rendered sequence.
- **sourceTag** – The shape tag specifying the shapes to use as input.
- **subtitleLanguage** – The language code specifying the *subtitle* language to use.

New in version 4.7.

- **original** – An optional tag, if specified it should be one of the tags specified in the tag parameter. Specifies that the original shape tag will be reset to the shape created to this tag.
- **destinationItem** – An item id, to which the new new shape will be associated.

New in version 4.4.

- **resourceId** – The transcoder resource to use to execute the transcode.

New in version 4.16.

- **notification** – The *placeholder job notification* to use for this job. (Optional)
- **notificationData** – Any additional data to include for *notifications* on this job. (Optional)
- **priority** – The priority to assign to the job. Default is `MEDIUM`.
- **jobmetadata** – Additional *information* for the job task.

Status Codes

- **404 Not found** – Could not find the item

Produces

- `application/xml`, `application/json` – `JobDocument`

Role `_sequence_read`

Role `_job_write`

Example

```
POST /item/VX-8/sequence/render?tag=h264
```

```
<?xml version="1.0" encoding="UTF-8" standalone="yes"?>
<JobDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <jobId>VX-13</jobId>
  <user>admin</user>
  <started>2011-10-26T20:23:11.897Z</started>
  <status>READY</status>
  <type>CONFORM</type>
  <priority>MEDIUM</priority>
</JobDocument>
```

17.11.7 Shapes

Item shapes

Get list of shapes

GET /item/ (id) /shape

Returns all existing shapes for a specified item.

Query Parameters

- **version** –
 - *essence-version-id* - Return shapes for a specified version.
 - *all* - Return shapes for all versions.
 - *latest* (default) - Return shapes for the latest version.
 - *latest-per-shapetag* - Return shapes with the highest essence version number per shape tag. (New in 4.12.)
- **tag** – Optional comma-separated list. Only return shapes with these tags.
- **url** –
 - *true* - Return list of URLs.
 - *false* (default) - Return list of ids.
- **placeholder** –
 - *true* - Only return placeholder shapes. (New in 4.2.3.)
 - *false* (default) - Only return non-placeholder shapes. (New in 4.2.3.)
 - *all* - Return all shapes. (New in 4.12.)

Status Codes

- **404 Not found** – Invalid id

Produces

- **application/xml**, **application/json** – URIListDocument
- **text/plain** – CRLF-delimited list of ids or URLs

Role `_item_shape_read`

Get shape

GET `/item/ (id) /shape/`
shape-id Returns a shape for a specified item.

Query Parameters

- **methodType** – Return URIs from storage methods with a particular *type*. By default, return URIs with empty `methodType`.
- **storageType** – Only return URIs for files from storages of this *type*.
- **methodMetadata** – Optional *metadata* used with storage method.
- **scheme** – URI scheme to return.
- **transient** –
 - `true` - Return the shape by inspecting the file on disk. Use with growing files to get an as up-to-date shape as possible.
 - `false` (default) - Return the shape that was last read from the file.
- **includePlaceholder** –
 - `true` - Include expected but not yet imported components in the shape.
 - `false` (default) - Do not include placeholder components.

Status Codes

- **404 Not found** – Invalid id

Produces

- `application/xml`, `application/json` – [ShapeDocument](#)

Role `_item_shape_read`

Get shape in graphical representation

New in version 4.12.

GET `/item/ (id) /shape/`
shape-id/graph Shows components and tracks in a graphical format.

Produces

- `image/png` –
role `_item_shape_read`

Get shape as a dot file

New in version 4.12.

GET `/item/ (id) /shape/`
shape-id/graph/dot Shows components and tracks in a graphical format in dot format, for further processing.

Produces

- `text/plain` –

Role `_item_shape_read`

Get shape as an IMF CPL

New in version 4.12.

GET `/item/ (id) /shape/shape-id/cpl` Returns component information as CPL.

Produces

- `application/xml` –

Role `_item_shape_read`

Deleting a shape

DELETE `/item/ (id) /shape/shape-id` Removes the specified shape. This will remove all components and mark files for deletion, unless files are used in other shapes.

Query Parameters

- `url` –
 - `true` - Instead of shape ids, return the full paths of the shapes in the response document.
 - `false` (default) - Only return the ids of the remaining shapes.
- `keepFiles` –
 - `true` - Keep the files belong to this shape.
 - `false` (default) - Remove the files belong to this shape.
- `updateMetadata` –
 - `true` - Remove the item metadata that is generate from this shape
 - `false` (default) - Keep the item metadata that is generate from this shape

Produces

- `application/xml`, `application/json` – `URListDocument`
- `text/plain` – CRLF-delimited list of ids or URLs

Role `_item_shape_write`

Delete all shapes

New in version 4.7.

DELETE `/item/ (id) /shape/` Removes all shapes, regardless of essence version, for the specified item. This will remove all components and mark files for deletion, unless files are used in other shapes.

To delete all shapes for a specific essence version, see `DELETE /item/ (id) /shape/ version/ (version)`.

Query Parameters

- `keepFiles` –
 - `true` - Keep the files belong to the shapes.

- `false` (default) - Remove the files belong to the shapes.

Role `_item_shape_write`

Importing a new shape

New shape can be imported in one of two methods. Both methods share a lot of similarities to item imports, *using a URI* or *using the request body*. The difference between a shape import and an essence version import is that it does not increment the essence version nor does it perform any transcoding.

Import a shape using a URI or an existing file

POST `/item/{id}/shape`

Starts a new shape import job using either a URI or a file id.

Query Parameters

- **uri** – A URI to the file that will be imported. Make sure to *percent encode* the URI. Must be specified unless `fileId` is specified.
- **fileId** – The id of the file that contains the essence. Must be specified unless `uri` is specified.
- **allowReimport** –
 - `true` - Import the file to this shape even if the file is already importing or is already part of another item.
 - `false` (default) Reject the request if the file with the given id has already been imported or is currently importing.
- **tag** – The tags to assign to the new shape.
- **storageId** – Optional identifier of storage where essence file is to be stored.
New in version 4.7.
- **notification** – The *placeholder job notification* to use for this job. (Optional)
- **notificationData** – Any additional data to include for *notifications* on this job. (Optional)
- **priority** – The priority to assign to the job. Default is `MEDIUM`.
- **jobmetadata** – Additional *information* for the job task.

Produces

- **application/xml**, **application/json** – A `JobDocument` that describes the import job.

Role `_import`

Import a shape using the request body

POST `/item/{id}/shape/raw`

Starts a new shape import job using the data in the request data.

Query Parameters

- **tag** – The tags to assign to the new shape.

- **storageId** – Optional identifier of storage where essence file is to be stored.
New in version 4.7.
- **filename** – The filename to be stored as original filename. Optional.
- **transferId** – An id to assign the transfer to be able to refer to it. Mandatory for chunked and passkey imports.
- **transferPriority** – An integer between 1 and 1000 that indicates what priority the transfer should be given in relation to other transfers (optional). A transfer with a high priority value is considered more important than a transfer with a low priority value.
- **notification** – The *placeholder job notification* to use for this job. (Optional)
- **notificationData** – Any additional data to include for *notifications* on this job. (Optional)
- **priority** – The priority to assign to the job. Default is `MEDIUM`.
- **jobmetadata** – Additional *information* for the job task.

Status Codes

- **400** – If the amount of data received does not match the given Content-Length header.
New in version 4.2.3.

Accepts

- **application/octet-stream** – The raw essence data.

Produces

- **application/xml**, **application/json** – A `JobDocument` that describes the import job.

Role _import

Create a shape using shape technical information

POST `/item/{id}/shape/create`

Creates a new shape using the supplied information.

Changed in version 4.17.2: If the shape document has components that reference files (by id), then these files will be associated with the corresponding component.

Query Parameters

- **tag** – The tags to assign to the new shape.
- **updateItemMetadata** – If the shape is tagged `original` and this query parameter is `true`, the item's system metadata (e.g. `durationSeconds`) is updated.

Accepts

- **application/xml**, **application/json** – `ShapeDocument`

Produces

- **application/xml**, **application/json** – `ShapeDocument`

Role _import

Import a shape from an IMF package

New in version 4.12.

POST `/item/ (id) /shape/imp`

Starts a new shape import job using a URI of an IMF asset map

Query Parameters

- **uri** – The URI of the asset map
- **tag** – The tags to assign to the new shape.
- **storageId** – Optional identifier of storage where essence file is to be stored.
- **removeOldEssenceFiles** –
 - `true` - Remove files associated with shapes with same tags and lower essence version.
 - `false` (default) - Keep the files belong to the shapes.
- **notification** – The *placeholder job notification* to use for this job. (Optional)
- **notificationData** – Any additional data to include for *notifications* on this job. (Optional)
- **priority** – The priority to assign to the job. Default is `MEDIUM`.
- **jobmetadata** – Additional *information* for the job task.
- **importTag** – An optional list of shape tags that the created shape will be associated with. Default value is `original`. (New in 4.12.)

Produces

- **application/xml**, **application/json** – A `JobDocument` that describes the import job.

Role `_import`

Creating thumbnails and posters

Thumbnails and posters of a specific shape can be created by starting a thumbnail job.

Start a thumbnail job

New in version 4.2.3.

POST `/item/ (item-id) /shape/`

`shape-id/thumbnail` Creates a new thumbnail job with the specified parameters. Note that a job cannot both create thumbnails at specified intervals and posters. Creating thumbnails according to transcoder rules and creating posters is however allowed.

Query Parameters

- **createThumbnails** –
 - `true` - Creates thumbnails according to default transcoder rules.
 - `t1, ...` - Thumbnails will be created on the specified, comma-separated, *time codes*.
 - `false` (default) - No thumbnails will be created.

- **createPosters** – An optional list of *time codes* to use for creating posters.
 - **thumbnailWidth** – An optional integer specifying the width of the thumbnails. If `thumbnailWidth` is specified, `thumbnailHeight` must also be specified.
 - **thumbnailHeight** – An optional integer specifying the height of the thumbnails. If `thumbnailHeight` is specified, `thumbnailWidth` must also be specified.
 - **thumbnailPeriod** – An optional timecode string specifying the interval of the thumbnails. It should be a decimal integer when working with multi-page images/PDFs, meaning every N page(s).
 - **posterWidth** – An optional integer specifying the width of the posters.
 - **posterHeight** – An optional integer specifying the height of the posters.
 - **posterFormat** –
 - `jpeg` (default) - Creates posters in JPEG format.
 - `png` - Creates posters in PNG format.
 - **thumbnailService** – An optional identifier to which thumbnail resource that should be used.
 - **tag** – Include additional video settings from this transcode preset. Resolution settings in the tag are overridden by query parameters `thumbnailHeight` and `thumbnailWidth`.
 - **notification** – The *placeholder job notification* to use for this job. (Optional)
 - **notificationData** – Any additional data to include for *notifications* on this job. (Optional)
 - **priority** – The priority to assign to the job. Default is `MEDIUM`.
 - **jobmetadata** – Additional *information* for the job task.
 - **resourceId** – The transcoder resource to use to execute the transcode.
- New in version 4.13.

Produces

- `application/xml`, `application/json` – [JobDocument](#)

Essence versions

New versions of essence can be imported in one of two methods. Both methods share a lot of similarities to item imports, *using a URI* or *using the request body*.

Get all essence versions for an item

GET `/item/(id)/shape/version`

Returns a list containing URLs to all essence versions of the item.

Produces

- `application/xml`, `application/json` – *EssenceVersionListDocument* containing information to all essence versions of the item.

Role `_item_shape_read`

Import essence version using a URI or an existing file

POST `/item/{id}/shape/essence`

Starts a new essence import job using either a URI or a file id.

Query Parameters

- **uri** – A URI to the file that will be imported. Make sure to *percent encode* the URI. Must be specified unless `fileId` is specified.
- **fileId** – The id of the file that contains the essence. Must be specified unless `uri` is specified.
- **allowReimport** –
 - `true` - Import the file to this shape even if the file is already importing or is already part of another item.
 - `false` (default) Reject the request if the file with the given id has already been imported or is currently importing.
- **storageId** – Optional identifier of storage where essence file is to be stored.
New in version 4.8.
- **tag** – The tags to assign to the new shape.
- **notification** – The *placeholder job notification* to use for this job. (Optional)
- **notificationData** – Any additional data to include for *notifications* on this job. (Optional)
- **priority** – The priority to assign to the job. Default is `MEDIUM`.
- **jobmetadata** – Additional *information* for the job task.

Produces

- **application/xml**, **application/json** – A `JobDocument` that describes the import job.

Role `_import`

Import essence version using the request body

POST `/item/{id}/shape/essence/raw`

Starts a new essence import job using the data in the request data.

Query Parameters

- **tag** – The tags to assign to the new shape.
- **storageId** – Optional identifier of storage where essence file is to be stored.
- **filename** – The filename to be stored as original filename. Optional.
- **transferId** – An id to assign the transfer to be able to refer to it. Mandatory for chunked and passkey imports.
- **transferPriority** – An integer between 1 and 1000 that indicates what priority the transfer should be given in relation to other transfers (optional). A transfer with a high priority value is considered more important than a transfer with a low priority value.
- **notification** – The *placeholder job notification* to use for this job. (Optional)

- **notificationData** – Any additional data to include for *notifications* on this job. (Optional)
- **priority** – The priority to assign to the job. Default is `MEDIUM`.
- **jobmetadata** – Additional *information* for the job task.

Status Codes

- **400** – If the amount of data received does not match the given Content-Length header.
New in version 4.2.3.

Accepts

- **application/octet-stream** – The raw essence data.

Produces

- **application/xml**, **application/json** – A `JobDocument` that describes the import job.

Role `_import`

Get a particular essence versions for an item

GET `/item/ (id) /shape/version/ version-number` Returns a list of shapes from the specified version.

Produces

- **application/xml**, **application/json** – `EssenceVersionDocument` containing all the shapes with the specified version.

Role `_item_shape_read`

Deleting an essence version of an item

DELETE `/item/ (id) /shape/version/ version` Deletes all shapes associated with the specified version. Thumbnails connected to the version will also be deleted.

Role `_item_shape_write`

Copy an essence version of a shape to a new version

New in version 4.12.

POST `/item/ (id) /shape/ shape-id/version` Copies the specified shape to a new shape, with the new latest essence version number.

Produces

- **application/xml**, **application/json** – `ShapeDocument` containing the new shape.

Role `_item_shape_write`

Copy an essence version of a shape to a specific version

New in version 4.12.

PUT `/item/ (id) /shape/`

shape-id/version/new-version Copies the specified shape to a new shape, with the given essence version number.

Produces

- `application/xml`, `application/json` – [ShapeDocument](#) containing the new shape.

Role `_item_shape_write`

Placeholder shapes

Create a placeholder shape

POST `/item/ (id) /shape/placeholder`

Creates a new placeholder shape for a specific item.

Query Parameters

- `tag` – Optional comma separated shape tags to be added to the shape.
- `container` – Optional integer, the number of container components
- `audio` – Optional integer, the number of audio components
- `video` – Optional integer, the number of video components
- `binary` – Optional integer, the number of binary components
- `frameDuration` – Optional *duration* for each image in the sequence (optional).

Accepts

- `application/xml`, `application/json` – [SimpleMetadataDocument](#)

Produces

- `text/plain` – The id of the new shape.

Role `_import`

Modify a placeholder shape

PUT `/item/ (id) /shape/`

shape-id/placeholder Updates the expected number of container, video, audio and binary components for a specific placeholder shape.

Query Parameters

- `tag` – Optional comma separated shape tags to be added to the shape.
- `container` – Optional integer, the number of container components
- `audio` – Optional integer, the number of audio components
- `video` – Optional integer, the number of video components
- `binary` – Optional integer, the number of binary components

Accepts

- `application/xml`, `application/json` – [SimpleMetadataDocument](#)

Role `_import`

Shape files**Get files for shape**

GET `/item/{id}/shape/shape-id/file` Returns all files that are associated with the specified shape.

Matrix Parameters

- **includeItem** –
 - `true` - Return associated items, shapes, and components.
 - `false` (default) - Do not return any information about associated items, shapes, and components.

Query Parameters

- **closedFiles** –
 - `true` (default) - Return only files that are closed.
 - `false` - Return all files.
- **methodType** – Return URIs from storage methods with a particular *type*. By default, return URLs with empty `methodType`.
- **storageType** – Only return URIs for files from storages of this *type*.
- **methodMetadata** – Optional *metadata* used with storage method.
- **scheme** – URI scheme to return.

Produces

- `application/xml`, `application/json` – [FileListDocument](#)

Role `_item_shape_read`

Shape metadata

New in version 4.0.

Please refer to *Key-value metadata*.

Updating an existing shape

If the shape deduction on import for some reason gave an incorrect result, it is possible to re-run the shape deduction using this command.

Re-run a shape deduction on an existing shape

POST `/item/ (item-id) /shape/ shape-id/update` Starts a new shape deduction job for the specified shape.

Query Parameters

- **notification** – The *placeholder job notification* to use for this job. (Optional)
- **notificationData** – Any additional data to include for *notifications* on this job. (Optional)
- **priority** – The priority to assign to the job. Default is `MEDIUM`.
- **jobmetadata** – Additional *information* for the job task.

Produces

- `application/xml`, `application/json` – `JobDocument`

Role `_item_shape_write`

Tags of a shape

Get a list of tags associated with a shape

GET `/item/ (item-id) /shape/ shape-id/tag/` Retrieves all shape tags associated with a certain shape.

Query Parameters

- **url** –
 - `true` - Return list of URLs.
 - `false` (default) - Return list of ids.

Produces

- `application/xml`, `application/json` – `URListDocument`
- `text/plain` – A list of the tags.

Role `_shape_tag_read`

Add a tag to a shape

PUT `/item/ (item-id) /shape/ shape-id/tag/tag-name` Adds shape tag with the given name to the specified shape. If the shape already has that tag, this operation does nothing.

Status Codes

- **200 OK** – Tag added successfully.
- **404 Not found** – No tag with that name exists.

Role `_shape_tag_write`

Remove a tag from a shape

DELETE `/item/ (item-id) /shape/`

`shape-id/tag/tag-name` Removes a tag with the given name from the specified shape.

Status Codes

- **200 OK** – Tag added successfully.
- **404 Not found** – No tag with that name exists within the shape.

Role `_shape_tag_write`

Shape mime types

List all mime types for a shape

GET `/item/ (id) /shape/`

`shape-id/mime/` Lists all mime types that are set on the shape. These can also be seen the [ShapeDocument](#) of the shape.

Produces

- **application/xml, application/json** – [URIListDocument](#) containing all the mime types of the shape.
- **text/plain** – CRLF-delimited list of mime types

Role `_item_shape_read`

Add a mime type

PUT `/item/ (id) /shape/`

`shape-id/mime/mime-type` Adds a new mime type to the shape. This operation does nothing if the shape already has the mime-type.

Role `_item_shape_write`

Remove a mime type

DELETE `/item/ (id) /shape/`

`shape-id/mime/mime-type` Removes a mime type from the shape.

Role `_item_shape_write`

17.11.8 Shape analysis

Shapes can be analyzed to detect for example detect cropping and silence.

New in version 4.4.

Analysis will also generation information for generating waveform data, to be visualized in a UI.

Operations

Analyze a shape

POST `/item/ (item-id) /shape/`

`shape-id/analyze` Analyzes the specified shape with the parameters specified in the job document. The result of the analyze will appear in the *RestBulkyMetadata* of the shape.

Query Parameters

- **resourceId** – The transcoder resource to use to execute the transcode.
New in version 4.11.
- **storageId** – The storage on which to store a temporary analysis data file when using a Vidinet transcoder to analyze a shape. If no storageId have been specified Vidispine will (by default) automatically pick a supported storage. StorageId will be ignored when using a non Vidinet transcoder.
New in version 4.14.
- **notification** – The *placeholder job notification* to use for this job. (Optional)
- **notificationData** – Any additional data to include for *notifications* on this job. (Optional)
- **priority** – The priority to assign to the job. Default is MEDIUM .
- **jobmetadata** – Additional *information* for the job task.

Accepts

- `application/xml`, `application/json` – [AnalyzeJobDocument](#)

Produces

- `application/xml`, `application/json` – [JobDocument](#)

Role `_job_write`

Example

Analyze a shape with default parameters:

```
POST /item/VX-123/shape/VX-456/analyze
Content-Type: application/xml

<AnalyzeJobDocument xmlns="http://xml.vidispine.com/schema/vidispine"/>
```

```
<JobDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <jobId>VX-426</jobId>
  <user>admin</user>
  <started>2012-03-26T11:27:49.173Z</started>
  <status>READY</status>
  <type>ANALYZE</type>
  <priority>MEDIUM</priority>
</JobDocument>
```

Example

Analyze a shape with custom parameters:

```
POST /item/VX-124/shape/VX-457/analyze
Content-Type: application/xml

<AnalyzeJobDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <black>
    <threshold>0.1</threshold>
    <percentage>95</percentage>
  </black>
  <freeze>
    <time>1.0</time>
    <threshold>0.05</threshold>
  </freeze>
  <bars>
    <percentage>10</percentage>
    <threshold>0.05</threshold>
  </bars>
</AnalyzeJobDocument>
```

```
<JobDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <jobId>VX-427</jobId>
  <user>admin</user>
  <started>2012-03-26T11:27:49.173Z</started>
  <status>READY</status>
  <type>ANALYZE</type>
  <priority>MEDIUM</priority>
</JobDocument>
```

In this example, settings for black frame, freeze and bar detection are included. The `threshold` elements determine the threshold to use when detecting black frames or freezes. The values have the following meaning:

- `threshold` for black frame detection and bar detection denotes that any pixel whose value is greater than `threshold * 255` should not be regarded as black. I.e. only if `threshold` is 0 will only completely black pixels be counted.
- For freeze frame detection `threshold` determines how much any one pixel may change between two frames. If the difference in value between two frames is greater than `threshold * 255`, the frame will not be regarded as frozen.

Viewing the results

The results of the analysis is stored in the bulky metadata for the shape. For example, to view the black frame information (if available), go to `/item/VX-123/shape/VX-456/metadata/bulky/black`. You should see something like the following:

```
<BulkyMetadataDocument xmlns="http://xml.vidispine.com/schema/vidispine" id="VX-295">
  <field stream="0" end="6@50" start="0@50">
    <key>black</key>
    <value>1</value>
  </field>
  <field stream="0" end="1650@50" start="1490@50">
    <key>black</key>
    <value>1</value>
  </field>
</BulkyMetadataDocument>
```

```
</field>
</BulkyMetadataDocument>
```

Each field contains a `start` and an `end` attribute, denoting the start and end timecodes for the black frames.

Loudness analysis

When an analysis is done, a loudness analysis is done automatically. The result of the loudness analysis is written to the bulky metadata, but there are utility methods to easily extract the information.

Get loudness values

GET `/item/(item-id)/loudness`

Extracts loudness information from bulky metadata.

Produces

- `application/xml`, `application/json` – `LoudnessDocument`

Role `_item_shape_read`

Example

```
POST /item/VX-124/shape/VX-457/analyze
```

```
GET /item/VX-124/loudness
```

```
<LoudnessDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <id>VX-124</id>
  <shape>VX-457</shape>
  <shapeTag>original</shapeTag>
  <mix>
    <name>Left</name>
    <weightdB>0.0</weightdB>
    <sourceStream>0</sourceStream>
    <sourceChannel>0</sourceChannel>
  </mix>
  <mix>
    <name>Right</name>
    <weightdB>0.0</weightdB>
    <sourceStream>0</sourceStream>
    <sourceChannel>1</sourceChannel>
  </mix>
  <mix>
    <name>Center</name>
    <weightdB>0.0</weightdB>
  </mix>
  <mix>
    <name>Left Surround</name>
    <weightdB>1.5</weightdB>
  </mix>
  <mix>
    <name>Right Surround</name>
    <weightdB>1.5</weightdB>
```

```

</mix>
<startLoudness>0@48000</startLoudness>
<endLoudness>1339200@48000</endLoudness>
<startRange>0@48000</startRange>
<endRange>1296000@48000</endRange>
<loudnessLU>0.014140396527686505</loudnessLU>
<loudnessRangeLU>4.974758665644899</loudnessRangeLU>
</LoudnessDocument>

```

Get loudness values for interval

PUT `/item/ (item-id) /loudness`

Extracts loudness information from bulky metadata. Start and end range can be specified, as well as custom mixing.

Accepts

- `application/xml`, `application/json` – [LoudnessDocument](#)

Produces

- `application/xml`, `application/json` – [LoudnessDocument](#)

Role `_item_shape_read`

Waveform information

New in version 4.4.

The waveform data is not exactly the waveform, but measurements of the RMS values with a rather high sampling rate.

Get waveform data

New in version 4.5.1.

GET `/item/ (item-id) /waveform/values`

Returns the waveform data as a [WaveformDataDocument](#).

Query Parameters

- **itemTrack** – The `itemTrack` value of the audio channel within the shape. (Optional)
- **stream** – The `stream` value of the audio channel within the component of the shape. (Optional)
- **channel** – The `channel` value of the audio channel within the stream of the component. Optional, if omitted the first channel. If `itemTrack` and `stream` are omitted, this value can be used to denote tracks in a linear fashion, regardless of `itemTrack` and `stream`. Then `channel=0` means the first audio track, `channel=1` the second, etc.
- **shape** – The shape id to use to get information from. Optional, if omitted the shape tag will be used. Note that an analysis of this shape must be done before the information is available.
- **tag** – The shape tag to use. Optional, if omitted the `original` shape tag will be used.
- **start** – The start time code to get waveform information for. Default is `-INF`.

- **end** – The end time code to get waveform information for. Default is `+INF`.
- **dB** –
 - `true` - Return RMS dB values.
 - `false` (default) - Return RMS 1-based absolute values.
- **width** – The number of sample points to return. Default is 400.

Produces

- **application/xml**, **application/json** – [WaveformDataDocument](#)

Role `_item_shape_read`

Get waveform data (deprecated)

Deprecated since version 4.5.1.

GET `/item/ (item-id) /waveform/data`
 Returns the waveform data as a JSON array.

Query Parameters

- **itemTrack** – The itemTrack value of the audio channel within the shape. (Optional)
- **stream** – The stream value of the audio channel within the component of the shape. (Optional)
- **channel** – The channel value of the audio channel within the stream of the component. Optional, if omitted the first channel. If itemTrack and stream are omitted, this value can be used to denote tracks in a linear fashion, regardless of itemTrack and stream. Then channel=0 means the first audio track, channel=1 the second, etc.
- **shape** – The shape id to use to get information from. Optional, if omitted the shape tag will be used. Note that an analysis of this shape must be done before the information is available.
- **tag** – The shape tag to use. Optional, if omitted the `original` shape tag will be used.
- **start** – The start time code to get waveform information for. Default is `-INF`.
- **end** – The end time code to get waveform information for. Default is `+INF`.
- **dB** –
 - `true` - Return RMS dB values.
 - `false` (default) - Return RMS 1-based absolute values.
- **width** – The number of sample points to return. Default is 400.

Produces

- **application/json** – A JSON array with one JSON object. The JSON object contains one value with key `data`. The value is a JSON array with `width` number of data points.

Role `_item_shape_read`

Get waveform image

GET `/item/ (item-id) /waveform/image`

Returns an image with the waveform drawn on the canvas as described by the query parameters.

Query Parameters

- **itemTrack** – The itemTrack value of the audio channel within the shape. (Optional)
- **stream** – The stream value of the audio channel within the component of the shape. (Optional)
- **channel** – The channel value of the audio channel within the stream of the component. Optional, if omitted the first channel. If itemTrack and stream are omitted, this value can be used to denote tracks in a linear fashion, regardless of itemTrack and stream. Then channel=0 means the first audio track, channel=1 the second, etc.
- **shape** – The shape id to use to get information from. Optional, if omitted the shape tag will be used. Note that an analysis of this shape must be done before the information is available.
- **tag** – The shape tag to use. Optional, if omitted the `original` shape tag will be used.
- **start** – The start time code to get waveform information for. Default is `-INF`.
- **end** – The end time code to get waveform information for. Default is `+INF`.
- **dB** –
 - `true` - Return RMS dB values.
 - `false` (default) - Return RMS 1-based absolute values.
- **width** – The number of sample points to return. Default is 400.
- **height** – The height, in pixels, of the image. Default is 100.
- **bgcolor** – The background color of the image, as hex triplet. Defaults to `#000000` (black).
- **fgcolor** – The color of the waveform, as hex triplet. Defaults to white.
- **hgridline** – The position of primary horizontal gridlines, in units of the audio. Default is no gridline.
- **hgridlinecolor** – The color of primary horizontal gridlines.
- **hgridline2** – The position of secondary horizontal gridlines, in units of the audio. Default is no gridline.
- **hgridline2color** – The color of secondary horizontal gridlines.
- **vgridline** – The position of primary vertical gridlines, where 0 is left border and 1 is right border. Default is no gridline.
- **vgridlinecolor** – The color of primary vertical gridlines.
- **vgridline2** – The position of primary vertical gridlines, where 0 is left border and 1 is right border. Default is no gridline.
- **vgridline2color** – The color of primary vertical gridlines.
- **min** – The audio value that corresponds the bottom border. Defaults to `-1` if `dB` is `false`, and `-80` otherwise.

- **max** – The audio value that corresponds the top border. Defaults to 1 if dB is false, and 0 otherwise.

Produces

- **image/png** – A PNG image.

Role `_item_shape_read`

Get waveform image URI

New in version 4.5.1.

GET `/item/ (item-id) /waveform/imageURI`

Returns a URI that does not require authentication to the generated image. The URI expires after 1 hour.

Query Parameters

- **itemTrack** – The itemTrack value of the audio channel within the shape. (Optional)
- **stream** – The stream value of the audio channel within the component of the shape. (Optional)
- **channel** – The channel value of the audio channel within the stream of the component. Optional, if omitted the first channel. If itemTrack and stream are omitted, this value can be used to denote tracks in a linear fashion, regardless of itemTrack and stream. Then channel=0 means the first audio track, channel=1 the second, etc.
- **shape** – The shape id to use to get information from. Optional, if omitted the shape tag will be used. Note that an analysis of this shape must be done before the information is available.
- **tag** – The shape tag to use. Optional, if omitted the original shape tag will be used.
- **start** – The start time code to get waveform information for. Default is `-INF`.
- **end** – The end time code to get waveform information for. Default is `+INF`.
- **dB** –
 - `true` - Return RMS dB values.
 - `false` (default) - Return RMS 1-based absolute values.
- **width** – The number of sample points to return. Default is 400.
- **height** – The height, in pixels, of the image. Default is 100.
- **bgcolor** – The background color of the image, as hex triplet. Defaults to `#000000` (black).
- **fgcolor** – The color of the waveform, as hex triplet. Defaults to white.
- **hgridline** – The position of primary horizontal gridlines, in units of the audio. Default is no gridline.
- **hgridlinecolor** – The color of primary horizontal gridlines.
- **hgridline2** – The position of secondary horizontal gridlines, in units of the audio. Default is no gridline.
- **hgridline2color** – The color of secondary horizontal gridlines.
- **vgridline** – The position of primary vertical gridlines, where 0 is left border and 1 is right border. Default is no gridline.

- **vgridlinecolor** – The color of primary vertical gridlines.
- **vgridline2** – The position of primary vertical gridlines, where 0 is left border and 1 is right border. Default is no gridline.
- **vgridline2color** – The color of primary vertical gridlines.
- **min** – The audio value that corresponds the bottom border. Defaults to -1 if dB is false, and -80 otherwise.
- **max** – The audio value that corresponds the top border. Defaults to 1 if dB is false, and 0 otherwise.

Produces

- **text/plain** – The URI to the image.

Role `_item_shape_read`

Get waveform images for all audio channels

Solely used for debugging. May be deprecated in newer releases.

GET `/item/ (item-id) /waveform/alltracks`

Returns a HTML document including image references to waveform images for all channels. Query parameters can be used to control the image appearance.

Query Parameters

- **itemTrack** – The itemTrack value of the audio channel within the shape. (Optional)
- **stream** – The stream value of the audio channel within the component of the shape. (Optional)
- **channel** – The channel value of the audio channel within the stream of the component. Optional, if omitted the first channel. If itemTrack and stream are omitted, this value can be used to denote tracks in a linear fashion, regardless of itemTrack and stream. Then channel=0 means the first audio track, channel=1 the second, etc.
- **shape** – The shape id to use to get information from. Optional, if omitted the shape tag will be used. Note that an analysis of this shape must be done before the information is available.
- **tag** – The shape tag to use. Optional, if omitted the `original` shape tag will be used.
- **start** – The start time code to get waveform information for. Default is `-INF`.
- **end** – The end time code to get waveform information for. Default is `+INF`.
- **dB** –
 - `true` - Return RMS dB values.
 - `false` (default) - Return RMS 1-based absolute values.
- **width** – The number of sample points to return. Default is 400.
- **height** – The height, in pixels, of the image. Default is 100.
- **bgcolor** – The background color of the image, as hex triplet. Defaults to `#000000` (black).
- **fgcolor** – The color of the waveform, as hex triplet. Defaults to white.

- **hgridline** – The position of primary horizontal gridlines, in units of the audio. Default is no gridline.
- **hgridlinecolor** – The color of primary horizontal gridlines.
- **hgridline2** – The position of secondary horizontal gridlines, in units of the audio. Default is no gridline.
- **hgridline2color** – The color of secondary horizontal gridlines.
- **vgridline** – The position of primary vertical gridlines, where 0 is left border and 1 is right border. Default is no gridline.
- **vgridlinecolor** – The color of primary vertical gridlines.
- **vgridline2** – The position of primary vertical gridlines, where 0 is left border and 1 is right border. Default is no gridline.
- **vgridline2color** – The color of primary vertical gridlines.
- **min** – The audio value that corresponds the bottom border. Defaults to -1 if dB is false, and -80 otherwise.
- **max** – The audio value that corresponds the top border. Defaults to 1 if dB is false, and 0 otherwise.

Produces

- **text/html** – A HTML document.

Role `_item_shape_read`

17.11.9 Shape components

Components

Get components for shape

GET `/item/ (id) /shape/`

shape-id/**component** Returns all components for a specified shape. Currently, this call returns the same information as the return shape, but is available for orthogonality.

Status Codes

- **404 Not found** – Invalid id

Produces

- **application/xml, application/json** – [ComponentListDocument](#)

Role `_item_shape_read`

Get component information

GET `/item/ (id) /shape/`

shape-id/**component**/*component-id* Returns all files, or the complete component information, for a specified component.

Query Parameters

- **full** –

- `true` - Return the component information.
- `false` - Return all files.

Produces

- `application/xml`, `application/json` - `ComponentDocument` if `full=true`, else a `FileListDocument`.
- `text/plain` - List of file URLs

Role `_item_shape_read`

Component import**Import component using a URI or an existing file**

POST `/item/{id}/shape/`

`shape-id/component` Starts a job that imports a component to an existing shape. The shape must be a media shape and must not be a placeholder.

Query Parameters

- **uri** - The URI to the file containing the new shape.
- **fileId** - The id of the file that contains the new shape.
- **allowReimport** -
 - `true` - Import the file to this shape even if the file is already importing or is already part of another item.
 - `false` (default) Reject the request if the file with the given id has already been imported or is currently importing.
- **notification** - The *placeholder job notification* to use for this job. (Optional)
- **notificationData** - Any additional data to include for *notifications* on this job. (Optional)
- **priority** - The priority to assign to the job. Default is `MEDIUM`.
- **jobmetadata** - Additional *information* for the job task.

Produces

- `application/xml`, `application/json` - `JobDocument`

Status Codes

- **400** - If the file has already been imported.

Role `_import`

Move/copy components**Move component to another shape**

POST `/item/{id}/shape/`

`shape-id/component/component-id/move/item/target-id/shape/target-shape-id` Move this component to another shape.

Query Parameters

- **index** – The component index (track) of component. If the target shape has a component with this index, then it will be replaced/removed.
- **keepMetadata** –
 - `true` - Preserve the metadata from the replaced component.
 - `false` (default) - Discard any metadata from the replaced component.

Produces

- **application/xml**, **application/json** – [ShapeDocument](#) from the target shape.

Role `_item_shape_write`**Move component to another shape/component****POST** `/item/ (id) /shape/``shape-id/component/component-id/move/item/target-id/shape/target-shape-id/component/target-component-id` Move this component to another shape, replacing a specific component by id.**Query Parameters**

- **index** – The component index (track) of component.
- **keepMetadata** –
 - `true` - Preserve the metadata from the replaced component.
 - `false` (default) - Discard any metadata from the replaced component.

Produces

- **application/xml**, **application/json** – [ShapeDocument](#) from the target shape.

Role `_item_shape_write`**Copy component to another shape****POST** `/item/ (id) /shape/``shape-id/component/component-id/copy/item/target-id/shape/target-shape-id` Copy this component to another shape.**Query Parameters**

- **index** – The component index (track) of component. If the target shape has a component with this index, then it will be replaced/removed.
- **keepMetadata** –
 - `true` - Preserve the metadata from the replaced component.
 - `false` (default) - Discard any metadata from the replaced component.

Produces

- **application/xml**, **application/json** – [ShapeDocument](#) from the target shape.

Role `_item_shape_write`

Copy component to another shape/component

POST `/item/ (id) /shape/`

`shape-id/component/component-id/copy/item/target-id/shape/target-shape-id/component/target-component-id` Copy this component to another shape, replacing a specific component by id.

Query Parameters

- **index** – The component index (track) of component.
- **keepMetadata** –
 - `true` - Preserve the metadata from the replaced component.
 - `false` (default) - Discard any metadata from the replaced component.

Produces

- `application/xml`, `application/json` – [ShapeDocument](#) from the target shape.

Role `_item_shape_write`

Delete component

DELETE `/item/ (id) /shape/`

`shape-id/component/component-id` Removes the component from the shape. Any files belonging to the component is not Copy this component to another shape, replacing a specific component by id.

New in version 4.12.

Query Parameters

- **keepFiles** –
 - `true` - Keep the files belong to this shape.
 - `false` (default) - Remove the files belong to this shape.

Role `_item_shape_write`

Component files

Associate a file with a component

PUT `/item/ (id) /shape/`

`shape-id/component/component-id/file/file-id` Attaches the specified file to the specified component

New in version 4.12.

Query Parameters

- **allowReimport** –
 - `true` - Associate the file regardless of whether it already belongs to a component.
 - `false` (default) - Only files that do not already belong to a component can be associated.

Produces

- `application/xml`, `application/json` – [ComponentDocument](#)

Role `_item_shape_write`

Disassociate a file from a component

DELETE `/item/ (id) /shape/`

`shape-id/component/component-id/file/file-id` Removes the specified file from the specified component

New in version 4.12.

Role `_item_shape_write`

Placeholder components

Create a placeholder component

POST `/item/ (id) /shape/`

`shape-id/component/placeholder` Creates an new placeholder component for a specific shape.

Query Parameters

- **type** – The type of component. Either audio, video, container or binary.
- **index** – The component index (track) of new component.

Produces

- `application/xml`, `application/json` – [ComponentDocument](#)

Component metadata

New in version 4.0.

Please refer to [Key-value metadata](#).

17.11.10 Thumbnails

Creating thumbnails and posters

Thumbnails and posters can be created by starting a thumbnail job.

Start a thumbnail job

POST `/item/ (item-id) /thumbnail`

Creates a new thumbnail job with the specified parameters. Note that a job cannot both create thumbnails at specified intervals and posters. Creating thumbnails according to transcoder rules and creating posters is however allowed.

Query Parameters

- **createThumbnails** –
 - `true` - Creates thumbnails according to default transcoder rules.
 - `t1, ...` - Thumbnails will be created on the specified, comma-separated, [time codes](#).
 - `false` (default) - No thumbnails will be created.
- **createPosters** – An optional list of [time codes](#) to use for creating posters.

- **thumbnailWidth** – An optional integer specifying the width of the thumbnails. If thumbnailWidth is specified, thumbnailHeight must also be specified.
- **thumbnailHeight** – An optional integer specifying the height of the thumbnails. If thumbnailHeight is specified, thumbnailWidth must also be specified.
- **thumbnailPeriod** – An optional timecode string specifying the interval of the thumbnails. It should be a decimal integer when working with multi-page images/PDFs, meaning every N page(s).
- **posterWidth** – An optional integer specifying the width of the posters.
- **posterHeight** – An optional integer specifying the height of the posters.
- **posterFormat** –
 - `jpeg` (default) - Creates posters in JPEG format.
 - `png` - Creates posters in PNG format.
- **thumbnailService** – An optional identifier to which thumbnail resource that should be used.
- **tag** – Include additional video settings from this transcode preset. Resolution settings in the tag are overridden by query parameters thumbnailHeight and thumbnailWidth.
- **version** – An optional version number. For creating thumbnails for older versions of the item essence. Default is latest version.
- **sourceTag** – Optional comma separated shape tags. The first valid shape will be chosen as the source of the job. If none of the tags are valid, the original shape will be used.
New in version 4.2.3.
- **resourceId** – The transcoder resource to use to execute the transcode.
New in version 4.13.
- **notification** – The *placeholder job notification* to use for this job. (Optional)
- **notificationData** – Any additional data to include for *notifications* on this job. (Optional)
- **priority** – The priority to assign to the job. Default is `MEDIUM`.
- **jobmetadata** – Additional *information* for the job task.

Produces

- `application/xml`, `application/json` – `JobDocument`

Role `_job_write`

Example

Creating thumbnails according to transcoder rules and posters at the time codes 50@PAL and 100@PAL.

```
POST /item/VX-123/thumbnail?createThumbnails=true&createPosters=50@PAL,100@PAL&
↪sourceTag=mov,mp4
```

```
<JobDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <jobId>VX-1219</jobId>
  <user>admin</user>
  <started>2010-04-23T11:24:24.434+02:00</started>
```

```
<status>READY</status>
<type>THUMBNAIL</type>
<priority>MEDIUM</priority>
</JobDocument>
```

Item thumbnail resources

The following requests deal with managing thumbnail resources for specific items.

Get resources for an item

GET */item/ (item-id) /thumbnailresource*

Return one or more poster resource URIs which can be used to manage the thumbnails for a specific item.

Query Parameters

- **version** – Return thumbnails from this essence version. By default thumbnails for the latest version will be returned.

Produces

- **text/plain** – CRLF-delimited list of thumbnail resource URIs
- **application/xml, application/json** – [URIListDocument](#) of thumbnail resource URIs

New in version 4.2.

GET */item/ (item-id) /posterresource*

Return one or more poster resource URIs which can be used to manage the posters for a specific item.

Query Parameters

- **version** – Return posters from this essence version. By default posters for the latest version will be returned.

Produces

- **text/plain** – CRLF-delimited list of thumbnail resource URIs
- **application/xml, application/json** – [URIListDocument](#) of thumbnail resource URIs

Put resources for an item

PUT */item/ (item-id) /thumbnailresource*

If no thumbnail resources are defined for an item, create a resource and return it.

Produces

- **text/plain** – CRLF-delimited list of thumbnail resource URIs
- **application/xml, application/json** – [URIListDocument](#) of thumbnail resource URIs

New in version 4.2.

PUT */item/ (item-id) /posterresource*

If no poster resources are defined for an item, create a resource and return it.

Produces

- **text/plain** – CRLF-delimited list of thumbnail resource URIs
- **application/xml**, **application/json** – [URIListDocument](#) of thumbnail resource URIs

Note: Thumbnails and posters for an item share the same resource. Hence, if a resource is added for posters, it is automatically added for thumbnails as well.

Thumbnail resource handling

The following requests deal with managing collections of thumbnail URIs for a specific thumbnail resource.

Get list of thumbnails**GET {thumbnail-resource}**

Returns thumbnail URIs on which further requests may be performed.

Query Parameters

- **url** –
 - `true` - Return list of URLs.
 - `false` (default) - Return list of ids.
- **noauth-url** –
 - `true` Return URIs that do not need authentication.
 - `false` (default) Return normal URIs

Produces

- **text/plain** – CRLF-delimited list of thumbnail URIs.
- **application/xml**, **application/json** – [URIListDocument](#) of thumbnail URIs

Role `_thumbnail_read`

Insert or update thumbnail**PUT {thumbnail-resource}/(time)**

Create a new thumbnail at the specified time code. If a thumbnail with the specified time code already exists it is replaced.

Accepts

- **image/png**, **image/jpeg** – Image to insert

Produces

- **text/plain** – Informational status message.

Status Codes

- **400** – Given data was not valid `image/png` or `image/jpeg`

Role `_thumbnail_write`

Remove all thumbnails

DELETE `{thumbnail-resource}`

Remove all thumbnails handled by this resource.

Role `_thumbnail_write`

Thumbnail handling

The following requests concern handling a specific thumbnail.

Get image representation

GET `{thumbnail-resource}/(time)`

Return the image representation of this thumbnail.

Produces

- `image/png`, `image/jpeg` – Image of the thumbnail

Role `_thumbnail_read`

Remove thumbnail

DELETE `{thumbnail-resource}/(time)`

Remove this thumbnail.

Role `_thumbnail_write`

Export thumbnail

POST `{thumbnail-resource}/(time)/export`

Starts a job that writes the thumbnail or poster to a specific destination.

Query Parameters

- **uri** – Mandatory URI of export location of thumbnail or poster
- **format** – Optional image format of destination. E.g. `tiff`.
- **notification** – The *placeholder job notification* to use for this job. (Optional)
- **notificationData** – Any additional data to include for *notifications* on this job. (Optional)
- **priority** – The priority to assign to the job. Default is `MEDIUM`.
- **jobmetadata** – Additional *information* for the job task.

Produces

- `application/xml`, `application/json` – `JobDocument`

Role `_thumbnail_read`

17.11.11 Transcoding

Transcoding

Start an item transcode job

POST `/item/ (item-id) /transcode`

Starts a new job that transcode an item to a number of shapes according to the given shape tags.

Query Parameters

- **tag** – A comma-separated list of shape tags, that specify the desired output.
- **createThumbnails** –
 - `true` - Creates thumbnails according to default transcoder rules.
 - `false` (default) - No thumbnails will be created.
- **createPosters** – An optional list of *time codes* to use for creating posters.
- **thumbnailService** – An optional identifier to which thumbnail resource that should be used.
- **destinationItem** – An item id, to which the new new shape will be associated.
New in version 4.4.
- **original** – An optional tag, if specified it should be one of the tags specified in the tag parameter. Specifies that the original shape tag will be reset to the shape created to this tag.
New in version 4.6.
- **resourceId** – The transcoder resource to use to execute the transcode.
New in version 4.11.
- **storageId** – Optional identifier of storage where essence file is to be stored.
New in version 4.16.
- **overrideFastStart** –
 - `true` (default) - Use transcoder's estimate of the duration for allocating header space in MOV files and similar files.
 - `false` - Do not use the transcoder's estimate of the duration.
- **requireFastStart** –
 - `true` (default) - Try to put the index tables (header) in front of the file.
 - `false` - Put header at end of file.
- **fastStartLength** – Optional estimated duration of the clip in seconds.
- **notification** – The *placeholder job notification* to use for this job. (Optional)
- **notificationData** – Any additional data to include for *notifications* on this job. (Optional)
- **priority** – The priority to assign to the job. Default is `MEDIUM`.
- **jobmetadata** – Additional *information* for the job task.

Produces

- `application/xml`, `application/json` – `JobDocument`

Role `_job_write`

Start a shape transcode job

POST `/item/ (item-id) /shape/`

`shape-id/transcode` Starts a new job that transcode a specific shape on an item to a number of shapes according to the given shape tags.

Query Parameters

- **tag** – A comma-separated list of shape tags, that specify the desired output.
- **createThumbnails** –
 - `true` - Creates thumbnails according to default transcoder rules.
 - `false` (default) - No thumbnails will be created.
- **createPosters** – An optional list of *time codes* to use for creating posters.
- **thumbnailService** – An optional identifier to which thumbnail resource that should be used.
- **destinationItem** – An item id, to which the new new shape will be associated.
New in version 4.4.
- **original** – An optional tag, if specified it should be one of the tags specified in the tag parameter. Specifies that the original shape tag will be reset to the shape created to this tag.
New in version 4.6.
- **resourceId** – The transcoder resource to use to execute the transcode.
New in version 4.11.
- **storageId** – Optional identifier of storage where essence file is to be stored.
New in version 4.16.
- **overrideFastStart** –
 - `true` (default) - Use transcoder's estimate of the duration for allocating header space in MOV files and similar files.
 - `false` - Do not use the transcoder's estimate of the duration.
- **requireFastStart** –
 - `true` (default) - Try to put the index tables (header) in front of the file.
 - `false` - Put header at end of file.
- **fastStartLength** – Optional estimated duration of the clip in seconds.
- **notification** – The *placeholder job notification* to use for this job. (Optional)
- **notificationData** – Any additional data to include for *notifications* on this job. (Optional)
- **priority** – The priority to assign to the job. Default is `MEDIUM`.
- **jobmetadata** – Additional *information* for the job task.

Produces

- `application/xml`, `application/json` – `JobDocument`

Role `_job_write`

17.11.12 Item conform

New in version 4.0.

The conform resource exposes a simple way to combine media from one or more items into a new item. It is also possible to select specific parts from the input by specifying an input interval.

This could be used when you for example want to:

- Merge spanned P2 clips.
- Render a simple sequence as defined by a user.

Conforming

Start a conform job

POST `/conform`

Starts a new `CONFORM` job that creates a new item and one or more shapes that contains media according to the conform timeline.

Query Parameters

- **conformMetadata** –
 - `true` (default) - Copy metadata from the source items, according to the timeline, to the resulting item.
 - `false` - Do not copy metadata from the source items.

New in version 4.2.3.

- **sourceTag** – A comma-separated list of shape tags, that specify the shapes that should be used as inputs.
- **original** – An optional tag, if specified it should be one of the tags specified in the tag parameter. Specifies that the original shape tag will be reset to the shape created to this tag.
- **resourceId** – The transcoder resource to use to execute the transcode.

New in version 4.11.

- **tag** – A comma-separated list of shape tags, that specify the desired output.
- **createThumbnails** –
 - `true` - Creates thumbnails according to default transcoder rules.
 - `false` (default) - No thumbnails will be created.
- **createPosters** – An optional list of *time codes* to use for creating posters.
- **thumbnailService** – An optional identifier to which thumbnail resource that should be used.
- **destinationItem** – An item id, to which the new new shape will be associated.

New in version 4.4.

- **notification** – The *placeholder job notification* to use for this job. (Optional)

- **notificationData** – Any additional data to include for *notifications* on this job. (Optional)
- **priority** – The priority to assign to the job. Default is `MEDIUM`.
- **jobmetadata** – Additional *information* for the job task.

Accepts

- **application/xml**, **application/json** – [ConformRequestDocument](#)

Produces

- **application/xml**, **application/json** – [JobDocument](#)

Role `_job_write`

Start a conform job for an existing item

POST `/item/{id}/timeline/`

timeline-format/**conform** Starts a new CONFORM job that creates one or more shapes that contains media according to the conform timeline.

The timeline must be a [ConformDocument](#), else the request will be rejected.

Query Parameters

- **conformMetadata** –
 - `true` (default) - Copy metadata from the source items, according to the timeline, to the resulting item.
 - `false` - Do not copy metadata from the source items.

New in version 4.2.3.

- **sourceTag** – A comma-separated list of shape tags, that specify the shapes that should be used as inputs.
- **original** – An optional tag, if specified it should be one of the tags specified in the tag parameter. Specifies that the original shape tag will be reset to the shape created to this tag.
- **resourceId** – The transcoder resource to use to execute the transcode.

New in version 4.11.

- **tag** – A comma-separated list of shape tags, that specify the desired output.
 - **createThumbnails** –
 - `true` - Creates thumbnails according to default transcoder rules.
 - `false` (default) - No thumbnails will be created.
 - **createPosters** – An optional list of *time codes* to use for creating posters.
 - **thumbnailService** – An optional identifier to which thumbnail resource that should be used.
 - **destinationItem** – An item id, to which the new new shape will be associated.
- New in version 4.4.
- **overrideFastStart** –

- `true` (default) - Use transcoder's estimate of the duration for allocating header space in MOV files and similar files.
- `false` - Do not use the transcoder's estimate of the duration.
- **requireFastStart** -
 - `true` (default) - Try to put the index tables (header) in front of the file.
 - `false` - Put header at end of file.
- **fastStartLength** - Optional estimated duration of the clip in seconds.
- **notification** - The *placeholder job notification* to use for this job. (Optional)
- **notificationData** - Any additional data to include for *notifications* on this job. (Optional)
- **priority** - The priority to assign to the job. Default is `MEDIUM`.
- **jobmetadata** - Additional *information* for the job task.

Produces

- `application/xml`, `application/json` - `JobDocument`

Role `_job_write`

Example: joining two clips

In this example item VX-1 and VX-2 are the two clips that should be joined/concatenated. A shape-tag with an empty preset (here the `original` tag) is specified so that the output has the same format as the input.

```
POST /conform?tag=original
Content-Type: application/xml

<ConformRequest xmlns="http://xml.vidispine.com/schema/vidispine">
  <conform>
    <timeline>
      <segment>
        <source>
          <id>VX-1</id>
        </source>
      </segment>
      <segment>
        <source>
          <id>VX-2</id>
        </source>
      </segment>
    </timeline>
  </conform>
  <metadata>
    <timespan start="-INF" end="+INF">
      <field>
        <name>title</name>
        <value>Joined A and B</value>
      </field>
    </timespan>
  </metadata>
</ConformRequest>
```

```
<JobDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <jobId>VX-21527</jobId>
  <user>admin</user>
  <started>2013-05-14T06:56:40.868Z</started>
  <status>READY</status>
  <type>CONFORM</type>
  <priority>MEDIUM</priority>
</JobDocument>
```

17.11.13 Timeline

Timeline API is used to store and retrieve timelines in the system. A timeline is represented in the system as a combination of:

- The timeline itself (in the native format, but can be converted to other formats)
- The rendered result as a new item.
- The timeline with its constituent parts as a collection.

There is no special datatype for the timeline, instead it is stored in one or several metadata fields.

Get Information about Item Timeline

Get List of Timeline Representations

GET */item/ (id) /timeline*

Returns a list of timeline stored and all timeline formats that can be derived. The precision number returned is an estimation of how close the converted timeline format will match the original. The lowest number, 0, means the original timeline format, 1 means derived timeline without any loss of information compared to the original format. The highest number, 100, means straight cuts only.

Produces

- **text/plain** – CRLF-delimited list of TabbedTuple of timeline format and precision.

Role `_item_timeline_read`

See also:

CRLF is used in `text/plain` representation when several values are returned, such as tuples or lists. CRLF is represented by the two bytes 0d 0a in hexadecimal notation.

See also:

TabbedTuple is used in `text/plain` representation when several values are returned, such as tuples or lists. TabbedTuples delimits each value by the tab character, 09 in hexadecimal notation. Together with CRLF it is used to create lists of tuples. Users should ignore any output after the last defined element in the tuple, more elements may be returned in future versions of the API.

Get Timeline Representation

GET */item/ (id) /timeline/ timeline-format* Returns timeline.

Produces

- ***/*** – Timeline representation. The actual MIME type depends on timeline format.

Status Codes

- **400** – Could not find the timeline identified by timeline-format.

Role `_item_timeline_read`

Create/Modify Timeline

PUT `/item/ (id) /timeline/`*timeline-format* Creates or updates a timeline representation for an item.**Accepts**

- ***/*** – Timeline representation. The actual MIME type depends on timeline format.

Status Codes

- **200** – The timeline was created/modified successfully.

Role `_item_timeline_write`

Remove All Timeline Representations

DELETE `/item/ (id) /timeline`

Removes all timeline representations.

Status Codes

- **200** – All timelines associated with the item were deleted successfully.

Role `_item_timeline_write`

Remove Specific Timeline Representations

DELETE `/item/ (id) /timeline/`*timeline-format* Removes specific timeline representation.**Status Codes**

- **200** – The timeline was deleted successfully.
- **400** – Could not find the timeline identified by timeline-format.

Role `_item_timeline_write`

17.12 JavaScript

17.12.1 Testing scripts

New in version 4.0.3.

In order to test functionality, the JavaScript engine can be called manually.

Executing JavaScript code

POST /javascript/test

Executes the given JavaScript code.

Accepts

- **application/javascript** , **text/plain**, **text/javascript** – The JavaScript code

Produces

- **application/json** – The object returned by the code, in JSON format

Role _administrator

17.12.2 JavaScript sessions

See *Debugging JavaScript* on how to debug JavaScript scripts.

Retrieve JavaScript sessions

GET /javascript/session

Retrieves the the current JavaScript sessions, their current status, and which port they listen to.

Produces

- **text/plain** – A textual list of the current JavaScript sessions in Vidispine, their current status, and which port they listen to

Role _administrator

Note: Multiple JavaScript debug sessions cannot share the same port. If several JavaScript sessions are started simultaneously, each is allocate the next free port. The port number can be found using the request above.

Example

```
POST /javascript/test
Content-Type: application/javascript

1+1
```

```
GET /javascript/session
```

```
0      testscript      STARTED/RUNNING 0.0.0.0/0.0.0.0:59000      null
```

Retrieve JavaScript session

GET /javascript/session/(id)

Retrieves stack trace of a specific JavaScript session.

Produces

- **text/plain** – The stack trace of the session

Status Codes

- **400** – The session has no frames
- **404** – No such session

Role `_administrator`

Example

After having connected to the session:

```
GET /javascript/session
```

```
0    testscript    CONNECTED/SUSPENDED    0.0.0.0/0.0.0.0:59000    testscript-
→213efccdd3.js:2
```

```
GET /javascript/session/0
```

```
testscript-213efccdd3.js:2
```

Stop a JavaScript session

DELETE `/javascript/session/` (*id*)

Stops an active debugging session.

Query Parameters

- **stop** –
 - `true` - Kill the running script.
 - `false` (default) - Stop the debugging session, and leave the script running.

Status Codes

- **400** – If no such session could be found.

Role `_administrator`

17.13 Jobs

17.13.1 Managing jobs

Create job

See *Creating jobs*.

Get list of jobs

GET /job

Return jobs matching the criteria given.

Query Parameters

- **jobmetadata** – Optional, multiple query parameters can be specified. If no query parameters are specified, all jobs are returned.
 - *key = value* - Filter out only the jobs that has job metadata according to the filter criteria. Note that = is part of the query parameter, and has to be encoded (%3d).
- **metadata** –
 - *true* - Include job metadata with all jobs.
 - *false* (default) - Do not include job metadata with all jobs.
- **idonly** –
 - *true* - Only return a list of ids
 - *false* (default) - Return job information such as job status
- **starttime-from** – Optional ISO8601 timestamp. Return only jobs started after and at the given timestamp.
- **starttime-to** – Optional ISO8601 timestamp. Return only jobs started before and at the given timestamp.
- **finishtime-from** – Optional ISO8601 timestamp. Return only jobs finished after and at the given timestamp.
New in version 4.10.
- **finishtime-to** – Optional ISO8601 timestamp. Return only jobs finished before and at the given timestamp.
New in version 4.10.
- **step** –
 - *true* - Include step information in the job listing.
 - *false* (default) - Do not include step information in the job listing.

Matrix Parameters

- **type** – Optional comma-separated list of *job types*. Default is *all*, return all jobs.
- **state** – Optional comma-separated list of *job states*. Default is *all*, return all jobs.
- **first** – Optional integer. Return jobs from that number in the list of sorted jobs. Default is 1, the first jobs.
- **number** – Optional integer. Return at most that number of jobs. Default returns the first 100 jobs.
- **sort** – Optional list of form *field (asc|desc) [, ...]*. Sort by specific fields.
 - *jobId*
 - *type*
 - *state*

- user
- startTime
- priority

New in version 4.0.1.

- **user** -
 - true (default) - Include only jobs created by current user
 - false - Include all jobs

Produces

- **application/xml**, **application/json** - [JobListDocument](#)
- **text/plain** - CRLF-delimited list of job ids.

Role _job_read

Get job information

GET /job/ (*job-id*)

Return information about specified job.

When returning in format `text/plain`, only a string representation of the state is returned.

Query Parameters

- **metadata** -
 - true - Include job metadata with all jobs.
 - false (default) - Do not include job metadata with all jobs.

Status Codes

- **404 Not found** - Invalid id

Produces

- **application/xml**, **application/json** - [JobDocument](#)
- **text/plain** - State of job

Role _job_read

Modify job parameter

PUT /job/ (*job-id*)

Updates the job by setting job priority

Query Parameters

- **priority** - Change the job priority. Value should be one of LOWEST, LOW, MEDIUM, HIGH, HIGHEST or IMMEDIATE.

Status Codes

- **404 Not found** - Invalid id

Role _job_write

Warning: Jobs with priority `IMMEDIATE` are always started, even if the *max concurrent jobs* limit is reached. This could impact system performance. To execute the job with `IMMEDIATE` priority the user must be a super user, that is, have role `_super_access_user`.

Abort job

DELETE `/job/ (job-id)`

Does not delete the job, but aborts it.

To delete one or more jobs, use `DELETE /job`.

The job is marked for abortion, but the call may return before all tasks have been killed. Hence, the status return by this call is likely to be `ABORT_PENDING` rather than `ABORTED`. Caller should poll the status of the job or use job notifications to find out when job has been fully aborted.

Query Parameters

- **reason** – Optional string, reason for cancellation.
- **cleanup** –
 - `true` (default) - Run cleanup steps before aborting.
 - `false` - Skip the cleanup steps, unless the job is already running. For `READY` jobs this means that the job will immediately be marked as `ABORTED`.

New in version 4.2.4.

Status Codes

- **404 Not found** – Invalid id

Role `_job_write`

Create duplicate job

POST `/job/ (job-id) /re-run`

Retrieves an existing job, duplicates it and starts the duplicated version.

Changed in version 4.2.5: The job priority now defaults to the priority of the existing job. Previously the priority was always `MEDIUM`.

Query Parameters

- **priority** – The priority of the new job. If no priority is specified then the priority of the existing job will be used.

New in version 4.2.5.

Status Codes

- **404 Not found** – Invalid id

Produces

- `application/xml`, `application/json` – `JobDocument`

Role `_job_write`

Start a job with custom type

POST /job

Starts a new job, of the type specified in the `type` parameter.

New in version 4.6.

Query Parameters

- **type** – The job type name. Mandatory parameter.
- **notification** – The *placeholder job notification* to use for this job. (Optional)
- **notificationData** – Any additional data to include for *notifications* on this job. (Optional)
- **priority** – The priority to assign to the job. Default is `MEDIUM`.
- **jobmetadata** – Additional *information* for the job task.

Status Codes

- **400** – Invalid job type name

Produces

- `application/xml`, `application/json` – `JobDocument`

Role `_job_write`

17.13.2 Job problem conditions

Jobs can enter the state `WAITING` if a recoverable problem has occurred. Depending on the problem the system might resolve itself or require manual assistance, e.g. out of storage space.

Get a list of all active job problems

GET /job/problem

Returns a list of unresolved problems, together with what jobs are waiting for them to be resolved.

Produces

- `application/xml`, `application/json` – `JobProblemListDocument`.

Role `_job_read`

Get a list of all job problems that affects a specific job

GET /job/(job-id)/problem

Retrieves a list of problems that affects the specified job.

Status Codes

- **404 Not found** – Invalid id

Produces

- `application/xml`, `application/json` – `JobProblemListDocument`

Role `_job_read`

Delete one or several jobs

DELETE /job

Deletes a job and every related database entry.

Query Parameters

- **id** – Comma-separated list of job ids. Must not be empty.

Status Codes

- **400 Invalid input** – The job is still running
- **404 Not found** – Invalid id

Role _job_write

17.13.3 Job states

Job states

The following states are defined for a job:

READY Job can be run, in queue.

STARTED One or several job steps are running.

VIDINET_JOB One or several job steps are running on Vidinet.

FINISHED The job has finished with success.

FINISHED_WARNING The job has finished, but a non-critical step failed.

FAILED_TOTAL The job has finished, but a critical Job step has failed.

WAITING The job is waiting for a condition.

ABORT_PENDING A request to abort the job has been made.

ABORTED The job is aborted, and all job steps have finished.

Step states

The following states are defined for a job step (task):

NONE Job step has just been initialized. Normally this should not be returned.

READY Job step about to start.

STARTED Job step started, running in a transaction. (Short tasks.)

STARTED_ASYNCHRONOUS Job step started, running outside of an transaction. (Longer tasks, or tasks that cannot execute in an EJB.)

STARTED_PARALLEL Job step has started, and signals that other parallel tasks can start.

STARTED_PARALLEL_ASYNCHRONOUS Job step has started, and signals that other parallel tasks can start.

STARTED_SUBTASKS Job step has started, and will be performed in multiple subtasks.

New in version 4.0.

FINISHED Job step has finished successfully.

FAILED_RETRY Job step has failed, but will be retried.

FAILED_FATAL Job step has failed, and will not be retried.

WAITING Job step is waiting for a condition, see *Get a list of all job problems that affects a specific job* for cause.

DISAPPEARED The job worker was missing (possible cause is a restart of the application server). The job step will be re-run.

17.13.4 Job types

The following job types exists. They can also be retrieved using `GET /jobtype`.

NONE Not used.

IMPORT Not used.

PLACEHOLDER_IMPORT Regular import (using URI or file id to existing or new item).

RAW_IMPORT Import where essence is in request body.

AUTO_IMPORT Import using auto import rules.

SHAPE_IMPORT Import using URI or file id to a shape.

SIDECAR_IMPORT Import a sidecar file to an existing item.

New in version 4.0.1.

ESSENCE_VERSION Import a new essence version.

TRANSCODE Transcode of item.

TRANSCODE_RANGE Transcode of part of item.

CONFORM Conform an item sequence.

TIMELINE Conform a timeline.

THUMBNAIL Create thumbnails or posters of item.

ANALYZE. Do analysis of item.

SHAPE_UPDATE Update shape information of item.

RAW_TRANSCODE. Send transcode job directly to transcoder.

EXPORT Export item to remote location.

COPY_FILE Copy file (and keep track of new copy).

MOVE_FILE Move file.

DELETE_FILE Delete file.

LIST_ITEMS Generate item report.

Get list of job types

GET /jobtype

Get list of job types

Produces

- `application/xml`, `application/json` – URIListDocument
- `text/plain` – list of job types

17.13.5 Job metadata

Additional job metadata can be specified using the `jobmetadata` parameter, when a job is created. Note that the equals sign is part of the value of the query parameter, so it has to be URL encoded (`%3d`).

Hint: Prefer to always prefix any custom job metadata by the name of your application, for example, `myApp_customSetting`, to avoid conflict with any existing or future job metadata used by Vidispine.

Reserved keys

smpteTimeCode

The first frame to be included in transcoded output.

Type String (SMPTE timecode)

lastSmpteTimeCode

The last frame to be included in transcoded output.

Type String (SMPTE timecode)

checksumMode

Can be set to `transfer` to have the checksum computed during the transfer step of the import job.

Note This will not work if the files are transferred by the transcoder.

Since 4.2.8

cerifyPriority

The priority to assign jobs created in Cerify. Either `LOW`, `MEDIUM` or `HIGH`.

Default `LOW`

Since 4.2.8

17.14 Libraries

A library can be seen as a lightweight collection that is deleted on a regular basis if it is not being used. Libraries can only contain items.

17.14.1 Managing libraries

Retrieve a list of all libraries

GET `/library`

Retrieves a list of the ids of all known libraries.

Matrix Parameters

- **first** – Integer, from resulting list of items, start return list from specified offset. Default is 1, start return list from beginning.
- **number** – Integer, the number of entities to fetch. Default 100.

- **autoRefresh** – Optional boolean value, only list libraries with the specified auto refresh status.

New in version 4.2.3.

- **frequencyFrom** – Optional integer value, only list libraries whose update frequency is greater than it.

New in version 4.2.3.

- **frequencyTo** – Optional boolean value, only list libraries whose update frequency is less than it.

New in version 4.2.3.

- **updateMode** – Optional string value, only list libraries with the specified update mode.

New in version 4.2.3.

Produces

- **application/xml**, **application/json** – [URIListDocument](#) containing the ids of all the libraries.
- **text/plain** – CRLF-delimited list of ids

Role _library_read

Example

```
GET /library
```

```
<URIListDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <uri>VX*48</uri>
  <uri>VX*49</uri>
  <uri>VX*45</uri>
</URIListDocument>
```

Create a library

POST /library

Creates a library and returns the id of the created library.

Query Parameters

- **externalId** – An external identifier to assign to the library.

Accepts

- **application/xml**, **application/json** – [ItemListDocument](#) that contains the ids of any items that should be added to the library

Produces

- **application/xml**, **application/json** – [URIListDocument](#) containing the id of the created library.
- **text/plain** – CRLF-delimited list of ids

Status Codes

- **400** – If the external id is already in use.

Role `_library_write`

Example

```
POST /library
Content-Type: application/xml

<ItemListDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <item id="VX-250"/>
  <item id="VX-1000"/>
</ItemListDocument>
```

```
<URIListDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <uri>VX*48</uri>
</URIListDocument>
```

Delete a library

DELETE `/library/` (*library-id*)

Deletes the library with the specified id.

Query Parameters

- **async** –
 - `true` - Start a `DELETE_LIBRARY` job that removes the library.
 - `false` (default) - Remove the library immediately.
- **notification** – The *placeholder job notification* to use for this job. (Optional)
- **notificationData** – Any additional data to include for *notifications* on this job. (Optional)
- **priority** – The priority to assign to the job. Default is `MEDIUM`.
- **jobmetadata** – Additional *information* for the job task.

Produces

- `application/xml`, `application/json` – `JobDocument` containing library delete job.

Status Codes

- **202** – The library will be removed by the returned job.
- **200** – The library has been deleted.

Role `_library_write`

Example

```
DELETE /library/VX*51
```

Delete multiple libraries

New in version 4.8.

DELETE /library

Deletes the libraries with the specified ids.

Query Parameters

- **id** – Comma-separated list of library ids or external ids. Must not be empty.
- **async** –
 - `true` - Start a `DELETE_LIBRARY` job that removes the libraries.
 - `false` (default) - Remove the libraries immediately.
- **notification** – The *placeholder job notification* to use for this job. (Optional)
- **notificationData** – Any additional data to include for *notifications* on this job. (Optional)
- **priority** – The priority to assign to the job. Default is `MEDIUM`.
- **jobmetadata** – Additional *information* for the job task.

Produces

- **application/xml**, **application/json** – `JobDocument` containing library delete job.

Status Codes

- **202** – The libraries will be removed by the returned job.
- **200** – The libraries have been deleted.

Role `_library_write`

Example

```
DELETE /library?id=VX*50,VX*51
```

17.14.2 Library settings

Retrieve library settings

GET /library/(library-id)/settings

Retrieves the settings and status of a library.

Produces

- **application/xml**, **application/json** – `LibrarySettingsDocument`

Role `_library_read`

Example

```
GET /library/VX*67/settings HTTP/1.1
```

```
<LibrarySettingsDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <id>VX*67</id>
  <username>admin</username>
  <updateMode>REPLACE</updateMode>
  <autoRefresh>true</autoRefresh>
  <query>
    <field>
      <name>originalWidth</name>
      <range>
        <value>640</value>
        <value>720</value>
      </range>
    </field>
  </query>
</LibrarySettingsDocument>
```

Update library settings

New in version 4.0.3.

PUT /library/ (*library-id*) /settings

Update the settings of a library.

Accepts

- **application/xml**, **application/json** – LibrarySettingsDocument

Role _library_write

17.14.3 Library content

Retrieve library content

GET /library/ (*library-id*)

Returns the items together with any requested data.

Matrix Parameters

- **starttc** –
 - **true** - Interval is given relative to start timecode of item.
 - **false** (default) - Interval is 0-based.
- **storage** – Optional list of storage ids. Return only files from specific storages. Can be specified multiple times.
New in version 4.13.
- **storageGroup** – Optional storage group id. Return only files from storages specified in the storage group.
New in version 4.13.

Query Parameters

- **first** – Integer, from resulting list of items, start return list from specified offset. Default is 1, start return list from beginning.
- **number** – Integer, the number of entities to fetch. Default 100.
- **count** –
 - `true` (default) - Return hits in result.
 - `false` - Do not return hits in result, in order to produce results faster.
- **noauth-url** –
 - `true` Return URIs that do not need authentication.
 - `false` (default) Return normal URIs
- **baseURI** – Which base URI to use for the thumbnail URLs.
- **p** – Comma separated list of *paths* specifying the content to include. Overrides the content and filter parameters.
New in version 4.5.
- **content** – Comma-separated list of the types of content to retrieve, possible values are `metadata`, `uri`, `shape`, `poster`, `thumbnail`, `access`, `merged-access`, `external`.
- **interval** – Comma-separated list
 - *time-span* - Filter out metadata, return only metadata for specified *time span*.
 - `generic` - Return all non-timed metadata.
 - `all` (default) - Return all metadata, same as `interval=generic, -INF-+INF`
- **field** – Comma-separated list.
 - *field-name* - Return specified field.
 - *field-name* ":" *new-name* - Return specified field, renamed to a new name in return value.
 - "-" *field-name* - Exclude specified field.
 - (default) - Return all fields.
- **group** – Comma-separated list.
 - *group-name* - Return specified group.
 - *group-name* + - Return specified group and subgroups.
New in version 4.1.
 - *group-name* : *new-name* - Return specified group, renamed to a new name in return value.
 - - *group-name* - Exclude specified group.
 - (default) - Return all groups.
- **language** – Comma separated list.
 - *language-tag* - Return metadata for specific language, e.g. `en_US`. Wildcards may be used, e.g. `*_CA` for both Canadian French and Canadian English.
 - `none` - Return all metadata without language specification.
 - `all` (default) - Return all metadata, with or without language specification.

- **sampleRate** – Convert all outgoing *time instants* to specified rate. *NB! Time codes* which cannot be expressed in an integer number of samples will be returned as a decimal number, with risk of losing precision.
- **track** – Comma separated list.
 - *track-type track-number* - Return metadata for specified track. Example of track is A2.
 - *track-type t1 - t2* - Return metadata for specified track interval, e.g. A2-4.
 - *track-type ** - Return metadata for all tracks of specified type, e.g. A*.
 - *generic* - Return all non-tracked metadata.
 - *all* (default) - All metadata, with or without track specification, are returned.
- **include** – A list of keys. Includes additional *field specific data*. Additionally, if set to *type* the type definition of the field will be retrieved.
- **includeValues** – Return the value enumeration for each metadata field.
- **conflict** –
 - *yes* (default) - Include all metadata conflicts, unresolved.
 - *no* - Return conflicts resolved according to field rules.
- **terse** –
 - *yes* - Return metadata in *terse format*.
 - *no* (default) - Return metadata in verbose format.
- **defaultValue** –
 - *true* - For unset fields, return *default values*.
 - *false* (default) - Do not return default values.
- **includeTransientMetadata** –
 - *true* (default) - Include *transient metadata*.
 - *false* - Do not include transient metadata in response.
- **revision** – Optional revision, specifying which metadata to display. Only used if requesting a single item or collection.
- **mergedType** – The type of operation to check for.
- **mergedPermission** – The lowest required permission level.
- **mergedExtradata** – Any possible extradata.
- **uriType** – Optional comma-separated list of format types (container format) to return.
- **scheme** – URI scheme to return.
- **storageType** – Only return URIs for files from storages of this *type*.
- **methodType** – Optional *type of access method*.
 - *AUTO* - Gives an APIInoauth URI to the media. Access to file is tunneled through Vidispine.
 - *AZURE_SAS* - If the storage schema is *azure://* you can get direct access to the media. The resulting URI will not tunnel through Vidispine but rather point directly to the media location at the azure storage.

- **methodMetadata** – Optional *metadata* used with storage method.
- **tag** – A *URI parameter*: Optional comma-separated list of *shape tags* to return.
- **version** – Optional integer, specifying which essence version to return for shapes. If special value `all`, display all versions. If special value `latest` (default), display latest version of shapes.
- **closedFiles** – A *URI parameter*:
 - `true` (default) - Return only URIs that point to closed files.
 - `false` - Return all URIs.

Produces

- **application/xml, application/json** – `ItemListDocument` containing the items together with the requested data.

Role `_library_read`

Example

```
GET /library/VX*48/?content=access HTTP/1.1
```

```
<ItemListDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <item id="VX-250">
    <access>
      <type>GENERIC</type>
      <permission>ALL</permission>
    </access>
    <access>
      <type>METADATA</type>
      <permission>ALL</permission>
    </access>
    <access>
      <type>ID</type>
      <permission>ALL</permission>
    </access>
    <access>
      <type>URI</type>
      <permission>ALL</permission>
    </access>
  </item>
  <item id="VX-1000">
    <access>
      <type>GENERIC</type>
      <permission>ALL</permission>
    </access>
    <access>
      <type>METADATA</type>
      <permission>ALL</permission>
    </access>
    <access>
      <type>ID</type>
      <permission>ALL</permission>
    </access>
    <access>
      <type>URI</type>
    </access>
  </item>
</ItemListDocument>
```

```
<permission>ALL</permission>
  </access>
</item>
</ItemListDocument>
```

Add multiple items to a library

PUT `/library/ (library-id)`
Adds all the items specified in the document to the library.

Accepts

- `application/xml`, `application/json` – `ItemListDocument` that contains the item ids.

Role `_library_write`

Example

```
PUT /library/VX*48
Content-Type: application/xml

<ItemListDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <item id="VX-1000"/>
  <item id="VX-250"/>
</ItemListDocument>
```

```
200 OK
```

Add a specific item to a library

PUT `/library/ (library-id) /`
`item-id` Adds the specified item to the library.

Role `_library_write`

Example

```
PUT /library/VX*48/VX-251
```

```
200 OK
```

Remove a specific item from a library

DELETE `/library/ (library-id) /`
`item-id` Removes the specified item from the library.

Role `_library_write`

Example

```
DELETE /library/VX*48/VX-251
```

```
200 OK
```

Modify metadata of the items in a specific library

PUT `/library/ (library-id) /item-metadata`

Modify metadata of the items in a specific library

Query Parameters

- **notification** – The *placeholder job notification* to use for this job. (Optional)
- **notificationData** – Any additional data to include for *notifications* on this job. (Optional)
- **priority** – The priority to assign to the job. Default is `MEDIUM`.
- **jobmetadata** – Additional *information* for the job task.

Accepts

- **application/xml**, **application/json** – `MetadataDocument` the metadata to apply to the items.

Produces

- **application/xml**, **application/json** – `JobDocument`

Role `_library_write`

17.14.4 Listing library items in batch

New in version 4.5.

Creating an item list job

POST `/library/ (library-id) /list`

Starts a new job that goes through all the items in the specific library and outputs a file to the supplied URI.

The output format depends on the specified parameter, if set to XML an `ItemListDocument` will be produced. Furthermore if an XSLT is given the `ItemListDocument` will be transformed.

Query Parameters

- **destinationUri** – The URI to output the CSV file to.
- **outputFormat** – Specifies the output format. Valid values are `xml` (default) and `csv`.
- **field** – A comma-separated list of metadata fields to include in the result.
- **data** – Specifies any additional data that should be included with the metadata fields.
- **p** – Comma-separated list of *paths* specifying the content to include. Overrides the field and data parameters. Only supported for XML output.
- **notification** – The *placeholder job notification* to use for this job. (Optional)

- **notificationData** – Any additional data to include for *notifications* on this job. (Optional)
- **priority** – The priority to assign to the job. Default is MEDIUM.
- **jobmetadata** – Additional *information* for the job task.

Accepts

- **application/xslt** – An optional XSLT capable of transforming `ItemListDocument`.

Produces

- **application/xml**, **application/json** – `JobDocument`.

Role `_library_read`

Example

```
POST /library/VX*75/list?p=id,shape.containerComponent.duration&destinationUri=file://
↳home/user/output.xml
Content-Type: application/xml
```

```
<JobDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <jobId>VX-121</jobId>
  <user>admin</user>
  <started>2016-02-21T10:11:42.998+01:00</started>
  <status>READY</status>
  <type>LIST_ITEMS</type>
  <priority>MEDIUM</priority>
</JobDocument>
```

```
$ xmllint --format /home/user/output.xml
```

```
<?xml version="1.0"?>
<ItemListDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <item xmlns="http://xml.vidispine.com/schema/vidispine" id="VX-47">
    <shape>
      <containerComponent>
        <duration>
          <samples>1871720000</samples>
          <timeBase>
            <numerator>1</numerator>
            <denominator>1000000</denominator>
          </timeBase>
        </duration>
      </containerComponent>
    </shape>
  </item>
  <item xmlns="http://xml.vidispine.com/schema/vidispine" id="VX-48">
    <shape>
      <containerComponent>
        <duration>
          <samples>1871763000</samples>
          <timeBase>
            <numerator>1</numerator>
            <denominator>1000000</denominator>
          </timeBase>
        </duration>
      </containerComponent>
    </shape>
  </item>
</ItemListDocument>
```

```

    </duration>
  </containerComponent>
</shape>
</item>
</ItemListDocument>

```

17.15 License

The license resource allows you to view and update your Vidispine license. It is also the entry point to use if the system is being used as a licensing provider.

17.15.1 Version and license

Get version and license information

GET /version

Display your license allowance and current system usage.

Produces

- `application/xml`, `application/json` – [VersionDocument](#)
- `text/plain` – The version details in a informational text format.

The `systemInfo` element in the response shows the MAC addresses discovered on the local system. The MAC-address(es) in the license key must match that/those of your system.

Retrieve license file

GET /license

Retrieves the contents of the installed license file.

Produces

- `text/plain` – The contents of the license file.

17.15.2 Slave management and monitoring

Install slave license on master node

PUT /license/slave

Installs the slave license file with the given path.

Query Parameters

- `path` – The name of the slave license file.

Produces

- `application/xml`, `application/json` – [SlaveLicenseDocument](#)

Install slave license on master node

POST /license/slave

Installs a slave license.

Accepts

- `text/plain` – The content of the slave license file.

Produces

- `application/xml`, `application/json` – [SlaveLicenseDocument](#)

List all slaves

GET /license/slave

Returns a list of all the slave nodes connected to this master. Slaves that have not been seen for more than 180 minutes will not be available.

Produces

- `application/xml`, `application/json` – [SlaveListDocument](#)

List slave license status

GET /license/slave/ (id)

Returns information about the slave with the given id.

New in version 4.0.3.

Produces

- `application/xml`, `application/json` – [VersionDocument](#)

Retrieve slave license file

GET /license/slave/ (id) /license

Returns the slave license for a specific slave.

Produces

- `application/xml`, `application/json` – [SlaveLicenseDocument](#)

Remove slave instance

DELETE /license/slave/ (id)

Removes the slave with the given id.

New in version 4.0.3.

List all installed slave licenses

GET /license/slave/license

Returns the `id` and `SlaveIdentifier` of all installed slave license on a master

Produces

- `application/xml`, `application/json` – [SlaveLicenseListDocument](#)

List installed slave licenses by id

GET `/license/slave/license/` (*id*)

Returns the detail of an installed slave license with the given id

Produces

- `application/xml`, `application/json` – `SlaveLicenseDocument`

Install or update slave connection string

PUT `/APIInoauth/license/auth-info`

Accepts

- `application/xml`, `application/json` – `SlaveAuthInfoDocument`

Example

```
PUT /APIInoauth/license/auth-info
Content-Type: application/xml

<SlaveAuthInfoDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <masterHost>http://192.168.0.1:8080/</masterHost>
  <masterHost>http://my.other.server:8080/</masterHost>
  <slaveId>your-slave-id</slaveId>
</SlaveAuthInfoDocument>
```

License validity and status can be seen from `GET /version`.

17.16 Metadata

17.16.1 Auto-projection rules

Working with automatic projection rules

Retrieve all automatic projection rules

GET `/auto-projection`

Retrieves all automatic projection rules.

Produces

- `application/xml`, `application/json` – `URIListDocument`
- `text/plain` – CRLF-delimited list of names

Role `_auto_projection_read`

Retrieve all disabled automatic projection rules

GET `/auto-projection/disable`

Retrieves all disabled automatic projection rules.

Produces

- `application/xml`, `application/json` – `URIListDocument`
- `text/plain` – CRLF-delimited list of names

Role `_auto_projection_read`

Retrieve all enabled automatic projection rules

GET `/auto-projection/enable`

Retrieves all enabled automatic projection rules.

Produces

- `application/xml`, `application/json` – `URIListDocument`
- `text/plain` – CRLF-delimited list of names

Role `_auto_projection_read`

Retrieve an automatic projection rule

GET `/auto-projection/ (name)`

Retrieves a specific projection rule.

Produces

- `application/xml`, `application/json` – `AutoProjectionRuleDocument`

Role `_auto_projection_read`

Create an automatic projection rule

PUT `/auto-projection/ (name)`

Creates a new projection rule based on the information in the `AutoProjectionRuleDocument`.

Accepts

- `application/xml`, `application/json` – `AutoProjectionRuleDocument`

Role `_auto_projection_write`

Example

```
PUT /auto-projection/testProjection
Content-Type: application/xml

<?xml version="1.0" encoding="UTF-8" standalone="yes"?>
<AutoProjectionRuleDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <step>
    <order>1</order>
    <description>step1 description</description>
    <script>...</script>
  </step>
  <step>
    <order>2</order>
```



```

    <description>step2 description</description>
    <script>...</script>
  </step>
  <description>rule description</description>
  <inputFilters>
    <inputFilter>oldMetadata</inputFilter>
    <inputFilter>shapeDocument</inputFilter>
    <bulkyMetadataKeysRegex>.*</bulkyMetadataKeysRegex>
  </inputFilters>
  <triggers>
    <trigger>itemMetadata</trigger>
    <trigger>shapeMetadata</trigger>
  </triggers>
</AutoProjectionRuleDocument>

```

Delete an automatic projection rule

DELETE `/auto-projection/ (name)`

Deletes the automatic projection rule.

Role `_auto_projection_write`

Disable an automatic projection rule

PUT `/auto-projection/ (name) /disable`

Disables the automatic projection rule.

Role `_auto_projection_write`

Enable an automatic projection rule

PUT `/auto-projection/ (name) /enable`

Enables the automatic projection rule.

Role `_auto_projection_write`

17.16.2 Bulky metadata

Bulky metadata can be used to store large amounts of timed metadata. The metadata is arranged in a key-value fashion, where the key is the quintuple (*field*, start, end, stream, channel).

The metadata is not indexed, but is typically used as a temporary container for metadata that is to be processed later, for example using *auto-projection rules*.

Managing bulky metadata

Both items and shapes can hold bulky metadata.

Insert values in bulk

PUT `/item/ (item-id) /metadata/bulky/`

PUT `/item/ (item-id) /shape/`

`shape-id/metadata/bulky/` Inserts all key-value pairs from a given document.

Accepts

- `application/xml`, `application/json` – `BulkyMetadataDocument`

Role `_metadata_write`

Example

```
PUT /item/VX-250/metadata/bulky
Content-Type: application/xml

<BulkyMetadataDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <field start="3" end="5">
    <key>mykey</key>
    <value>This is the value of mykey for the first interval.</value>
  </field>
  <field start="5" end="9">
    <key>mykey</key>
    <value>This is the value of mykey for the second interval.</value>
  </field>
</BulkyMetadataDocument>
```

Retrieve all keys used in the bulky metadata

GET `/item/ (item-id) /metadata/bulky/`

GET `/item/ (item-id) /shape/`

`shape-id/metadata/bulky/` Retrieves a list of all keys in the bulky metadata.

Produces

- `application/xml`, `application/json` – `URIListDocument`
- `text/plain` – CRLF-delimited list of keys

Role `_metadata_read`

Remove all keys used in the bulky metadata

DELETE `/item/ (item-id) /metadata/bulky/`

DELETE `/item/ (item-id) /shape/`

`shape-id/metadata/bulky/` Removes all the keys in the bulky metadata.

Role `_metadata_write`

Read values

GET `/item/ (item-id) /metadata/bulky/`

`key`

GET `/item/ (item-id) /shape/ shape-id/metadata/bulky/key` Retrieves all values of a certain key over a specified interval. All values for that key can be retrieved by specifying start as “-INF” and end as “+INF”.

Matrix Parameters

- **start** – A *time code* that defines the start of the interval.
- **end** – A *time code* that defines the end of the interval.

Produces

- **application/xml**, **application/json** – `BulkyMetadataDocument`

Role `_metadata_read`

Example

```
GET /item/VX-123/metadata/bulky/mykey;start=-INF;end=+INF
```

```
<BulkyMetadataDocument id="VX-123" xmlns="http://xml.vidispine.com/schema/vidispine">
  <field start="3" end="5">
    <key>mykey</key>
    <value>This is the value of mykey for the first interval.</value>
  </field>
  <field start="5" end="9">
    <key>mykey</key>
    <value>This is the value of mykey for the second interval.</value>
  </field>
</BulkyMetadataDocument>
```

Insert values

PUT `/item/ (item-id) /metadata/bulky/ key`

PUT `/item/ (item-id) /shape/ shape-id/metadata/bulky/key` Inserts a value at the specified interval for the given key. If the key already has a value at that specific interval then that value will be overwritten.

Matrix Parameters

- **start** – A *time code* that defines the start of the interval.
- **end** – A *time code* that defines the end of the interval.
- **stream** – The stream index (optional).
- **channel** – The audio channel index (optional).
- **itemTrack** – The track in the item (optional).

Accepts

- **text/plain** – The value to set.

Role `_metadata_write`

Example

```
PUT /item/VX-123/metadata/bulky/mykey;start=3;end=5
Content-Type: text/plain
```

```
This is the value of mykey for the first interval.
```

```
PUT /item/VX-123/metadata/bulky/mykey;start=5;end=9
Content-Type: text/plain
```

```
This is the value of mykey for the second interval.
```

Remove values

```
DELETE /item/ (item-id) /metadata/bulky/
      key
```

```
DELETE /item/ (item-id) /shape/
      shape-id/metadata/bulky/key Removes all the values for a certain key over the specified interval.
```

Matrix Parameters

- **start** – A *time code* that defines the start of the interval.
- **end** – A *time code* that defines the end of the interval.

Role _metadata_write

17.16.3 Global metadata

Global metadata is metadata that is not associated with any item or collection. It can primarily be used as a reference, for example holding a field that is referenced from many items.

Retrieving the global metadata

```
GET /metadata
```

Retrieves the global metadata.

Matrix Parameters

- **interval** – Comma-separated list
 - *time-span* - Filter out metadata, return only metadata for specified *time span*.
 - *generic* - Return all non-timed metadata.
 - *all* (default) - Return all metadata, same as `interval=generic,-INF-+INF`
- **field** – Comma-separated list.
 - *field-name* - Return specified field.
 - *field-name* ":" *new-name* - Return specified field, renamed to a new name in return value.
 - "-" *field-name* - Exclude specified field.
 - (default) - Return all fields.
- **group** – Comma-separated list.

- *group-name* - Return specified group.
- *group-name +* - Return specified group and subgroups.
New in version 4.1.
- *group-name : new-name* - Return specified group, renamed to a new name in return value.
- *- group-name* - Exclude specified group.
- (default) - Return all groups.
- **track** – Comma separated list.
 - *track-type track-number* - Return metadata for specified track. Example of track is A2.
 - *track-type t1 - t2* - Return metadata for specified track interval, e.g. A2-4.
 - *track-type ** - Return metadata for all tracks of specified type, e.g. A*.
 - *generic* - Return all non-tracked metadata.
 - *all* (default) - All metadata, with or without track specification, are returned.
- **language** – Comma separated list.
 - *language-tag* - Return metadata for specific language, e.g. en_US. Wildcards may be used, e.g. *_CA for both Canadian French and Canadian English.
 - *none* - Return all metadata without language specification.
 - *all* (default) - Return all metadata, with or without language specification.
- **samplerate** – Convert all outgoing *time instants* to specified rate. *NB! Time codes* which cannot be expressed in an integer number of samples will be returned as a decimal number, with risk of losing precision.
- **conflict** –
 - *yes* (default) - Include all metadata conflicts, unresolved.
 - *no* - Return conflicts resolved according to field rules.
- **include** – A list of keys. Includes additional *field specific data*. Additionally, if set to *type* the type definition of the field will be retrieved.
- **defaultValue** –
 - *true* - For unset fields, return *default values*.
 - *false* (default) - Do not return default values.
- **includeConstraintValue** – Optional comma separated value, specifying a list of fields whose “display value” should be retrieved from the *metadata dataset*. (New in 4.13.)
 - *all* (default) - Return the “display value” of all fields.
 - *none* - No “display value” will be returned. The fields will only have *id* set.
 - *comma separated field names* - Return the “display value” of the specified fields.

Produces

- **application/xml, application/json** – *MetadataDocument*

Role `_metadata_global_read`

Modifying the global metadata

PUT /metadata

Modifies the global metadata. This resource shares the same query and matrix parameters as the item metadata resource.

Query Parameters

- **revision** – The known revision. If not specified, the change set will attempt to override existing change sets.
- **skipForbidden** – Skip fields or groups that the user doesn't have write access to.
- **onlyReturnChanges** – New in version 4.16.6.
 - `true` - Only return the changed entries.
 - `false` (default) - Return the whole global metadata after the update.

Accepts

- `application/xml`, `application/json` – `MetadataDocument`

Produces

- `application/xml`, `application/json` – `MetadataDocument`

Retrieving metadata by UUID

GET /metadata/(uuid)

Retrieves the metadata entry that matches the UUID.

Produces

- `application/xml`, `application/json` – `MetadataEntryDocument`

Role `_metadata_global_read`

Example

```
GET /metadata/c3dc7918-9316-4fef-b4fc-ff2b0149e854
```

```
<MetadataEntryDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <field uuid="c3dc7918-9316-4fef-b4fc-ff2b0149e854" user="system" timestamp="2011-01-
  ↪10T10:00:54.845+01:00" change="VX-7">
    <name>originalVideoCodec</name>
    <value uuid="199255d8-59ec-421e-9c7b-757c46c92b14" user="system" timestamp="2011-
  ↪01-10T10:00:54.845+01:00" change="VX-7">h264</value>
  </field>
</MetadataEntryDocument>
```

```
GET /metadata/199255d8-59ec-421e-9c7b-757c46c92b14
```

```
<MetadataEntryDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <value uuid="199255d8-59ec-421e-9c7b-757c46c92b14" user="system" timestamp="2011-01-
  ↪10T10:00:54.845+01:00" change="VX-7">h264</value>
</MetadataEntryDocument>
```

Removing metadata by UUID

DELETE `/metadata/` (*uuid*)

Removes the metadata with the specified UUID.

Role `_metadata_global_write`

Example

```
DELETE /metadata/6fba17bb-ed52-43ab-86b7-07f5494e deed
```

```
200 OK
```

17.16.4 Document metadata

New in version 4.2.3.

Document metadata is similar to global metadata but instead of having a single, large global metadata document, it could be spread to multiple, small documents. This to reduce the size of the metadata and to improve performance.

Retrieve a list of all documents

GET `/document`

Retrieves the list of metadata documents.

Matrix Parameters

- **first** – Optional integer. Return documents from that number in the document list. Default is 1.
- **number** – Optional integer. Return at most that number of documents. Default is 100.

Produces

- `application/xml`, `application/json` – *DocumentListDocument*

Role `_document_read`

Example

```
GET /document
```

```
<?xml version="1.0" ?>
<DocumentListDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <document>
    <name>producer</name>
    <uri>http://localhost:8080/API/document/producer</uri>
  </document>
  <document>
    <name>editor</name>
    <uri>http://localhost:8080/API/document/editor</uri>
  </document>
</DocumentListDocument>
```

Retrieve a document by name

GET /document/ (*name*)

Retrieves the document with the specified name. This resource shares the same query and matrix parameters as the *item metadata resource*.

Matrix Parameters

- **interval** – Comma-separated list
 - *time-span* - Filter out metadata, return only metadata for specified *time span*.
 - *generic* - Return all non-timed metadata.
 - *all* (default) - Return all metadata, same as *interval=generic, -INF--+INF*
- **field** – Comma-separated list.
 - *field-name* - Return specified field.
 - *field-name* ":" *new-name* - Return specified field, renamed to a new name in return value.
 - "-" *field-name* - Exclude specified field.
 - (default) - Return all fields.
- **group** – Comma-separated list.
 - *group-name* - Return specified group.
 - *group-name* + - Return specified group and subgroups.
New in version 4.1.
 - *group-name* : *new-name* - Return specified group, renamed to a new name in return value.
 - - *group-name* - Exclude specified group.
 - (default) - Return all groups.
- **track** – Comma separated list.
 - *track-type track-number* - Return metadata for specified track. Example of track is A2.
 - *track-type t1 - t2* - Return metadata for specified track interval, e.g. A2-4.
 - *track-type ** - Return metadata for all tracks of specified type, e.g. A*.
 - *generic* - Return all non-tracked metadata.
 - *all* (default) - All metadata, with or without track specification, are returned.
- **language** – Comma separated list.
 - *language-tag* - Return metadata for specific language, e.g. en_US. Wildcards may be used, e.g. *_CA for both Canadian French and Canadian English.
 - *none* - Return all metadata without language specification.
 - *all* (default) - Return all metadata, with or without language specification.
- **samplerate** – Convert all outgoing *time instants* to specified rate. *NB! Time codes* which cannot be expressed in an integer number of samples will be returned as a decimal number, with risk of losing precision.
- **conflict** –
 - *yes* (default) - Include all metadata conflicts, unresolved.

- no - Return conflicts resolved according to field rules.
- **include** – A list of keys. Includes additional *field specific data*. Additionally, if set to type the type definition of the field will be retrieved.
- **defaultValue** –
 - true - For unset fields, return *default values*.
 - false (default) - Do not return default values.

Produces

- **application/xml**, **application/json** – `MetadataDocument`

Role `_document_read`

Example

```
GET /document/editor
```

```
<?xml version="1.0" ?>
<MetadataDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <revision>VX-20383</revision>
  <timespan end="+INF" start="-INF">
    <field change="VX-20383" timestamp="2014-11-18T10:29:45.166+01:00" user="admin"
    ↪ uid="ff48980c-6431-4234-83ac-bd8d0af9462d">
      <name>editor_name</name>
      <value change="VX-20383" timestamp="2014-11-18T10:29:45.166+01:00" user=
    ↪ "admin" uid="5b9929ba-cce9-43eb-b63b-62a2426b9891">Bob</value>
    </field>
  </timespan>
</MetadataDocument>
```

Create/modify a document

```
PUT /document/ (name)
```

Creates a new or modifies the existing document with the specified name.

Query Parameters

- **revision** – The known revision. If not specified, the change set will attempt to override existing change sets.
- **skipForbidden** – Skip fields or groups that the user doesn't have write access to.

Accepts

- **application/xml**, **application/json** – `MetadataDocument`

Produces

- **application/xml**, **application/json** – `MetadataDocument`

Role `_document_read`

Example

```
PUT /document/editor
```

```
<?xml version="1.0" encoding="UTF-8"?>
<MetadataDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <timespan start="-INF" end="+INF">
    <field>
      <name>editor_name</name>
      <value>Bob</value>
    </field>
  </timespan>
</MetadataDocument>
```

Response:

```
<?xml version="1.0" ?>
<MetadataDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <revision>VX-20424</revision>
  <timespan end="+INF" start="-INF">
    <field change="VX-20424" timestamp="2014-11-18T13:36:46.130+01:00" user="admin
↪" uuid="6279f922-621b-4f0a-b09c-41586736eb9e">
      <name>title</name>
      <value change="VX-20424" timestamp="2014-11-18T13:36:46.130+01:00" user=
↪"admin" uuid="0c662ed2-6623-45ac-9272-b6abc232488e">Bob</value>
    </field>
  </timespan>
</MetadataDocument>
```

View change sets

GET /document/(name)/changes

Retrieves all change sets that have been applied to the document.

Query Parameters

- **change** – An optional parameter to retrieve a single change set.
- **first** – Optional integer. Return change sets from that number in the list of sorted change sets. Default is 1.
- **number** – Optional integer. Return at most that number of change sets. Default is all change sets.

Response Headers

- **Link** – Contains URLs to the previous, next, first and last pages.

Produces

- **application/xml**, **application/json** – [MetadataChangeSetDocument](#)

Role _document_read

Example

GET `/document/editor/changes`

```

<?xml version="1.0" ?>
<MetadataChangeSetDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <changeSet>
    <id>VX-20381</id>
    <metadata>
      <revision>VX-20380</revision>
      <timespan end="+INF" start="-INF">
        <field change="VX-20381" timestamp="2014-11-18T10:27:31.192+01:00"
↵ user="admin" uuid="7d1032a5-2ced-42ce-a553-1fbbaf2faeef">
          <name>editor_name</name>
          <value change="VX-20381" timestamp="2014-11-18T10:27:31.192+01:00
↵" user="admin" uuid="c0426f6f-f1f0-4729-aaef-43a7f3b5bbfa">alice</value>
        </field>
      </timespan>
    </metadata>
  </changeSet>
  <changeSet>
    <id>VX-20382</id>
    <metadata>
      <revision>VX-20381</revision>
      <timespan end="+INF" start="-INF">
        <field change="VX-20382" timestamp="2014-11-18T10:27:31.229+01:00"
↵ user="admin" uuid="7d1032a5-2ced-42ce-a553-1fbbaf2faeef">
          <name>editor_name</name>
          <value change="VX-20382" timestamp="2014-11-18T10:27:31.229+01:00
↵" user="admin" uuid="281d6f83-a624-4fa0-81fd-debe0e8bdf68">Bob</value>
        </field>
      </timespan>
    </metadata>
  </changeSet>
</MetadataChangeSetDocument>

```

Remove a document

DELETE `/document/` (*name*)

Removes the metadata document with the specified name.

Role `_document_write`

17.16.5 Key-value metadata

Some resources support basic key-value metadata (not to be confused with *item metadata*). This metadata is not indexed nor is it revision controlled. The role required to use the metadata depends on the resource.

Changed in version 4.16: Support for key-value metadata was added to shape-tags, libraries and task-definitions.

Changed in version 4.12: Keys can now be hierarchical, meaning the key can include the slash character.

Supported resources

The resources that support key-value metadata can be seen in the table below. These are referred to as {key-value-metadata-resource} the the definitions below.

Resource	URI	Read role	Write role
<i>Groups</i>	/group/{group-name}/metadata	_group_read	_group_write
<i>Users</i>	/user/{username}/metadata	_administrator	_administrator
<i>Storages</i>	/storage/{storage-id}/metadata	_storage_read	_storage_write
<i>Storage methods</i>	/storage/{storage-id}/method/{method-id}/metadata		_storage_write
<i>Storage groups</i>	/storage/storage-group/{storagegroup-name}/metadata	_storage_group_read	_storage_group_write
<i>Metadata fields</i>	/metadata-field/{field-name}/metadata	_metadata_field_read	_metadata_field_write
<i>Metadata field groups</i>	/metadata-field/field-group/{group-name}/metadata	_metadata_field_group_read	_metadata_field_group_write
<i>Shapes</i>	/item/{item-id}/shape/{shape-id}/metadata	_shape_read	_shape_write
<i>Shape components</i>	/item/{item-id}/shape/{shape-id}/component/{component-id}/metadata		
<i>Files</i>	/storage/{storage-id}/file/{file-id}/metadata	_file_read	_file_write
<i>Task groups</i>	/task-group/{groupname}/metadata	_administrator	_administrator
<i>Libraries</i>	/library/{library-id}/metadata	_library_read	_library_write
<i>Shape tags</i>	/shape-tag/{tag-name}/metadata	_shape_tag_read	_shape_tag_write
<i>Task definitions</i>	/task-definition/{task-id}/metadata	_taskdefinition_read	_taskdefinition_write

Managing key-value metadata

Retrieving all metadata

GET {key-value-metadata-resource}

Retrieves all key-value pairs associated with the specified entity.

Produces

- **application/xml**, **application/json** – A `SimpleMetadataDocument` containing all key-value pairs.

Example

```
GET /user/myuser/metadata
```

```
<SimpleMetadataDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <field>
    <key>occupation</key>
    <value>developer</value>
  </field>
  <field>
    <key>location</key>
```

```
<value>London</value>
</field>
</SimpleMetadataDocument>
```

Retrieving all metadata for a subtree

New in version 4.12.

GET {~~key-value-metadata-resource~~} / (*keypath*)

Retrieves all key-value pairs associated with the specified key path. The key path can contain `*` for a wildcard segment, or `**` for any number of arbitrary segments.

Produces

- `application/xml`, `application/json` – A `SimpleMetadataDocument` containing all key-value pairs matching.

Example

```
GET /user/myuser/metadata/**/id
```

Setting multiple key-value pairs

PUT {~~key-value-metadata-resource~~}

Sets all the specified key-value pairs.

Accepts

- `application/xml`, `application/json` – `SimpleMetadataDocument`

PUT {~~key-value-metadata-resource~~} / (*prefix*)

Sets all the specified key-value pairs, prefixed by key path. Key path may not contain wildcards.

New in version 4.12.

Accepts

- `application/xml`, `application/json` – `SimpleMetadataDocument`

Example

```
PUT /user/myuser/metadata
Content-Type: application/xml

<SimpleMetadataDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <field>
    <key>occupation</key>
    <value>developer</value>
  </field>
  <field>
    <key>location</key>
    <value>London</value>
  </field>
</SimpleMetadataDocument>
```

```
200 OK
```

Clearing all key-value pairs

DELETE {~~key-value-metadata-resource~~}
Clears all key-value pairs for the specified entity.

Example

```
DELETE /user/myuser/metadata
```

```
200 OK
```

Retrieving the metadata for a specific key

GET {~~key-value-metadata-resource~~}/ (*keypath*)
Retrieves the value of a specific key. If a key path is specified, exactly one key-value pair must match the key path, else an error is returned.

Changed in version 4.12: Key paths can now be specified as well as specific keys.

Produces

- **text/plain** – The raw string value.

Example

```
GET /user/myuser/metadata/location
```

```
London
```

Setting the value for a specific key

PUT {~~key-value-metadata-resource~~}/ (*keypath*)
Sets the value for a specific key. The key path may not contain wildcards.

Accepts

- **text/plain** – The raw string value.

Example

```
PUT /user/myuser/metadata/location  
Content-Type: text/plain  
  
Stockholm
```

```
200 OK
```

Delete key-value pairs

DELETE {**key-value-metadata-resource**} / (*keypath*)

Deletes the key-value pair with the specified key. If a key path is given, it may include wildcards for deleting multiple keys.

Changed in version 4.12: Key paths can now be specified as well as specific keys.

Example

```
DELETE /user/myuser/metadata/location
```

```
200 OK
```

17.16.6 Metadata

This page describes metadata related resources for item and collection.

In the following reference, {*metadata-entity*} is one of the following:

- /item
- /collection

Changed in version 4.5: Collections now support the metadata operations listed here.

Get metadata for an entity

Get metadata

GET {**metadata-entity**} / (*entity-id*) / **metadata**

Returns the *metadata set* for an entity. This means all metadata change sets, combined, and then filtered according to matrix parameters.

Conflicts are normally returned with all possible values. With *conflict=no*, a user interface may choose to receive only one value; i.e., automatic conflict resolution will be enforced. The conflict resolution is only applied to the returned XML document, not to metadata in database.

Matrix Parameters

- **projection** – (only supported in item metadata)
Return metadata set according to projection. Default projection is *default*.
- **interval** – Comma-separated list
 - *time-span* - Filter out metadata, return only metadata for specified *time span*.
 - *generic* - Return all non-timed metadata.
 - *all* (default) - Return all metadata, same as *interval=generic, -INF-+INF*
- **starttc** –

- `true` - Interval is given relative to start timecode of item.
- `false` (default) - Interval is 0-based.
- **field** – Comma-separated list.
 - `field-name` - Return specified field.
 - `field-name ":" new-name` - Return specified field, renamed to a new name in return value.
 - `"-" field-name` - Exclude specified field.
 - (default) - Return all fields.
- **group** – Comma-separated list.
 - `group-name` - Return specified group.
 - `group-name +` - Return specified group and subgroups.
 - New in version 4.1.
 - `group-name : new-name` - Return specified group, renamed to a new name in return value.
 - `- group-name` - Exclude specified group.
 - (default) - Return all groups.
- **track** – Comma separated list.
 - `track-type track-number` - Return metadata for specified track. Example of track is A2.
 - `track-type t1 - t2` - Return metadata for specified track interval, e.g. A2-4.
 - `track-type *` - Return metadata for all tracks of specified type, e.g. A*.
 - `generic` - Return all non-tracked metadata.
 - `all` (default) - All metadata, with or without track specification, are returned.
- **language** – Comma separated list.
 - `language-tag` - Return metadata for specific language, e.g. `en_US`. Wildcards may be used, e.g. `*_CA` for both Canadian French and Canadian English.
 - `none` - Return all metadata without language specification.
 - `all` (default) - Return all metadata, with or without language specification.
- **conflict** –
 - `yes` (default) - Include all metadata conflicts, unresolved.
 - `no` - Return conflicts resolved according to field rules.
- **samplerate** – Convert all outgoing *time instants* to specified rate. *NB!* *Time codes* which cannot be expressed in an integer number of samples will be returned as a decimal number, with risk of losing precision.
- **revision** – A *change-set-id*, retrieves metadata the way it looked at the given revision.
- **terse** – (only supported in item metadata)
 - `yes` - Return metadata in *terse format*
 - `no` (default) - Return metadata in verbose format
- **include** – A list of keys. Includes additional *field specific data*. Additionally, if set to `type` the type definition of the field will be retrieved.

- **defaultValue** –
 - `true` - For unset fields, return *default values*.
 - `false` (default) - Do not return default values.
- **from** – (only supported in item metadata)

A timestamp value. Return metadata starting from the specific timestamp (inclusive)
- **to** – (only supported in item metadata)

A timestamp value. Return metadata until the specific timestamp (non-inclusive)
- **includeConstraintValue** – Optional comma separated value, specifying a list of fields whose “display value” should be retrieved from the *metadata dataset*. (New in 4.13.)
 - `all` (default) - Return the “display value” of all fields.
 - `none` - No “display value” will be returned. The fields will only have `id` set.
 - *comma separated field names* - Return the “display value” of the specified fields.

Query Parameters

- **includeTransientMetadata** –
 - `true` (default) - Include *transient metadata*.
 - `false` - Do not include transient metadata in response.

Produces

- **application/xml, application/json** –
 - `MetadataListDocument` for items
 - `MetadataDocument` for collections
 - or according to specified outgoing projection

Role `_metadata_read`

Examples

```
GET /item/VX-7888/metadata;field=audio-comments:comment;track=A3;interval=40-60;
↪samplerate=PAL;language=en
```

```
<MetadataListDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <item id="VX-7888">
    <metadata>
      <timespan start="1000/PAL" end="1250/PAL">
        <field>
          <name>comment</name>
          <value lang="en_US" user="joed" site="VY" timestamp="2009-10-
↪11T11:36:30.330+02:00">Music</value>
        </field>
      </timespan>
      <timespan start="1250/PAL" end="1500/PAL">
        <field conflict="yes">
          <name>comment</name>
          <value lang="en_US" user="joed" site="VY" timestamp="2009-10-
↪11T11:36:34.527+02:00">Congressman Smith</value>
          <value lang="en_US" user="bigc" site="VX" timestamp="2009-10-
↪11T11:32:30.330+02:00">Congressman Smythe</value>
        </field>
      </timespan>
    </metadata>
  </item>
</MetadataListDocument>
```

```

        </field>
      </timespan>
    </metadata>
  </item>
</MetadataListDocument>

```

```
GET /item/VX-7888/metadata;track=A3;interval=1000/25-1500/25;conflict=no
```

```

<MetadataListDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <metadata>
    <item id="VX-7888">
      <timespan start="1000/25" end="1250/25">
        <field>
          <name>audio-comments</name>
          <value lang="en_US" user="joed" site="VY" timestamp="2009-10-
↪11T11:36:30.330+02:00">Music</value>
          <value lang="sv_SE" user="karin" site="VS" timestamp="2009-10-
↪11T14:11:14.888+02:00">Musik</value>
        </field>
      </timespan>
      <timespan start="1250/25" end="1500/25">
        <field conflict="yes">
          <name>audio-comments</name>
          <value lang="en_US" user="joed" site="VY" timestamp="2009-10-
↪11T11:36:34.527+02:00">Congressman Smith</value>
          <value lang="sv_SE" user="karin" site="VS" timestamp="2009-10-
↪11T14:13:10.100+02:00">Kongressledamot Smith</value>
        </field>
      </timespan>
    </item>
  </metadata>
</MetadataListDocument>

```

Manipulating change sets

Add a metadata change set

PUT {metadata-entity}/(entity-id)/metadata

Sets the metadata for an entity, or, more specifically, creates a metadata *change set* for an entity.

The metadata change set binds to different intervals, tracks, and languages, which can be specified either in the URL or in the XML. Providing an empty timespan or an empty field will be interpreted as the removal of any existing element that matches. Fields specified by the system will not be removed by this action.

The revision can either be specified in the input XML/JSON or as a query parameter. If it is not set at all, it will attempt to override any existing values.

Query Parameters

- **revision** – The known revision. If not specified, the change set will attempt to override existing change sets.
- **skipForbidden** – Skip fields or groups that the user doesn't have write access to.
- **onlyReturnChanges** – New in version 4.16.6.
 - `true` - Only return the changed entries.

- `false` (default) - Return the whole global metadata after the update.

Matrix Parameters

- **projection** – (only supported in item metadata)
Sets metadata set according to projection. Default projection is `default`
- **output-projection** – (only supported in item metadata)
Returns metadata according to projection. Default projection is `default`

Status Codes

- **400** – Invalid input.
- **404** – Invalid id.

Accepts

- **application/json, application/xml** – [MetadataDocument](#) or according to specified projection

Produces

- **application/xml, application/json** –
 - [MetadataListDocument](#) for items
 - [MetadataDocument](#) for collections
 - or according to specified outgoing projection

Role `_metadata_write`

Moving metadata

PUT `{metadata-entity}/(entity-id)/metadata/move`

Moves the specified field or group from one timespan to another. There are some restrictions to this operation:

1. Only top-level elements can be moved, i. e. no groups or fields that belongs to a group can be moved.
2. All conflicts for the specified element must first be resolved before moving it.
3. If moving a field, it cannot be set as sortable.
4. If moving a field, it cannot be system specified.

Query Parameters

- **start** – The new start *time code*
- **end** – The new end *time code*
- **uuid** – The UUID of the element.

Status Codes

- **400** – Invalid input.
- **404** – Invalid id.

Produces

- **application/xml, application/json** – [MetadataDocument](#)

Role `_metadata_write`

Example

Retrieving the current metadata and checking the UUID of the top-level group element.

```
GET /item/VX-7620/metadata
```

```
<MetadataDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <timespan end="18" start="17">
    <group change="VX-16293" timestamp="2010-09-07T16:41:09.045+02:00" user="admin"
    ↪uid="96635ac0-1242-496b-ae14-100de8934a2c">
      <name>myfieldgroup</name>
      <group change="VX-16293" timestamp="2010-09-07T16:41:09.045+02:00" user=
    ↪"admin" uid="eada6004-7b7e-4000-8707-d6797ed27d72">
        <name>myfieldgroup</name>
        <field change="VX-16293" timestamp="2010-09-07T16:41:09.045+02:00" user=
    ↪"admin" uid="03a37ea1-ab96-4c15-af6d-9a0efcac97f0">
          <name>title</name>
          <value change="VX-16293" timestamp="2010-09-07T16:41:09.045+02:00"
    ↪user="admin" uid="fa205556-f2cc-4456-8e54-075828e9da81">This is my title.</value>
        </field>
      </group>
    </group>
  </timespan>
</MetadataDocument>
```

Moving the top-level element to the timespan (-INF, +INF):

```
PUT /item/VX-7620/metadata/move?uid=96635ac0-1242-496b-ae14-100de8934a2c&start=-INF&
    ↪end=%2BINF
```

Content-Type: application/xml

```
<MetadataDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <timespan end="+INF" start="-INF">
    <group change="VX-16293" timestamp="2010-09-07T16:41:09.045+02:00" user="admin"
    ↪uid="96635ac0-1242-496b-ae14-100de8934a2c">
      <name>myfieldgroup</name>
      <group change="VX-16293" timestamp="2010-09-07T16:41:09.045+02:00" user=
    ↪"admin" uid="eada6004-7b7e-4000-8707-d6797ed27d72">
        <name>myfieldgroup</name>
        <field change="VX-16293" timestamp="2010-09-07T16:41:09.045+02:00" user=
    ↪"admin" uid="03a37ea1-ab96-4c15-af6d-9a0efcac97f0">
          <name>title</name>
          <value change="VX-16293" timestamp="2010-09-07T16:41:09.045+02:00"
    ↪user="admin" uid="fa205556-f2cc-4456-8e54-075828e9da81">This is my title.</value>
        </field>
      </group>
    </group>
  </timespan>
</MetadataDocument>
```

Viewing change sets

```
GET {metadata-entity}/(entity-id)/metadata/changes
```

Retrieves change sets that have been applied to the metadata.

Query Parameters

- **change** – An optional parameter to retrieve a single change set.
- **first** – Optional integer. Return change sets from that number in the list of sorted change sets. Default is 1.
- **number** – Optional integer. Return at most that number of change sets. Default is all change sets.

Status Codes

- **404** – Could not find the entity.

Response Headers

- **Link** – Contains URLs to the previous, next, first and last pages.

Produces

- **application/xml**, **application/json** – `MetadataChangeSetDocument`

Role `_metadata_read`

Example

```
GET item/VX-250/metadata/changes
```

```
<MetadataChangeSetDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <changeSet>
    <id>VX-30</id>
    <metadata>
      <revision>VX-30</revision>
      <timespan start="-INF" end="+INF">
        <field>
          <name>durationSeconds</name>
          <value user="system" timestamp="2010-03-19T09:08:09.563+01:00" change="VX-30
↔">232.32</value>
        </field>
        <field>
          <name>durationTimeCode</name>
          <value user="system" timestamp="2010-03-19T09:08:09.576+01:00" change="VX-30
↔">232320000@1000000</value>
        </field>
      </timespan>
    </metadata>
  </changeSet>
  <changeSet>
    <id>VX-31</id>
    <metadata>
      <revision>VX-31</revision>
      <timespan start="-INF" end="+INF">
        <field>
          <name>title</name>
          <value user="admin" timestamp="2010-03-19T09:16:25.454+01:00" change="VX-31
↔">ul's title</value>
        </field>
      </timespan>
    </metadata>
  </changeSet>
  <changeSet>
    <id>VX-32</id>
```

```

<metadata>
  <revision>VX-32</revision>
  <timespan start="-INF" end="+INF">
    <field>
      <name>title</name>
      <value user="admin" timestamp="2010-03-19T09:16:56.419+01:00" change="VX-32
↪">u2's title</value>
    </field>
  </timespan>
</metadata>
</changeSet>
<changeSet>
  <id>VX-33</id>
  <metadata>
    <revision>VX-33</revision>
    <timespan start="-INF" end="+INF">
      <field>
        <name>title</name>
        <value user="admin" timestamp="2010-03-19T09:21:28.692+01:00" change="VX-33
↪">u1's and u2's title</value>
      </field>
    </timespan>
  </metadata>
</changeSet>
</MetadataChangeSetDocument>

```

Viewing a specific change set

GET `{metadata-entity}/(entity-id)/metadata/changes/changeset-id` Retrieves a specific change set.

Status Codes

- **404** – Could not find the entity or the change set.

Produces

- **application/xml**, **application/json** – A `MetadataChangeSetDocument` containing the metadata from the change.

Role `_metadata_read`

Comparing change sets

New in version 4.0.

GET `{metadata-entity}/(entity-id)/metadata/changes/changeset-id/compareTo/previous`

GET `{metadata-entity}/(entity-id)/metadata/changes/changeset-id/compareTo/from-changeset-id` Retrieves a metadata document containing the differences between the entity metadata as of revision `changeset-id` compared to the metadata as of revision `from-changeset-id`.

The `mode` attribute is used to indicate if a field, field group or value has been added or removed.

Note: This should be seen as a diff between the metadata as it was between the two revisions, meaning that for example fields or field groups that have been added and then removed in between will not be shown.

Query Parameters

- **valuesByUuid** – If `true` (default) then field values will be compared by uuid, if false then by the value itself.

Matrix Parameters

- **interval** – Comma-separated list
 - *time-span* - Filter out metadata, return only metadata for specified *time span*.
 - *generic* - Return all non-timed metadata.
 - *all* (default) - Return all metadata, same as `interval=generic,-INF-+INF`
- **field** – Comma-separated list.
 - *field-name* - Return specified field.
 - *field-name* ":" *new-name* - Return specified field, renamed to a new name in return value.
 - "-" *field-name* - Exclude specified field.
 - (default) - Return all fields.
- **group** – Comma-separated list.
 - *group-name* - Return specified group.
 - *group-name* + - Return specified group and subgroups.
New in version 4.1.
 - *group-name* : *new-name* - Return specified group, renamed to a new name in return value.
 - - *group-name* - Exclude specified group.
 - (default) - Return all groups.
- **track** – Comma separated list.
 - *track-type track-number* - Return metadata for specified track. Example of track is A2.
 - *track-type t1 - t2* - Return metadata for specified track interval, e.g. A2-4.
 - *track-type ** - Return metadata for all tracks of specified type, e.g. A*.
 - *generic* - Return all non-tracked metadata.
 - *all* (default) - All metadata, with or without track specification, are returned.
- **language** – Comma separated list.
 - *language-tag* - Return metadata for specific language, e.g. `en_US`. Wildcards may be used, e.g. `*_CA` for both Canadian French and Canadian English.
 - *none* - Return all metadata without language specification.
 - *all* (default) - Return all metadata, with or without language specification.
- **samplerate** – Convert all outgoing *time instants* to specified rate. *NB!* *Time codes* which cannot be expressed in an integer number of samples will be returned as a decimal number, with risk of losing precision.
- **conflict** –
 - *yes* (default) - Include all metadata conflicts, unresolved.
 - *no* - Return conflicts resolved according to field rules.

- **include** – A list of keys. Includes additional *field specific data*. Additionally, if set to type the type definition of the field will be retrieved.
- **defaultValue** –
 - true - For unset fields, return *default values*.
 - false (default) - Do not return default values.

Status Codes

- **404** – Could not find the item.

Produces

- **application/xml**, **application/json** – `MetadataDocument`

Role `_metadata_read`

Example

Retrieving the current metadata of the item:

```
GET /item/VX-250/metadata/
```

```
<MetadataListDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <item id="VX-12621">
    <metadata>
      <revision>VX-41277,VX-41278</revision>
      <timespan end="+INF" start="-INF">
        <field change="VX-41277" timestamp="2013-04-17T15:20:44.686+02:00" user=
↪"system" uuid="6ddc9537-8c10-46ff-9ed8-5f12bedc589a">
          <name>itemId</name>
          <value change="VX-41277" timestamp="2013-04-17T15:20:44.686+02:00"
↪user="system" uuid="d26312bf-e240-4534-9695-670be5c7bb76">VX-12621</value>
        </field>
        <field change="VX-41277" timestamp="2013-04-17T15:20:44.686+02:00" user=
↪"system" uuid="048ebf22-43b7-4979-abe0-8aa5c12363ad">
          <name>created</name>
          <value change="VX-41277" timestamp="2013-04-17T15:20:44.686+02:00"
↪user="system" uuid="8eeb6df4-92f4-4d94-96be-ad1b8dd7a06b">2013-04-17T13:20:44.512Z</
↪value>
        </field>
      </timespan>
    </metadata>
  </item>
</MetadataListDocument>
```

Set the item title:

```
PUT /item/VX-250/metadata/
Content-Type: application/xml

<MetadataDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <timespan start="-INF" end="+INF">
    <field>
      <name>title</name>
      <value>New title</value>
    </field>
```



```
</timespan>
</MetadataDocument>
```

```
<?xml version="1.0" encoding="UTF-8" standalone="no"?>
<MetadataListDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <item>
    <metadata>
      <revision>VX-41277,VX-41278,VX-41279</revision>
      <timespan end="+INF" start="-INF">
        <field change="VX-41279" timestamp="2013-04-17T15:24:00.907+02:00" user=
↪ "admin" uuid="2332c696-b3c8-4a55-9d37-437043258411">
          <name>title</name>
          <value change="VX-41279" timestamp="2013-04-17T15:24:00.907+02:00"
↪ user="admin" uuid="dd139c76-86cf-4826-9037-892c928818d9">New title</value>
        </field>
        <field change="VX-41277" timestamp="2013-04-17T15:20:44.686+02:00" user=
↪ "system" uuid="6ddc9537-8c10-46ff-9ed8-5f12bedc589a">
          <name>itemId</name>
          <value change="VX-41277" timestamp="2013-04-17T15:20:44.686+02:00"
↪ user="system" uuid="d26312bf-e240-4534-9695-670be5c7bb76">VX-12621</value>
        </field>
        <field change="VX-41277" timestamp="2013-04-17T15:20:44.686+02:00" user=
↪ "system" uuid="048ebf22-43b7-4979-abe0-8aa5c12363ad">
          <name>created</name>
          <value change="VX-41277" timestamp="2013-04-17T15:20:44.686+02:00"
↪ user="system" uuid="8eeb6df4-92f4-4d94-96be-ad1b8dd7a06b">2013-04-17T13:20:44.512Z</
↪ value>
        </field>
      </timespan>
    </metadata>
  </item>
</MetadataListDocument>
```

Retrieving the changes since the last update:

```
GET item/VX-250/metadata/changes/VX-41279/compareTo/previous
```

```
<?xml version="1.0" encoding="UTF-8" standalone="yes"?>
<MetadataDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <timespan start="-INF" end="+INF">
    <field uuid="2332c696-b3c8-4a55-9d37-437043258411" user="admin" timestamp="2013-
↪ 04-17T15:24:00.907+02:00" change="VX-41279" mode="add">
      <name>title</name>
      <value uuid="dd139c76-86cf-4826-9037-892c928818d9">New title</value>
    </field>
  </timespan>
</MetadataDocument>
```

Modifying a single change set

PUT `{metadata-entity}/(entity-id)/metadata/changes/changeset-id` Replaces the contents of a change set with the specified id with the metadata given in the document.

Status Codes

- **404** – Could not find the item or the change set.

Accepts

- `application/xml`, `application/json` – A `MetadataDocument` containing the new version of the change set.

Produces

- `application/xml`, `application/json` – A `MetadataDocument` containing the metadata of the item.

Role `_metadata_write`

Example

Retrieving the current metadata of the item:

```
GET item/VX-250/metadata/
```

```
<MetadataListDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <item id="VX-250">
    <metadata>
      <revision>VX-15930</revision>
      <timespan end="+INF" start="-INF">
        <name>durationSeconds</name>
        <value change="VX-15930" timestamp="2010-07-02T10:36:20.317+02:00"
↪user="system">14.118</value>
        </field>
        <field>
          <name>durationTimeCode</name>
          <value change="VX-15930" timestamp="2010-07-02T10:36:20.317+02:00"
↪user="system">14118000@1000000</value>
        </field>
      </timespan>
    </metadata>
  </item>
</MetadataListDocument>
```

Inserting some metadata:

```
PUT /item/VX-250/metadata/
Content-Type: application/xml
```

```
<MetadataDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <timespan end="8" start="5">
    <field>
      <name>title</name>
      <value lang="en_US">My title!</value>
    </field>
    <field>
      <name>my_field</name>
      <value lang="en_US">4</value>
    </field>
  </timespan>
</MetadataDocument>
```

```
<MetadataListDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <item id="VX-250">
    <metadata>
```

```

    <revision>VX-15930,VX-15932</revision>
    <timespan end="+INF" start="-INF">
      <name>durationSeconds</name>
      <value change="VX-15930" timestamp="2010-07-02T10:36:20.317+02:00"
↪user="system">14.118</value>
    </field>
    <field>
      <name>durationTimeCode</name>
      <value change="VX-15930" timestamp="2010-07-02T10:36:20.317+02:00"
↪user="system">14118000@1000000</value>
    </field>
  </timespan>
  <timespan end="8" start="5">
    <field>
      <name>title</name>
      <value change="VX-15932" lang="en_US" timestamp="2010-07-02T10:39:31.
↪170+02:00" user="admin">My title!</value>
    </field>
    <field>
      <name>my_field</name>
      <value change="VX-15932" lang="en_US" timestamp="2010-07-02T10:39:31.
↪168+02:00" user="admin">4</value>
    </field>
  </timespan>
</metadata>
</item>
</MetadataListDocument>

```

Modifying that change set:

```

PUT /item/VX-250/metadata/changes/VX-15932
Content-Type: application/xml

```

```

<MetadataDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <timespan end="15" start="8">
    <field>
      <name>title</name>
      <value lang="en_US">My title!</value>
    </field>
  </timespan>
</MetadataDocument>

```

```

<MetadataDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <revision>VX-15930,VX-15932</revision>
  <timespan end="+INF" start="-INF">
    <field>
      <name>durationSeconds</name>
      <value change="VX-15930" timestamp="2010-07-02T10:36:20.317+02:00" user=
↪"system">14.118</value>
    </field>
    <field>
      <name>durationTimeCode</name>
      <value change="VX-15930" timestamp="2010-07-02T10:36:20.317+02:00" user=
↪"system">14118000@1000000</value>
    </field>
  </timespan>
  <timespan end="15" start="8">
    <field>

```

```
<name>title</name>
  <value change="VX-15932" lang="en_US" timestamp="2010-07-02T10:39:31.
↪170+02:00" user="admin">My title!</value>
  </field>
</timespan>
</MetadataDocument>
```

Modifying multiple change sets

PUT `{metadata-entity}/(entity-id)/metadata/changes/`
Replaces the metadata in the specified change sets with the given data.

Statuscode Could not find the entity or the change set.

Accepts

- `application/xml`, `application/json` – A `MetadataChangeSetDocument` containing the change sets that should be modified.

Produces

- `application/xml`, `application/json` – A `MetadataChangeSetDocument` containing a list of the modified change sets.

Role `_metadata_write`

Trimming change sets

New in version 4.2.5.

PUT `{metadata-entity}/(entity-id)/metadata/changes/trim`
PUT `{metadata-entity}/(entity-id)/metadata/changes/changeset-id/trim` Removes fields and values from the change set(s) that did not result in an actual change of the metadata.

Note that if all fields of a change set are removed, then the change set will also be removed.

Status Codes

- **404** – Could not find the item or the change set.

Produces

- `application/xml`, `application/json` – A `MetadataChangeSetDocument` containing a list of the modified change sets.

Role `_metadata_write`

Example

Given an item with multiple change sets for the same set of fields:

```
GET /item/VX-260/metadata/changes
```

```

<MetadataChangeSetDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <changeSet>
    <id>VX-816670</id>
    <metadata>
      <revision/>
      <timespan start="-INF" end="+INF">
        <field uuid="0e6bb918-090a-4388-9a55-e039a0462a20" user="admin" timestamp=
↪ "2015-02-19T18:24:51.234+01:00" change="VX-816670">
          <name>title</name>
          <value uuid="9b2b24a5-9426-4f10-a37c-6ec0de90b07e" user="admin" timestamp=
↪ "2015-02-19T18:24:51.234+01:00" change="VX-816670">A</value>
        </field>
      </timespan>
    </metadata>
  </changeSet>
  <changeSet>
    <id>VX-816671</id>
    <metadata>
      <revision>VX-816669,VX-816670,VX-816668</revision>
      <timespan start="-INF" end="+INF">
        <field uuid="0e6bb918-090a-4388-9a55-e039a0462a20" user="admin" timestamp=
↪ "2015-02-19T18:24:51.397+01:00" change="VX-816671">
          <name>title</name>
          <value uuid="b7d9a4ad-a564-4d03-abf5-280f5ad69658" user="admin" timestamp=
↪ "2015-02-19T18:24:51.397+01:00" change="VX-816671">B</value>
        </field>
        <field uuid="ea7a2b4a-c105-4cb0-a55b-dc0aa9457e82" user="admin" timestamp=
↪ "2015-02-19T18:24:51.397+01:00" change="VX-816671">
          <name>created</name>
          <value uuid="35f3b25c-c4ca-48e7-865b-2918fald33e0" user="admin" timestamp=
↪ "2015-02-19T18:24:51.397+01:00" change="VX-816671">2015-02-19T17:24:50.262Z</value>
        </field>
        <field uuid="452c038e-b7c8-4076-be40-43210b07c004" user="admin" timestamp=
↪ "2015-02-19T18:24:51.397+01:00" change="VX-816671">
          <name>mediaType</name>
          <value uuid="018a0d40-6a0b-4238-b37f-d20dd9720d3a" user="admin" timestamp=
↪ "2015-02-19T18:24:51.397+01:00" change="VX-816671">none</value>
        </field>
        <field uuid="57e830d5-e06c-47bd-9495-e0f5d78e0a99" user="admin" timestamp=
↪ "2015-02-19T18:24:51.397+01:00" change="VX-816671">
          <name>itemId</name>
          <value uuid="5f1add70-1ff6-445f-a72d-e80e7734d399" user="admin" timestamp=
↪ "2015-02-19T18:24:51.397+01:00" change="VX-816671">VX-415819</value>
        </field>
        <field uuid="66efebb4-fbb3-4b7a-8cac-fbb4f68e28e8" user="admin" timestamp=
↪ "2015-02-19T18:24:51.397+01:00" change="VX-816671">
          <name>shapeTag</name>
          <value uuid="6402586c-a9dc-45f7-a676-b133fc38e7b3" user="admin" timestamp=
↪ "2015-02-19T18:24:51.397+01:00" change="VX-816671">original</value>
        </field>
      </timespan>
    </metadata>
  </changeSet>
</MetadataChangeSetDocument>

```

Trimming the change sets will then cause fields where the values are unchanged to be removed.

```
PUT /item/VX-260/metadata/changes/trim
```

```
<MetadataChangeSetDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <changeSet>
    <id>VX-816670</id>
    <metadata>
      <revision/>
      <timespan start="-INF" end="+INF">
        <field uuid="0e6bb918-090a-4388-9a55-e039a0462a20" user="admin" timestamp=
↪"2015-02-19T18:24:51.234+01:00" change="VX-816670">
          <name>title</name>
          <value uuid="9b2b24a5-9426-4f10-a37c-6ec0de90b07e" user="admin" timestamp=
↪"2015-02-19T18:24:51.234+01:00" change="VX-816670">A</value>
        </field>
      </timespan>
    </metadata>
  </changeSet>
  <changeSet>
    <id>VX-816671</id>
    <metadata>
      <revision>VX-816670</revision>
      <timespan start="-INF" end="+INF">
        <field uuid="0e6bb918-090a-4388-9a55-e039a0462a20" user="admin" timestamp=
↪"2015-02-19T18:24:51.397+01:00" change="VX-816671">
          <name>title</name>
          <value uuid="b7d9a4ad-a564-4d03-abf5-280f5ad69658" user="admin" timestamp=
↪"2015-02-19T18:24:51.397+01:00" change="VX-816671">B</value>
        </field>
      </timespan>
    </metadata>
  </changeSet>
```

Deleting a change set

DELETE {*metadata-entity*}/ (*entity-id*)/*metadata/changes/changeset-id* Deletes an entire change set.

Status Codes

- **404** – Could not find the entity or the change set.

Produces

- **application/xml**, **application/json** – A `MetadataDocument` containing the metadata of the item.

Role `_metadata_write`

Example

Retrieving the current metadata:

```
GET /item/VX-250/metadata
```

```

<MetadataListDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <item id="VX-250">
    <metadata>
      <revision>VX-15930,VX-15932</revision>
      <timespan end="+INF" start="-INF">
        <name>durationSeconds</name>
        <value change="VX-15930" timestamp="2010-07-02T10:36:20.317+02:00"
↪ user="system">14.118</value>
        </field>
        <field>
          <name>durationTimeCode</name>
          <value change="VX-15930" timestamp="2010-07-02T10:36:20.317+02:00"
↪ user="system">14118000@1000000</value>
        </field>
      </timespan>
      <timespan end="8" start="5">
        <field>
          <name>title</name>
          <value change="VX-15932" lang="en_US" timestamp="2010-07-02T10:39:31.
↪ 170+02:00" user="admin">My title!</value>
        </field>
        <field>
          <name>my_field</name>
          <value change="VX-15932" lang="en_US" timestamp="2010-07-02T10:39:31.
↪ 168+02:00" user="admin">4</value>
        </field>
      </timespan>
    </metadata>
  </item>
</MetadataListDocument>

```

Deleting the change set “VX-15932”:

```
DELETE /item/VX-250/metadata/changes/VX-15932
```

```

<MetadataDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <revision>VX-15930</revision>
  <timespan end="+INF" start="-INF">
    <field>
      <name>durationSeconds</name>
      <value change="VX-15930" timestamp="2010-07-02T10:36:20.317+02:00" user=
↪ "system">14.118</value>
    </field>
    <field>
      <name>durationTimeCode</name>
      <value change="VX-15930" timestamp="2010-07-02T10:36:20.317+02:00" user=
↪ "system">14118000@1000000</value>
    </field>
  </timespan>
</MetadataDocument>

```

Modifying metadata using metadata entries

Metadata can also be modified using a `MetadataEntryDocument` or a `MetadataEntryListDocument`. They reference existing fields/groups/values with UUID.

New in version 4.1.

Modify a metadata entry

PUT {*metadata-entity*}/ (*entity-id*) /*metadata/entry/entry-uuid* Modifies a specific metadata field/group/value by UUID.

Accepts

- `application/xml`, `application/json` – `MetadataEntryDocument`

Produces

- `application/xml`, `application/json` – `MetadataDocument`

Role `_metadata_write`

Example

Assume we have item VX-10 with the following metadata:

```
<MetadataListDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <item id="VX-10">
    <metadata>
      <revision>VX-110,VX-109,VX-148</revision>
      <timespan end="+INF" start="-INF">
        <field change="VX-109" timestamp="2013-11-12T09:39:54.767+01:00" user="system
↵" uuid="31514647-8cf8-4d74-b674-e5941e007e77">
          <name>created</name>
          <value change="VX-109" timestamp="2013-11-12T09:39:54.767+01:00" user=
↵"system" uuid="afeb8aae-093f-4679-a156-eccf6aa5ba63">2013-11-12T08:39:54.670Z</
↵value>
        </field>
        <field change="VX-109" timestamp="2013-11-12T09:39:54.767+01:00" user="system
↵" uuid="5ba7c8f1-d77b-45fb-a8ed-ceda1d794207">
          <name>itemId</name>
          <value change="VX-109" timestamp="2013-11-12T09:39:54.767+01:00" user=
↵"system" uuid="01934732-9c66-4c6d-90a1-f14b8d188612">VX-10</value>
        </field>
        <field change="VX-148" timestamp="2013-11-13T12:13:12.160+01:00" user="admin"
↵" uuid="fd59a9f0-fe18-4183-82cb-e11aa33ad4bd">
          <name>title</name>
          <value change="VX-148" timestamp="2013-11-13T12:13:12.160+01:00" user="admin
↵" uuid="17d6bac2-56c4-4117-b0dd-da474912bc3c">my item's title</value>
        </field>
        <field change="VX-148" timestamp="2013-11-13T12:13:12.160+01:00" user="admin"
↵" uuid="e2e964d4-5376-47f0-83dd-f4e3663181d8">
          <name>item_tags</name>
          <value change="VX-148" timestamp="2013-11-13T12:13:12.160+01:00" user="admin
↵" uuid="45588018-2c14-4627-a889-b71559f1a318">tag 1</value>
          <value change="VX-148" timestamp="2013-11-13T12:13:12.160+01:00" user="admin
↵" uuid="a1054ba4-da2d-46bf-8a87-e11bda2df243">tag 2</value>
        </field>
      </timespan>
    </metadata>
  </item>
</MetadataListDocument>
```

And we want to change the title of this item's metadata. Note that the UUID of the title value is 17d6bac2-56c4-4117-b0dd-da474912bc3c. We can then make the following request;


```
PUT /item/VX-10/metadata/entry/17d6bac2-56c4-4117-b0dd-da474912bc3c
Content-Type: application/xml

<MetadataEntryDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <value>my item's new title</value>
</MetadataEntryDocument>
```

If we instead want to replace the values in the `item_tags` field, we can make the following request:

```
PUT /item/VX-10/metadata/entry/e2e964d4-5376-47f0-83dd-f4e3663181d8
Content-Type: application/xml

<MetadataEntryDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <field>
    <name>item_tags</name>
    <value>new tag 1</value>
    <value>new tag 2</value>
  </field>
</MetadataEntryDocument>
```

This works in a similar fashion for field groups too.

Modify several metadata entries in one request

PUT `{metadata-entity}/(entity-id)/metadata/entry/`
 Modifies multiple metadata fields/groups/values by UUID.

Accepts

- `application/xml`, `application/json` – `MetadataEntryListDocument`

Produces

- `application/xml`, `application/json` – `MetadataDocument`

Role `_metadata_write`

Example

The above changes could be made in one request in the following way:

```
PUT /item/VX-10/metadata/entry
Content-Type: application/xml

<MetadataEntryListDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <entry uuid="17d6bac2-56c4-4117-b0dd-da474912bc3c">
    <value>my item's new title</value>
  </entry>
  <entry uuid="e2e964d4-5376-47f0-83dd-f4e3663181d8">
    <field>
      <name>item_tags</name>
      <value>new tag 1</value>
      <value>new tag 2</value>
    </field>
  </entry>
</MetadataEntryListDocument>
```

Metadata visualization

Get metadata graph

GET `{metadata-entity}/(entity-id)/metadata/graph`

Shows fields and values and their history as a graph.

Query Parameters

- **groupBy** –
 - `change` (default) - Group fields and values by change set.
 - `none` - Present fields and groups without any grouping.

Produces

- **image/png** –

Role `_administrator`

Get metadata graph as dot file

GET `{metadata-entity}/(entity-id)/metadata/graph/dot`

Shows fields and values and their history in dot format, for further processing.

Query Parameters

- **groupBy** –
 - `change` (default) - Group fields and values by change set.
 - `none` - Present fields and groups without any grouping.

Produces

- **text/plain, text/vnd.graphviz** –

Role `_administrator`

17.16.7 Re-indexing metadata

The text index can be fully reindexed without disturbing production. The reindexing process also handles application server restarts, and can be monitored. Normally, reindexing is only needed if the metadata field definition are changed, but it can be a good idea to reindex if the database is moved or if upgrading to a newer version of Vidispine.

Note: The number of indexes returned in the `GET` command is only an estimate.

Changed in version 4.14: The `thumbnail` index was added.

Requesting a reindex

PUT `/reindex/(index)`

Starts a reindex. If a reindex of the same type (`item/collection/ACL/file`) is already in progress, it is restarted.

Note: Only files that do *not* belong to an item will be indexed when reindexing files. To reindex all files both a file and item reindex must be started.

Parameters

- **index** – One of item, collection, acl, file or thumbnail.

Query Parameters

- **status** – If current status is FINISHED or ABORTED then PAUSED, ABORTED and IN_PROGRESS are no-ops.
 - IN_QUEUE (default) - To start or restart reindex.
 - PAUSED - To pause reindex.
 - ABORTED - To cancel reindex.
 - IN_PROGRESS/IN PROGRESS - To resume a paused reindex.

New in version 4.7.

- **priority** – The priority of this reindex request compare to other request. Requests with a larger/higher priority will be processed first. Default is 500.

Produces

- **application/xml, application/json** – [ReindexRequestDocument](#)

Role _administrator

Example:

```
PUT /reindex/item
```

```
<ReindexRequestDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <index>item</index>
  <priority>500</priority>
  <status>IN_QUEUE</status>
  <start>2016-03-23T22:41:04.133+01:00</start>
</ReindexRequestDocument>
```

Retrieving reindex information

GET /reindex/ (*index*)

Gets information about a reindex process, i.e., progress and whether it is finished.

Produces

- **application/xml, application/json** – [ReindexRequestDocument](#)

Role _administrator

Example:

```
GET /reindex/item
```

```
<ReindexRequestDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <index>item</index>
  <priority>500</priority>
  <status>FINISHED</status>
  <start>2016-03-23T22:41:04.133+01:00</start>
  <finish>2016-03-23T22:41:04.774+01:00</finish>
  <indexesDone>48</indexesDone>
  <indexesTotal>48</indexesTotal>
</ReindexRequestDocument>
```

Controlling index of items/collections

If the metadata field `solr-index` of an item/collection is set to `false`, it won't be indexed.

Example:

```
<MetadataDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <timespan end="+INF" start="-INF">
    <field>
      <name>solr-index</name>
      <value>>false</value>
    </field>
  </timespan>
</MetadataDocument>
```

17.16.8 Metadata locks

New in version 4.17: Collection metadata support

A locking container is a stateful resource that holds locks for any number of fields of the metadata of an item or collection.

Operations on metadata locks uses `{metadata-resource}` which is either of

- `/collection`
- `/item`

Get all containers

GET `{metadata-resource}/(id)/metadata-lock`

Returns all locking containers.

Produces

- `application/xml`, `application/json` – `MetadataLockListDocument`
- `text/plain` – CRLF-delimited list of locking ids

Role `_metadata_lock_read`

Get specific container

GET `{metadata-resource}/(id)/metadata-lock/`

`lock-id` Returns information about specified locking container.

Produces

- `application/xml`, `application/json` – `MetadataLockDocument`

Role `_metadata_lock_read`

Create locking container

POST `{metadata-resource}/(id)/metadata-lock`

Creates a new locking container, optionally with initial locks.

Query Parameters

- `field` – Optional comma-separated list of fields to lock.
- `timeout` – Optional integer for time-out in seconds. Default is no time-out.

Produces

- `application/xml`, `application/json` – `MetadataLockDocument`
- `text/plain` – Locking id

Role `_metadata_lock_write`

Add fields to locking container

PUT `{metadata-resource}/(id)/metadata-lock/`

lock-id Add new fields to the locking container and/or updates the expiry time.

Query Parameters

- `field` – Optional comma-separated list of fields to lock.
- `timeout` – Optional integer for time-out in seconds. Default is no time-out.

Produces

- `application/xml`, `application/json` – `MetadataLockDocument`
- `text/plain` – Locking id

Role `_metadata_lock_write`

Remove locking container and locks

DELETE `{metadata-resource}/(id)/metadata-lock/`

lock-id Remove the locking container and all locks associated with it.

Role `_metadata_lock_write`

17.16.9 Metadata fields

A metadata field is an ingredient of definition of the metadata set. Metadata fields define name and *type* of fields. Metadata fields can be organized into *groups of fields*. Furthermore fields can also be assigned *additional data*.

Access to fields can be restricted using *access controls*.

Managing metadata fields

Get list of fields

GET `/metadata-field`

Returns a list of all defined *fields*.

Query Parameters

- **includeValues** – Return the value enumeration for each field.
- **data** – An optional comma-separated list of any additional data to include.

Produces

- **application/xml**, **application/json** – [MetadataFieldListDocument](#)
- **text/plain** – CRLF-delimited list of ids or URLs

Role `_metadata_field_read`

Get field definition

GET `/metadata-field/ (field-name)`

Returns information about a specific metadata field definition.

Query Parameters

- **includeValues** – Return the value enumeration for this field.
- **data** – An optional comma-separated list of any additional data to include. Wildcard characters. e.g. `*,myapp_*,*_version` can be used. (New in 4.17.)

Status Codes

- **404 Not found** – The specified field could not be found.

Produces

- **application/xml**, **application/json** – [MetadataFieldDocument](#)

Role `_metadata_field_read`

Create or update field definition

PUT `/metadata-field/ (field-name)`

Creates or updates a metadata field definition.

Status Codes

- **400 Bad request** – Either the [MetadataFieldDocument](#) was not specified correctly or an illegal type was given.

Accepts

- **application/xml**, **application/json** – [MetadataFieldDocument](#)

Produces

- **application/xml**, **application/json** – [MetadataFieldDocument](#)

Role `_metadata_field_write`

Remove field definition

DELETE `/metadata-field/` (*field-name*)

Removes the metadata field definition. Note that this action may invalidate existing metadata.

Status Codes

- **200 OK** – The field was deleted successfully.
- **404 Not found** – The field could not be found.

Role `_metadata_field_write`

Field value enumerations and validation

New in version 4.13.

It's possible to get a list of allowed values based on the defined *metadata dataset* on the field.

Retrieve enumeration for field

GET `/metadata-field/` (*field-name*) `/allowed-values`

Returns the allowed values for a field based on the defined metadata dataset on the field.

Query Parameters

- **constraint** – Optional, multiple query parameters can be specified. If no query parameters are specified, all the allowed values are returned.
 - *field-name* = *value* - Apply additional constraint to the resulting value.
- Note that = is part of the query parameter, and has to be encoded (%3d).

Produces

- `application/xml`, `application/json` – `ConstraintValueListDocument`

Example:

```
GET /metadata-field/rdf_city/allowed-values
```

Response:

```
<?xml version="1.0" encoding="UTF-8" standalone="yes"?>
<ConstraintValueListDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <value id="testNS:manchester1">Manchester</value>
  <value id="testNS:nyc1">New York City</value>
  <value id="vidi:gid7">Buffalo</value>
  <value id="vidi:gid1">Los Angeles</value>
  <value id="vidi:gid6">Rochester</value>
  <value id="testNS:london1">London</value>
  <value id="vidi:gid8">San Francisco</value>
</ConstraintValueListDocument>
```

```
GET /metadata-field/rdf_city/allowed-values?constraint=rdf_country=UK
```

Response:

```
<?xml version="1.0" encoding="UTF-8" standalone="yes"?>
<ConstraintValueListDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <value id="testNS:manchester1">Manchester</value>
  <value id="testNS:london1">London</value>
</ConstraintValueListDocument>
```

Retrieve enumeration for field with some constraints

POST /metadata-field/ (*field-name*) /allowed-values

Returns the allowed values for a field based on the defined metadata dataset on the field.

Accepts

- `application/xml`, `application/json` – MetadataFieldValueConstraintListDocument

Produces

- `application/xml`, `application/json` – ConstraintValueListDocument

Example request:

```
POST /metadata-field/rdf_city/allowed-values
```

```
<?xml version="1.0" encoding="UTF-8" standalone="yes"?>
<MetadataFieldValueConstraintListDocument xmlns="http://xml.vidispine.com/schema/
↪vidispine">
  <constraint>
    <field>rdf_country</field>
    <value>USA</value>
  </constraint>
  <constraint>
    <field>rdf_state</field>
    <value>New York</value>
  </constraint>
</MetadataFieldValueConstraintListDocument>
```

Response:

```
<?xml version="1.0" encoding="UTF-8" standalone="yes"?>
<ConstraintValueListDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <value id="testNS:nyc1">New York City</value>
  <value id="vidi:gid7">Buffalo</value>
  <value id="vidi:gid6">Rochester</value>
</ConstraintValueListDocument>
```

Field value enumerations

Certain fields may have a restricted set of possible values, that a user should be able to select from for example. These value enumerations for a field can be stored in Vidispine.

Enumerations are made up out of a key and a value. The key is what should be stored in the metadata, while the value is the display name or description of the value.

Retrieve enumeration for field

GET `/metadata-field/ (field-name) /values`

Retrieves the value enumeration for a specific field.

- Only one of key-exact, key-start or key-regex can be set.
- Only one of value-exact, value-start or value-regex can be set.

Query Parameters

- **key-exact** – Return the key with this name.
- **key-start** – Return keys starting with this prefix.
- **key-regex** – Return keys matching this regular expression.
- **value-exact** – Return keys with this value.
- **value-start** – Return keys with a value starting with this prefix.
- **value-regex** – Return keys with a value matching this regular expression.
- **hits** – The maximum number of keys to return. Default is all.

Produces

- `application/xml`, `application/json` – [SimpleMetadataDocument](#)

Example

```
GET /metadata-field/document_language/values
```

```
<SimpleMetadataDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <field>
    <key>en</key>
    <value>English</value>
  </field>
  <field>
    <key>sv</key>
    <value>Swedish</value>
  </field>
</SimpleMetadataDocument>
```

Set enumeration for field

PUT `/metadata-field/ (field-name) /values`

Sets the value enumeration for a specific field.

Accepts

- `application/xml`, `application/json` – [SimpleMetadataDocument](#)

Example

```
PUT /metadata-field/document_language/values
```

```
<SimpleMetadataDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <field>
    <key>en</key>
    <value>English</value>
  </field>
  <field>
    <key>sv</key>
    <value>Swedish</value>
  </field>
</SimpleMetadataDocument>
```

```
200 OK
```

Field metadata

Metadata fields can be assigned additional data in a key-value fashion. This data can later be seen when retrieving metadata, using the include parameter in *Get metadata*.

Deprecated since version 4.1.2: Use the *Key-value metadata* interface instead.

Terse metadata schema

Retrieve terse metadata schema

GET /metadata-field/terse-schema

Retrieves the schema that defines terse *metadata*. This schema is dynamically generated based on the fields present in the system.

Produces

- **application/xml** – An XML schema.

Role _metadata_field_read

Viewing effective permissions

The merged access resource on fields and field groups can be used to check if a specific user is allowed to view, edit or delete specific fields or groups.

Retrieve user access to all fields

GET /metadata-field/merged-access/

Retrieves the permission for a specific user to all fields.

Query Parameters

- **username** – The name of the user to check.

Produces

- **application/xml**, **application/json** – An *AccessControlMergedDocument* containing the fields, user and permissions.

Role _accesscontrol_read

Example

```
GET /metadata-field/merged-access
```

```
<AccessControlMergedDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <field username="admin">
    <name>collectionId</name>
    <permission>DELETE</permission>
  </field>
  <field username="admin">
    <name>itemId</name>
    <permission>DELETE</permission>
  </field>
  <field username="admin">
    <name>mediaType</name>
    <permission>DELETE</permission>
  </field>
  <field username="admin">
    <name>mrk_color</name>
    <permission>DELETE</permission>
  </field>
  ...
</AccessControlMergedDocument>
```

Retrieve user access to field

GET /metadata-field/ (*field-name*) /merged-access/
Retrieves the permission for a specific user to a field.

Query Parameters

- **username** – The name of the user to check.

Produces

- **application/xml**, **application/json** – An `AccessControlMergedDocument` containing the field, user and permission.

Role `_accesscontrol_read`

Example

For a field without any access controls:

```
GET /metadata-field/title/access
```

```
<MetadataFieldAccessControlListDocument xmlns="http://xml.vidispine.com/schema/
↪vidispine"/>
```

We can see that the default, which is to allow full access to fields, is in effect:

```
GET /metadata-field/title/merged-access
```

```
<AccessControlMergedDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <field username="admin">
    <name>title</name>
    <permission>DELETE</permission>
  </field>
</AccessControlMergedDocument>
```

Retrieve user access to all field groups

GET `/metadata-field/field-group/merged-access/`

Retrieves the permission for a specific user to all field groups and the field groups and fields part of those groups.

Query Parameters

- **username** – The name of the user to check.

Produces

- **application/xml**, **application/json** – An `AccessControlMergedDocument` containing the group, its children, user and permission.

Role `_accesscontrol_read`

Example

```
GET /metadata-field/field-group/merged-access
```

```
<AccessControlMergedDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <fieldGroup username="admin">
    <name>facedetect_face</name>
    <permission>DELETE</permission>
    <field username="admin">
      <name>facedetect_pid</name>
      <permission>DELETE</permission>
    </field>
  </fieldGroup>
  ...
</AccessControlMergedDocument>
```

Retrieve user access to field group

GET `/metadata-field/field-group/ (group-name) /merged-access/`

Retrieves the permission for a specific user to a field group and the field groups and fields part of that group.

Query Parameters

- **username** – The name of the user to check.

Produces

- **application/xml**, **application/json** – An `AccessControlMergedDocument` containing the group, its children, user and permission.

Role `_accesscontrol_read`

Example

```
GET /metadata-field/field-group/mrk_marker/merged-access?username=test-user
```

```
<AccessControlMergedDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <fieldGroup username="test-user">
    <name>mrk_marker</name>
    <permission>DELETE</permission>
    <field username="test-user">
      <name>mrk_color</name>
      <permission>DELETE</permission>
    </field>
    <field username="test-user">
      <name>mrk_text</name>
      <permission>DELETE</permission>
    </field>
    <field username="test-user">
      <name>mrk_zerolength</name>
      <permission>DELETE</permission>
    </field>
  </fieldGroup>
</AccessControlMergedDocument>
```

17.16.10 Metadata field access controls

In the following reference, {field-access-resource} is one of the following:

- /metadata-field/{field-name}/access
- /metadata-field/field-group/{group-name}/access

Managing metadata field access controls

Retrieve the access control list of an item

GET {field-access-resource}

Returns the access control list that is applied to the specified field or group.

Produces

- **application/xml**, **application/json** – MetadataFieldAccessControlListDocument

Role _administrator

Example

```
GET /metadata-field/title/access
```

```
<MetadataFieldAccessControlListDocument xmlns="http://xml.vidispine.com/schema/
↪vidispine">
  <access>
    <id>VX-10</id>
```

```

<field>title</field>
<group>mygroup</group>
<permission>READ</permission>
</access>
<access>
  <id>VX-5</id>
  <field>title</field>
  <user>myuser</user>
  <permission>DELETE</permission>
</access>
</MetadataFieldAccessControlListDocument>

```

Add an access control entry

POST {field-access-resource}

Creates an entry in the access control list and returns the created entry together with its id.

Accepts

- `application/xml`, `application/json` – [MetadataFieldAccessControlDocument](#)

Produces

- `application/xml`, `application/json` – [MetadataFieldAccessControlDocument](#)

Role `_administrator`

Examples

```
POST /metadata-field/title/access
```

```
Content-Type: application/xml
```

```

<MetadataFieldAccessControlDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <user>admin</user>
  <permission>DELETE</permission>
</MetadataFieldAccessControlDocument>

```

```

<MetadataFieldAccessControlDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <id>VX-11</id>
  <user>admin</user>
  <permission>DELETE</permission>
</MetadataFieldAccessControlDocument>

```

Remove an access control entry

DELETE {field-access-resource}/(access-id)

Removes the access control entry with the specified id.

Role `_administrator`

Examples

```
DELETE /metadata-field/title/access/VX-11
```

```
200 OK
```

17.16.11 Metadata field groups

Field groups are named sets of *fields* and groups. The structure of groups is defined using a *metadata schema*.

Access to field groups can be restricted using *access controls*.

Managing field groups

Get a list of known groups

GET /metadata-field/field-group

Retrieves all metadata field groups known by the system.

Query Parameters

- **content** –
 - `true` - Return the groups and their members.
 - `false` (default) - Return the group names only.
- **traverse** –
 - `true` - Traverse any sub-groups in order to retrieve the entire hierarchy.
 - `false` (default) - Only retrieves the names of the members.
- **data** – An optional comma-separated list of any additional data to include.
 - accepts wildcard characters. e.g. `*`, `myapp_*`, `*_version`.
 (New in 4.17.)

Produces

- **application/xml**, **application/json** – `MetadataFieldGroupListDocument`
- **text/plain** – CRLF-delimited list of field group names.

Role `_metadata_field_group_read`

Create a new field group

PUT /metadata-field/field-group/ (*group-name*)

Creates a new group with the given name. If a group with that name already exists, this operation does nothing.

Status Codes

- **200 OK** – Group created successfully.

Role `_metadata_field_group_write`

Create a new group and add fields and access to it

PUT `/metadata-field/field-group/` (*group-name*)

Creates a new group with the given name, if it does not already exist, and adds any specified fields and access control entries to it. If the fields do not exist, they will be created. Furthermore any additional data for the fields will be set as well.

Query Parameters

- **clear** –
 - `true` - If the group already exists, clear all content from it before updating.
 - `false` (default) - If the group already exists, append child groups/fields from the input document.

New in version 4.10.

Status Codes

- **200 OK** – Group created successfully.

Accepts

- `application/xml`, `application/json` – `MetadataFieldGroupDocument`

Role `_metadata_field_group_write`

Example

```
PUT /metadata-field/field-group/myfieldgroup
```

```
Content-Type: application/xml
```

```
<MetadataFieldGroupDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <data>
    <key>myextradata</key>
    <value>Extradata for the group</value>
  </data>
  <field>
    <name>title</name>
    <data>
      <key>text</key>
      <value>Here is some text.</value>
    </data>
  </field>
  <field>
    <name>durationSeconds</name>
  </field>
  <field>
    <name>this_field_does_not_exist_yet</name>
    <type>string</type>
    <data>
      <key>myextradata</key>
      <value>Some additional data</value>
    </data>
  </field>
  <access>
    <user>admin</user>
    <permission>DELETE</permission>
```



```
</access>
</MetadataFieldGroupDocument>
```

```
200 OK
```

Delete an existing group

DELETE `/metadata-field/field-group/ (group-name)`

Deletes the group with the given name.

Status Codes

- **200 OK** – Group deleted successfully.
- **404 Not found** – No group with that name exists.

Role `_metadata_field_group_write`

Group contents

Retrieving the fields of a group

GET `/metadata-field/field-group/ (group-name)`

Retrieves the specified field group.

Query Parameters

- **includeValues** – Return the value enumeration for each field.
- **traverse** –
 - `true` - Traverse any sub-groups in order to retrieve the entire hierarchy.
 - `false` (default) - Only retrieves the names of the members.
- **data** – An optional comma-separated list of any additional data to include.
 - accepts wildcard characters. e.g. `*`, `myapp_*`, `*_version`.

(New in 4.17.)

Produces

- `application/xml`, `application/json` – [MetadataFieldGroupDocument](#)

Role `_metadata_field_group_read`

Adding a field to a group

PUT `/metadata-field/field-group/ (group-name) /`

`field-name` Adds the field with the specified name to the group. If the field is already contained within the group this operation does nothing.

Status Codes

- **200 OK** – Field added successfully.

Role `_metadata_field_group_write`

Removing a field from a group

DELETE `/metadata-field/field-group/ (group-name) / field-name` Removes the field with the specified name from the group.

Status Codes

- **200 OK** – Field removed successfully.
- **404 Not found** – No field with that name is contained within the group.

Role `_metadata_field_group_write`

Adding a group to a group

PUT `/metadata-field/field-group/ (parent-group-name) /group/ child-group-name` Adds the group with the specified name to the group. If the group is already contained within the group this operation does nothing.

Status Codes

- **200 OK** – Group added successfully.

Role `_metadata_field_group_write`

Removing a group from a group

DELETE `/metadata-field/field-group/ (parent-group-name) /group/ child-group-name` Removes the group with the specified name from the group.

Status Codes

- **200 OK** – Group removed successfully.

Role `_metadata_field_group_write`

Searching for field groups

Searching for groups used in metadata

PUT `/metadata-field/field-group`

Much like *searching for items*, specific fields can be used when searching. The result is a list of used metadata groups that matches the query. Optionally the definition of the group and the value of the group can be retrieved.

Note: Results will only be returned if *field group indexing* has not been disabled.

Matrix Parameters

- **first** – Integer, from resulting list of items, start return list from specified offset. Default is 1, start return list from beginning.
- **number** – Integer, the number of entities to fetch. Default 100.

Query Parameters

- **traverse** –

- `true` - Traverse any sub-groups in order to retrieve the entire hierarchy.
 - `false` (default) - Only retrieves the names of the members.
 - **data** - An optional comma-separated list of any additional data to include.
 - accepts wildcard characters. e.g. `*`, `myapp_*`, `*_version`.
 - (New in 4.17.)
 - **group** - Optional comma-separated list of group names to restrict search in.
 - **includeValue** -
 - `true` - The value is included in the result. I.e., how the group is specified in the metadata.
 - `false` (default) - The value is not included.
 - **includeDefinition** -
 - `true` - The definition of the group is included in the result.
 - `false` (default) - The definition is not included.
 - **includeSource** -
 - `true` - Information about which entity that contains the matching metadata group is included in the result.
 - `false` (default) - Entity information is not included.
 - **source** -
 - `item` - Only search for groups in item metadata.
 - `collection` - Only search for groups in collection metadata.
 - `global` - Only search for groups in the global metadata.
 - `document` - Only search for groups in the document metadata.
- New in version 4.5.

Accepts

- `application/xml`, `application/json` - [MetadataFieldGroupSearchDocument](#)

Produces

- `application/xml`, `application/json` - [MetadataFieldResultDocument](#)

Role `_item_search`

Example

Searching for employees named Andrew (please note that the parameter `group` is set to `employee` to only search for employees named Andrew):

```
PUT /metadata-field/field-group?includeValue=true&includeDefinition=true&
↪traverse=false&group=employee&includeSource=true
Content-Type: application/xml

<MetadataFieldGroupSearchDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <field>
    <name>example_name</name>
    <value>Andrew</value>
```

```
</field>
</MetadataFieldGroupSearchDocument>
```

```
<MetadataFieldResultDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <hits>1</hits>
  <group name="employee" uuid="db26c542-3507-4d3c-a772-55d4627b3d59" start="-INF" end=
  ↪ "+INF">
    <value uuid="db26c542-3507-4d3c-a772-55d4627b3d59" user="admin" timestamp="2011-
  ↪ 01-10T12:30:01.483+01:00" change="VX-11">
      <name>employee</name>
      <field uuid="82738de5-8ce3-4f28-badc-c97924bb5837" user="admin" timestamp="2011-
  ↪ 01-10T12:30:01.483+01:00" change="VX-11">
          <name>example_title</name>
          <value uuid="552f5d06-50d5-4109-9017-8b8ce7d101ff" user="admin" timestamp=
  ↪ "2011-01-10T12:30:01.483+01:00" change="VX-11">Editor</value>
          </field>
          <field uuid="9ff7fced-4500-4d11-a8e9-eb8821b42cbc" user="admin" timestamp="2011-
  ↪ 01-10T12:30:01.483+01:00" change="VX-11">
              <name>example_name</name>
              <value uuid="45379c11-b30a-4b6c-a93a-eb5229a61905" user="admin" timestamp=
  ↪ "2011-01-10T12:30:01.483+01:00" change="VX-11">Andrew</value>
              </field>
            </value>
          <definition>
            <name>employee</name>
            <schema min="0" max="-1" name="employee"/>
            <field sortable="false">
              <name>example_title</name>
              <schema reference="false" min="0" max="1" name="example_title"/>
              <type>string</type>
            </field>
            <field sortable="false">
              <name>example_name</name>
              <schema reference="false" min="1" max="1" name="example_name"/>
              <type>string</type>
            </field>
          </definition>
          <source>
            <id>VX-15</id>
            <type>item</type>
          </source>
        </group>
</MetadataFieldResultDocument>
```

17.16.12 Metadata datasets

Metadata *datasets* can be linked to metadata fields to restrict the *allowed values* for that field.

New in version 4.13.

Retrieve a list of datasets

GET /metadata/dataset

Retrieves the list of metadata datasets.

Produces

- `application/xml`, `application/json` – `MetadataDatasetListDocument`

Role `_metadata_dataset_read`

Example

```
GET /metadata/dataset
```

```
<?xml version="1.0"?>
<MetadataDatasetListDocument>
  <dataset>
    <name>testmodel1</name>
    <uri>http://localhost:8080/API/metadata/dataset/testmodel1</uri>
  </dataset>
  <dataset>
    <name>testmodel2</name>
    <uri>http://localhost:8080/API/metadata/dataset/testmodel2</uri>
  </dataset>
</MetadataModelListDocument>
```

Retrieve a dataset by name

GET `/metadata/dataset/` (*name*)

Retrieves the metadata dataset with the specified name. The returned serialization format of the RDF model is RDF/XML or TURTLE depending on the request header.

Produces

- `application/rdf+xml`, `text/turtle`, `application/ld+json` – The RDF model.

Role `_metadata_dataset_read`

Example

```
GET /metadata/dataset/testmodel1
```

```
Accept: text/turtle
```

```
@prefix rdf: <http://www.w3.org/1999/02/22-rdf-syntax-ns#> .
@prefix skos: <http://www.w3.org/2004/02/skos/core#> .
@prefix vidi: <http://rdf.vidispine.com/id/#> .

vidi:gid2 skos:definition "country" ;
          skos:member      vidi:gid3 ;
          skos:prefLabel   "United Kingdom" .

vidi:gid1 skos:definition "city" ;
          skos:prefLabel   "London" .

vidi:gid0 skos:definition "city" ;
          skos:prefLabel   "Manchester" .

vidi:gid3 a      rdf:Bag ;
```

```

rdf:_1 vidi:gid1 ;
rdf:_2 vidi:gid0 .

```

```
GET /metadata/dataset/testmodel1
```

```
Accept: application/rdf+xml
```

```

<rdf:RDF
  xmlns:rdf="http://www.w3.org/1999/02/22-rdf-syntax-ns#"
  xmlns:skos="http://www.w3.org/2004/02/skos/core#"
  xmlns:vidi="http://rdf.vidispine.com/id/#">
  <rdf:Description rdf:about="http://rdf.vidispine.com/id/#gid2">
    <skos:prefLabel>United Kingdom</skos:prefLabel>
    <skos:member>
      <rdf:Bag rdf:about="http://rdf.vidispine.com/id/#gid3">
        <rdf:li>
          <rdf:Description rdf:about="http://rdf.vidispine.com/id/#gid1">
            <skos:prefLabel>London</skos:prefLabel>
            <skos:definition>city</skos:definition>
          </rdf:Description>
        </rdf:li>
        <rdf:li>
          <rdf:Description rdf:about="http://rdf.vidispine.com/id/#gid0">
            <skos:prefLabel>Manchester</skos:prefLabel>
            <skos:definition>city</skos:definition>
          </rdf:Description>
        </rdf:li>
      </rdf:Bag>
    </skos:member>
    <skos:definition>country</skos:definition>
  </rdf:Description>
</rdf:RDF>

```

Create/modify a dataset

PUT /metadata/dataset/ (*name*)

Creates a new or modifies the existing dataset with the specified name.

Query Parameters

- **id-seed** – (Optional) A property name in the RDF model.

If the id of a subject is not provided in the model, the value of this property will be used to generate an id for this subject.

If not set or the subject doesn't have this property, a random id will be generated.

Accepts

- **application/rdf+xml**, **text/turtle**, **application/ld+json** – The RDF model.

Produces

- **application/rdf+xml**, **text/turtle**, **application/ld+json** – The RDF model.

Role _metadata_dataset_write

Example

```
PUT /metadata/dataset/testmodell?id-seed=skos:prefLabel
```

```
<rdf:RDF
  xmlns:rdf="http://www.w3.org/1999/02/22-rdf-syntax-ns#"
  xmlns:skos="http://www.w3.org/2004/02/skos/core#"
  <rdf:Description>
    <skos:definition>country</skos:definition>
    <skos:member>
      <rdf:Bag>
        <rdf:li>
          <rdf:Description>
            <skos:definition>city</skos:definition>
            <skos:prefLabel>London</skos:prefLabel>
          </rdf:Description>
        </rdf:li>
        <rdf:li>
          <rdf:Description>
            <skos:definition>city</skos:definition>
            <skos:prefLabel>Manchester</skos:prefLabel>
          </rdf:Description>
        </rdf:li>
      </rdf:Bag>
    </skos:member>
    <skos:prefLabel>United Kingdom</skos:prefLabel>
  </rdf:Description>
</rdf:RDF>
```

Response:

```
<rdf:RDF
  xmlns:rdf="http://www.w3.org/1999/02/22-rdf-syntax-ns#"
  xmlns:skos="http://www.w3.org/2004/02/skos/core#"
  xmlns:vidi="http://rdf.vidispine.com/id/#">
  <rdf:Description rdf:about="http://rdf.vidispine.com/id/#unitedkingdom">
    <skos:prefLabel>United Kingdom</skos:prefLabel>
    <skos:member>
      <rdf:Bag rdf:about="http://rdf.vidispine.com/id/#gid0">
        <rdf:li>
          <rdf:Description rdf:about="http://rdf.vidispine.com/id/#london">
            <skos:prefLabel>London</skos:prefLabel>
            <skos:definition>city</skos:definition>
          </rdf:Description>
        </rdf:li>
        <rdf:li>
          <rdf:Description rdf:about="http://rdf.vidispine.com/id/#manchester">
            <skos:prefLabel>Manchester</skos:prefLabel>
            <skos:definition>city</skos:definition>
          </rdf:Description>
        </rdf:li>
      </rdf:Bag>
    </skos:member>
    <skos:definition>country</skos:definition>
  </rdf:Description>
</rdf:RDF>
```

Remove a dataset

DELETE `/metadata/dataset/` (*name*)

Removes the metadata dataset with the specified name.

Role `_metadata_dataset_write`

17.16.13 Metadata migrations

Managing migrations

List all existing migrations

GET `/metadata/migration`

Lists all metadata migrations defined in the system.

Role `_metadata_read`

Produces

- `application/xml`, `application/json` – [MetadataSchemaMigrationListDocument](#)

Define a new metadata migration

POST `/metadata/migration`

Creates a new metadata migration.

Role `_metadata_write`

Accepts

- `application/xml`, `application/json` – [MetadataSchemaMigrationDocument](#)

Produces

- `text/plain` –

View a single migration

GET `/metadata/migration/` (*id*)

Shows a single metadata migration.

Role `_metadata_read`

Produces

- `application/xml`, `application/json` – [MetadataSchemaMigrationDocument](#)

17.16.14 Metadata projections

Get information about projections

Get list of projections

GET /projection

Returns a list of all defined projections.

Query Parameters

- **url** –
 - `true` - Return list of URLs.
 - `false` (default) - Return list of ids.

Produces

- `application/xml`, `application/json` – `URListDocument`
- `text/plain` – CRLF-delimited list of ids or URLs

Role `_projection_read`

Get outgoing projection

GET /projection/ (projection-id) /outgoing

Returns the projection use to transform information *from* the Vidispine API, GET metadata.

Status Codes

- **404 Not found** – Could not find the projection identified by `projection-id`.

Produces

- `application/xml` – XML, XSLT stylesheet

Role `_projection_read`

Get incoming projection

GET /projection/ (projection-id) /incoming

Returns the projection use to transform information *to* the Vidispine API, PUT metadata.

Status Codes

- **404 Not found** – Could not find the projection identified by `projection-id`.

Produces

- `application/xml` – XML, XSLT stylesheet

Role `_projection_read`

Create/modify/delete projections

Note: Please note that the projection result must be an valid XML document.

Create projection/set outgoing projection

PUT `/projection/ (projection-id) /outgoing`

Creates a new projection if not defined earlier, and sets the outgoing projection to the specified stylesheet. If a new projection is created, the incoming transformation is set to be the identity transform.

Accepts

- **application/xml** – XML, XSLT stylesheet

Produces

- **application/xml** – XML, XSLT stylesheet

Role `_projection_write`

Create projection/set incoming projection

PUT `/projection/ (projection-id) /incoming`

Creates a new projection if not defined earlier, and sets the incoming projection to the specified stylesheet. If a new projection is created, the outgoing transformation is set to be the identity transform.

Accepts

- **application/xml** – XML, XSLT stylesheet

Produces

- **application/xml** – XML, XSLT stylesheet

Role `_projection_write`

Remove projection

DELETE `/projection/ (projection-id)`

Removes the projection.

Status Codes

- **200 OK** – The projection was deleted successfully.
- **404 Not found** – Could not find the projection identified by `projection-id`.

Role `_projection_write`

17.16.15 Metadata schema

A metadata schema can be used to enforce a particular data model in the metadata. A such restriction can say that the *field group* “goal” should contain exactly one *field* “goal_time” and one or more references to the group “player”.

See *Defining a metadata schema* and *Alternate way of creating a schema* for an example on how to create a metadata schema.

Managing the metadata schema

Retrieve the schema

GET /metadata-schema

Retrieves the full metadata schema.

Produces

- `application/xml`, `application/json` – `MetadataSchemaDocument`

Role `_metadata_schema_read`

Example

```
GET /metadata-schema
```

```
<MetadataSchemaDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <group min="0" max="-1" name="organization">
    <group reference="false" min="1" max="-1" name="employee"/>
    <group reference="false" min="0" max="-1" name="project"/>
    <field reference="false" min="1" max="1" name="example_name"/>
  </group>
  <group min="0" max="0" name="project">
    <group reference="true" min="1" max="-1" name="employee"/>
    <field reference="false" min="1" max="1" name="example_name"/>
    <field reference="false" min="1" max="1" name="example_location"/>
  </group>
  <group min="0" max="0" name="employee">
    <field reference="false" min="1" max="1" name="example_name"/>
    <field reference="false" min="0" max="1" name="example_title"/>
  </group>
</MetadataSchemaDocument>
```

Update the schema

PUT /metadata-schema

Updates the schema with the given document.

Accepts

- `application/xml`, `application/json` – `MetadataSchemaDocument`

Role `_metadata_schema_write`

Example

```
PUT /metadata-schema
```

```
Content-Type: application/xml
```

```
<MetadataSchemaDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <!-- The organization is optional and can exist [0,n] outside of groups -->
  <group name="organization" min="0" max="-1">
    <!-- An organization has one or more employees -->
```

```

<group name="employee" min="1" max="-1" reference="false"/>
<!-- An organization has one or more projects -->
<group name="project" min="0" max="-1" reference="false"/>
<!-- An organization has exactly one name -->
<field name="example_name" min="1" max="1" reference="false"/>
</group>

<!-- A project cannot exist outside of a group -->
<group name="project" min="0" max="0">
  <!-- A project has at least one employee, which has to be referenced -->
  <group name="employee" min="1" max="-1" reference="true"/>
  <!-- A project has exactly one name -->
  <field name="example_name" min="1" max="1" reference="false"/>
  <!-- A project has exactly one location element (it still can have more than
↳one value) -->
  <field name="example_location" min="1" max="1" reference="false"/>
</group>

<!-- An employee cannot exist outside of a group -->
<group name="employee" min="0" max="0">
  <!-- An employee has exactly one name -->
  <field name="example_name" min="1" max="1" reference="false"/>
  <!-- An employee might have a title -->
  <field name="example_title" min="0" max="1" reference="false"/>
</group>
</MetadataSchemaDocument>

```

Remove the schema

DELETE /metadata-schema

Clears the schema, causing no validation to be made.

Role _metadata_schema_write

Example

```
DELETE /metadata-schema
```

```
200 OK
```

Groups in the schema

Retrieve a group from the schema

GET /metadata-schema/ (group-name)

Retrieves the schema for a particular group.

Produces

- application/xml, application/json – MetadataSchemaGroupDocument

Role _metadata_schema_read

Example

```
GET /metadata-schema/project
```

```
<MetadataSchemaGroupDocument xmlns="http://xml.vidispine.com/schema/vidispine" min="0"
  ↳ " max="0" name="project">
  <group reference="true" min="1" max="-1" name="employee"/>
  <field reference="false" min="1" max="1" name="example_name"/>
  <field reference="false" min="1" max="1" name="example_location"/>
</MetadataSchemaGroupDocument>
```

Update a particular group in the schema

PUT /metadata-schema/ (*group-name*)

Updates the specified group in the schema

Accepts

- `application/xml`, `application/json` – `MetadataSchemaGroupDocument`

Role `_metadata_schema_write`

Example

```
PUT /metadata-schema/employee
```

```
200 OK
```

Remove a group from the schema

DELETE /metadata-schema/ (*group-name*)

Removes the group from the schema.

Role `_metadata_schema_write`

Example

```
DELETE /metadata-schema/employee
```

```
200 OK
```

17.16.16 Subtitles

Vidispine is able to produce SCC and TTML files from given subtitle metadata on items.

Changed in version 4.7: Support for SCC subtitle export was added.

Exporting subtitles

Export to SCC

GET `/item/ (id) /metadata/export/scc`

Returns the subtitles from the item metadata in SCC format.

New in version 4.7.

Matrix Parameters

- **interval** – A list of *time spans* of subtitle metadata to export. Defaults to all, meaning all subtitles.

Produces

- **text/plain** – The SCC data.

Role `_metadata_read`

Example

```
PUT /item/VX-52/metadata/
```

```
<?xml version="1.0"?>
<MetadataDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <timespan start="10" end="20">
    <group>
      <name>stl_subtitle</name>
      <field>
        <name>stl_text</name>
        <value>Text</value>
      </field>
    </group>
  </timespan>
</MetadataDocument>
```

```
GET /item/VX-56/metadata/export/scc
```

```
Scenarist_SCC V1.0

00:00:00:00  942c 942c 9420 9420 9470 9470 54e5 f8f4

00:00:10:00  942f 942f

00:00:20:00  942c 942c
```

Export to TTML

GET `/item/ (id) /metadata/export/ttml`

Generates a TTML file containing the subtitle metadata from a specific item.

The output TTML file obeys **EBU-TT** (<http://tech.ebu.ch/ebu-tt>) standard (EBU Tech 3360 (<http://tech.ebu.ch/webdav/site/tech/shared/tech/tech3360.pdf>))

An optional offset can be applied to the time span by adding ":" and the offset.

Matrix Parameters

- **interval** – A list of *time spans* of subtitle metadata to export. Defaults to all, meaning all subtitles.

Produces

- **application/xml** – The TTML XML.

Role `_metadata_read`

New in version 4.1.2: Support for specifying a time offset was added.

Example

Firstly, import an STL file as a *sidecar* file

```
POST /import/sidecar/{item-id}?sidecar=subtitle.stl
```

Then export the STL metadata to TTML:

```
GET /item/{id}/metadata/export/ttml
```

Example result:

```
<?xml version="1.0" encoding="UTF-8" standalone="yes"?>
<tt xmlns:ns2="http://www.w3.org/ns/ttml#styling" xmlns="http://www.w3.org/ns/ttml"
↳xmlns:ns4="http://www.w3.org/ns/ttml#metadata" xmlns:ns3="urn:ebu:tt:style" xmlns:
↳ns5="http://www.w3.org/ns/ttml#parameter" xmlns:ns6="urn:ebu:tt:metadata" ns5:
↳frameRate="25" ns5:cellResolution="50 30" ns2:extent="704px 576px" xml:lang="en">
  <head>
    <metadata>
      <ns6:documentMetadata>
        <ns6:documentTargetAspectRatio>4:3</ns6:documentTargetAspectRatio>
        <ns6:documentTotalNumberOfSubtitles>11</ns6:documentTotalNumberOfSubtitles>
        <ns6:documentMaximumNumberOfDisplayableCharacterInAnyRow>40</ns6:
↳documentMaximumNumberOfDisplayableCharacterInAnyRow>
        <ns6:documentStartOfProgramme>00:00:00:00</ns6:documentStartOfProgramme>
        <ns6:documentCountryOfOrigin>GB</ns6:documentCountryOfOrigin>
        <ns6:documentPublisher>Institut fuer Rundfunktechnik </ns6:
↳documentPublisher>
      </ns6:documentMetadata>
    </metadata>
    <styling>
      <style xml:id="textCenter" ns2:textAlign="center"/>
      <style xml:id="defaultStyle" ns2:fontFamily="monospaceSansSerif" ns2:fontSize=
↳"1c 1c" ns2:lineHeight="normal" ns2:textAlign="center" ns2:color="white" ns2:
↳backgroundColor="transparent" ns2:fontStyle="normal" ns2:fontWeight="normal" ns2:
↳textDecoration="none"/>
      <style xml:id="whiteOnblackDH" ns2:fontSize="1c 2c" ns2:color="white" ns2:
↳backgroundColor="black"/>
    </styling>
    <layout>
      <region xml:id="bottom" ns2:origin="10% 10%" ns2:extent="80% 80%" ns2:
↳displayAlign="after" ns2:padding="0c" ns2:writingMode="lrtb"/>
      <region xml:id="top" ns2:origin="10% 10%" ns2:extent="80% 80%" ns2:displayAlign=
↳"before" ns2:padding="0c" ns2:writingMode="lrtb"/>
    </layout>
  </head>
```



```

    <span style="whiteOnblackDH">on row 16</span>
    <br/>
    <br/>
    <br/>
    <br/>
  </p>
  <p region="bottom" style="textCenter" begin="00:00:23:07" end="00:00:25:12">
    <span style="whiteOnblackDH">one-line row 18</span>
    <br/>
    <br/>
    <br/>
    <br/>
  </p>
  <p region="top" style="textCenter" begin="00:00:26:12" end="00:00:29:10">
    <br/>
    <br/>
    <br/>
    <br/>
    <br/>
    <span style="whiteOnblackDH">two-line subtitle</span>
    <br/>
    <span style="whiteOnblackDH">on row 5</span>
  </p>
  <p region="top" style="textCenter" begin="00:00:28:21" end="00:00:31:01">
    <br/>
    <br/>
    <br/>
    <br/>
    <br/>
    <span style="whiteOnblackDH"> one-line on row 5</span>
  </p>
</div>
</body>
</tt>

```

Only export the part of STL metadata to TTML:

```

GET /item/{id}/metadata/export/ttml;interval=905207@PAL-905253@PAL,904994@PAL-
↪905065@PAL

```

New in version 4.1.2: It is possible to apply different offsets to the exported time intervals:

```

GET /item/{id}/metadata/export/ttml;interval=100@PAL-250@PAL:-25@PAL,500@PAL-1000@PAL:
↪-250@PAL

```

17.17 Miscellaneous

17.17.1 Stitching images

New in version 4.0.

This resource provides an easy way of stitching images together. The result is cached in memory (and Memcached if it is activated in the configuration properties) for 3 hours.

It can be used with any image content and is not bound to be used with material imported in Vidispine. However, a typical usage of this service would be to assemble together representative thumbnails from several items of a collection.

Note: This request must go to <http://server:8080/APIoauth/> instead of the usual <http://server:8080/API/>

Note: For a better quality rendering configure your Vidispine to use ImageMagick, see *Configuration properties!*

Note: Don't forget to URL encode all parameters!

Stitching images

Stitch images

GET /APIoauth/stitch

Query Parameters

- **uri** – Multiple uri instances of the images to use. For example: `uri=img1.png&uri=img2.png&uri=img3.png...`
- **geometry** – Optional geometry of the collage. For example, `100x50+10+10` will first downscale every image to fit in `100x50` then add a 10 pixels padding. If no parameter is specified, the original dimensions are used.
- **tile** – The tiling strategy. Examples are `2x2` or `2x` or `x3...` If no parameter is specified, the system will try find the best alignment.
- **format** – The format of the output image, default is PNG.
- **background** – The color of the background, default is white. Color can be specified as hex values (`0xffffffff`, `#ffffff`) or as name (`white`). `none` will create an image with transparent background (PNG only).

Produces

- `image/png` , `image/jpeg` – The stitched image

Example

```
GET /stitch?uri=http%3A%2F%2Fvidispine.com%2Fsites%2Fall%2Fthemes%2Fvidispine%2Flogo.png&uri=http%3A%2F%2Fvidispine.com%2Fsites%2Fall%2Fthemes%2Fvidispine%2Flogo.png&uri=http%3A%2F%2Fvidispine.com%2Fsites%2Fall%2Fthemes%2Fvidispine%2Flogo.png&uri=http%3A%2F%2Fvidispine.com%2Fsites%2Fall%2Fthemes%2Fvidispine%2Flogo.png&geometry=100x50%2B10&background=0xf5f7f8
```

17.17.2 Time zone

The `timezone` query parameter can be used to change the time zone of all dates in a response. This is supported for all API requests.

For example, to get the job information with dates in GMT-8.

```
GET /API/job?timezone=GMT-8
```

```
<JobListDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <hits>116730</hits>
  <job>
    <jobId>VX-1</jobId>
    <user>admin</user>
    <started>2013-02-02T04:28:17.023-08:00</started>
    <status>ABORTED</status>
    <type>PLACEHOLDER_IMPORT</type>
    <priority>MEDIUM</priority>
  </job>
  ...
</JobListDocument>
```

See also:

`TimeZone.getAvailableIDs` ([http://docs.oracle.com/javase/7/docs/api/java/util/TimeZone.html#getAvailableIDs\(\)](http://docs.oracle.com/javase/7/docs/api/java/util/TimeZone.html#getAvailableIDs())) for all legal time zone identifiers.

17.17.3 Troubleshooting

New in version 4.2.2.

These resources are intended to aid when developing against Vidispine or when troubleshooting.

XML and JSON

Echo

PUT /API/inoauth/debug/echo

Returns the provided XML in the Vidispine schema as either XML or JSON.

Use it to verify that XML is valid and parsed properly, or to convert from XML to JSON for example.

Accepts

- `application/xml` – Any XML in the Vidispine schema.

Produces

- `application/xml`, `application/json` – The input as XML or JSON.

Example

```
PUT /API/inoauth/debug/echo
```

```
Accept: application/json
```

```
<ItemSearchDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <text>test</text>
</ItemSearchDocument>
```

```
200 OK
```

```
{
  "text": [
    {
      "value": "foo"
    }
  ]
}
```

17.17.4 WADL

A WADL file describing the API can be obtained using `GET API/application.wadl`.

GET /application.wadl

Retrieves the application WADL that describes the resources and methods exposed by the VS API.

Produces

- `application/vnd.sun.wadl+xml`, `application/xml` – The application WADL

17.17.5 Callback

New in version 4.6.

CloudConvert Callback

GET /API/Inoauth/callback/cloudconvert

Used by CloudConvert to notify that a process has finished. See <https://cloudconvert.com/api/conversions/callback>.

Should not be used directly.

Query Parameters

- `id` – The id of the CloudConvert process
- `url` – location of the process result
- `step` – The current step of the CloudConvert process

17.17.6 Return the current user

This resource will return the username of the calling user. This can for example be used to validate user credentials, or get the username of the caller when using token authorization.

GET /whoami

Validates the currently used credentials and returns the calling users username.

Status Codes

- `200 OK` – The credentials are correct.
- `401 Unauthorized` – The credentials are incorrect.

Produces

- `text/plain` – \$USERNAME

17.18 Notifications

To define a notification, you need an action, a trigger, and a resource. Actions define what to do when the event happens. The trigger defines what type of event to trigger on, and the resource defines which entities to trigger for.

17.18.1 Actions

An action is what will be done when a notification is triggered. The action taken is that a message will be sent to either a HTTP, EJB, Amazon SQS (New in 4.7.) or JMS recipient, or being processed by a JavaScript.

An action can be sent either synchronously or asynchronously. The behaviour of synchronous vs. asynchronous notifications differ somewhat between the different action types, and is explained in the reference below. In general, however, synchronous notifications are sent from the same thread from where it was triggered, and asynchronous notifications are sent in a separate thread, allowing processing to continue right away after triggering.

Asynchronous delivery

Asynchronous notifications are delivered by multiple threads, one thread per notification endpoint (HTTP endpoint, EJB method, JMS queue, SQS endpoint or script.) This can be customized by defining a thread group name for the actions. Notifications with the same thread group name will then be delivered by the same thread.

```
<NotificationDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <action>
    <http synchronous="false" group="app_notifications">
      ...
    </http>
  </action>
  <trigger>
    ...
  </trigger>
</NotificationDocument>
```

Changed in version 4.6: In prior versions, all asynchronous notifications were delivered sequentially by a single thread.

HTTP

Action parameters

The details of the HTTP action are set in the action element in the notification definition.

url The URL to the HTTP resource. Mandatory parameter. (New in 4.1.4.) Basic auth username and password is supported. (`http://user:password@host...`)

method The HTTP method to use, POST and PUT are supported. Mandatory parameter.

timeout The timeout (in seconds) before assuming network failure. Use 0 or none to specify that there is no timeout. Mandatory parameter.

retry The number of retries. Mandatory parameter.

synchronous See below. Mandatory parameter.

contentType The content type of the message sent to the destination. For supported values, see below. Optional value.

Request body in notification message

The message in the request body depends on `contentType`:

text/plain Default format. A CRLF-delimited list with tab-separated rows that consist of the key followed by its values.

application/xml [SimpleMetadataDocument](#)

application/json [SimpleMetadataDocument](#)

Error-handling logic

The output depends on the content-type set in the action definition. The way the HTTP action works depends on if it is setup as synchronous or asynchronous. Below is a table that shows the differences.

Response	Synchronous	Asynchronous
Connection timeout	Stops	Will retry for a specified number of times
Receives HTTP code 2xx	Continues	Continues
Receives HTTP code 4xx	Stops	Stops
Receives HTTP code 5xx	Stops	Will retry for a specified number of times

Example

```
<NotificationDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <action>
    <http synchronous="false">
      <retry>3</retry>
      <contentType>application/json</contentType>
      <url>http://example.com/notify</url>
      <method>POST</method>
      <timeout>5</timeout>
    </http>
  </action>
  <trigger>
    ...
  </trigger>
</NotificationDocument>
```

EJB

Methods in EJBs must have the following signature and should not throw any exceptions. A null value as a response will always be regarded as that the message is *not* accepted and the action should stop. Note that returning the empty string is not the same as returning null, and will just be treated as an empty response.

```
public java.lang.String methodName (java.util.Map<java.lang.String, java.util.List
↳<java.lang.String>>)
```

Note: JNDI names must be prefixed by `vidibrain` (case insensitive). The interface name must match the class named plus the postfix `Remote`.

Action parameters

The details of the EJB action are set in the action element in the notification definition.

bean The JNDI name of the bean. Mandatory parameter.

method The method name of the bean. See above for method signature. Mandatory parameter.

data Key-value pairs with additional parameters that are passed to the bean method in the `java.util.Map<>` parameter. The keys in the map are the keys in the `NotificationDocument` prefixed by `data/` (e.g. the key `uri` in the `NotificationDocument` will get the key `data/uri` in the map).

New in version 4.13.

synchronous See below. Mandatory parameter.

Error-handling logic

Response	Synchronous	Asynchronous
Could not find the bean	Stops	Continues
Could not find the method	Stops	Continues
Returns null value	Stops	Continues
Returns non-null value	Continues	Continues

Example

```
<NotificationDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <action>
    <ejb synchronous="true">
      <bean>vidibrain.beans.MyBeanRemote</bean>
      <method>myMethod</method>
      <data>
        <key>param1</key>
        <value>value1</value>
      </data>
      <data>
        <key>param2</key>
        <value>value2</value>
      </data>
      <data>
        <key>param3</key>
        <value>value3</value>
      </data>
    </ejb>
  </action>
  <trigger>
    ...
  </trigger>
</NotificationDocument>
```

JMS

When running a standalone ActiveMQ instance, it is possible to send notifications to any queue that has been set up there. While it is possible to call them in asynchronous mode, there is not much point in doing so. This is since

messages on JMS queues always are treated asynchronously. Below a table can be seen over what the outcome is based on the different responses.

Action parameters

The details of the EJB action are set in the action element in the notification definition.

queue The JNDI name of the JMS queue. Mandatory parameter.

synchronous See below. Mandatory parameter.

contentType (New in 4.2.1.) The content type of the message sent to the destination. For supported values, see below. Optional value.

Notification message

The JMS message depends on `contentType`:

application/x-java-serialized-object Default format. An `ObjectMessage` with a `Map<String, List<String> >` object.

text/plain A `TextMessage` with a CRLF-delimited list with tab-separated rows that consist of the key followed by its values.

application/xml A `TextMessage` with `SimpleMetadataDocument`

application/json A `TextMessage` with `SimpleMetadataDocument`

Error-handling logic

Response	Synchronous	Asynchronous
Could not find the queue	Stops	Continues
Could not find the queue factory	Stops	Continues

Example

```
<NotificationDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <action>
    <jms synchronous="true">
      <queue>MyNotificationQueue</queue>
    </jms>
  </action>
  <trigger>
    ...
  </trigger>
</NotificationDocument>
```

JavaScript

New in version 4.2.

With a notification with a JavaScript action, it is possible to script actions directly in Vidispine. All of the output values (see below), are mapped to its respective variable in the JavaScript environment, unless if it is a multi-value list, then

it is mapped to `name + List`. All output values are also available in the variable `data`, which is a Map from the id to a List of strings.

Action parameters

The details of the EJB action are set in the action element in the notification definition.

script The actual JavaScript. Mandatory parameter.

synchronous See below. Mandatory parameter.

Error-handling logic

Response	Synchronous	Asynchronous
Errors (exceptions) in the execution	Stops	Continues

Example

```
<NotificationDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <action>
    <javascript>
      <script>
        logger.log("itemId: "+itemId+", "+data);
      </script>
    </javascript>
  </action>
  <trigger>
    ...
  </trigger>
</NotificationDocument>
```

Amazon SQS

New in version 4.7.

endpoint The endpoint of the SQS. Mandatory parameter.

queue The queue name. Mandatory parameter.

accessKey AWS access key. Note that the `secret` field should not be empty if this field is set.

Optional parameter.

secret If `accessKey` is set, this field should be the AWS secret key. Otherwise, it should be the *alias of the secret* that contains the credentials to SQS.

Optional parameter.

synchronous Mandatory parameter.

More info about synchronous/asynchronous notification.

contentType The content type of the message sent to the destination. For supported values, see below. Optional value.

Request body in notification message

The message in the request body depends on `contentType`:

text/plain Default format. A CRLF-delimited list with tab-separated rows that consist of the key followed by its values.

application/xml `SimpleMetadataDocument`

application/json `SimpleMetadataDocument`

Example

```
<NotificationDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <action>
    <sqs synchronous="false">
      <contentType>application/xml</contentType>
      <endpoint>sqs.eu-west-1.amazonaws.com</endpoint>
      <queue>notification</queue>
      <secret>aws</secret>
    </sqs>
  </action>
  <trigger>
    ...
  </trigger>
</NotificationDocument>
```

17.18.2 Triggers

A trigger is the event that will cause the notification to be sent. Different triggers exist for different resources. The trigger used determines what output that can be expected. Note that all keys will not necessarily be set and some keys may have more than one value.

Item triggers

Item create

Resource	/item	
Parameters	-	
Output	itemId	The id of the created item
	action	The string "CREATE"

Notifies when an item has been created.

Example

```
<NotificationDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <action>
    ...
  </action>
  <trigger>
    <item>
```

```

    <create/>
  </item>
</trigger>
</NotificationDocument>

```

Item delete

Resource	/item	
Parameters	-	
Output	itemId	The id of the deleted item
	action	The string "DELETE"

Notifies when an item has been deleted.

Example

```

<NotificationDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <action>
    ...
  </action>
  <trigger>
    <item>
      <delete/>
    </item>
  </trigger>
</NotificationDocument>

```

Item modify

Resource	/item	
Parameters	field	Specifies which fields to trigger on.
	interval	Specifies which intervals to trigger on.
	language	Specifies which languages to trigger on.
	track	Specifies which tracks to trigger on.
Output	itemId	The id of the modified item.
	changeSetId	The id of the metadata change set that was created. (New in 4.0.)
	(field-name)	The value of the field with the name (field-name).

Notifies when the metadata of an item has been modified. For the syntax of the parameters, please refer to *Get metadata*.

Example

```

<NotificationDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <action>
    ...
  </action>
  <trigger>
    <metadata>
      <modify>

```

```

        <field>field_a, field_b</field>
        <language>en_*</language>
    </modify>
</metadata>
</trigger>
</NotificationDocument>

```

Item create access

Resource	/item	
Parameters	-	
Output	notificationType	The string "access".
	notificationTrigger	The string "CREATE".
	itemId	The id of the item that were assigned the access control.
	accessId	The id of the access control.
	permission	The level of permission granted by the access control.
	user	If the access control grants access to a particular user, this value is set.
	group	If the access control grants access to a particular group, this value is set.

Sends a notification when an access control is created.

Example

```

<NotificationDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <action>
    ...
  </action>
  <trigger>
    <access>
      <create/>
    </access>
  </trigger>
</NotificationDocument>

```

Item delete access

Resource	/item	
Parameters	-	
Output	notificationType	The string "access".
	notificationTrigger	The string "DELETE".
	itemId	The id of the item that were assigned the access control.
	accessId	The id of the access control.
	permission	The level of permission granted by the access control.
	user	If the access control grants access to a particular user, this value is set.
	group	If the access control grants access to a particular group, this value is set.

Sends a notification an access control is deleted.

Example

```
<NotificationDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <action>
    ...
  </action>
  <trigger>
    <access>
      <delete/>
    </access>
  </trigger>
</NotificationDocument>
```

Item change access

New in version 4.0.

Resource	/item	
Parameters	-	
Output	notificationType	The string "access".
	notificationTrigger	The string "CHANGE".
	itemId	The id of the item that were assigned the access control.
	accessId	The id of the access control.
	permission	The level of permission granted by the access control.
	user	If the access control grants access to a particular user, this value is set.
	group	If the access control grants access to a particular group, this value is set.

Sends a notification when an access control is changed.

Example

```
<NotificationDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <action>
    ...
  </action>
  <trigger>
    <access>
      <change/>
    </access>
  </trigger>
</NotificationDocument>
```

Item create shape

Resource	/item	
Parameters	-	
Output	notificationType	The string "shape".
	notificationTrigger	The string "CREATE".
	itemId	The id of the item that the shape belongs to.
	shapeId	The id of the shape.

Sends a notification when a shape is created.

Example

```
<NotificationDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <action>
    ...
  </action>
  <trigger>
    <shape>
      <create/>
    </shape>
  </trigger>
</NotificationDocument>
```

Item modify shape

Resource	/item	
Parameters	-	
Output	notificationType	The string "shape".
	notificationTrigger	The string "MODIFY".
	itemId	The id of the item that the shape belongs to.
	shapeId	The id of the shape.

Sends a notification when a shape is modified.

Example

```
<NotificationDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <action>
    ...
  </action>
  <trigger>
    <shape>
      <modify/>
    </shape>
  </trigger>
</NotificationDocument>
```

Item delete shape

Resource	/item	
Parameters	-	
Output	notificationType	The string "shape".
	notificationTrigger	The string "DELETE".
	itemId	The id of the item that the shape belongs to.
	shapeId	The id of the shape.

Sends a notification when a shape is deleted.

Example

```
<NotificationDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <action>
    ...
  </action>
  <trigger>
    <shape>
      <delete/>
    </shape>
  </trigger>
</NotificationDocument>
```

Collection triggers

Collection create

Resource	/collection	
Parameters	-	
Output	collectionId	The id of the created collection
	action	The string "CREATE"

Notifies when a collection has been created.

Example

```
<NotificationDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <action>
    ...
  </action>
  <trigger>
    <collection>
      <create/>
    </collection>
  </trigger>
</NotificationDocument>
```

Collection delete

Resource	/collection	
Parameters	-	
Output	collectionId	The id of the deleted collection
	action	The string "DELETE"

Notifies when a collection has been deleted.

Example

```
<NotificationDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <action>
    ...
  </action>
  <trigger>
    <collection>
      <delete/>
    </collection>
  </trigger>
</NotificationDocument>
```

Collection metadata

Resource	/collection	
Parameters	field	Specifies which fields to trigger on.
	interval	Specifies which intervals to trigger on.
	language	Specifies which languages to trigger on.
	track	Specifies which tracks to trigger on.
Output	collectionId	The id of the modified collection.
	changeSetId	The id of the metadata change set that was created. (New in 4.0'.)
	(field-name)	The value of the field with the name (field-name).

Notifies when the metadata of a collection has been modified. For the syntax of the parameters, please refer to *Get metadata*.

Example

```
<NotificationDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <action>
    ...
  </action>
  <trigger>
    <collection>
      <metadata>
        <modify>
          <field>field_a, field_b</field>
          <language>en_*</language>
        </modify>
      </metadata>
    </collection>
  </trigger>
</NotificationDocument>
```

Collection modify

Resource	/collection	
Parameters	-	
Output	notificationType	The string "collection".
	notificationTrigger	The string "MODIFY".
	collectionId	The id of the collection that has changed.

Sends a notification when the content of a collection has been modified.

Example

```
<NotificationDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <action>
    ...
  </action>
  <trigger>
    <collection>
      <modify/>
    </collection>
  </trigger>
</NotificationDocument>
```

Document triggers

New in version 4.8.

Document create

Resource	/document	
Parameters	-	
Output	document	The name of the created document
	action	The string "CREATE"

Notifies when a document has been created.

Example

```
<NotificationDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <action>
    ...
  </action>
  <trigger>
    <document>
      <create/>
    </document>
  </trigger>
</NotificationDocument>
```

Document delete

Resource	/document	
Parameters	-	
Output	document	The name of the deleted document
	action	The string "DELETE"

Notifies when a document has been deleted.

Example

```
<NotificationDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <action>
    ...
  </action>
  <trigger>
    <document>
      <delete/>
    </document>
  </trigger>
</NotificationDocument>
```

Document update

Resource	/document	
Parameters	field	Specifies which fields to trigger on.
	interval	Specifies which intervals to trigger on.
	language	Specifies which languages to trigger on.
	track	Specifies which tracks to trigger on.
Output	document	The name of the modified document.
	changeSetId	The id of the metadata change set that was created.
	(field-name)	The value of the field with the name (field-name).

Notifies when the document metadata has been modified. For the syntax of the parameters, please refer to [Get meta-data](#).

Example

```
<NotificationDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <action>
    ...
  </action>
  <trigger>
    <document>
      <modify>
        <field>field_a, field_b</field>
        <language>en_*</language>
      </modify>
    </document>
  </trigger>
</NotificationDocument>
```

Group triggers

Group create

Resource	/group	
Parameters	-	
Output	group	The name of the created group.
	action	The string "CREATE"
	username	The name of the user that created the group.

Sends a notification when a group is created.

Example

```
<NotificationDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <action>
    ...
  </action>
  <trigger>
    <group>
      <create/>
    </group>
  </trigger>
</NotificationDocument>
```

Group delete

Resource	/group	
Parameters	-	
Output	group	The name of the deleted group.
	action	The string "DELETE"
	username	The name of the user that deleted the group.

Notifies when a group has been deleted.

Example

```
<NotificationDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <action>
    ...
  </action>
  <trigger>
    <group>
      <delete/>
    </group>
  </trigger>
</NotificationDocument>
```

Group modify

Resource	/group	
Parameters	-	
Output	group	The name of the modified group.
	action	The string "MODIFY"
	username	The name of the user that modified the group.
	mode	Either has the value "ADD" or "REMOVE" depending on the action taken on the group.
	affectedGroup	Contains the name of any affected group.
	affectedUser	Contains the name of any affected user.

Notifies when the contents of a group has been modified.

Example

```
<NotificationDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <action>
    ...
  </action>
  <trigger>
    <group>
      <modify/>
    </group>
  </trigger>
</NotificationDocument>
```

Job triggers

Normal job notifications

```
POST /job/notification
Content-Type: application/xml

<NotificationDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <action>
    ...
  </action>
  <trigger>
    <job>
      <stop/>
    </job>
  </trigger>
</NotificationDocument>
```

This notification will be triggered when any job stops.

Placeholder job notifications

One way job notifications differ from other notifications is that they can be created in advanced and then later be specified when starting a job. Note that a single job notification can be used for several jobs.

Creating a placeholder notification, that triggers when jobs stop:

```
POST /job/notification
Content-Type: application/xml

<NotificationDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <action>
    ...
  </action>
  <trigger>
    <job>
      <stop/>
      <placeholder>true</placeholder>
    </job>
  </trigger>
</NotificationDocument>
```

VX-16

Using that notification when creating a new import job:

```
POST /import/?URL=http://example.com/video.avi&notification=VX-16
Content-Type: application/xml

<MetadataDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <timespan start="-INF" end="+INF">
    <field>
      <name>title</name>
      <value>My notification item!</value>
    </field>
  </timespan>
</MetadataDocument>
```

Job create

Resource	/job	
Parameters	-	
Output	jobId	The id of the created job.
	action	The string "CREATE".
	status	The status of the job.
	type	The type of the job.

Notifies when a job is created.

Example

```
<NotificationDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <action>
    ...
  </action>
  <trigger>
    <job>
      <create/>
    </job>
  </trigger>
</NotificationDocument>
```

```
</trigger>
</NotificationDocument>
```

Job stop

Resource	/job	
Parameters	-	
Output	jobId	The id of the stopped job.
	action	The string "STOP".
	status	The status of the job.
	type	The type of the job.
	currentStepNumber	The current step number.
	currentStepStatus	The status of the current step.

Notifies when a job has stopped running, either successfully or unsuccessfully. Note that the output may also contain additional job specific data such as `itemId`, in the case of an import job.

Example

```
<NotificationDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <action>
    ...
  </action>
  <trigger>
    <job>
      <stop/>
    </job>
  </trigger>
</NotificationDocument>
```

Job update

Resource	/job	
Parameters	-	
Output	jobId	The id of the stopped job.
	action	The string "UPDATE".
	status	The status of the job.
	type	The type of the job.
	currentStepNumber	The current step number.
	currentStepStatus	The status of the current step.

Notifies when the status of a job changes. Note that the output may also contain additional job specific data such as `itemId`, in the case of an import job.

Example

```
<NotificationDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <action>
    ...
  </action>
```

```

    <trigger>
      <job>
        <update/>
      </job>
    </trigger>
  </NotificationDocument>

```

Job filtering

Job types

Filter criteria can be added to job notifications in order to filter the jobs they trigger on.

Name	Description
type	The type of the job
step	The step that the job is currently on
jobdata	A particular value in the job metadata. Job metadata consists of key value pairs and can be matched either by string comparison or regular expressions.

Example

```

POST /job/notification
Content-Type: application/xml

<NotificationDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <action>
    ...
  </action>
  <trigger>
    <job>
      <stop/>
      <filter>
        <type>PLACEHOLDER_IMPORT</type>
      </filter>
    </job>
  </trigger>
</NotificationDocument>

```

this notification is triggered only when a PLACEHOLDER_IMPORT job stops.

Note: If you find notification filtering not working, please verify that there is no normal job notification existing.

Job metadata

Either by string comparison or regular expressions:

```

<NotificationDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <action>
    ...
  </action>
  <trigger>

```

```
<job>
  <stop/>
  <filter>
    <type>PLACEHOLDER_IMPORT</type>
    <jobdata>
      <key>key</key>
      <value>value</value>
    </jobdata>
  </filter>
</job>
</trigger>
</NotificationDocument>
```

```
<NotificationDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <action>
    ...
  </action>
  <trigger>
    <job>
      <stop/>
      <filter>
        <type>PLACEHOLDER_IMPORT</type>
        <jobdata>
          <key-regex>regex</key-regex>
          <value-regex>regex</value-regex>
        </jobdata>
      </filter>
    </job>
  </trigger>
</NotificationDocument>
```

Content Filter

New in version 4.0.

Content filter criteria can be added to job notifications in order to reduce the size of jobDocument returned by Vidispine.

Example:

```
POST /job/notification
Content-Type: application/xml

<NotificationDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <action>
    ...
  </action>
  <trigger>
    <job>
      <stop/>
      <contentFilters>
        <contentFilter>jobId</contentFilter>
        <contentFilter>jobState</contentFilter>
      </contentFilters>
    </job>
  </trigger>
```



```
</NotificationDocument>
```

Legal content filters are:

```
<contentFilters>
  <contentFilter>jobId</contentFilter>
  <contentFilter>jobState</contentFilter>
  <contentFilter>user</contentFilter>
  <contentFilter>startTime</contentFilter>
  <contentFilter>jobType</contentFilter>
  <contentFilter>jobData</contentFilter>
  <contentFilter>errorMessage</contentFilter>
  <contentFilter>itemId</contentFilter>
  <contentFilter>totalSteps</contentFilter>
  <contentFilter>currentStep</contentFilter>
</contentFilters>
```

Storage triggers

Create storage

Resource	/storage	
Parameters	-	
Output	storageId	The id of the created storage.
	action	The string "CREATE".

Notifies when a storage is created.

Example

```
<NotificationDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <action>
    ...
  </action>
  <trigger>
    <storage>
      <create/>
    </storage>
  </trigger>
</NotificationDocument>
```

Delete storage

Resource	/storage	
Parameters	-	
Output	storageId	The id of the deleted storage.
	action	The string "DELETE".

Notifies when a storage is being deleted.

Example

```
<NotificationDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <action>
    ...
  </action>
  <trigger>
    <storage>
      <delete/>
    </storage>
  </trigger>
</NotificationDocument>
```

Generate filename

Resource	/storage	
Parameters	-	
Output	storageId	The id of the storage.
	action	The string "FILENAME".
	itemId	The id of the item the file belongs to.
	shapeId	The id of the shape the file belongs to.
	componentId	The id of the component the file belongs to.
	fileId	The id of the file.
	username	The name of the user that causes the file to be created.
	metadata	The metadata of the item.
	shapeTag	A list of shape tags that belong to the shape.

Notifies when a file is being created on a storage. The message returned by the HTTP or EJB action will be used as a filename. If multiple notifications exist for a storage, then either one that returns a valid filename will be used. A valid filename follows the following format: `[A-Za-z0-9_\-]+`. It is recommended to use `fileId` in some way to guarantee the uniqueness of the filename.

Note that only the `storageId`, `action` and `fileId` output values are guaranteed to be included.

Example

```
<NotificationDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <action>
    ...
  </action>
  <trigger>
    <storage>
      <filename/>
    </storage>
  </trigger>
</NotificationDocument>
```

Note: It is recommended to use the filename generation script function instead, see *Naming files on storage*.

File triggers

Only generic file notifications are available, that is, there is no way to apply a notification to an individual file.

Creating file notifications

Creating a placeholder notification, that triggers when file is created:

```
POST /storage/file/notification
Content-Type: application/xml

<NotificationDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <action>
    ...
  </action>
  <trigger>
    <file>
      <new/>
    </file>
  </trigger>
</NotificationDocument>
```

VX-16

New file

Resource	/storage/file	
Parameters	-	
Output	fileId	The id of the new file.
	action	The string "NEW".
	storageId	The id of the storage the file is located on.
	shapeId	The shapeId of the file, if available.
	itemId	The id of the item the file is associated with if available.

Notifies when a file is created, or has been discovered.

Example

```
<NotificationDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <action>
    ...
  </action>
  <trigger>
    <file>
      <new/>
    </file>
  </trigger>
</NotificationDocument>
```

File has changed

Resource	/storage/file	
Parameters	-	
Output	fileId	The id of the changed file.
	action	The string "CHANGE".
	storageId	The id of the storage the file is located on.
	shapeId	The shapeId of the file, if available.
	itemId	The id of the item the file is associated with if available.

Notifies when a file has changed.

Example

```
<NotificationDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <action>
    ...
  </action>
  <trigger>
    <file>
      <change/>
    </file>
  </trigger>
</NotificationDocument>
```

File has closed

Resource	/storage/file	
Parameters	-	
Output	fileId	The id of the changed file.
	action	The string "CLOSE".
	storageId	The id of the storage the file is located on.
	shapeId	The shapeId of the file, if available.
	itemId	The id of the item the file is associated with if available.

Notifies when a file has been marked as closed in Vidispine.

Example

```
<NotificationDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <action>
    ...
  </action>
  <trigger>
    <file>
      <close/>
    </file>
  </trigger>
</NotificationDocument>
```

File was deleted

Resource	/storage/file	
Parameters	-	
Output	fileId	The id of the deleted file.
	action	The string "DELETE".
	storageId	The id of the storage the file is located on.
	shapeId	The shapeId of the file, if available.
	itemId	The id of the item the file is associated with if available.

Notifies when a file has been deleted.

Example

```
<NotificationDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <action>
    ...
  </action>
  <trigger>
    <file>
      <delete/>
    </file>
  </trigger>
</NotificationDocument>
```

File hash has been computed

New in version 4.1.

Resource	/storage/file	
Parameters	-	
Output	fileId	The id of the hashed file.
	action	The string "HASH".
	storageId	The id of the storage the file is located on.
	shapeId	The shapeId of the file, if available.
	itemId	The id of the item the file is associated with if available.

Notifies when a file has been hashed.

Example

```
<NotificationDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <action>
    ...
  </action>
  <trigger>
    <file>
      <hash/>
    </file>
  </trigger>
</NotificationDocument>
```

Quota triggers

Quota triggers can be set to send a notification when a quota has been exceeded, when a quota is added, and when a quota is deleted.

Create quota notifications

Creating a placeholder notification, that triggers when a quota is exceeded:

```
POST /quota/notification
Content-Type: application/xml

<NotificationDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <action>
    ...
  </action>
  <trigger>
    <quota>
      <warning/>
    </quota>
  </trigger>
</NotificationDocument>
```

VX-16

Quota warning

Resource	/quota	
Parameters	-	
Output	ruleId	The id of the quota rule
	notificationTrigger	The string "WARNING".
	itemLimit	The item limit set in the triggering rule.
	storageLimit	The storage limit set in the triggering rule.
	itemUsage	The current usage in items
	storageUsage	The current usage on storages.

Notifies when a quota has been exceeded.

Example

```
<NotificationDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <action>
    ...
  </action>
  <trigger>
    <quota>
      <warning/>
    </quota>
  </trigger>
</NotificationDocument>
```

Quota create

Resource	/quota	
Parameters	-	
Output	ruleId	The id of the quota rule
	notificationTrigger	The string "CREATE".
	itemLimit	The item limit set in the triggering rule.
	storageLimit	The storage limit set in the triggering rule.
	itemUsage	The current usage in items
	storageUsage	The current usage on storages.

Notifies when a quota has been created.

Example

```
<NotificationDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <action>
    ...
  </action>
  <trigger>
    <quota>
      <created/>
    </quota>
  </trigger>
</NotificationDocument>
```

Quota delete

Resource	/quota	
Parameters	-	
Output	ruleId	The id of the quota rule
	notificationTrigger	The string "DELETE".
	itemLimit	The item limit set in the triggering rule.
	storageLimit	The storage limit set in the triggering rule.
	itemUsage	The current usage in items
	storageUsage	The current usage on storages.

Notifies when a quota has been exceeded.

Example

```
<NotificationDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <action>
    ...
  </action>
  <trigger>
    <quota>
      <delete/>
    </quota>
  </trigger>
</NotificationDocument>
```

Deletion lock triggers

New in version 4.15.

Lock create

Resource	.../deletion-lock	
Parameters	-	
Output	newLockId	The id of the newly created lock.
	newExpiry	The expiration time of the lock.

Triggered when a new deletion lock is created.

Example

```
<NotificationDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <action>
    ...
  </action>
  <trigger>
    <deletionLock>
      <create/>
    </deletionLock>
  </trigger>
</NotificationDocument>
```

Lock modify

Triggered when a deletion lock has been modified.

Resource	.../deletion-lock	
Parameters	-	
Output	oldLockId	The id of the lock that was modified.
	oldExpiry	The old expiration time of the lock.
	newLockId	The id of the lock that was modified.
	newExpiry	The new expiration time of the lock.

Example

```
<NotificationDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <action>
    ...
  </action>
  <trigger>
    <deletionLock>
      <modify/>
    </deletionLock>
  </trigger>
</NotificationDocument>
```


Lock delete

Resource	.../deletion-lock	
Parameters	-	
Output	oldLockId	The id of the lock that was deleted.
	oldExpiry	The expiration time of that lock.

Triggered when a deletion lock has been deleted, and the change has propagated to all the sub entities.

Example

```
<NotificationDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <action>
    ...
  </action>
  <trigger>
    <deletionLock>
      <delete/>
    </deletionLock>
  </trigger>
</NotificationDocument>
```

Lock expired

Resource	.../deletion-lock	
Parameters	-	
Output	oldLockId	The id of the lock that expired.
	oldExpiry	The expiration time of that lock.

Triggered when a lock has expired.

Example

```
<NotificationDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <action>
    ...
  </action>
  <trigger>
    <deletionLock>
      <expire/>
    </deletionLock>
  </trigger>
</NotificationDocument>
```

Effective lock change

Resource	.../deletion-lock	
Parameters	-	
Output	oldLockId	The id of the previous effective lock.
	oldExpiry	The old expiration time of the old lock.
	newLockId	The id of the new effective lock.
	newExpiry	The expiration time of the new lock.

Triggered when an effective lock on the entity has changed.

Example

```
<NotificationDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <action>
    ...
  </action>
  <trigger>
    <deletionLock>
      <effective/>
    </deletionLock>
  </trigger>
</NotificationDocument>
```

17.18.3 Notifications

Most URLs that acts as resources in the RESTful API are used as resources in the notification framework as well.

In the following reference, {notification-entity} is one of the following:

- /item
- /collection
- /job
- /storage
- /storage/file
- /quota
- /group
- /document
- /deletion-lock

In the following reference, {notification-resource} is one of the following:

- {notification-entity}/notification
- /notification

Where the single notification endpoint is the placeholder-entity. To read and write these placeholder notifications the releveant role must be used, in this case the placeholder read/write roles.

In the following reference, {notification-entity-read-role} is one of the following:

- _{notification-entity}_notification_read

- `_placeholder_notification_read`

In the following reference, `{notification-entity-write-role}` is one of the following:

- `_{notification-entity}_notification_write`
- `_placeholder_notification_write`

Changed in version 4.8: The `/document` notification resource was added.

Changed in version 4.17: The placeholder notification resource was added.

Applying notifications to entire resources

Notifications can be applied to entire resources. For example if used on the item resource, then events that occur to any item will potentially trigger the event.

Retrieve all notifications that exists within an entire resource

GET `{notification-resource}/`

Lists URIs to all notifications that exists within the given resource.

Produces

- `application/xml`, `application/json` – A `URIListDocument` containing URIs to all available notifications.
- `text/plain` – A CRLF-delimited list of URIs.

Role `{notification-entity-read-role}`

Example

```
GET /item/job/notification
Accept: application/xml
```

```
<URIListDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <uri>VX-573</uri>
</URIListDocument>
```

Create a new notification that is applied to the entire resource

POST `{notification-resource}/`

Adds a notification that is applied to an entire resource

Accepts

- `application/xml`, `application/json` – `NotificationDocument`

Produces

- `application/xml`, `application/json` – `URIListDocument`
- `text/plain` – The id of the notification.

Role `{notification-entity-write-role}`

Example

Create a notification that triggers when PLACEHOLDER_IMPORT job finish.

```
POST /item/job/notification
Content-Type: application/xml

<NotificationDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <action>
    <http>
      <url>http://10.10.0.3/notify-job</url>
      <timeout>5</timeout>
      <retry>3</retry>
      <method>POST</method>
      <contentType>application/xml</contentType>
    </http>
  </action>
  <trigger>
    <job>
      <finished/>
      <filter>
        <type>PLACEHOLDER_IMPORT</type>
      </filter>
    </job>
  </trigger>
</NotificationDocument>
```

```
<URIListDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <uri>VX-573</uri>
</URIListDocument>
```

Deletes all notifications that exists within an entire resource

DELETE {notification-resource}/

Removes all notifications that exists within the specified resource.

Status Codes

- **200 OK** – Everything went well.

Role {notification-entity-write-role}

Retrieve a particular notification

GET {notification-resource}/ (notification-id)

Retrieves a particular notification with the given id.

Status Codes

- **404 Not found** – No notification with that id exists in that resource.

Produces

- **application/xml, application/json** – NotificationDocument

Role {notification-entity-read-role}

Example

Retrieve job notification VX-573.

```
GET /job/notification/VX-573
Accept: application/xml
```

```
<NotificationDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <action>
    <http>
      <url>http://10.10.0.3/notify-job</url>
      <timeout>5</timeout>
      <retry>3</retry>
      <method>POST</method>
      <contentType>application/xml</contentType>
    </http>
  </action>
  <trigger>
    <job>
      <finished/>
      <filter>
        <type>PLACEHOLDER_IMPORT</type>
      </filter>
    </job>
  </trigger>
</NotificationDocument>
```

Remove a particular notification

DELETE {notification-resource}/(notification-id)

Removes a particular notification with the given id.

Status Codes

- **200 OK** – The notification was successfully removed.
- **404 Not found** – No notification with that id exists in that resource.

Role {notification-entity-write-role}

Applying notifications to specific entities

Notifications can also be applied on specific entities, for example a single job.

Note: These resources do not apply for the `/storage/file` endpoint.

Retrieve all notifications that exists for a particular entity

GET {notification-entity}/(entity-id)/notification/

Lists URIs to all notifications that exists for a given entity.

Produces

- `application/xml`, `application/json` – A `URIListDocument` containing URIs to all available notifications.
- `text/plain` – A CRLF-delimited list of URIs.

Role {notification-entity-read-role}

Create a new notification that is applied to a particular entity

POST {notification-entity}/(entity-id)/notification/

Adds a notification to the given entity.

Accepts

- `application/xml`, `application/json` – `NotificationDocument`

Produces

- `application/xml`, `application/json` – `URIListDocument`
- `text/plain` – The id of the notification.

Role {notification-entity-write-role}

Deletes all notifications that exists within an entire resource

DELETE {notification-entity}/(entity-id)/notification/

Removes all notifications that exists within the specified entity.

Status Codes

- **200 OK** – Everything went well.

Role {notification-entity-write-role}

Retrieve a particular notification

GET {notification-entity}/(entity-id)/notification/

notification-id Retrieves a particular notification with the given id.

Status Codes

- **404 Not found** – No notification with that id exists in that resource.

Produces

- `application/xml`, `application/json` – `NotificationDocument`

Role {notification-entity-read-role}

Remove a particular notification

DELETE {notification-entity}/(entity-id)/notification/

notification-id Removes a particular notification with the given id.

Status Codes

- **200 OK** – The notification was successfully removed.

- **404 Not found** – No notification with that id exists in that resource.

Role {notification-entity-write-role}

Change a particular notification on a whole entity

PUT {**notification-resource**}/ (*notification-id*)

Change the action and/or trigger of the notification that exists within the given resource.

Accepts

- **application/xml**, **application/json** – [NotificationDocument](#)

Produces

- **application/xml**, **application/json** – [NotificationDocument](#)

Role {notification-entity-write-role}

Status Codes

- **200 OK** – The notification was successfully changed.
- **404 Not found** – No notification with that id exists in that resource.

Change a particular notification on a specific entity

PUT {**notification-entity**}/ (*entity-id*) /**notification/**

notification-id Change the action and/or trigger of the notification that exists within the given resource.

Accepts

- **application/xml**, **application/json** – [NotificationDocument](#)

Produces

- **application/xml**, **application/json** – [NotificationDocument](#)

Role {notification-entity-write-role}

Status Codes

- **200 OK** – The notification was successfully changed.
- **404 Not found** – No notification with that id exists in that resource.

Example

```
GET /item/VX-43/notification/VX-573
```

```
<NotificationDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <action>
    <http>
      <url>http://10.10.0.3/notify-job</url>
      <timeout>5</timeout>
      <retry>3</retry>
      <method>POST</method>
      <contentType>application/xml</contentType>
    </http>
  </action>
```

```
<trigger>
  <job>
    <finished/>
    <filter>
      <type>PLACEHOLDER_IMPORT</type>
    </filter>
  </job>
</trigger>
</NotificationDocument>
```

```
PUT /item/VX-43/notification/VX-573
Content-Type: application/xml
```

```
<NotificationDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <action>
    <http>
      <url>http://service.example.com/notify</url>
      <timeout>5</timeout>
      <retry>3</retry>
      <method>POST</method>
      <contentType>application/xml</contentType>
    </http>
  </action>
  <trigger>
    <job>
      <finished/>
      <filter>
        <type>TRANSCODE</type>
      </filter>
    </job>
  </trigger>
</NotificationDocument>
```

```
GET /item/VX-43/notification/VX-573
```

```
<NotificationDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <action>
    <http>
      <url>http://service.example.com/notify</url>
      <timeout>5</timeout>
      <retry>3</retry>
      <method>POST</method>
      <contentType>application/xml</contentType>
    </http>
  </action>
  <trigger>
    <job>
      <finished/>
      <filter>
        <type>TRANSCODE</type>
      </filter>
    </job>
  </trigger>
</NotificationDocument>
```


17.19 Projects and versions

17.19.1 Projects

Create a project collection

POST /collection/project

Creates a project collection with the given name and metadata.

Accepts

- `application/xml`, `application/json` – ProjectDocument

Produces

- `application/xml`, `application/json` – URIListDocument
- `text/plain` – CRLF-delimited list of ids

Example

```
POST /collection/project
Content-Type: application/xml

<?xml version="1.0" encoding="UTF-8" standalone="yes"?>
<ProjectDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <name>Untitled Project</name>
  <metadata>...</metadata>
</ProjectDocument>
```

```
<?xml version="1.0" encoding="UTF-8" standalone="yes"?>
<URIListDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <uri>VX-1</uri>
</URIListDocument>
```

17.19.2 Project versions

Create a project version collection

POST /collection/{id}/version

Creates a new project version collection for a specific project.

Status Codes

- **404 Not found** – Could not find the collection

Accepts

- `application/xml`, `application/json` – ProjectVersionDocument

Produces

- `application/xml`, `application/json` – URIListDocument
- `text/plain` – CRLF-delimited list of ids

Example

```
POST /collection/VX-1/version
Content-Type: application/xml
```

```
<?xml version="1.0" encoding="UTF-8" standalone="yes"?>
<ProjectVersionDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <item>
    <id>VX-1</id>
  </item>
  <sequence>...</sequence>
  <metadata>...</metadata>
</ProjectVersionDocument>
```

```
<?xml version="1.0" encoding="UTF-8" standalone="yes"?>
<URIListDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <uri>VX-2</uri>
</URIListDocument>
```

17.19.3 Version definitions

List the available version definitions

GET /collection/ (*id*) /definition

Returns the format of the definitions that have been stored for a specific project version.

Status Codes

- **404 Not found** – Could not find the collection

Produces

- **text/plain** – A CLRF separated list of formats.

Role _collection_read

Update a project version definition

PUT /collection/ (*id*) /definition/

format Updates a binary representation of the project version. The collection must be a project version collection.

Status Codes

- **404 Not found** – Could not find the collection

Accepts

- **application/octet-stream** – The binary version definition

Role _collection_write

Retrieve a project version definition

GET /collection/ (*id*) /definition/

format Retrieves a binary representation of the project version.

Status Codes

- **404 Not found** – Could not find the collection
- **404 Not found** – Could not find the definition

Produces

- **application/octet-stream** – The stored version definition

Role `_collection_read`

Delete a project version definition

DELETE `/collection/ (id) /definition/`
format Deletes a binary representation of the project version.

Status Codes

- **404 Not found** – Could not find the collection

Role `_collection_write`

17.19.4 Assets in project version definition

To be able to track which clips and sequences corresponds to which items in Vidispine, an essence mapping can be stored for each version definition. This mapping is required for Vidispine to be able to convert between different formats.

Retrieve the asset definition

GET `/collection/ (id) /definition/`
format/asset Returns the asset document that has been stored for a specific project version definition.

Status Codes

- **404 Not found** – Could not find the collection
- **404 Not found** – Could not find the definition

Produces

- **application/xml, application/json** – `EssenceMappingsDocument`

Role `_collection_read`

Update the asset definition

PUT `/collection/ (id) /definition/`
format/asset Stores an asset document for a specific project version definition. The document should identify the items and files referenced by the definition.

Status Codes

- **404 Not found** – Could not find the collection
- **404 Not found** – Could not find the definition

Accepts

- `application/xml`, `application/json` – `EssenceMappingsDocument`

Role `_collection_write`

Delete the asset definition

DELETE `/collection/ (id) /definition/`
`format/asset` Deletes an asset document for a specific project version definition.

Status Codes

- **404 Not found** – Could not find the collection
- **404 Not found** – Could not find the definition

Role `_collection_write`

17.19.5 Version definition extradata

Each version definition can also store arbitrary extradata.

Retrieve the extradata

GET `/collection/ (id) /definition/`
`format/extradata` Returns the extradata that has been stored for a specific project version definition.

Status Codes

- **404 Not found** – Could not find the collection
- **404 Not found** – Could not find the definition

Produces

- `application/octet-stream` – The binary extradata.

Role `_collection_read`

Update the extradata

PUT `/collection/ (id) /definition/`
`format/extradata` Stores extradata for a specific project version definition.

Status Codes

- **404 Not found** – Could not find the collection
- **404 Not found** – Could not find the definition

Accepts

- `application/octet-stream` – The binary extradata.

Role `_collection_write`

Delete the extradata

DELETE `/collection/` (*id*) `/definition/`
format/extradata Deletes the extradata for a specific project version definition.

Status Codes

- **404 Not found** – Could not find the collection
- **404 Not found** – Could not find the definition

Role `_collection_write`

17.19.6 Inspecting project files

Inspect a project file

POST `/collection/project/inspect`
 Returns a document listing the sequences and assets referenced from a given project file.

Query Parameters

- **uri** – The location of the file to inspect.
- **type** – The file format.

Accepts

- `application/xml`, `application/json` – `EssenceMappingsDocument`

Produces

- `application/xml`, `application/json` – `ProjectFileDocument`

Example

```
POST /collection/project/inspect?uri=file:///home/maria/sequence.xml&type=finalcut
Content-Type: application/xml
```

```
<?xml version="1.0" encoding="UTF-8" standalone="yes"?>
<EssenceMappingDocument xmlns="http://xml.vidispine.com/schema/vidispine">
</EssenceMappingDocument>
```

```
<?xml version="1.0" encoding="UTF-8" standalone="yes"?>
<ProjectFileDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <location>file:///home/maria/sequence.xml</location>
  <asset>
    <id>urn:uuid:8CED8AFE-1A67-4632-AB57-D5F5B1E0BC49</id>
    <name>Sequence 1</name>
    <type>sequence</type>
    <status>unknown</status>
  </asset>
  <asset>
    <id>urn:uuid:FCAD0878-7129-43DA-A8A0-696590EFE4DA</id>
    <name>Sample Clip B</name>
    <type>clip</type>
    <status>unknown</status>
    <file>
```

```

    <path>file://localhost/Users/maria/Sample%20Clip%20B.mov</path>
  </file>
</asset>
<asset>
  <id>urn:uuid:76BE320F-48E0-47A5-A076-227158C50024</id>
  <name>Clip A</name>
  <type>clip</type>
  <status>unknown</status>
  <file>
    <path>file://localhost/Users/maria/Movies/Vidispine/VX-1.mov</path>
  </file>
</asset>
</ProjectFileDocument>

```

17.19.7 Importing projects and sequences

Import a sequence

POST /import/project/sequence

Creates a new item with a Vidispine sequence representations of the given file. The file must contain a single sequence.

The item will also have a sequence contain the original data from the file, together with an essence mapping for identifying the items and files referenced by the sequence.

Query Parameters

- **uri** – The location of the file to import.
- **type** – The file format.
- **assignId** – True if external ids should be created for the items in this project, using the ids from the project.
- **pauseFrame** – When a rendering job is started, this parameter determines which frame the job will pause at. The job will resume when the sequence is updated.

Accepts

- **application/xml**, **application/json** – [EssenceMappingsDocument](#)

Produces

- **application/xml**, **application/json** – [URIListDocument](#)
- **text/plain** – CRLF-delimited list of ids

Role _import

Role _external_id_write

Example

```

POST /import/project/sequence?uri=file:///home/maria/sequence.xml&type=finalcut
Content-Type: application/xml

<?xml version="1.0" encoding="UTF-8" standalone="yes"?>
<EssenceMappingsDocument xmlns="http://xml.vidispine.com/schema/vidispine">

```

```
<asset id="urn:uuid:76BE320F-48E0-47A5-A076-227158C50024" item="VX-1"/>
<file path="file://localhost/storage/VX-1.mov" hash=
↪"7b8d6ffe1ea468800578d6b7d4a09b012c461569"/>
</EssenceMappingsDocument>
```

```
<?xml version="1.0" encoding="UTF-8" standalone="yes"?>
<URIListDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <uri>VX-8</uri>
</URIListDocument>
```

Retrieving the sequences:

```
GET /item/VX-8/sequence
```

```
<?xml version="1.0" encoding="UTF-8" standalone="yes"?>
<SequenceListDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <sequence>
    <id>VX-1</sequence>
    <type>finalcut</type>
  </sequence>
  <sequence>
    <id>VX-2</sequence>
    <type>vidispine</type>
  </sequence>
</SequenceListDocument>
```

Import a project

POST /import/project

Creates a new project version containing the clips and sequences found in the given project file. Sequences in the file will be created as items having a Vidispine sequence representation.

Query Parameters

- **collectionId** – The id of the project to create a new version for.
- **uri** – The location of the file to import.
- **type** – The file format.
- **assignId** – True if external ids should be created for the items in this project, using the ids from the project.

Accepts

- **application/xml**, **application/json** – [EssenceMappingsDocument](#)

Produces

- **application/xml**, **application/json** – [URIListDocument](#) with the id of the new project version.
- **text/plain** – CRLF-delimited list of ids

Role _import

Role _collection_write

Role _external_id_write

Example

Creating a new project:

```
POST /collection/project
Content-Type: application/xml

<?xml version="1.0" encoding="UTF-8" standalone="yes"?>
<ProjectDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <name>Marias Project</name>
  <metadata/>
</ProjectDocument>
```

```
<?xml version="1.0" encoding="UTF-8" standalone="yes"?>
<URIListDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <uri>VX-1</uri>
</URIListDocument>
```

Creating a new project version with the clips and sequences from a Final Cut Pro project.

```
POST /import/project?collectionId=VX-1&type=finalcut&uri=file:///storage/
↳project.xml
Content-Type: application/xml

<?xml version="1.0" encoding="UTF-8" standalone="yes"?>
<EssenceMappingsDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <asset id="urn:uuid:76BE320F-48E0-47A5-A076-227158C50024" item="VX-1"/>
  <file path="file://localhost/storage/VX-1.mov" hash=
↳"7b8d6ffe1ea468800578d6b7d4a09b012c461569"/>
</EssenceMappingsDocument>
```

```
<?xml version="1.0" encoding="UTF-8" standalone="yes"?>
<URIListDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <uri>VX-2</uri>
</URIListDocument>
```

17.19.8 Exporting projects and sequences

Export a project or sequence

POST /collection/(id)/version/export

POST /item/(id)/sequence/export

POST /sequence/export

Exports the sequence or project to the requested output format and saves the result at the given location.

For POST /sequence/export the sequence must be specified in the request document.

Query Parameters

- **uri** – The destination URI.
- **type** – The output format.
- **tag** – A comma separated list of shape tags specifying which shapes to reference in the output.

- **format** – A comma separated list of formats specifying which shapes to reference in the output. If both tag and format is given, then both must match.
- **dryRun** – When set to true, any export problems will be returned and no file will be written.
- **content** – Comma-separated list of content to include in the output. Possible values are: markers, subtitles, sequences, * (default).
- **toSequence** – Export as a sequence with an item, instead of as a standalone item.

Status Codes

- **404 Not found** – Invalid id

Accepts

- **application/xml, application/json** – [ExportRequestDocument](#) with details on the export.

Produces

- **application/xml, application/json** – [ExportResponseDocument](#) containing the essence mapping, and any export problems (if a dry run.)
- **multipart/mixed** – The response document and the export data. The uri parameter will be ignored.

The storage(s) that should be used can be specified in the request, and should be ordered in descending priority. For each storage it is also possible to specify the path to where the files will be available, so that formats that reference files by path can contain a usable client-side path.

Example

```
POST /item/VX-6/sequence/export?uri=file:///tmp/output.xml&type=finalcut
Content-Type: application/xml
```

```
<?xml version="1.0" encoding="UTF-8" standalone="yes"?>
<ExportRequestDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <storage>
    <id>VX-1</id>
    <path>/Users/maria/Movies/Vidispine/</path>
  </storage>
</ExportRequestDocument>
```

```
<?xml version="1.0" encoding="UTF-8" standalone="yes"?>
<ExportResponseDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <mappings>
    <file path="file:///Users/maria/Movies/Vidispine/VX-1.mov" hash=
    ↪"7b8d6ffe1ea468800578d6b7d4a09b012c461569" size="30346173"/>
    <asset id="480a5bd6-b89a-476c-be2f-c2ce23ba53e8" item="VX-1"/>
  </mappings>
</ExportResponseDocument>
```

```
$ cat /tmp/output.xml
```

```
<?xml version="1.0" encoding="UTF-8"?>
<!DOCTYPE xmeml>
<xmeml version="5">
  ...
```

```

<clip id="480a5bd6-b89a-476c-be2f-c2ce23ba53e8">
  <name>Item title</name>
  <uuid>480a5bd6-b89a-476c-be2f-c2ce23ba53e8</uuid>
  <file>
    ...
    <pathurl>file://localhost/Users/maria/Movies/Vidispine/VX-1.mov</pathurl>
  </file>
  ...
</clip>
...
</xmeml>

```

Exporting to AAF without first transcoding the items to OP-Atom.

```

POST /item/VX-6/sequence/export?type=aaf&dryRun=true&tag=op-atom`
Content-Type: application/xml

```

```

<?xml version="1.0" encoding="UTF-8" standalone="yes"?>
<ExportRequestDocument xmlns="http://xml.vidispine.com/schema/vidispine">
</ExportRequestDocument>

```

```

<?xml version="1.0" encoding="UTF-8" standalone="yes"?>
<ExportResponseDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <problem>
    <type>missing-shape</type>
    <message>Found no shape matching the given format</message>
    <parameter>
      <key>item</key>
      <value>VX-1</value>
    </parameter>
    <parameter>
      <key>format</key>
      <value></value>
    </parameter>
    <parameter>
      <key>tag</key>
      <value>op-atom</value>
    </parameter>
  </problem>
  <mappings>
    <asset id="urn:uuid:11111111-2222-3333-4444-555555555555" item="VX-1"/>
  </mappings>
</ExportResponseDocument>

```

GET /collection/ (*id*) /version/export

GET /item/ (*id*) /sequence/export

Exports the sequence or project to the requested output format and saves the result at the given location.

Query Parameters

- **type** – The output format.
- **tag** – A comma separated list of shape tags specifying which shapes to reference in the output.
- **format** – A comma separated list of formats specifying which shapes to reference in the output. If both tag and format is given, then both must match.
- **dryRun** – When set to true, any export problems will be returned and no file will be written.

- **content** – Comma-separated list of content to include in the output. Possible values are: `markers`, `subtitles`, `sequences`, `*` (default).
- **storage** – Comma-separated list of item paths in format `storageId=path`.
- **item** – Comma-separated list of item paths in format `itemId=path`.
- **toSequence** – Export as a sequence with an item, instead of as a standalone item.

Status Codes

- **404 Not found** – Invalid id

Produces

- **application/xml**, **application/json** – `ExportResponseDocument` if `dryRun=true`.
- ***/*** – The export data, in the media type of the format, if `dryRun=false`.

17.20 Quota rules

Vidispine can monitor the disk usage and the number of items that exist in the system, and send a notification if the usage exceeds certain user defined limits. A quota rule is used to define the limits that apply for a certain set of resources - items and files.

17.20.1 Managing quota rules

Create a quota rule

POST /quota/

Creates a quota rule with the filters and resource limits as specified in the quota rule document.

Accepts

- **application/xml**, **application/json** – `QuotaRuleDocument`

Produces

- **application/xml**, **application/json** – `QuotaRuleDocument`

Role `_quota_write`

Example

Limit user `stephen` to 1000 items and 10000000 bytes of storage on `VX-1`:

```
POST /quota
Content-Type: application/xml

<QuotaRuleDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <user>stephen</user>
  <storage>VX-1</storage>
  <resource>
    <name>item</name>
    <limit>1000</limit>
  </resource>
</resource>
```

```

    <name>storage</name>
    <limit>10000000</limit>
  </resource>
</QuotaRuleDocument>

```

```

<QuotaRuleDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <id>VX-255</id>
  <user>stephen</user>
  <storage>VX-1</storage>
  <resource>
    <name>item</name>
    <limit>1000</limit>
    <usage>2</usage>
  </resource>
  <resource>
    <name>storage</name>
    <limit>10000000</limit>
    <usage>1266704</usage>
  </resource>
</QuotaRuleDocument>

```

List existing quota rules

GET /quota/

Returns the quota rules that exist in the system.

Query Parameters

- **content** – Optional comma-separated list of addition content to retrieve. Possible values are: external.
- **filter** – Optional comma-separated list of key-value pairs (in the format key=value) that can be used to filter the result set. Possible key values are: user, group, storage, storageGroup, collection, library and tag.

New in version 4.6.

- **exceeded** –
 - true - Returns only rules where the usage of a resource exceeds the limit that has been specified for a rule.
 - false (default) - Returns rules regardless of the current resource usage.

Produces

- **application/xml**, **application/json** – [QuotaRuleListDocument](#)

Role _quota_read

Example

```
GET /quota
```

```

<QuotaRuleListDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <rule>
    <id>VX-255</id>

```

```

<user>stephen</user>
<storage>VX-1</storage>
<resource>
  <name>item</name>
  <limit>1000</limit>
  <usage>2</usage>
</resource>
<resource>
  <name>storage</name>
  <limit>10000000</limit>
  <usage>1266704</usage>
</resource>
</rule>
</QuotaRuleListDocument>

```

Retrieve a quota rule

GET `/quota/ (rule-id)`

Retrieves a specific quota rule.

Produces

- `application/xml`, `application/json` – `QuotaRuleDocument`

Role `_quota_read`

Evaluate a quota rule

PUT `/quota/ (rule-id) /evaluate`

Immediately calculates the resource usage as defined by a quota rule.

Role `_quota_write`

Delete a quota rule

DELETE `/quota/ (rule-id)`

Deletes the quota rule.

Role `_quota_write`

17.21 Resources

17.21.1 Resource types

Retrieve list of resource types

GET `/resource`

Retrieves the available resource types.

Produces

- `application/xml`, `application/json` – `ResourceTypeListDocument`

- **text/plain** – CRLF-delimited list of resource type URLs (/resource/ { **resource-type** }

Role _resource_read

17.21.2 Resources

Retrieve list of resources

GET /**resource**/ (*resource-type*)

Retrieves the resources of the given type that have been configured.

Produces

- **application/xml**, **application/json** – [ResourceListDocument](#)
- **text/plain** – CRLF-delimited list of resource URLs (/resource/ { **resource-type** } / { **resource-id** })

Role _resource_read

Create resources

POST /**resource**

POST /**resource**/ (*resource-type*)

Create a new resource.

Accepts

- **application/xml**, **application/json** – [ResourceDocument](#)

Produces

- **application/xml**, **application/json** – [ResourceDocument](#)
- **text/plain** – Resource URL

Role _resource_write

Modify resource

PUT /**resource**/ (*resource-type*) /

resource-id Updates an existing resource.

Accepts

- **application/xml**, **application/json** – [ResourceDocument](#)

Produces

- **application/xml**, **application/json** – [ResourceDocument](#)
- **text/plain** – Resource URL

Role _resource_write

Status Codes

- **400 Invalid Input** – The resource type is not correct.

Get resource

GET `/resource/ (resource-type) / resource-id` Retrieves information on a specific resource.

Produces

- `application/xml`, `application/json` – [ResourceDocument](#)

Role `_resource_read`

Status Codes

- **400 Invalid Input** – The resource type is not correct.

Delete resource

DELETE `/resource/ (resource-type) / resource-id` Deletes the resource. All connection from other resources to the resource will become invalid.

Role `_resource_write`

Status Codes

- **400 Invalid Input** – The resource type is not correct.

Changed in version 4.10: It is now validated that the resource type matches the type of the resource.

17.21.3 Resource status

Get resource status

GET `/resource/ (resource-type) / resource-id/status` Retrieves the status of a specific resource.

Produces

- `text/plain` – Status string

Status Codes

- **400** – If the resource does not have a status.

Role `_resource_read`

17.22 Scheduling requests

Some resources support that requests are scheduled for later processing. This is done by specifying the field `schedule` in the request header. The value should be an ISO-8601 compatible timestamp stating the earliest time the request should be processed.

If the specified timestamp already has occurred, the call will proceed as usual. Otherwise HTTP status code 202 (Accepted) will be returned together with the CRLF-delimited triple (timestamp, request id, request URI).

For example, retrieving all metadata fields at a later time:

```
GET /metadata-fields HTTP/1.1
Schedule: 2010-07-02T11:55:00+02:00
```

```
HTTP/1.1 202 Accepted
```

```
2010-07-02T11:55:00+02:00      802972  http://localhost:8080/API/scheduled-request/
↪802972
```

17.22.1 States of scheduled requests

There are four states that a scheduled request can be in.

WAITING The request has been scheduled and is waiting to be processed.

SUCCESS The request has been processed successfully, by receiving status code 200 (OK).

CONNECTION_FAILURE The request has been processed, but failed for unknown reasons.

BAD_REQUEST The request has been processed, but received an unexpected status code.

17.22.2 Managing scheduled requests

Listing all scheduled requests

GET `/scheduled-request`

Retrieves all known scheduled requests for the current user.

Query Parameters

- **state** – An optional parameter to retrieve requests belonging to a certain state.

Produces

- `application/xml`, `application/json` – `ScheduledRequestListDocument`

Example

```
GET /scheduled-request?state=SUCCESS
```

```
<ScheduledRequestListDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <scheduledRequest>
    <id>802972</id>
    <user>admin</user>
    <state>SUCCESS</state>
    <date>2010-07-02T11:55:00.000+02:00</date>
    <created>2010-07-02T11:54:16.161+02:00</created>
    <executed>2010-07-02T11:55:36.762+02:00</executed>
    <request>
      <uri>http://localhost:8080/API/metadata-field</uri>
      <method>GET</method>
    </request>
    <response>
      <statusCode>200</statusCode>
      <hasBody>true</hasBody>
      <contentType>application/xml</contentType>
    </response>
  </scheduledRequest>
</ScheduledRequestListDocument>
```


Retrieving a specific request

GET `/scheduled-request/` (*request-id*)

Retrieves the request that matches the specified id.

Produces

- `application/xml`, `application/json` – `ScheduledRequestDocument`

Example

```
GET /scheduled-request/802972
```

```
<ScheduledRequestDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <id>802972</id>
  <user>admin</user>
  <state>SUCCESS</state>
  <date>2010-07-02T11:55:00.000+02:00</date>
  <created>2010-07-02T11:54:16.161+02:00</created>
  <executed>2010-07-02T11:55:36.762+02:00</executed>
  <request>
    <uri>http://localhost:8080/API/metadata-field</uri>
    <method>GET</method>
  </request>
  <response>
    <statusCode>200</statusCode>
    <hasBody>true</hasBody>
    <contentType>application/xml</contentType>
  </response>
</ScheduledRequestDocument>
```

Retrieving the response body

GET `/scheduled-request/` (*request-id*) `/response`

Retrieves the response body of the scheduled request. This can only be called if the state of the request is either SUCCESS or BAD_REQUEST. The content-type is the same that was returned when the request was processed.

Produces

- `*/*` – The response body.

Example

```
GET /scheduled-request/802972/response
```

```
<MetadataFieldListDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <field system="true">
    <name>durationTimeCode</name>
    <type>string-noindex</type>
  </field>
  <field system="true">
    <name>mimeType</name>
    <type>string-exact</type>
  </field>
</MetadataFieldListDocument>
```

```
...  
</MetadataFieldListDocument>
```

Deleting all requests

DELETE `/scheduled-request/`
Deletes all scheduled requests for the current user.

Example

```
DELETE /scheduled-request/
```

```
200 OK
```

Deleting a specific request

DELETE `/scheduled-request/` (*request-id*)
Deletes the scheduled request with the specified id.

Example

```
DELETE /scheduled-request/802972
```

```
200 OK
```

17.23 Search

17.23.1 Search items and collections

Items and collections be browsed and searched with a single request. This type of search essentially has the combined set of the functionality of item search and collection search.

Browse items and collections

GET `/search`
Browses items and collections.

Content Parameters See *Retrieving item information*

Matrix Parameters

- **first** – Integer, from resulting list of items, start return list from specified offset. Default is 1, start return list from beginning.
- **number** – Integer, the number of entities to fetch. Default 100.

- **storage** – Optional list of storage ids. Return only files from specific storages. Can be specified multiple times.

New in version 4.13.

- **storageGroup** – Optional storage group id. Return only files from storages specified in the storage group.

New in version 4.13.

Query Parameters

- **count** –
 - `true` (default) - Return hits in result.
 - `false` - Do not return hits in result, in order to produce results faster.
- **p** – Comma separated list of *paths* specifying the content to include. Overrides the content and filter parameters.

New in version 4.5.

- **content** – Comma-separated list of the types of content to retrieve, possible values are `metadata`, `uri`, `shape`, `poster`, `thumbnail`, `access`, `merged-access`, `external`.

- **interval** – Comma-separated list
 - *time-span* - Filter out metadata, return only metadata for specified *time span*.
 - `generic` - Return all non-timed metadata.
 - `all` (default) - Return all metadata, same as `interval=generic,-INF-+INF`
- **field** – Comma-separated list.
 - *field-name* - Return specified field.
 - *field-name* ":" *new-name* - Return specified field, renamed to a new name in return value.
 - "-" *field-name* - Exclude specified field.
 - (default) - Return all fields.

- **group** – Comma-separated list.
 - *group-name* - Return specified group.
 - *group-name* + - Return specified group and subgroups.

New in version 4.1.

- *group-name* : *new-name* - Return specified group, renamed to a new name in return value.
- - *group-name* - Exclude specified group.
- (default) - Return all groups.
- **language** – Comma separated list.
 - *language-tag* - Return metadata for specific language, e.g. `en_US`. Wildcards may be used, e.g. `*_CA` for both Canadian French and Canadian English.
 - `none` - Return all metadata without language specification.
 - `all` (default) - Return all metadata, with or without language specification.

- **sampleRate** – Convert all outgoing *time instants* to specified rate. *NB! Time codes* which cannot be expressed in an integer number of samples will be returned as a decimal number, with risk of losing precision.
- **track** – Comma separated list.
 - *track-type track-number* - Return metadata for specified track. Example of track is A2.
 - *track-type t1 - t2* - Return metadata for specified track interval, e.g. A2-4.
 - *track-type ** - Return metadata for all tracks of specified type, e.g. A*.
 - *generic* - Return all non-tracked metadata.
 - *all* (default) - All metadata, with or without track specification, are returned.
- **include** – A list of keys. Includes additional *field specific data*. Additionally, if set to *type* the type definition of the field will be retrieved.
- **includeValues** – Return the value enumeration for each metadata field.
- **conflict** –
 - *yes* (default) - Include all metadata conflicts, unresolved.
 - *no* - Return conflicts resolved according to field rules.
- **terse** –
 - *yes* - Return metadata in *terse format*.
 - *no* (default) - Return metadata in verbose format.
- **defaultValue** –
 - *true* - For unset fields, return *default values*.
 - *false* (default) - Do not return default values.
- **includeTransientMetadata** –
 - *true* (default) - Include *transient metadata*.
 - *false* - Do not include transient metadata in response.
- **revision** – Optional revision, specifying which metadata to display. Only used if requesting a single item or collection.
- **mergedType** – The type of operation to check for.
- **mergedPermission** – The lowest required permission level.
- **mergedExtradata** – Any possible extradata.
- **uriType** – Optional comma-separated list of format types (container format) to return.
- **scheme** – URI scheme to return.
- **storageType** – Only return URIs for files from storages of this *type*.
- **methodType** – Optional *type of access method*.
 - *AUTO* - Gives an APIInoauth URI to the media. Access to file is tunneled through Vidispine.
 - *AZURE_SAS* - If the storage schema is *azure://* you can get direct access to the media. The resulting URI will not tunnel through Vidispine but rather point directly to the media location at the azure storage.

- **methodMetadata** – Optional *metadata* used with storage method.
 - **tag** – A *URI parameter*: Optional comma-separated list of *shape tags* to return.
 - **version** – Optional integer, specifying which essence version to return for shapes. If special value `all`, display all versions. If special value `latest` (default), display latest version of shapes.
 - **closedFiles** – A *URI parameter*:
 - `true` (default) - Return only URIs that point to closed files.
 - `false` - Return all URIs.
 - **noauth-url** –
 - `true` Return URIs that do not need authentication.
 - `false` (default) Return normal URIs
 - **baseURI** – Which base URI to use for the thumbnail URLs.
 - **save** –
 - `true` - Returns a 303 See Other, with a `Location` header containing an URI to fetch the search result
 - `false` (default) - Returns a regular search result
- New in version 4.7.

Produces

- `application/xml`, `application/json` – [SearchResultDocument](#)

Role `_item_search`

Role `_collection_read`

Search items and collections**PUT /search**

Searches items and collections with a shared search query.

Note: This resource doesn't support joint search, use `PUT /item`, `PUT /search/shape` or `PUT /search/file` for item, shape or file joint search respectively.

Content Parameters See [Retrieving item information](#)

Matrix Parameters

- **first** – Integer, from resulting list of items, start return list from specified offset. Default is 1, start return list from beginning.
- **number** – Integer, the number of entities to fetch. Default 100.
- **storage** – Optional list of storage ids. Return only files from specific storages. Can be specified multiple times.

New in version 4.13.

- **storageGroup** – Optional storage group id. Return only files from storages specified in the storage group.

New in version 4.13.

Query Parameters

- **count** –
 - `true` (default) - Return hits in result.
 - `false` - Do not return hits in result, in order to produce results faster.
- **p** – Comma separated list of *paths* specifying the content to include. Overrides the content and filter parameters.

New in version 4.5.

- **content** – Comma-separated list of the types of content to retrieve, possible values are `metadata`, `uri`, `shape`, `poster`, `thumbnail`, `access`, `merged-access`, `external`.
- **interval** – Comma-separated list
 - *time-span* - Filter out metadata, return only metadata for specified *time span*.
 - `generic` - Return all non-timed metadata.
 - `all` (default) - Return all metadata, same as `interval=generic,-INF-+INF`
- **field** – Comma-separated list.
 - *field-name* - Return specified field.
 - *field-name* ":" *new-name* - Return specified field, renamed to a new name in return value.
 - "-" *field-name* - Exclude specified field.
 - (default) - Return all fields.
- **group** – Comma-separated list.
 - *group-name* - Return specified group.
 - *group-name* + - Return specified group and subgroups.

New in version 4.1.

- *group-name* : *new-name* - Return specified group, renamed to a new name in return value.
- - *group-name* - Exclude specified group.
- (default) - Return all groups.
- **language** – Comma separated list.
 - *language-tag* - Return metadata for specific language, e.g. `en_US`. Wildcards may be used, e.g. `*_CA` for both Canadian French and Canadian English.
 - `none` - Return all metadata without language specification.
 - `all` (default) - Return all metadata, with or without language specification.
- **sampleRate** – Convert all outgoing *time instants* to specified rate. *NB!* *Time codes* which cannot be expressed in an integer number of samples will be returned as a decimal number, with risk of losing precision.
- **track** – Comma separated list.

- *track-type track-number* - Return metadata for specified track. Example of track is A2.
- *track-type t1 - t2* - Return metadata for specified track interval, e.g. A2-4.
- *track-type ** - Return metadata for all tracks of specified type, e.g. A*.
- *generic* - Return all non-tracked metadata.
- *all* (default) - All metadata, with or without track specification, are returned.
- **include** - A list of keys. Includes additional *field specific data*. Additionally, if set to *type* the type definition of the field will be retrieved.
- **includeValues** - Return the value enumeration for each metadata field.
- **conflict** -
 - *yes* (default) - Include all metadata conflicts, unresolved.
 - *no* - Return conflicts resolved according to field rules.
- **terse** -
 - *yes* - Return metadata in *terse format*.
 - *no* (default) - Return metadata in verbose format.
- **defaultValue** -
 - *true* - For unset fields, return *default values*.
 - *false* (default) - Do not return default values.
- **includeTransientMetadata** -
 - *true* (default) - Include *transient metadata*.
 - *false* - Do not include transient metadata in response.
- **revision** - Optional revision, specifying which metadata to display. Only used if requesting a single item or collection.
- **mergedType** - The type of operation to check for.
- **mergedPermission** - The lowest required permission level.
- **mergedExtradata** - Any possible extradata.
- **uriType** - Optional comma-separated list of format types (container format) to return.
- **scheme** - URI scheme to return.
- **storageType** - Only return URIs for files from storages of this *type*.
- **methodType** - Optional *type of access method*.
 - *AUTO* - Gives an APIInoauth URI to the media. Access to file is tunneled through Vidispine.
 - *AZURE_SAS* - If the storage schema is *azure://* you can get direct access to the media. The resulting URI will not tunnel through Vidispine but rather point directly to the media location at the azure storage.
- **methodMetadata** - Optional *metadata* used with storage method.
- **tag** - A *URI parameter*: Optional comma-separated list of *shape tags* to return.

- **version** – Optional integer, specifying which essence version to return for shapes. If special value `all`, display all versions. If special value `latest` (default), display latest version of shapes.
- **closedFiles** – A *URI parameter*:
 - `true` (default) - Return only URIs that point to closed files.
 - `false` - Return all URIs.
- **noauth-url** –
 - `true` Return URIs that do not need authentication.
 - `false` (default) Return normal URIs
- **baseURI** – Which base URI to use for the thumbnail URLs.
- **save** –
 - `true` - Returns a 303 See Other, with a `Location` header containing an URI to fetch the search result
 - `false` (default) - Returns a regular search result

New in version 4.7.

Accepts

- **application/xml, application/json** – `ItemSearchDocument`

Produces

- **application/xml, application/json** – `SearchResultDocument`

Role `_item_search`

Role `_collection_read`

Example

```
PUT /search?content=metadata&field=title
Content-Type: application/xml

<ItemSearchDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <field>
    <name>title</name>
    <value>Something</value>
  </field>
</ItemSearchDocument>
```

```
<SearchResultDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <hits>3</hits>
  <entry start="-INF" end="+INF" type="Item" id="DE-42">
    <item id="DE-42" start="-INF" end="+INF">
      <metadata>
        <revision>DE-278,DE-276,DE-277</revision>
        <timespan start="-INF" end="+INF">
          <field uuid="e527b7f3-1bfa-4067-8dde-753368c09617" user="admin" timestamp=
↪"2012-03-23T10:10:42.845+01:00" change="DE-278">
            <name>title</name>
            <value uuid="38609429-67d1-4357-980c-64e7559768ff" user="admin" timestamp=
↪"2012-03-23T10:10:42.845+01:00" change="DE-278">Something</value>
```



```

        </field>
      </timespan>
    </metadata>
  </item>
  <timespan start="-INF" end="+INF"/>
</entry>
<entry start="-INF" end="+INF" type="Collection" id="DE-13">
  <collection>
    <id>DE-13</id>
    <metadata>
      <revision>DE-273,DE-279</revision>
      <timespan start="-INF" end="+INF">
        <field uuid="c203856a-e8e3-4d50-8287-642821941791" user="admin" timestamp=
↪ "2012-03-23T10:10:57.103+01:00" change="DE-279">
          <name>title</name>
          <value uuid="f80fb9a1-1eca-479a-8b1a-11d30f93fa5d" user="admin" timestamp=
↪ "2012-03-23T10:10:57.103+01:00" change="DE-279">Something</value>
        </field>
      </timespan>
    </metadata>
  </collection>
  <timespan start="-INF" end="+INF"/>
</entry>
<entry start="-INF" end="+INF" type="Item" id="DE-37">
  <item id="DE-37" start="-INF" end="+INF">
    <metadata>
      <revision>DE-255,DE-280,DE-256</revision>
      <timespan start="-INF" end="+INF">
        <field uuid="f1ac0198-6b8f-43a0-9caa-e8c36e80eee8" user="admin" timestamp=
↪ "2012-03-23T10:11:16.849+01:00" change="DE-280">
          <name>title</name>
          <value uuid="dcd6a3bb-bf70-4cb7-8d77-e2adfe1e3b1c" user="admin" timestamp=
↪ "2012-03-23T10:11:16.849+01:00" change="DE-280">Something</value>
        </field>
      </timespan>
    </metadata>
  </item>
  <timespan start="-INF" end="+INF"/>
</entry>
</SearchResultDocument>

```

17.23.2 Search shapes

New in version 4.2.2.

Search shapes

GET /search/shape

PUT /search/shape

Searches shapes. Using GET is identical as performing a search with an empty search document.

Matrix Parameters

- **first** – Integer, from resulting list of items, start return list from specified offset. Default is 1, start return list from beginning.

- **number** – Integer, the number of entities to fetch. Default 100.

Query Parameters

- **count** –
 - `true` (default) - Return hits in result.
 - `false` - Do not return hits in result, in order to produce results faster.
- **content** – Comma-separated list of the types of content to retrieve, possible values are `component`, `metadata`, `essenceVersion`, `tag`, `mimeType` and `*`.
- **methodType** – Return URIs from storage methods with a particular *type*. By default, return URLs with empty `methodType`.
- **storageType** – Only return URIs for files from storages of this *type*.
- **methodMetadata** – Optional *metadata* used with storage method.
- **scheme** – URI scheme to return.
- **save** –
 - `true` - Returns a 303 See Other, with a `Location` header containing an URI to fetch the search result
 - `false` (default) - Returns a regular search result

New in version 4.7.

Accepts

- `application/xml`, `application/json` – *ShapeSearchDocument*

Produces

- `application/xml`, `application/json` – *ShapeListDocument*

Role `_item_shape_read`

17.23.3 Search files

New in version 4.2.2.

Search files

GET `/search/file`

PUT `/search/file`

Searches files. Using GET is identical as performing a search with an empty search document.

Note: This resource searches the same index and will produce the same results as `GET /storage/(storage-id)/file`. The only difference is the syntax, that is, the query/matrix parameters versus search documents. When using a search document it is also possible to perform joins.

Matrix Parameters

- **first** – Integer, from resulting list of items, start return list from specified offset. Default is 1, start return list from beginning.

- **number** – Integer, the number of entities to fetch. Default 100.

Query Parameters

- **count** –
 - `true` (default) - Return hits in result.
 - `false` - Do not return hits in result, in order to produce results faster.
- **methodType** – Return URIs from storage methods with a particular *type*. By default, return URLs with empty `methodType`.
- **storageType** – Only return URIs for files from storages of this *type*.
- **methodMetadata** – Optional *metadata* used with storage method.
- **scheme** – URI scheme to return.
- **save** –
 - `true` - Returns a 303 See Other, with a Location header containing an URI to fetch the search result
 - `false` (default) - Returns a regular search result
 New in version 4.7.

Accepts

- `application/xml`, `application/json` – [FileSearchDocument](#)

Produces

- `application/xml`, `application/json` – [FileListDocument](#)

Role `_file_read`

17.23.4 Autocompletion

There are two ways to get autocomplete suggestions. The first way is to make a separate autocomplete request to the API, this will generate a result set spanning over all items that the user has access to. The second way is to embed the request in a search document. When performed in this way, the autocomplete suggestions will only span the matching result set.

Autocomplete text

Text can be autocompleted against the search index.

PUT `/search/autocomplete`

Requests suggestion matching text in all or a specific metadata field.

Status Codes

- **400 Bad request** – A parameter was invalid.

Accepts

- `application/xml`, `application/json` – [AutocompleteRequestDocument](#)

Produces

- `application/xml`, `application/json` – [AutocompleteResponseDocument](#)

Role `_search`

Example

Assuming the user intends to type “original duration”. The user first starts typing “original”:

```
PUT /search/autocomplete
Content-Type: application/xml

<AutocompleteRequestDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <text>orig</text>
  <maximumSuggestions>3</maximumSuggestions>
</AutocompleteRequestDocument
```

```
<AutocompleteResponseDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <suggestion>original</suggestion>
  <suggestion>origin</suggestion>
  <suggestion>originated</suggestion>
</AutocompleteResponseDocument>
```

Then the user continues to start typing “duration”:

```
<AutocompleteRequestDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <text>original dur</text>
  <maximumSuggestions>3</maximumSuggestions>
</AutocompleteRequestDocument>
```

```
<AutocompleteResponseDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <suggestion>original duration</suggestion>
</AutocompleteResponseDocument>
```

Auto-complete on one metadata field

New in version 4.1.

Since 4.1 auto-complete on one metadata field is supported. And in order to make the auto-complete case insensitive, the metadata field should be set as `<index>extend</index>`.

Example:

A metadata field `foo_bar` with config:

```
<MetadataFieldDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <type>string-exact</type>
  <index>extend</index>
</MetadataFieldDocument>
```

and this field contains multiple values: “Animal”, “Sky”, “Animal and Sky”, “animal and sky”

An auto-complete request with user input “animal a”:

```
PUT /search/autocomplete
Content-Type: application/xml

<AutocompleteRequestDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <field>foo_bar</field>
```

```
<text>animal a</text>
</AutocompleteRequestDocument>
```

will give result:

```
<AutocompleteResponseDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <suggestion>Animal and Sky</suggestion>
  <suggestion>animal and sky</suggestion>
</AutocompleteResponseDocument>
```

Autocompletion as part of a search

To perform an autocomplete within a search, just append one or more `<autocomplete>` elements in the search document. The syntax is the same as for a separate autocomplete request.

Example

```
PUT /item
Content-Type: application/xml

<ItemSearchDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <field>
    <name>my_category</name>
    <value>stock_photo</value>
  </field>
  <autocomplete>
    <field>my_tag</field>
    <text>hi</text>
  </autocomplete>
</ItemSearchDocument>
```

```
<ItemListDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <hits>5</hits>
  <item id="VX-6934" start="-INF" end="+INF">
    <timespan start="-INF" end="+INF"/>
  </item>
  <item id="VX-3464" start="-INF" end="+INF">
    <timespan start="-INF" end="+INF"/>
  </item>
  <item id="VX-2658" start="-INF" end="+INF">
    <timespan start="-INF" end="+INF"/>
  </item>
  <item id="VX-7234" start="-INF" end="+INF">
    <timespan start="-INF" end="+INF"/>
  </item>
  <item id="VX-3723" start="-INF" end="+INF">
    <timespan start="-INF" end="+INF"/>
  </item>
  <autocomplete>
    <field>my_tag</field>
    <suggestion>highres</suggestion>
    <suggestion>hills</suggestion>
    <suggestion>history</suggestion>
  </autocomplete>
</ItemListDocument>
```

```
</autocomplete>
</ItemListDocument>
```

17.23.5 Optimize index

New in version 4.1.

If you wish to optimize the Solr index then we recommend that this is done via this API instead of sending an optimize request to Solr directly.

Note: Solr needs twice the disk space when optimizing the index. Make sure there's enough free space on the drive hosting the Solr index before optimizing.

Note: Solr will not accept updates while optimizing, meaning that new or updated item will not appear in the search results until the optimize operation has finished.

Optimize search index

POST /search/optimize

Submits an optimize request to Solr.

This request can be made to block until the optimize request has completed using the `blocking` parameter.

Query Parameters

- **blocking** –
 - `true` - The request will block until the Solr optimize request has finished.
 - `false` (default) - Optimize will be scheduled and the request will return immediately.
- **timeout** – Integer, block for maximum number of specified milliseconds. Default is 0, which means block indefinitely.

Status Codes

- **200 OK** – If the operation finished successfully. Only if `blocking=true`.
- **202 Accepted** – If the operation was accepted but not yet finished.
- **500 Internal Server Error** – If an error occurs.

Role _administrator

17.24 Self tests

New in version 4.0.

Changed in version 4.2: The self test has moved from `APIInoauth` to `API`.

17.24.1 Running the test

Execute all tests

GET /API/selftest

Executes all the self tests.

Query Parameters

- **exclude** – Optional comma-separated list of *test names* to exclude.

Produces

- **application/xml**, **application/json** – *SelfTestDocument*

GET /APIInoauth/selftest

Executes a database test. Since database problems may cause API unavailable, there is a database test available on APIInoauth.

Query Parameters

- **exclude** – Optional comma-separated list of *test names* to exclude.

Produces

- **application/xml**, **application/json** – *SelfTestDocument*

Execute a specific test

GET /API/selftest/ (test-name)

Executes the test with the specified name.

Produces

- **application/xml**, **application/json** – *SelfTestDocument*

17.25 Shape tags

17.25.1 Managing shape tags

Get list of known shape tags

GET /shape-tag/

Retrieves all shape tags known by the system.

Query Parameters

- **url** –
 - `true` - Return list of URLs.
 - `false` (default) - Return list of ids.

Produces

- **application/xml**, **application/json** – *URIListDocument*
- **text/plain** – A list of the tags.

Role `_shape_tag_read`

Create a new shape tag

PUT `/shape-tag/` (*tag-name*)

Creates a new shape tag with the given tag name. If the tag already exists, its transcode preset will be updated.

Accepts

- `application/xml`, `application/json` – `TranscodePresetDocument`

Role `_shape_tag_write`

Example

Creating a shape tag that specifies FLV as the container format, FLV as the video codec and AAC as the audio codec and uses the face detect plugin.

```
PUT /shape-tag/my_flv
Content-Type: application/xml

<TranscodePresetDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <format>flv</format>
  <video>
    <codec>flv</codec>
  </video>
  <audio>
    <codec>aac</codec>
  </audio>
  <faceDetect>true</faceDetect>
</TranscodePresetDocument>
```

Retrieve a specific shape tag

GET `/shape-tag/` (*tag-name*)

Retrieves the transcode preset of shape tag with the given tag name.

Produces

- `application/xml`, `application/json` – `TranscodePresetDocument`

Role `_shape_tag_read`

Delete a shape tag

DELETE `/shape-tag/` (*tag-name*)

Deletes a shape tag with the given tag name.

Status Codes

- **200 OK** – Tag deleted successfully.
- **404 Not found** – No tag with that name exists.

Role `_shape_tag_write`

Caution: Note that the tag will also be removed from any existing shapes with which it is associated.

17.25.2 Tags of a shape

See *Tags of a shape* for how to manage the tags associated with a specific shape.

17.25.3 Transcode preset scripts

Retrieve the script for a shape tag

GET `/shape-tag/ (tag-name) /script`

Retrieves the script of the shape tag.

Produces

- `application/javascript` – A JavaScript

Role `_shape_tag_read`

Set a script for a shape tag

PUT `/shape-tag/ (tag-name) /script`

Sets a script for the shape tag.

Accepts

- `application/javascript` – A JavaScript

Role `_shape-tag_write`

Remove the script for a shape tag

DELETE `/shape-tag/ (tag-name) /script`

Unsets the script for the shape tag.

Role `_shape_tag_write`

Test a script

GET `/shape-tag/ (tag-name) /item/`

`item-id/shape/shape-id` Tests the script of the shape tag with the specified shape as input and returns the resulting preset.

Query Parameters

- `job` – The id of a job to retrieve job metadata from (optional).

Produces

- `application/xml`, `application/json` – `TranscodePresetDocument`

Role `_shape_tag_read`

17.26 Sites

17.26.1 Managing sites

Retrieve configured sites

GET `/site`

Retrieves the ids of the sites that have been configured.

Query Parameters

- **type** –
 - `all` (default) - Return the ids of all added sites.
 - `current` - Return the id of the current site.

Produces

- `application/xml`, `application/json` – `URIListDocument`

Add a new site

PUT `/site/` (*site-id*)

Adds a new site using the given site definition.

The only supported value for `syncPolicy` is currently `ONDEMAND`.

Accepts

- `application/xml`, `application/json` – `SiteDefinitionDocument`

Produces

- `application/xml`, `application/json` – `SiteDefinitionDocument`

Example

```
PUT /site/VY
Content-Type: application/xml

<SiteDefinitionDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <url>http://10.1.2.3:8080/API/</url>
  <username>site-manager</username>
  <password>p4ssw0rd</password>
  <syncPolicy>ONDEMAND</syncPolicy>
</SiteDefinitionDocument>
```

Retrieve a site

GET `/site/` (*site-id*)

Retrieves the definition for a specific site.

Produces

- `application/xml`, `application/json` – `SiteDefinitionDocument`

Role `_site_manager`

17.27 Site rules

17.27.1 Managing site rules

In the following reference, `{site-rule-entity}` is one of the following:

- `/item`
- `/item/{item-id}`
- `/collection`
- `/collection/{collection-id}`
- `/library`
- `/library/{library-id}`
- `/user`
- `/user/{username}`
- `/group`
- `/group/{group-name}`

Retrieve site rules for a specific entity

GET `{site-rule-entity}/site-rule`

Retrieves all site rules for the given entity/entities.

Produces

- `application/xml`, `application/json` – `SiteRuleListDocument`

Role `_site_rule_read`

Example

```
GET /item/VX-62/site-rule
```

```
<SiteRuleListDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <siteRule>
    <site>VY</site>
    <metadata>true</metadata>
    <access>true</access>
    <shape>original</shape>
  </siteRule>
  <siteRule>
    <site>VZ</site>
    <metadata>true</metadata>
    <access>true</access>
    <shape>lowres</shape>
    <shape>original</shape>
  </siteRule>
</SiteRuleListDocument>
```

```
</siteRule>
</SiteRuleListDocument>
```

Create a site rule

POST {site-rule-entity}/site-rule/

Creates a new site rule for an entity.

Status Codes

- **200 OK** – Rule set successfully.
- **400 Bad request** – The request was malformed.
- **404 Not found** – Could not find the specified entity.

Accepts

- `application/xml`, `application/json` – `SiteRuleDocument`

Produces

- `application/xml`, `application/json` – `SiteRuleDocument`

Role `_site_rule_write`

Example

```
POST /item/VX-67/site-rule/
Content-Type: application/xml

<SiteRuleDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <site>VY</site>
  <metadata>true</metadata>
  <access>true</access>
  <shape>original</shape>
  <shape>lowres</shape>
</SiteRuleDocument>
```

Set the site rule for users.

```
POST /user/site-rule/
Content-Type: application/xml

<SiteRuleDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <site>VY</site>
</SiteRuleDocument>
```

Set the site rule for groups. Setting a generic site rule for groups will also enable syncing of all users.

```
POST /group/site-rule/
Content-Type: application/xml

<SiteRuleDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <site>VY</site>
</SiteRuleDocument>
```

Retrieve a site rule

GET `{site-rule-entity}/site-rule/ (id)`

Retrieves a specific site rule.

Produces

- `application/xml, application/json` – SiteRuleDocument

Role `_site_rule_read`

Update a site rule

PUT `{site-rule-entity}/site-rule/ (id)`

Updates a site rule.

Status Codes

- **200 OK** – Rule set successfully.
- **400 Bad request** – The request was malformed.
- **404 Not found** – Could not find the specified rule.

Accepts

- `application/xml, application/json` – SiteRuleDocument

Produces

- `application/xml, application/json` – SiteRuleDocument

Role `_site_rule_write`

Delete a site rule

DELETE `{site-rule-entity}/site-rule/ (id)`

Deletes a site rule.

Status Codes

- **200 OK** – Rule deleted successfully.
- **400 Bad request** – The request was malformed.
- **404 Not found** – Could not find the specified rule.

Role `_site_rule_write`

17.28 Storages

17.28.1 Auto-import rules

Reading/modifying auto-import rules

Set an auto-import rule

PUT `/storage/ (storage-id) /auto-import/`

Sets the auto-import rule for the specified storage.

Accepts

- `application/xml`, `application/json` – `AutoImportRuleDocument`

Role `_storage_write`

Note: In order for auto imports to work the `showImportables` property must be set to `true` on the storage.

Example

```
PUT /storage/VX-5/auto-import
Content-Type: application/xml

<AutoImportRuleDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <metadata>
    <timespan start="-INF" end="+INF">
      <field>
        <name>title</name>
        <value>This is an auto-imported item.</value>
      </field>
    </timespan>
  </metadata>
  <tag>myflvtag</tag>
</AutoImportRuleDocument>
```

Retrieve all auto-import rules

GET `/storage/auto-import/`

Returns all known auto-import rules.

Produces

- `application/xml`, `application/json` – `AutoImportRuleListDocument`

Role `_storage_read`

Retrieve an auto-import rule

GET `/storage/ (storage-id) /auto-import/`

Returns the auto-import rule for a storage if there is one.

Produces

- `application/xml`, `application/json` – `AutoImportRuleDocument`

Role `_storage_read`

Disable an auto-import rule

New in version 4.9.

PUT `/storage/ (storage-id) /auto-import/disable`

Stops auto-import jobs from being created for new files on this storage.

Status Codes

- **404 Not found** – This storage does not have an auto-import rule.

Role `_storage_write`

Enable an auto-import rule

New in version 4.9.

PUT `/storage/ (storage-id) /auto-import/enable`

Resumes creation of auto-import jobs for files on this storage.

Status Codes

- **404 Not found** – This storage does not have an auto-import rule.

Role `_storage_write`

Delete an auto-import rule

DELETE `/storage/ (storage-id) /auto-import/`

Removes any auto-import rule that might exist on the storage.

Role `_storage_write`

17.28.2 Files

The base path, referred to as `{storage-resource}` below, is one of the following depending on if a request should resolve all files or files on a specific storage only.

- `/storage/{storage-id}`
- `/storage`

Operations on files, uses `{file-resource}` can be one of:

- `{storage-resource}/file/{file-id}`
- `{storage-resource}/file/path/{path}`
- `{storage-resource}/file/uri/{uri}`

Information about files in storage**List files in storage**

New in version 4.1.2.

GET `{storage-resource}/file`

Retrieves the files for all or a specific storage.

There is a limit on how many files that can be returned for each call to this method. To get all files, iterate the calls.

Query Parameters

- **id** – Optional, if multiple `id` query parameters are specified only those files are returned. If no ids are specified, all files are returned.

- **path** – Optional string
 - *path* - Return files under this sub-path to storage.
 - / (default) - Return all files.
- **prefix** –
 - *true* - Also include file prefixes that matches the criteria
 - *false* (default) - Do not include file prefixesNew in version 4.14.
- **ignorecase** –
 - *true* - Search file path case insensitively
 - *false* - Search file path case sensitively
- **recursive** –
 - *true* (default) - Return all files in tree.
 - *false* - Return only files directly under specified path.
- **wildcard** –
 - *true* - Allow use of wildcards in path.
 - *false* (default) - No wildcard handling of path.
- **hash** – Optional list of hash values. Only return files with specific hash value.
- **algorithm** – Optional hash algorithm. Search for hash values used by specified algorithm
- **count** –
 - *true* (default) - Return total number of hits in result
 - *false* - Do not return total number of hits in result, in order to produce results faster
- **state** – Optional string to filter results by *file state*. Can be used multiple times to select several states.
New in version 4.7.
- **methodType** – Return URIs from storage methods with a particular *type*. By default, return URLs with empty *methodType*.
- **storageType** – Only return URIs for files from storages of this *type*.
- **methodMetadata** – Optional *metadata* used with storage method.
- **scheme** – URI scheme to return.

Matrix Parameters

- **first** – Optional integer. From total list of files, start return list from specified number. Default is 0.
- **cursor** – New in version 4.16.
 - * - The initial cursor.
 - *string-from-search* - Cursor string returned from the search results.

If set, the `cursorMark` (https://lucene.apache.org/solr/guide/6_6/pagination-of-results.html#fetching-a-large-number-of-sorted-results-cursors) / `search after` (<https://www.elastic.co/guide/en/elasticsearch/reference/6.3/search-request-search-after.html#search-request-search-after>) features from Solr/Elasticsearch would be used to improve the `deep paging` (https://lucene.apache.org/solr/guide/6_6/pagination-of-results.html#performance-problems-with-deep-paging) performance during a search.

When `cursor` is used, The value of `first` will be ignored.

Only metadata searches in the `generic` interval supports `cursor`.

- **number** – Optional integer. Return a maximum of specified number of files. Default is 10.
- **prefixFirst** – Optional integer. From total list of prefixes, start return list from specified number. Default is 0.

Note: this parameter has no effect if Elasticsearch is the search backend.

New in version 4.14.

- **prefixNumber** – Optional integer. Return a maximum of specified number of prefixes. Default is 10.

New in version 4.14.

- **sort** – Optional comma-separated list.
 - `fileId` [`asc` (default) | `desc`] (default) - Order results by file id.
 - `size` [`asc` (default) | `desc`] - Order results by file size (bytes).
 - `state` [`asc` (default) | `desc`] - Order results by *file state*.
 - `timestamp` [`asc` (default) | `desc`] - Order results by file timestamp.
 - `filename` [`asc` (default) | `desc`] - Order results by filename.
 - `extension` [`asc` (default) | `desc`] - Order results by file extension.

New in version 4.2.1.

- **storage** – Optional list of storage ids. Return only files from specific storages. Same as `storage-id` in URL, but can be specified multiple times
- **storageGroup** – Optional storage group id. Return only files from storages specified in the storage group

New in version 4.13.

- **filter** –
 - `all` (default) - Return all files
 - `item` Only return files associated with an item.
 - `noitem` Only return files not associated with any item.
- **excludeQueued** –
 - `true` (default if searching importable files) - Exclude the files that are queued for import
 - `false` (default if searching all files) - Do not exclude the files that are queued for import
- **includeItem** –
 - `true` - Return associated items, shapes, and components.

- `false` (default) - Do not return any information about associated items, shapes, and components.

Produces

- `application/xml`, `application/json` – `FileListDocument`
- `text/plain` – CRLF-delimited list of file ids

Role `_file_read`

File search example

For examples on how `recursive` and `wildcard` works together, see the following table:

Path	Recur- sive	Wild- card	File on storage				Note
			foo	foo/bar	foo/bar/baz	foo/bar/?az	
	<code>false</code>	-	Y	N	N	N	(1)
	<code>true</code>	-	Y	Y	Y	Y	
/	<code>false</code>	-	Y	N	N	N	
/	<code>true</code>	-	Y	Y	Y	Y	
/foo	<code>false</code>	-	Y	N	N	N	
/foo	<code>true</code>	-	Y	Y	Y	Y	
foo	<code>false</code>	-	Y	N	N	N	(2)
foo	<code>true</code>	-	Y	Y	Y	Y	
/foo/	<code>false</code>	-	N	Y	N	N	
/foo/	<code>true</code>	-	N	Y	Y	Y	
/foo/bar	<code>false</code>	-	N	Y	N	N	
/foo/bar	<code>true</code>	-	N	Y	Y	Y	
/foo/bar/	-	-	N	N	Y	Y	
\foo\bar\	-	-	N	N	N	N	(3)
/foo/bax///.../bar./	-	-	N	N	Y	Y	
/foo/b?r	<code>false</code>	<code>true</code>	N	Y	N	N	(4)
/foo/b??r	<code>false</code>	<code>true</code>	N	N	N	N	
/foo/*r	<code>false</code>	<code>true</code>	N	Y	N	N	(5)
/foo/**r	<code>false</code>	<code>true</code>	N	Y	N	N	
/foo/bar/?az	<code>false</code>	<code>false</code>	N	N	N	Y	(6)
/foo/bar/?az	<code>false</code>	<code>true</code>	N	N	Y	Y	
/foo/bar/\ <code>?az</code>	<code>false</code>	<code>false</code>	N	N	N	N	(7)
/foo/bar/\ <code>?az</code>	<code>false</code>	<code>true</code>	N	N	N	Y	(8)

Notes:

1. Empty string = `/.`
2. The initial `/` is implicit.
3. `/` is the path delimiter in Vidispine, also on Windows.
4. `?` = exactly one.
5. `*` = 0 or more
6. `?` is not officially supported, see *URI's, URL's, and Special Characters*.
7. With `wildcard=false`, `\` is literal. However, `\` is not officially supported, see *URI's, URL's, and Special Characters*.

8. With wildcard=true, use \ to quote (" \ " has to be quoted).

Legend:

- Does not matter for this example

Y is included in search result

N is not include in search result

Prefix search example

Assuming there is a file app/Phone/Android/Oreo/GooglePlay.txt inside a storage, the result of some prefix search requests will be as follows:

```
GET /storage/{storage-id}/file?prefix=true
```

```
<FileDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <file>
    ...
  </file>
  <prefixes>
    <prefix>apps/Phone/Android/Oreo/</prefix>
  </prefixes>
</FileDocument>
```

```
GET /storage/{storage-id}/file?prefix=true&recursive=false
```

```
<FileDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <file>
    ...
  </file>
  <prefixes>
    <prefix>apps/</prefix>
  </prefixes>
</FileDocument>
```

```
GET /storage/{storage-id}/file?prefix=true&recursive=false&path=apps/
```

```
<FileDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <!-- The file list will be empty in this case -->
  <prefixes>
    <prefix>apps/Phone/</prefix>
  </prefixes>
</FileDocument>
```

In the case of wildcard=true and recursive=false, only the levels before the first wildcard character will be returned. So in the example below, apps/ will be returned, instead of apps/Phone/ or apps/Phone/Android/

```
GET /storage/{storage-id}/file?prefix=true&recursive=false&wildcard=true&path=app/
↪ *Oreo*
```

```
<FileDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <file>
    ...
```

```
</file>
<prefixes>
  <prefix>apps/</prefix>
</prefixes>
</FileDocument>
```

Get status of file in storage

GET {file-resource}

Retrieves the information, such as file size, status and checksum, of a specific file.

Query Parameters

- **methodType** – Return URIs from storage methods with a particular *type*. By default, return URLs with empty `methodType`.
- **storageType** – Only return URIs for files from storages of this *type*.
- **methodMetadata** – Optional *metadata* used with storage method.
- **scheme** – URI scheme to return.

Matrix Parameters

- **includeItem** –
 - `true` - Return associated items, shapes, and components.
 - `false` (default) - Do not return any information about associated items, shapes, and components.

Produces

- `application/xml`, `application/json` – `FileDocument`
- `text/plain` – *Tabbed tuples* of file id, file path, file size, file status, timestamp

Role `_file_read`

Upload file to storage

New in version 4.1.2.

POST {storage-resource}/file/data

Creates a new file on a specific storage, with the given file data.

Query Parameters

- **transferId** – An id to assign the transfer to be able to refer to it. Mandatory for chunked and passkey imports.
- **transferPriority** – An integer between 1 and 1000 that indicates what priority the transfer should be given in relation to other transfers (optional). A transfer with a high priority value is considered more important than a transfer with a low priority value.
- **path** – The path of the file on the storage (optional).

New in version 4.7.

- **uri** – The absolute file URI (optional and should be relative to the URI of a storage method).

New in version 4.7.

- **state** – The state of the file (optional).

New in version 4.7.

Status Codes

- **400** – If the amount of data received does not match the given Content-Length header.

New in version 4.2.3.

Accepts

- **application/octet-stream** – The raw essence data.

Produces

- **application/xml**, **application/json** – [FileDocument](#)

New in version 4.7.

- **text/plain** – file id

Role `_file_write`

File data

Get file data

GET `{file-resource}/data`

Retrieves the raw file data.

Produces

- **application/octet-stream** – The raw file data.

Role `_file_read`

Upload file data

New in version 4.1.2.

POST `{file-resource}/data`

Uploads the file data for a specific file, overwriting any existing file data for the file.

Query Parameters

- **transferId** – An id to assign the transfer to be able to refer to it. Mandatory for chunked and passkey imports.
- **transferPriority** – An integer between 1 and 1000 that indicates what priority the transfer should be given in relation to other transfers (optional). A transfer with a high priority value is considered more important than a transfer with a low priority value.

Status Codes

- **400** – If the amount of data received does not match the given Content-Length header.

New in version 4.2.3.

Accepts

- `application/octet-stream` – The raw file data.

Produces

- `application/xml`, `application/json` – `FileDocument`

Role `_file_write`

Generate temporary credentials

New in version 4.15.

POST `{file-resource}/uri`

Generates temporary access credentials that give either READ or WRITE access directly to the file. By default, if the file is on S3 or Azure, this will try to create a read-only pre-signed URL for the file; if this fail or if the file is on another type of storage, it will try to create a proxy URL (with direct access to the file).

Note: Please note that these generated credentials will only allow access to the exact same key / filename, to use the examples below it would be `image.jpg`. You will not be able to read or write another key / filename using these credentials.

Amazon S3

When using the `s3` scheme there are certain prerequisites that need to be met regarding policies and trust relationships with the account in use.

- If you specify which role to use by setting the `stsAssumeRole` property, you must make sure that this role have the permission policy to be able to assume the role (`sts:AssumeRole`) and that the policy allows to get the role (`iam:GetRole`).
- If you want to rely on Vidispine to find a role attached to an EC2 instance profile (by leaving the `stsAssumeRole` property unset), you must make sure that the policy allows for getting the the EC2 instance profile (`iam:GetInstanceProfile`) and to get the attached role (`iam:GetRole`) and also the permission to assume this role (`sts:AssumeRole`).

The permission policy for the role will only require `s3:GetObject` and `s3:PutObject` permissions to use the basic features. If you intend to use this for multipart uploads you might also want to add the permissions for `s3:ListMultipartUploadParts` and `s3:AbortMultipartUpload`. Finally this role will also need a trust relationship with an account with access to the storage(s) as an intersection is made to decide permissions in the end.

Vidispine will then create a custom policy to limit the credentials to either GET or PUT as requested.

Query Parameters

- **scheme** – Optional parameter to determine which type of URL / URI to be returned.
 - `s3` Utilize AWS's AssumeRole to generate a temporary URI giving access to only the specific file. Can be used either by setting the `stsAssumeRole` property to specify which role to assume when generating the credentials OR by leaving this unset which will make Vidispine try to use a role from an EC2 instance profile. These will also look at the configuration property for `stsRegion` and use that region when making the call to the STS API.

- `https` (default) - Generates a temporary pre-signed HTTPS URL for either S3 or Azure, or a proxy URL (based on the configuration property `apiNoauthUri`) if on another type of storage.
- `http` - Same as `https` but will also allow HTTP URL's to be returned.
- **write** – Optional, to set permission to either READ or WRITE.
 - `true` - Will give credentials with access to write. This would also enable the optional permissions for `s3:ListMultipartUploadParts` and `s3:AbortMultipartUpload` if used together with the `s3` scheme.
 - `false` - (Default) Will give credentials with access to read.
- **duration** – Optional, sets the duration of the temporary credentials in minutes. Default is set to the minimum (15) and the maximum is 720.

Produces

- `application/xml`, `application/json` – `URIListDocument`

Role `_file_write`

Examples

To generate a writeable S3 URL with temporary credentials:

Note: The user id and secret key will be replaced with the generated temporary credentials in the returned URI.

```
POST /storage/file/VX-56/uri?scheme=s3&write=true
```

```
<URIListDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <uri>s3://ASIA.....@example/image.jpg?sessionToken=...</uri>
</URIListDocument>
```

To generate a pre-signed HTTPS URL (or proxy URL depending on the type of storage):

```
POST /storage/file/VX-98/uri?scheme=https&write=true
```

```
<URIListDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <uri>https://example.blob.core.windows.net/image.jpg?sig=...</uri>
</URIListDocument>
```

Importable files**Get files that can be imported**

GET `{storage-resource}/importable`

Retrieves a list of files, together with any found metadata, for files that do not belong to any component.

Same query and matrix parameters as for `GET {storage-resource}/file`.

Query Parameters

- `auto` –

- `true` - Return files that will be automatically imported due to auto-import rules.
- `false` (default) - Do not return files that will be automatically imported.
- **id** - Optional, if multiple `id` query parameters are specified only those files are returned. If no ids are specified, all files are returned.
- **path** - Optional string
 - `path` - Return files under this sub-path to storage.
 - `/` (default) - Return all files.
- **prefix** -
 - `true` - Also include file prefixes that matches the criteria
 - `false` (default) - Do not include file prefixesNew in version 4.14.
- **ignorecase** -
 - `true` - Search file path case insensitively
 - `false` - Search file path case sensitively
- **recursive** -
 - `true` (default) - Return all files in tree.
 - `false` - Return only files directly under specified path.
- **wildcard** -
 - `true` - Allow use of wildcards in path.
 - `false` (default) - No wildcard handling of path.
- **hash** - Optional list of hash values. Only return files with specific hash value.
- **algorithm** - Optional hash algorithm. Search for hash values used by specified algorithm
- **count** -
 - `true` (default) - Return total number of hits in result
 - `false` - Do not return total number of hits in result, in order to produce results faster
- **state** - Optional string to filter results by *file state*. Can be used multiple times to select several states.
New in version 4.7.
- **methodType** - Return URIs from storage methods with a particular *type*. By default, return URLs with empty `methodType`.
- **storageType** - Only return URIs for files from storages of this *type*.
- **methodMetadata** - Optional *metadata* used with storage method.
- **scheme** - URI scheme to return.

Matrix Parameters

- **first** - Optional integer. From total list of files, start return list from specified number. Default is 0.
- **cursor** - New in version 4.16.

- * - The initial cursor.
- `string-from-search` - Cursor string returned from the search results.

If set, the `cursorMark` (https://lucene.apache.org/solr/guide/6_6/pagination-of-results.html#fetching-a-large-number-of-sorted-results-cursors) / `search after` (<https://www.elastic.co/guide/en/elasticsearch/reference/6.3/search-request-search-after.html#search-request-search-after>) features from Solr/Elasticsearch would be used to improve the `deep paging` (https://lucene.apache.org/solr/guide/6_6/pagination-of-results.html#performance-problems-with-deep-paging) performance during a search.

When `cursor` is used, The value of `first` will be ignored.

Only metadata searches in the `generic` interval supports `cursor`.

- **number** – Optional integer. Return a maximum of specified number of files. Default is 10.
- **prefixFirst** – Optional integer. From total list of prefixes, start return list from specified number. Default is 0.

Note: this parameter has no effect if Elasticsearch is the search backend.

New in version 4.14.

- **prefixNumber** – Optional integer. Return a maximum of specified number of prefixes. Default is 10.

New in version 4.14.

- **sort** – Optional comma-separated list.
 - `fileId` [`asc` (default) | `desc`] (default) - Order results by file id.
 - `size` [`asc` (default) | `desc`] - Order results by file size (bytes).
 - `state` [`asc` (default) | `desc`] - Order results by *file state*.
 - `timestamp` [`asc` (default) | `desc`] - Order results by file timestamp.
 - `filename` [`asc` (default) | `desc`] - Order results by filename.
 - `extension` [`asc` (default) | `desc`] - Order results by file extension.

New in version 4.2.1.

- **storage** – Optional list of storage ids. Return only files from specific storages. Same as `storage-id` in URL, but can be specified multiple times
- **storageGroup** – Optional storage group id. Return only files from storages specified in the storage group

New in version 4.13.

- **filter** –
 - `all` (default) - Return all files
 - `item` Only return files associated with an item.
 - `noitem` Only return files not associated with any item.
- **excludeQueued** –
 - `true` (default if searching importable files) - Exclude the files that are queued for import
 - `false` (default if searching all files) - Do not exclude the files that are queued for import

Produces

- **application/xml**, **application/json** – An [ImportableFileListDocument](#) describing the job.

Role `_storage_read`

Importing a file from a storage

Start an import job

POST `{file-resource}/import`

Starts a an import job that will import the specified file. Only files that do not belong to any components can be imported.

Query Parameters

- **filename** – The original filename of the file.
- **allowReimport** –
 - `true` - Import the file to this shape even if the file is already importing or is already part of another item.
 - `false` (default) Reject the request if the file with the given id has already been imported or is currently importing.
- **id** – A comma-delimited list of external ids to assign to the item.
- **tag** – An optional list of *shape tags* to use for transcoding.
- **original** – An optional tag, if specified it should be one of the tags specified in the tag parameter. Specifies that the original shape tag will be reset to the shape created to this tag.
- **createThumbnails** –
 - `true` (default) - Generate thumbnails as per defined by shape tag.
 - `false` - Disable thumbnail generation.
- **thumbnailService** – An optional identifier to which thumbnail resource that should be used.
- **createPosters** – An optional list of *time codes* to use for creating posters.
- **no-transcode** –
 - `true` - Will disable transcoding even if the `tags` parameter is set. Rather, the specified tag will be used to determine cropping, scaling etc. of thumbnails.
 - `false` (default) - Normal transcode.
- **resourceId** – The transcoder resource to use to execute the transcode.
New in version 4.12.
- **overrideFastStart** –
 - `true` (default) - Use transcoder's estimate of the duration for allocating header space in MOV files and similar files.
 - `false` - Do not use the transcoder's estimate of the duration.
- **requireFastStart** –
 - `true` (default) - Try to put the index tables (header) in front of the file.

- `false` - Put header at end of file.
- **fastStartLength** – Optional estimated duration of the clip in seconds.
- **notification** – The *placeholder job notification* to use for this job. (Optional)
- **notificationData** – Any additional data to include for *notifications* on this job. (Optional)
- **priority** – The priority to assign to the job. Default is `MEDIUM`.
- **jobmetadata** – Additional *information* for the job task.
- **settings** – Pre-configured *import settings*.
- **importTag** – An optional list of shape tags that the created shape will be associated with. Default value is `original`. (New in 4.12.)

Accepts

- **application/xml, application/json** – `MetadataDocument`, initial metadata that is given to the imported item.

Produces

- **application/xml, application/json** – A `JobDocument` that describes the import job.

Role `_import`

Start an import job of an IMF package**POST {file-resource}/import/assetmap**

Starts a an import job that will import an `ASSETMAP` file (SMPTE ST 429-9). Files pointed to by the assetmap (DCP/InterOp or SMPTE) has to be stored in the same directory.

Query Parameters

- **allowReimport** –
 - `true` - Import the file to this shape even if the file is already importing or is already part of another item.
 - `false` (default) Reject the request if the file with the given id has already been imported or is currently importing.
- **id** – A comma-delimited list of external ids to assign to the item.
- **tag** – An optional list of *shape tags* to use for transcoding.
- **original** – An optional tag, if specified it should be one of the tags specified in the tag parameter. Specifies that the original shape tag will be reset to the shape created to this tag.
- **createThumbnails** –
 - `true` (default) - Generate thumbnails as per defined by shape tag.
 - `false` - Disable thumbnail generation.
- **thumbnailService** – An optional identifier to which thumbnail resource that should be used.
- **createPosters** – An optional list of *time codes* to use for creating posters.
- **no-transcode** –

- `true` - Will disable transcoding even if the `tags` parameter is set. Rather, the specified tag will be used to determine cropping, scaling etc. of thumbnails.
- `false` (default) - Normal transcode.
- **overrideFastStart** -
 - `true` (default) - Use transcoder's estimate of the duration for allocating header space in MOV files and similar files.
 - `false` - Do not use the transcoder's estimate of the duration.
- **requireFastStart** -
 - `true` (default) - Try to put the index tables (header) in front of the file.
 - `false` - Put header at end of file.
- **fastStartLength** - Optional estimated duration of the clip in seconds.
- **notification** - The *placeholder job notification* to use for this job. (Optional)
- **notificationData** - Any additional data to include for *notifications* on this job. (Optional)
- **priority** - The priority to assign to the job. Default is `MEDIUM`.
- **jobmetadata** - Additional *information* for the job task.
- **settings** - Pre-configured *import settings*.
- **importTag** - An optional list of shape tags that the created shape will be associated with. Default value is `original`. (New in 4.12.)

Accepts

- **application/xml**, **application/json** - *MetadataDocument*, initial metadata that is given to the imported item.

Produces

- **application/xml**, **application/json** - A *JobDocument* that describes the import job.

Role `_import`

Start an import job from path

New in version 4.10.

POST `{storage-resource}/file/import`

Starts a an import job that will import the specified file. Only files that do not belong to any components can be imported.

Query Parameters

- **path** - The path of the file on the storage. Mandatory.
- **uri** - The absolute file URI (should be relative to the URI of a storage method).
- **state** - The state of the file. Default is `CLOSED`.
- **createOnly** -
 - `true` - Fail if a file with that path already exists.

- `false` (default) - Update the existing file if one exists, else create a new file entity.
- **filename** – The original filename of the file.
- **allowReimport** –
 - `true` - Import the file to this shape even if the file is already importing or is already part of another item.
 - `false` (default) Reject the request if the file with the given id has already been imported or is currently importing.
- **id** – A comma-delimited list of external ids to assign to the item.
- **tag** – An optional list of *shape tags* to use for transcoding.
- **original** – An optional tag, if specified it should be one of the tags specified in the tag parameter. Specifies that the original shape tag will be reset to the shape created to this tag.
- **createThumbnails** –
 - `true` (default) - Generate thumbnails as per defined by shape tag.
 - `false` - Disable thumbnail generation.
- **thumbnailService** – An optional identifier to which thumbnail resource that should be used.
- **createPosters** – An optional list of *time codes* to use for creating posters.
- **no-transcode** –
 - `true` - Will disable transcoding even if the `tags` parameter is set. Rather, the specified tag will be used to determine cropping, scaling etc. of thumbnails.
 - `false` (default) - Normal transcode.
- **resourceId** – The transcoder resource to use to execute the transcode.
New in version 4.12.
- **overrideFastStart** –
 - `true` (default) - Use transcoder's estimate of the duration for allocating header space in MOV files and similar files.
 - `false` - Do not use the transcoder's estimate of the duration.
- **requireFastStart** –
 - `true` (default) - Try to put the index tables (header) in front of the file.
 - `false` - Put header at end of file.
- **fastStartLength** – Optional estimated duration of the clip in seconds.
- **notification** – The *placeholder job notification* to use for this job. (Optional)
- **notificationData** – Any additional data to include for *notifications* on this job. (Optional)
- **priority** – The priority to assign to the job. Default is `MEDIUM`.
- **jobmetadata** – Additional *information* for the job task.
- **settings** – Pre-configured *import settings*.
- **importTag** – An optional list of shape tags that the created shape will be associated with. Default value is `original`. (New in 4.12.)

Accepts

- **application/xml**, **application/json** – [MetadataDocument](#), initial metadata that is given to the imported item.

Produces

- **application/xml**, **application/json** – A [JobDocument](#) that describes the import job.

Role `_import`

Start an import job of an IMF package from path

New in version 4.10.

POST `{storage-resource}/file/import/assetmap`

Starts a an import job that will import an `ASSETMAP` file (SMPTE ST 429-9). Files pointed to by the assetmap (DCP/InterOp or SMPTE) has to be stored in the same directory.

Query Parameters

- **path** – The path of the file on the storage. Mandatory.
- **uri** – The absolute file URI (should be relative to the URI of a storage method).
- **state** – The state of the file. Default is `CLOSED`.
- **createOnly** –
 - `true` - Fail if a file with that path already exists.
 - `false` (default) - Update the existing file if one exists, else create a new file entity.
- **allowReimport** –
 - `true` - Import the file to this shape even if the file is already importing or is already part of another item.
 - `false` (default) Reject the request if the file with the given id has already been imported or is currently importing.
- **id** – A comma-delimited list of external ids to assign to the item.
- **tag** – An optional list of *shape tags* to use for transcoding.
- **original** – An optional tag, if specified it should be one of the tags specified in the tag parameter. Specifies that the original shape tag will be reset to the shape created to this tag.
- **createThumbnails** –
 - `true` (default) - Generate thumbnails as per defined by shape tag.
 - `false` - Disable thumbnail generation.
- **thumbnailService** – An optional identifier to which thumbnail resource that should be used.
- **createPosters** – An optional list of *time codes* to use for creating posters.
- **no-transcode** –
 - `true` - Will disable transcoding even if the `tags` parameter is set. Rather, the specified tag will be used to determine cropping, scaling etc. of thumbnails.
 - `false` (default) - Normal transcode.

- **overrideFastStart** –
 - `true` (default) - Use transcoder’s estimate of the duration for allocating header space in MOV files and similar files.
 - `false` - Do not use the transcoder’s estimate of the duration.
- **requireFastStart** –
 - `true` (default) - Try to put the index tables (header) in front of the file.
 - `false` - Put header at end of file.
- **fastStartLength** – Optional estimated duration of the clip in seconds.
- **notification** – The *placeholder job notification* to use for this job. (Optional)
- **notificationData** – Any additional data to include for *notifications* on this job. (Optional)
- **priority** – The priority to assign to the job. Default is `MEDIUM`.
- **jobmetadata** – Additional *information* for the job task.
- **settings** – Pre-configured *import settings*.
- **importTag** – An optional list of shape tags that the created shape will be associated with. Default value is `original`. (New in 4.12.)

Accepts

- **application/xml**, **application/json** – *MetadataDocument*, initial metadata that is given to the imported item.

Produces

- **application/xml**, **application/json** – A *JobDocument* that describes the import job.

Role `_import`

Move/copy/delete files from a storage**Create a file move/copy job**

POST `{file-resource}/storage/ (target-storage-id)`

Starts a move or copy job for the specified file.

Query Parameters

- **move** –
 - `true` - Delete the original file when the copy has finished.
 - `false` - Just copy the file, and leave the original.
- **filename** – Optional filename, the desired target filename.
- **useOriginalFilename** – If set to true, the file will keep its original filename if available.
- **timeRequirement** – Optional number of seconds the target file is required to exist before being moved due to storage rules etc.

- **limitRate** – (New in 4.0.) Optional integer, throttle the rate at which the transfer takes place (bytes/second).
- **notification** – The *placeholder job notification* to use for this job. (Optional)
- **notificationData** – Any additional data to include for *notifications* on this job. (Optional)
- **priority** – The priority to assign to the job. Default is `MEDIUM`.
- **jobmetadata** – Additional *information* for the job task.

Produces

- `application/xml`, `application/json` – [JobDocument](#)

Role `_file_write`

Create a file delete job

DELETE `{file-resource}`

Starts a delete job for the specified file.

Query Parameters

- **notification** – The *placeholder job notification* to use for this job. (Optional)
- **notificationData** – Any additional data to include for *notifications* on this job. (Optional)
- **priority** – The priority to assign to the job. Default is `MEDIUM`.
- **jobmetadata** – Additional *information* for the job task.

Produces

- `application/xml`, `application/json` – [JobDocument](#)

Role `_file_write`

Managing files

Create a file entity in the database

POST `{storage-resource}/file`

Creates a file entity in the database. Does not create any physical files. Either a storage id and path or an absolute URI may be given.

Query Parameters

- **path** – The path of the file on the storage.
- **uri** – The absolute file URI (should be relative to the URI of a storage method).
- **state** – The state of the file. Default is `OPEN`.
- **createOnly** –
 - `true` (default) - Fail if a file with that path already exists.
 - `false` - Update the existing file if one exists, else create a new file entity.

Status Codes

- **409 Conflict** – If `createOnly=true` and a file with that path already exists.

Produces

- `application/xml`, `application/json` – [FileDocument](#)
- `text/plain` – The id of the new or updated file.

POST {storage-resource}/file

Creates a file entity in the database. Does not create any physical files. Either a storage id and path or an absolute URI may be given.

Query Parameters

- **createOnly** –
 - `true` (default) - Fail if a file with that path already exists.
 - `false` - Update the existing file if one exists, else create a new file entity.

Status Codes

- **409 Conflict** – If `createOnly=true` and a file with that path already exists.

Accepts

- `application/xml`, `application/json` – [FileDocument](#) with the path or uri and file state.

Produces

- `application/xml`, `application/json` – [FileDocument](#)
- `text/plain` – The id of the new or updated file.

Delete a file entity from the database

DELETE {file-resource}/entity

Deletes a file entity from the database. Does not touch the physical file.

Role `_file_write`

Set new file path

POST {file-resource}/path

Registers a new file, with the new path, and change all relevant components to point to the new file instead. The old file is marked for deletion. Hence, caller should first do the physical move, then issue this command.

The path of file entities in Vidispine is immutable. This command is used when a file is moved manually (without Vidispine), and caller wants to register the new path.

Use the `duplicate` parameter to add another file as a duplicate. The file at the new location will be added to all components that the file is already a part of. No file entities will be removed.

Query Parameters

- **storage** – Optional storage id. The new storage, if omitted, the same storage.
- **path** – The new path. Required.
- **state** – Optional new state of the file. (OPEN, CLOSED, etc).
- **duplicate** –

- `true` - The file at the target path is a duplicate of this file. The old file entity will NOT be removed.
 - `false` (default) - This target path is the new location. This old file entity will be removed.
- New in version 4.2.12.

Produces

- `application/xml`, `application/json` – [FileDocument](#)
- `text/plain` – File id

Role `_file_write`

Set file state

PUT `{file-resource}/state/` (*state*)

Changes the state of the specified file to the given state.

Can for example be used after writing a file to a storage, to immediately mark it as CLOSED and no longer growing.

Parameters

- `state` – The new state of the file.

Produces

- `application/xml`, `application/json` – The resulting [FileDocument](#)
- `text/plain` – The id of the file.

Example:

PUT `/storage/file/VX-12/state/CLOSED`

```
<FileDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <id>VX-432</id>
  <path>sample.mov</path>
  <uri>file:///srv/media1/sample.mov</uri>
  <state>CLOSED</state>
  <size>7889811</size>
  <hash>5eb9646332c96c738b4cacf7bc110d4cd8523ed5</hash>
  <timestamp>2016-03-24T17:02:53.796+01:00</timestamp>
  <refreshFlag>1</refreshFlag>
  <storage>VX-1</storage>
</FileDocument>
```

Unassociate a file with an item

PUT `{file-resource}/abandon`

Unassociates (disconnects) the physical file from the item. The shape which the file resided in will still exist, but there is no longer any connection between the file and the shape or item.

Query Parameters

- `item` – The item from which the file in unassociated

Role `_file_write`

Re-index file

PUT {file-resource}/re-index

Queues a single file for re-index.

Produces

- **text/plain** –

See *Re-indexing metadata* if you wish to reindex all files in the system.

17.28.3 Storages

Managing storages

Retrieve list of storages

GET /storage

Retrieves the storages that have been configured.

Query Parameters

- **size** – Optional range of bytes, in format *s1-s2*. Returns storages with nominal size that is in that range. Either number can be omitted to not specify lower/upper limit. *Size units* can be used. Default is –, all storages.
- **freebytes** – Optional range of bytes, in format *s1-s2*. Returns storages with free space that is in that range. Either number can be omitted to not specify lower/upper limit. *Size units* can be used. Default is –, all storages.
- **usedbytes** – Optional range of bytes, in format *s1-s2*. Returns storages with used space that is in that range. Either number can be omitted to not specify lower/upper limit. *Size units* can be used. Default is –, all storages.
- **freemount** – Optional range of percent as integers, in format *s1-s2*. Returns storages with used space that is in that range. Either number can be omitted to not specify lower/upper limit. Default is –, all storages.
- **files** – Optional range of files as integers, in format *s1-s2*. Returns storages with number of files that is in that range. Either number can be omitted to not specify lower/upper limit. Default is –, all storages.
- **storagegroup** – Optional list of storage groups.
 - *storage-group* - Returned storage is member of specified storage group.
 - *-storage-group* Returned storage is not member of specified storage group.
 - default Return all storages.
- **status** – Optional list of *storage status*.
 - *status* - Returned storage has this status.
 - *-status* - Returned storage does not have this status.
 - default - Return all storages.
- **url** – Returns storages with a method matching this URL. May include wildcards * and ?.

Produces

- `application/xml`, `application/json` – `StorageListDocument`
- `text/plain` – CRLF-delimited list of storage ids

Role `_storage_read`

Example

```
GET /storage
```

```
<StorageListDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <storage>
    <id>VX-1</id>
    <state>NONE</state>
    <type>LOCAL</type>
    <capacity>1600000000000</capacity>
    <freeCapacity>19993896424</freeCapacity>
    <method>
      <id>VX-6</id>
      <uri>file:///mnt/main/</uri>
      <bandwidth>0</bandwidth>
      <read>true</read>
      <write>true</write>
      <browse>true</browse>
      <lastSuccess>2014-07-04T08:39:00.739+02:00</lastSuccess>
      <type>NONE</type>
    </method>
    <metadata/>
    <lowWatermark>0</lowWatermark>
    <highWatermark>0</highWatermark>
    <showImportables>true</showImportables>
  </storage>
  <storage>
    <id>VX-2</id>
    <state>NONE</state>
    <type>LOCAL</type>
    <capacity>150000000000</capacity>
    <freeCapacity>19548305962</freeCapacity>
    <method>
      <id>VX-4</id>
      <uri>file:///mnt/ingest/</uri>
      <read>true</read>
      <write>true</write>
      <browse>true</browse>
      <lastSuccess>2014-07-04T08:38:56.773+02:00</lastSuccess>
      <type>NONE</type>
    </method>
    <metadata/>
    <lowWatermark>0</lowWatermark>
    <highWatermark>200000000000</highWatermark>
    <showImportables>true</showImportables>
  </storage>
</StorageListDocument>
```

Create storage

POST /storage

Creates a new storage.

Accepts

- `application/xml`, `application/json` – `StorageDocument`

Produces

- `application/xml`, `application/json` – `StorageDocument`
- `text/plain` – Storage id

Role `_storage_write`

Note: If your storage is to be used for autoimport, the `showImportables` property in the `StorageDocument` must be set to `true`. The files on the storage will then be discovered and available for use with `GET /storage/importable` or `GET /storage/auto-import/`.

Example

```
POST /storage
Content-Type: application/xml
```

```
<StorageDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <type>LOCAL</type>
  <capacity>15000000000</capacity>
  <method>
    <uri>file:///mnt/ingest/</uri>
    <read>true</read>
    <write>true</write>
    <browse>true</browse>
  </method>
  <lowWatermarkPercentage>90</lowWatermarkPercentage>
  <highWatermarkPercentage>75</highWatermarkPercentage>
  <showImportables>true</showImportables>
</StorageDocument>
```

```
<StorageDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <id>VX-2</id>
  <state>NONE</state>
  <type>LOCAL</type>
  <capacity>15000000000</capacity>
  <freeCapacity>15000000000</freeCapacity>
  <method>
    <id>VX-4</id>
    <uri>file:///mnt/ingest/</uri>
    <read>true</read>
    <write>true</write>
    <browse>true</browse>
    <type>NONE</type>
  </method>
  <metadata/>
  <lowWatermark>11250000000</lowWatermark>
```

```
<highWatermark>135000000000</highWatermark>
<lowWatermarkPercentage>75</lowWatermarkPercentage>
<highWatermarkPercentage>90</highWatermarkPercentage>
<showImportables>true</showImportables>
</StorageDocument>
```

Get storage

GET `/storage/` (*storage-id*)

Retrieves a specific storage.

Produces

- `application/xml`, `application/json` – `StorageDocument`

Role `_storage_read`

Example

```
GET /storage/VX-2
```

```
<StorageDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <id>VX-2</id>
  <state>NONE</state>
  <type>LOCAL</type>
  <capacity>150000000000</capacity>
  <freeCapacity>150000000000</freeCapacity>
  <method>
    <id>VX-4</id>
    <uri>file:///mnt/ingest/</uri>
    <read>true</read>
    <write>true</write>
    <browse>true</browse>
    <type>NONE</type>
  </method>
  <metadata/>
  <lowWatermark>112500000000</lowWatermark>
  <highWatermark>135000000000</highWatermark>
  <lowWatermarkPercentage>75</lowWatermarkPercentage>
  <highWatermarkPercentage>90</highWatermarkPercentage>
  <showImportables>true</showImportables>
</StorageDocument>
```

Modify storage

PUT `/storage/` (*storage-id*)

Updates an existing storage.

Accepts

- `application/xml`, `application/json` – `StorageDocument`

Produces

- `application/xml`, `application/json` – `StorageDocument`

- `text/plain` – Storage id

Example

```
PUT /storage/VX-2
Content-Type: application/xml

<StorageDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <type>LOCAL</type>
  <capacity>150000000000</capacity>
  <lowWatermarkPercentage>80</lowWatermarkPercentage>
  <highWatermarkPercentage>95</highWatermarkPercentage>
</StorageDocument>
```

```
<StorageDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <id>VX-2</id>
  <state>NONE</state>
  <type>LOCAL</type>
  <capacity>150000000000</capacity>
  <freeCapacity>150000000000</freeCapacity>
  <method>
    <id>VX-4</id>
    <uri>file:///mnt/ingest/</uri>
    <read>true</read>
    <write>true</write>
    <browse>true</browse>
    <type>NONE</type>
  </method>
  <metadata/>
  <lowWatermark>120000000000</lowWatermark>
  <highWatermark>142500000000</highWatermark>
  <lowWatermarkPercentage>80</lowWatermarkPercentage>
  <highWatermarkPercentage>95</highWatermarkPercentage>
  <showImportables>true</showImportables>
</StorageDocument>
```

Delete storage

DELETE `/storage/` (*storage-id*)

Deletes the storage. All files in storage will remain after call, but the Vidispine system will no longer manage them.

Query Parameters

- **safe** –
 - `true` - Storage will only be deleted if there are no files connected to items on the storage.
 - `false` (default) - Storage will be deleted, and any file entities will be disconnected from items and deleted.

Status Codes

- **409 Conflict** – If `safe` parameter is `true` this error code will be given if there are files connected to items on the storage.

Role `_storage_write`

Storage information

Set the storage type

PUT `/storage/ (storage-id) /type/`
type Sets the type of the storage.

Role `_storage_write`

Get storage status

GET `/storage/ (storage-id) /status`
Retrieves the status of the storage.

Produces

- **text/plain** – Status string

Role `_storage_read`

Get amount of free space on storage

GET `/storage/ (storage-id) /freespace`
Retrieves the amount of free space on the storage.

Produces

- **text/plain** – Amount of free space as decimal number, between 0 and 100, inclusive

Role `_storage_read`

Rescanning

The `scanInterval` property can be used to control how often (in seconds) a storage is scanned. Default is 60 seconds. By calling `/rescan`, the system is forced to rescan a storage without delay.

Rescan a storage

POST `/storage/ (storage-id) /rescan`
Triggers a rescan of a single storage.

Storage methods

New in version 4.1: Credentials are encrypted. This means that passwords cannot be viewed through the API/server logs.

Get storage methods

GET `/storage/ (storage-id) /method`
Retrieves the access methods configured on a specific storage.

Query Parameters

- **url** – Optional URL. Only return methods with this URL. Wildcards (?, *) can be used, for example `http:*`.

Matrix Parameters

- **read** –
 - `true` - Only return methods which have file read capability.
 - `false` (default) - Return methods regardless of file read capability.
- **write** –
 - `true` - Only return methods which have file write capability.
 - `false` (default) - Return methods regardless of file write capability.
- **browse** –
 - `true` - Only return methods which have file browse capability.
 - `false` (default) - Return methods regardless of file browse capability.

Produces

- `application/xml`, `application/json` – [StorageMethodListDocument](#)

Role `_storage_read`

Example

```
GET /storage/VX-2/method
```

```
<StorageMethodListDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <method>
    <id>VX-4</id>
    <uri>file:///mnt/ingest/</uri>
    <bandwidth>0</bandwidth>
    <read>true</read>
    <write>true</write>
    <browse>true</browse>
    <lastSuccess>2014-07-04T09:55:09.779+02:00</lastSuccess>
    <type>NONE</type>
  </method>
</StorageMethodListDocument>
```

Add new/update storage method

PUT `/storage/ (storage-id) /method`

Adds a new access method to the storage. If URL matches an existing method, a new method is not created, instead the existing one is updated.

Query Parameters

- **url** – Mandatory URL, method is access through this URL
- **read** –
 - `true` (default) - Method has file read capability
 - `false` - Method does not have file read capability

- **write** –
 - `true` (default) - Method has file write capability
 - `false` - Method does not have file write capability
- **browse** –
 - `true` (default) - Method has file browse capability
 - `false` - Method does not have file browse capability
- **bandwidth** – The *bandwidth* of this method in bytes per second. Default 0.
- **type** – Optional *method type*. Default is empty.

Produces

- **text/plain** – *Tabbed tuples* : id, URL, status string of method

Role `_storage_write`

Example

```
PUT /storage/VX-2/method?url=http://10.12.0.3/ingest/&read=true&write=false&
↪browse=false
```

VX-5	http://10.12.0.3/ingest/	NONE
------	--------------------------	------

Get storage method

GET `/storage/ (storage-id) /method/`
method-id Retrieves a specific access method to storage.

Produces

- **application/xml**, **application/json** – `StorageMethodListDocument`

Role `_storage_read`

Add new/update storage method

PUT `/storage/ (storage-id) /method/`
method-id Updates access method to the storage.

Query Parameters

- **url** – Mandatory URL, method is access through this URL
- **read** –
 - `true` - Method has file read capability.
 - `false` - Method does not have file read capability.
- **write** –
 - `true` - Method has file write capability.
 - `false` - Method does not have file write capability.

- **browse** –
 - `true` - Method has file browse capability.
 - `false` - Method does not have file browse capability.
- **bandwidth** – The *bandwidth* of this method in bytes per second. Default 0.
- **type** – Optional *method type*.

Produces

- **text/plain** – *Tabbed tuples* : id, URL, status string of method

Role `_storage_write`**Remove storage method****DELETE** `/storage/ (storage-id) /method/ method-id`**DELETE** `/storage/ (storage-id) /method;url= url` Removes an access method from a storage.**Role** `_storage_write`**Importing/exporting a storage definition**

Vidispine can export a definition document describing all the files within a storage, which can later be imported to a new storage on a different Vidispine instance.

Export a storage definition**GET** `/storage/ (storage-id) /export`

Creates a [StorageImportDocument](#) that describes every file on the storage. This should be saved to a file which can later be used to import the storage definition.

Produces

- **application/xml**, **application/json** – [StorageImportDocument](#)

Role `_storage_read`**Import a storage definition****POST** `/storage/import`

Creates a new storage based on the [StorageImportDocument](#). A file entity will be created for each entry in the document, if a file with that ID does not already exist. Finally, a storage method will be added, with the path supplied in the call.

Query Parameters

- **path** – The file system path to where the files are located.

Accepts

- **application/xml**, **application/json** – A [StorageImportDocument](#)

Role `_storage_write`

Evacuating storages

If you would like to delete a storage, but you still have files there which are connected to items, you can first trigger an evacuation of the storage. This will cause Vidispine to attempt to delete redundant files, or move files to other storages. Once the evacuation is complete, the storage will get the state `EVACUATED`.

Evacuate storage

PUT `/storage/ (storage-id) /evacuate`

Trigger evacuation of a storage.

Role `_storage_write`

Cancel evacuation of a storage

DELETE `/storage/ (storage-id) /evacuate`

Cancel the evacuation process on a storage.

Role `_storage_write`

Key-value metadata

Storages support *key-value metadata*.

Reserved keys

Certain keys are used to control the behavior of a storage, they must not be used to store generic metadata.

closeLimit

An integer specifying the number of minutes until the system automatically considers an open file to be closed.

Default 5

lostLimit

An integer specifying the number of minutes until the system automatically considers a missing file to be lost.

Default 10

toAppearLimit

An integer specifying the number of minutes the system waits for a file to appear before considering it to be missing.

Default 10

refreshInterval

The interval (in seconds) that Vidispine will compare the list of file seen on disk with the list of files in the database. This to fix any possible mismatch.

Default 900

hashMode

Set to `false` to disable hash computation for this storage.

Default `true`

additionalHash

A comma-separated list of additional hashing algorithms that should be applied to files. E.g.: MD5, SHA-256.

Since 4.14, the hash algorithm `FILENAME` is also supported, which takes the last part of the path concatenated with the file size, and calculates a SHA-1 checksum of that string.

Default (none)

fileListBatchSize

Maximum size of list of files that are updated in the database at the same time.

Default 100000

Since 4.0.3

keepMissingFiles

If set to `false` then missing files that do *not* belong to any items will be removed from the database instead of being marked as lost.

Default To the value of the configuration property `keepMissingFiles`.

Since 4.1

keepEmptyDirectories

Do not delete empty parent directories when deleting the last file in a directory, see *Parent directory management*.

Default To the value of the configuration property `keepEmptyDirectories`.

Since 4.2.5

statsPerSecond

An integer specifying the maximum number of `stat` system calls that are made to the storage (only `file://` URIs). See also the configuration property `statsPerSecond`.

Default (none)

Since 4.1.1

refreshOnStart

By default, Vidispine synchronizes the database with the file system on start-up. On very large systems, this can take a very long time. Set this parameter to `false`, and use the rescan functionality (see below) instead.

Default true

Since 4.1.1

deleteFileIfNotFound

If set to `true`: if file that is marked for deletion cannot be deleted, but is not found on the file system, it is assumed to be deleted.

Default false

Since 4.0.9

deleteFileIfReadOnly

If a file that is marked for deletion cannot be deleted, and the file exists on a readonly storage, then:

- If set to `true`: delete the file from the database, as if the file had been deleted.
- If set to a *file state*: set the file to this state.

Default false

Example true, ARCHIVED, LOST

Since 4.0.9

excludeFilter

A regular expression. Any file with a path (relative to the storage's root folder) that matches the expression will be ignored. Note that the expression must match the entire path, not only a part of the path.

Default (none)

Since 4.2

detectRenamedFiles

If this metadata is set to `true`, whenever a file belonging to an item is marked as `LOST`, and there is another file on the same storage with the same hash value, the new file is associated with the item instead.

Other possible values are `all`, where the old (lost) file resided on any storage, or a comma-separated list of identifiers of storages on which the old (lost) file resided on.

Default (none)

Since 4.2

probeFileBeforeClosing

If this metadata is set to `true`, Vidispine will attempt to read `OPEN` files before marking them as `CLOSED`. This is useful for Windows storages where the metadata is constant while a file is copied to the storage, but the file cannot be read (file is busy).

Default false

Since 4.2.1

vxaId

If this metadata field is set, the storage will be automatically deleted if the share is removed from the *Vidispine Server Agent*.

Default (none) for regular storages, automatically set by VSA when a share is added and a storage is created.

Since 4.4

sqsName

The name of Amazon SQS queue to poll for S3 file events. See *S3 Event Notifications* for more information.

This key is only read for S3 methods.

sqsEndpoint

The endpoint of Amazon SQS queue.

This key is only read for S3 methods.

Example: `sqs.eu-west-1.amazonaws.com`

hashingThreadCount

The number of hashing thread that should be run on the VSA side. Note: this configuration only work for VSA storage.

Default 1

Since 4.11

noDefaultHash

Do not calculate hash checksums for files on the storage.

Example: `true`

Default false

Since 4.14

verifyHashAfterTransfer

If a job is copying or moving a file to this storage the hash of the source file and the hash of the newly copied/moved file are compared to ensure that the new file is binary identical to the original file. If the hashes differ the job fails and the destination file is removed.

- If set to `true`: hash verification is performed after the file has arrived on this storage.
- If set to `false`: no hash verification is performed.

The hash verification procedure makes use of the hash calculation that is happening on all storages by default (see *File hashing*). If hash calculation is disabled on the source storage the hash is calculated *before* the copy/move operation is performed. If hash calculation is disabled on the destination storage the hash is calculated *after* the copy/move operation has completed. These hashes are stored in the Vidispine database for later reuse.

Note that hash calculation requires reading the whole file and thus is a lengthy process that can significantly increase execution time of copy/move jobs.

Default false

Since 4.14

storageActivationFile

Require a `.storage` file to be present in the storage method's URI for storage to register as online. Takes precedence over the *global setting*.

Default (none) - The global setting applies.

Since 4.17

Size units

In the query parameters above, size can be specified in number of bytes as `integer [[whitespace] unit]` where the multiplier unit can be one of (case insensitive):

Unit	Factor
KB	1000 ¹
K, KiB	2 ¹⁰
MB	1000 ²
M, MiB	2 ²⁰
GB	1000 ³
G, GiB	2 ³⁰
TB	1000 ⁴
T, TiB	2 ⁴⁰
PB	1000 ⁵
P, PiB	2 ⁵⁰
EB	1000 ⁶
E, EiB	2 ⁶⁰
ZB	1000 ⁷
Z, ZiB	2 ⁷⁰
YB	1000 ⁸
Y, YiB	2 ⁸⁰

It should be noted that currently, Vidispine has a 64-bit limit on the size of a storage, which means that multipliers larger than `ZB` are of limited use.

17.28.4 Storage groups

Storages can be organized in zero or more storage groups. Use storage groups to

- Allow users to group storages in your applications.
- Apply storage rules to these groups.

Managing storage groups

Get a list of known groups

GET `/storage/storage-group/`

Retrieves all storage groups known by the system.

Produces

- `application/xml`, `application/json` – `StorageGroupListDocument`

Role `_storage_group_read`

Create a storage group

PUT `/storage/storage-group/ (group-name)`

Creates a new storage group with the specified name. If the group already exists this operation does nothing.

Status Codes

- **200 OK** – Group created successfully.

Role `_storage_group_write`

Remove a storage group

DELETE `/storage/storage-group/ (group-name)`

Removes the storage group with the given name. Note that this operation does not remove the actual storages contained in the group.

Status Codes

- **200 OK** – Group removed successfully.
- **404 Not found** – No group with that name exists.

Role `_storage_group_write`

Storage group content

List all storages within a group

GET `/storage/storage-group/ (group-name)`

Lists all storages belonging to a certain group.

Status Codes

- **404 Not found** – No group with that name exists.

Produces

- `application/xml`, `application/json` – `StorageGroupDocument`

Role `_storage_group_read`

Add a storage to a group

PUT `/storage/storage-group/ (group-name) / storage-id` Adds a storage to a group. If that group already contains the specified storage this operation does nothing.

Status Codes

- **200 OK** – Group added successfully.
- **404 Not found** – No group with that name or no storage with that id exists.

Role `_storage_group_write`

Remove a storage from a group

DELETE `/storage/storage-group/ (group-name) / storage-id` Removes a storage from a group.

Status Codes

- **200 OK** – Group removed successfully.
- **404 Not found** – No group with that name exists, or the group does not contain that storage.

Role `_storage_group_write`

Storage group metadata

Storages groups support *key value metadata*.

17.28.5 Storage name rules**Working with storage name rules****Retrieve all name rules applied on a shape**

GET `/item/ (item-id) /shape/ shape-id/ filename` Retrieves a list of URIs to all storage name rules that are contained within a shape.

Produces

- `application/xml`, `application/json` – `URIListDocument`
- `text/plain` – CRLF-delimited list of URIs

Role `_storage_rule_read`

Create a new storage name rule

PUT */item/ (item-id) /shape/*

shape-id/filename/storage-id Creates a new storage name rule that attempts enforce the filename on a certain storage. This operation does not rename the file, it merely creates a rule for it. The file will then be renamed at a later time, if the file is located on that storage.

Query Parameters

- **filename** – The desired filename of the file.

Status Codes

- **200 OK** – Rule added successfully.
- **400 Bad request** – A conflicting rule exists.

Role `_storage_rule_write`

Delete a storage name rule

DELETE */item/ (item-id) /shape/*

shape-id/filename/storage-id Deletes a storage name rule that matches the (item id, shape id, storage id, filename) quadruple. Note that this does not change any existing filenames a file might have.

Query Parameters

- **filename** – The filename of the rule.

Status Codes

- **200 OK** – Rule removed successfully.

Role `_storage_rule_write`

17.28.6 Storage rules

Creating/modifying/reading storage rules

Storage rules can be applies on entities within the item, collection, library and shape tag resources. Note that for the shape tag resource no default rule can be set.

In the following reference, {rule-resource} is one of the following:

- `/item/{item-id}/storage-rule`
- `/collection/{collection-id}/storage-rule`
- `/library/{library-id}/storage-rule`
- `/shape-tag/storage-rule`

Retrieving storage rules across different resources

GET */storage-rule/*

Retrieves all storage-rules that matches the given parameters.

Query Parameters

- **type** – A comma-separated list of types to retrieve, if not specified all types will be retrieved. Valid values are ITEM, COLLECTION, LIBRARY and GENERIC.
- **tag** – A comma-separated list of tags to retrieve, if not specified rules of all tag types will be retrieved.

Produces

- **application/xml**, **application/json** – StorageRulesDocument

Role `_storage_rule_read`

Example

```
GET /storage-rule?type=LIBRARY, COLLECTION&tag=original, lowres
```

```
<StorageRulesDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <tag id="lowres">
    <storageCount>1</storageCount>
    <storage>VX-1</storage>
    <appliesTo>
      <id>VX-20</id>
      <type>COLLECTION</type>
    </appliesTo>
    <precedence>HIGH</precedence>
  </tag>
  <tag id="original">
    <storageCount>2</storageCount>
    <appliesTo>
      <id>*68</id>
      <type>LIBRARY</type>
    </appliesTo>
    <precedence>MEDIUM</precedence>
  </tag>
</StorageRulesDocument>
```

Retrieving all storage rules that applies to a certain shape

```
GET /item/ (item-id) /shape/
```

shape-id/**storage-rule** Retrieves the storage rules that applies to a certain shape in a sorted manner. The rules are sorted according to priority, with the most important rule being first and the least important rule being last.

Query Parameters

- **all** –
 - `true` - Return all rules, regardless whether another rule overwrites it or not.
 - `false` (default) - Return only rules that are in effect.

Produces

- **application/xml**, **application/json** – StorageRulesDocument

Role `_storage_rule_read`

Retrieving all storages rules

GET {rule-resource}

Retrieves all storage rules that are applied on a certain entity in a certain resource.

Produces

- `application/xml`, `application/json` – `StorageRulesDocument`

Role `_storage_rule_read`

Example

```
GET /storage-rule/
```

```
<StorageRulesDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <default>
    <storageCount>2</storageCount>
    <priority level="1">capacity</priority>
    <priority level="2">bandwidth</priority>
    <storage>VX-122</storage>
  </default>
  <tag id="lowres">
    <storageCount>3</storageCount>
    <storage>VX-123</storage>
  </tag>
  <tag id="web">
    <priority level="1">bandwidth</priority>
    <priority level="2">capacity</priority>
    <storage>VX-124</storage>
  </tag>
</StorageRulesDocument>
```

Set a default rule

PUT {rule-resource}

Sets the default rule.

Status Codes

- **200 OK** – Rule set successfully.
- **400 Bad request** – The request was malformed.
- **404 Not found** – Could not find a specified storage.

Accepts

- `application/xml`, `application/json` – `StorageRuleDocument`

Role `_storage_rule_write`

Example

```
PUT /collection/VX-45/storage-rule
```

```
Content-Type: application/xml
```

```
<StorageRuleDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <storageCount>2</storageCount>
  <priority level="1">capacity</priority>
  <priority level="2">bandwidth</priority>
  <storage>VX-122</storage>
</StorageRuleDocument>
```

Delete a default rule

DELETE {rule-resource}

Deletes the default rule.

Status Codes

- **200 OK** – Rule deleted successfully.
- **404 Not found** – Could not find a default rule.

Role _storage_rule_write

Example

```
DELETE /collection/VX-45/storage-rule
```

```
200 OK
```

Retrieving a a specific rule

GET {rule-resource}/(tag-name)

Returns the rule that is applied to a certain shape tag.

Status Codes

- **404 Not found** – No shape tag with that that name could be found.

Produces

- **application/xml**, **application/json** – StorageRuleDocument

Role _storage_rule_read

Example

```
GET /collection/VX-45/storage-rule/lowres
```

```
<StorageRuleDocument id="lowres" xmlns="http://xml.vidispine.com/schema/vidispine">
  <storageCount>3</storageCount>
  <priority level="1">capacity</priority>
  <priority level="2">bandwidth</priority>
```

```
<storage>VX-123</storage>
</StorageRuleDocument>
```

Setting a specific rule

PUT {rule-resource}/(tag-name)

Updates a storage rule applied to a certain shape tag.

Status Codes

- **200 OK** – Rule set successfully.
- **400 Bad request** – The request was malformed.
- **404 Not found** – Could not find a specified storage or a shape tag with that name.

Accepts

- **application/xml, application/json** – [StorageRuleDocument](#)

Role _storage_rule_write

Example

```
PUT /collection/VX-45/storage-rule/lowres
Content-Type: application/xml

<StorageRuleDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <storageCount>3</storageCount>
  <storage>VX-123</storage>
</StorageRuleDocument>
```

Delete a specific rule

DELETE {rule-resource}/(tag-name)

Deletes a specific rule.

Status Codes

- **200 OK** – Rule deleted successfully.
- **404 Not found** – Could not find a shape tag with that name or a specific rule applied to that tag.

Role _storage_rule_write

17.29 Task definitions

Jobs are made up of a number of tasks that execute in a specific order.

17.29.1 Task definitions

Retrieve task definitions

GET `/task-definition`

Retrieves all tasks that have been defined in the system.

Query Parameters

- **type** – Optional *job type* to retrieve task definitions for.

Produces

- **application/xml**, **application/json** – `TaskDefinitionListDocument`

Role `_taskdefinition_read`

Retrieve task definitions by type

GET `/task-definition/jobtype/ (type)`

Retrieves the tasks that have been defined for a specific job type.

Produces

- **application/xml**, **application/json** – `TaskDefinitionListDocument`

Role `_taskdefinition_read`

Define new task

POST `/task-definition`

Defines one or more new task.

Query Parameters

- **url** –
 - `true` - Return list of URLs.
 - `false` (default) - Return list of ids.

Accepts

- **application/xml**, **application/json** – `TaskDefinitionListDocument`

Produces

- **application/xml**, **application/json** – `URIListDocument`

Role `_taskdefinition_write`

Retrieve a task

GET `/task-definition/ (task-id)`

GET `/task-definition/jobtype/ (type) /step/`

step Retrieves the definition document for a task with a specific id.

Produces

- **application/xml**, **application/json** – `TaskDefinitionDocument`

Role `_taskdefinition_read`

Validate a task

GET `/task-definition/ (task-id) /validate`

GET `/task-definition/jobtype/ (type) /step/step/validate` Verifies that the bean referred to in the task can be resolved and that it contains the specified method.

Does nothing if the task is a script task.

Status Codes

- **200** – The bean and method exists.
- **400** – If the bean or method could not be found.

Produces

- **text/plain** – Informational status text.

Role `_taskdefinition_read`

Delete a task

DELETE `/task-definition/ (task-id)`

DELETE `/task-definition/jobtype/ (type) /step/step` Deletes the task.

Role `_taskdefinition_write`

Update an existing task

New in version 4.0.

PUT `/task-definition/ (task-id)`

PUT `/task-definition/jobtype/ (type) /step/step` Updates the task.

Accepts

- **application/xml, application/json** – [TaskDefinitionDocument](#)

Produces

- **application/xml, application/json** – [TaskDefinitionDocument](#)

Role `_taskdefinition_write`

17.29.2 Custom job types

New in version 4.6.

Create a new custom job type

POST `/task-definition/jobtype/ (type)`

Creates a new job type with the specified name. The recommended format of the `type` path parameter is `{VENDOR_PREFIX}_{JOB_TYPE}`.

Query Parameters

- **id** – An integer between 20000 and 30000, must be unique among job types. Mandatory parameter.

Status Codes

- **409** – Name or id already taken.
- **400** – If name or id was not specified.

Produces

- **application/xml**, **application/json** – `TaskDefinitionListDocument`

Role `_taskdefinition_write`

Delete a custom job type

DELETE `/task-definition/jobtype/ (type)`

Deletes the job type with the specified name. This will only work for custom job types. System defined job types cannot be deleted.

Status Codes

- **404** – Custom job type with specified name not found.

Role `_taskdefinition_write`

17.29.3 Task definition scripts

Retrieve the script for a task definition

GET `/task-definition/ (task-id) /script`

GET `/task-definition/jobtype/ (type) /step/step/script` Retrieves the script of the task definition.

Produces

- **application/javascript** – A JavaScript

Status Codes

- **204** – No script is set for the task definition.

Role `_taskdefinition_read`

Set a script for a shape tag

PUT `/task-definition/ (task-id) /script`

PUT `/task-definition/jobtype/ (type) /step/step/script` Sets a script for the task definition.

Accepts

- **application/javascript** – A JavaScript

Role `_taskdefinition_write`

17.29.4 Job graphs

In order to easily see the dependencies between steps for a particular job type, there is functionality to render the job definition as a graph. In order to render the graph, the [Graphviz](http://www.graphviz.org/) (<http://www.graphviz.org/>) package is required.

Get job graph

GET `/task-definition/jobtype/(type)/graph`

Shows the dependencies of the tasks of a specified *job type*.

Produces

- `image/png` –

Role `_administrator`

Get job graph as DOT file

GET `/task-definition/jobtype/(type)/graph/dot`

Shows the dependencies of the tasks of a specified *job type* in DOT format, for further processing.

Produces

- `text/plain`, `text/vnd.graphviz` –

Role `_administrator`

17.30 Task groups

Task groups can be used to control the resources that a specific job should use.

New in version 4.4.

17.30.1 Task groups

Retrieve task groups

GET `/task-group`

Retrieves all task groups that have been defined in the system.

Produces

- `application/xml`, `application/json` – `TaskGroupListDocument`

Role `_administrator`

Create or update task group

PUT `/task-group/(group-name)`

Creates or updates the task group with the given name.

Accepts

- `application/xml`, `application/json` – `TaskGroupDocument`

Produces

- `application/xml`, `application/json` – `TaskGroupDocument`

Role `_administrator`

Example

```
PUT /task-group/imports HTTP/1.1
Accept: application/xml
Content-Type: application/xml

<TaskGroupDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <job>
    <type>PLACEHOLDER_IMPORT</type>
  </job>
  <transcoder>
    <id>VX-1</id>
  </transcoder>
</TaskGroupDocument>
```

```
<TaskGroupDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <name>imports</name>
  <job>
    <type>PLACEHOLDER_IMPORT</type>
  </job>
  <transcoder>
    <id>VX-1</id>
  </transcoder>
</TaskGroupDocument>
```

Create or update task group

PUT `/task-group/` (*group-name*)

Creates or updates the task group with the given name.

This request is identical to the above, except that the task group parameters are specified using query parameters instead of using a `TaskGroupDocument`.

Query Parameters

- **priority** – The priority of the task group.
- **transcoder** – The id of the transcoder(s) to include in the group.
- **job** – The job criteria(s). One of:
 - `type:{type}` - Jobs of this type.
 - `priority:{priority}` - Jobs with this priority.
 - `user:{username}` - Jobs created by this user.
 - `group:{groupname}` - Jobs created by a user in this group.
 - `data:{key} [= {value}]` - Jobs with this job data.
- **metadata** – Any key-value metadata to set on the group. Format is `{key}={value}`.

Produces

- `application/xml`, `application/json` – `TaskGroupDocument`

Role _administrator

Example

```
PUT /task-group/imports?job=type:PLACEHOLDER_IMPORT&transcoder=VX-1 HTTP/1.1
Accept: application/xml
```

```
<TaskGroupDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <name>imports</name>
  <job>
    <type>PLACEHOLDER_IMPORT</type>
  </job>
  <transcoder>
    <id>VX-1</id>
  </transcoder>
</TaskGroupDocument>
```

Retrieve a task group

GET /task-group/ (*group-name*)

Retrieves the task group document for a task group with a specific name.

Produces

- application/xml, application/json – TaskGroupDocument

Role _administrator

Delete a task group

DELETE /task-group/ (*group-name*)

Deletes the task group.

Note that this only deletes the task group. It will not remove any transcoders or other resources that are in the group.

Role _administrator

Delete all task groups

DELETE /task-group

Deletes all task groups.

Note that this only deletes the task groups. It will not remove any transcoders or other resources that are in the groups.

Role _administrator

17.30.2 Task group transcoders

Add a transcoder to a task group

PUT /task-group/ (*group-name*) /transcoder/
transcoder-id Adds the transcoder to the specified task group.

Role _administrator

Remove a transcoder from a task group

DELETE `/task-group/ (group-name) /transcoder/ transcoder-id` Removes a transcoder from the specified task group.

Role _administrator

17.30.3 Key-value metadata

Task groups support *key-value metadata*.

17.31 Transfers

A transfer is normally started while doing a *Import using the request body*.

17.31.1 Overview

Transfer state

A transfer can be in one of the following states.

TRANSFERRING Data is currently being sent.

WAITING The transfer is waiting to start.

FINISHED All the data has been transferred.

ABORTED The transfer has been aborted by the user.

FAILED An error has occurred causing the transfer to fail.

FINISHED_PART A piece of the data has been sent.

Priorities

Transfers are assigned bandwidth according to their priorities. A priority is an integer between 1 and 1000. Transfers with a higher priority value is prioritized over transfers with a lower priority value.

17.31.2 Managing transfers

Retrieve all transfers of a specific state

GET `/transfer`

Returns all transfers that are in a particular state.

Query Parameters

- **state** – Optional *transfer state* of the transfers to retrieve. Default is “TRANSFERRING”.

Matrix Parameters

- **number** – Optional integer, the number of transfers to return. Default is all transfers.
- **first** – Optional integer, the number of the first transfer to return. Default is 1.

Produces

- **application/xml**, **application/json** – A [TransferListDocument](#)
- **text/plain** – CRLF-delimited list of transfer ids

Role `_transfer_read`

Retrieve a specific transfer

GET `/transfer/` (*transfer-id*)
Retrieves a specific transfer.

Produces

- **application/xml**, **application/json** – A [TransferDocument](#)

Role `_transfer_read`

Set the priority of a transfer

PUT `/transfer/` (*transfer-id*)
Sets a new priority for a specific transfer.

Query Parameters

- **transferPriority** – The desired priority.

Role `_transfer_write`

17.32 Transfer log

New in version 4.14.2.

The transfer log records low-level file transfers. It is typically used for troubleshooting, to be able to determine what happened when.

17.32.1 Examining the log

Retrieving log content

GET `/log/transfer-log`
Retrieves log entries according to the specified filtering criteria. Note that the transfer log table does not have a lot of indices, so the extraction of data can be slow. Do not use this method other than for troubleshooting.

Query Parameters

- **first** – Optional integer, number of first row to return, default is 0.
- **rows** – Optional integer, number of rows to return, default is 100. Cannot be greater than 1000.
- **starttime** – Optional ISO 8601 time, for lower limit of rows to return.

- **endtime** – Optional ISO 8601 time, for upper limit of rows to return.
- **storage** – Optional site id, only return transfers where source or destination storage matches. Default is all rows. Note that not all transfers contains information about storages.
- **file** – Optional site id, only return transfers where source or destination file matches. Default is all rows. Note that not all transfers contains information about files.
- **item** – Optional site id, only return transfers where source or destination item matches. Default is all rows. Note that not all transfers contains information about items.
- **shape** – Optional site id, only return transfers where source or destination shape matches. Default is all rows. Note that not all transfers contains information about shapes.
- **uri** – Optional URI, only return transfers where source or destination URI matches. Default is all rows. A star (*) in the URI represent a wildcard.
- **job** – Optional site id, only return transfers where job matches. Default is all rows. Note that not all transfers contains information about jobs.
- **status** – Optional status string, transfers where status matches. Valid values are NONE, STARTING, FINISHED, FAILED.
- **method** – Optional status string, transfers where method matches. Valid values are NONE, STARTING, FINISHED, FAILED.
- **performCount** –
 - `false` (default) - Do not return a total number of rows matching criteria.
 - `true` - Return a total number of rows matching criteria (except first and count).

Produces

- `application/xml`, `application/json` – [TransferLogListDocument](#)

Role `_administrator`

17.33 Users

17.33.1 Users

Managing users

Retrieve a list of all users

GET `/user`

Retrieves a list of all known users.

Query Parameters

- **name** – List of user names to return information about. Default is all users.
- **first** – Start returning users from specified number. Default is 1, the beginning of the list.
- **number** – Return at most specified number of users. Default is no limit.

Produces

- `application/xml`, `application/json` – [UserListDocument](#)

Role _administrator

Create a new user

POST /user

Creates a new user based on the information in the [UserDocument](#).

Query Parameters

- **passwordType** –
 - raw - Password is in plaintext.
 - md5 (default) - Password is already hashed.

Status Codes

- **200 OK** – User created.
- **409 Conflict** – A user with that username already exists.

Accepts

- **application/xml, application/json** – [UserDocument](#)

Role _administrator

Example

```
POST /user?passwordType=raw
Content-Type: application/xml

<UserDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <userName>myuser</userName>
  <realName>My User</realName>
  <password>qwerty</password>
  <groupList>
    <group>
      <groupName>mygroup</groupName>
    </group>
  </groupList>
</UserDocument>
```

Retrieve a specific user

GET /user/ (*username*)

Returns a specific user.

Produces

- **application/xml, application/json** – XML/JSON, schema [UserDocument](#)

Role _administrator

Create a new user

PUT `/user/` (*username*)

Creates a new user with the given username.

Status Codes

- **200 OK** – User created.
- **409 Conflict** – A user with that username already exists.

Role `_administrator`

Update a user

New in version 4.14.

PUT `/user/` (*username*)

Updates a user based on the information in the `UserDocument`.

The username of a user can be changed by providing a different username in the given user document.

Query Parameters

- **passwordType** –
 - `raw` - Password is in plaintext.
 - `md5` (default) - Password is already hashed.

Status Codes

- **200 OK** – User updated.
- **409 Conflict** – A user with the new username already exists.

Accepts

- `application/xml`, `application/json` – `UserDocument`

Produces

- `application/xml`, `application/json` – `UserDocument`

Role `_administrator`

Caution: To reflect a username change in the search index a re-index operation on items and collections is required. See *Re-indexing metadata*.

Example

For example, to change the name and username of a user:

```
PUT /user/stephen@example.com
Content-Type: application/xml

<UserDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <userName>stephen</userName>
  <realName>Stephen</realName>
</UserDocument>
```

Disable a user

DELETE `/user/` (*username*)

Disables a user with the given username, rendering that user unable to login.

Query Parameters

- **hard** – If set to `true`, the user will be removed completely, including all access controls granted by the user. Else the user will be disabled.

New in version 4.6.

- **preserveAccess** – If set to `true`, the access granted by the user will still apply. Only applicable for `hard=false`. Default is `false`.

New in version 4.17.

- **notification** – The *placeholder job notification* to use for this job. (Optional)
- **notificationData** – Any additional data to include for *notifications* on this job. (Optional)
- **priority** – The priority to assign to the job. Default is `MEDIUM`.
- **jobmetadata** – Additional *information* for the job task.

Produces

- **application/xml**, **application/json** – XML/JSON, schema `JobDocument` if `hard=true`

Role `_administrator`

Re-enable a user

PUT `/user/` (*username*) `/enable`

Re-enables a user with the given username, that has previously been disabled.

Role `_administrator`

Search users

New in version 4.0.

PUT `/user`

Simple search of fields `username`, `realname` and `metadata`.

Query Parameters

- **number** – Return at most specified number of users. Default is `10`.
- **first** – Start returning users from specified number. Default is `1`, the beginning of the list.

Accepts

- **application/xml**, **application/json** – `UserSearchDocument`

Produces

- **application/xml**, **application/json** – `UserListDocument`
- **text/plain** – CRLF-delimited list of *Tabbed tuples*: `username`, `realname`, `groups*`

Role _administrator

Example

```
PUT /user
Content-Type: application/xml

<UserSearchDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <field>
    <name>username</name>
    <value>vidi</value>
  </field>
  <field>
    <name>key</name>
    <value>value</value>
  </field>
</UserSearchDocument>
```

Note that keywords `username` and `realname` are reserved to do search on `username` and `realname` fields

The boolean operators AND and OR are supported:

```
<UserSearchDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <field>
    <name>username</name>
    <value>vidi</value>
  </field>
  <field>
    <name>realname</name>
    <value>vidispine</value>
  </field>
  <operator operation="OR">
    <field>
      <name>key1</name>
      <value>value1</value>
    </field>
    <field>
      <name>key2</name>
      <value>value2</value>
    </field>
  </operator>
</UserSearchDocument>
```

User information

Key-value metadata

Users support *key-value metadata*.

Retrieve the real name of a user

GET /user/ (*username*) /realname
Returns the real name of a user.

Produces

- **text/plain** – The real name of the user.

Role `_administrator`

Change the real name of a user

PUT `/user/ (username) /realname`

Changes the real name of a user.

Accepts

- **text/plain** – The new name.

Role `_administrator`

User credentials

Change the password of a user

PUT `/user/ (username) /password`

Changes the password for a user. Hashed passwords are assumed to be represented as hexadecimal strings.

Any hashed passwords need to be salted using the *salt of the user*.

Query Parameters

- **type** –
 - `raw` - Password is in plaintext.
 - `md5` (default) - Password is already hashed.

Accepts

- **text/plain** – The new password.

Role `_administrator`

Validate the password of a user

PUT `/user/ (username) /validate`

Validates the given password against the password of the user. Hashed passwords are assumed to be represented as hexadecimal strings. Another option to validate the user credentials is to call *whoami*.

Any hashed passwords need to be salted using the *salt of the user*.

Query Parameters

- **type** –
 - `raw` - Password is in plaintext.
 - `md5` (default) - Password is hashed.

Status Codes

- **200 OK** – The password is correct.
- **403 Forbidden** – The password is incorrect.

Accepts

- **text/plain** – The password of the user.

Produces

- **text/plain** – “OK <\$PASSWORD>”

Role `_administrator`

Retrieve the salt of a user

GET `/user/ (username) /password/salt`

Retrieves the salt of the specified user.

Status Codes

- **200** – Salt is returned.
- **204** – No salt is set for the user.

Produces

- **application/octet-stream** – The salt of the user.

Role `_administrator`

Generate a salt for a user

POST `/user/ (username) /password/salt`

Generates a new salt for the user, overwriting any existing salt.

Note that this will invalidate any set password for the user and requires a new password to be set for the user to be able to login. This method is typically not relevant if passwords are updated using plaintext.

Produces

- **application/octet-stream** – The salt of the user.

Role `_administrator`

Group-to-user relations**Retrieve a list of groups a user belongs to**

GET `/user/ (username) /groups`

Retrieves a list of all the groups a user belongs to.

Query Parameters

- **allgroups** –
 - `true` - List all groups the user belongs to, including parent groups.
 - `false` (default) - Just list the groups that the user is directly assigned to.
- **traverse** –
 - `true` - When used in combination with `allgroups=true`, the groups' hierarchies are shown.

- `false` (default) - List the groups without hierarchical ordering.

Produces

- `application/xml`, `application/json` - `GroupListDocument`

Role `_administrator`

Retrieve a list of roles a user has

GET `/user/ (username) /roles`

Returns a list of all the roles a user has.

Produces

- `application/xml`, `application/json` - `GroupListDocument`

Role `_administrator`

Retrieve all the roles and groups for a user

GET `/user/ (username) /allgroups`

Retrieves a list of all the groups a user belongs to, as well as all roles the user is in.

Produces

- `application/xml`, `application/json` - `GroupListDocument`

Role `_administrator`

Add a user to multiple groups

PUT `/user/ (username) /groups`

Adds a to multiple to groups. If the `move` parameter is set to `true`, it will cause the user to be moved to the specified groups.

Query Parameters

- `move` -
 - `true` - Remove all previous group-to-user relations
 - `false` (default) - Keep the current group-to-user relations, and add the specified list

Accepts

- `application/xml`, `application/json` - `GroupListDocument`

Role `_administrator`

Example

First the user belongs to a single group:

```
GET /user/myuser/groups
```

```
<GroupListDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <group>
    <groupName>A</groupName>
    <role>>false</role>
  </group>
</GroupListDocument>
```

The user is then added to groups B, C:

```
PUT /user/myuser/groups
Content-Type: application/xml

<GroupListDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <group>
    <groupName>B</groupName>
  </group>
  <group>
    <groupName>C</groupName>
  </group>
</GroupListDocument>
```

```
GET /user/myuser/groups
```

```
<GroupListDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <group>
    <groupName>A</groupName>
    <role>>false</role>
  </group>
  <group>
    <groupName>B</groupName>
    <role>>false</role>
  </group>
  <group>
    <groupName>C</groupName>
    <role>>false</role>
  </group>
</GroupListDocument>
```

And then moved to groups A, B:

```
PUT /user/myuser/groups?move=true
Content-Type: application/xml

<GroupListDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <group>
    <groupName>A</groupName>
  </group>
  <group>
    <groupName>B</groupName>
  </group>
</GroupListDocument>
```

```
GET /user/myuser/groups
```

```
<GroupListDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <group>
```

```
<groupName>A</groupName>
<role>>false</role>
</group>
<group>
  <groupName>B</groupName>
  <role>>false</role>
</group>
</GroupListDocument>
```

User/group visualization

New in version 4.1.2.

In order to easily see the dependencies between users and groups there is a functionality to render the user and group hierarchy as a graph. In order to render the graph, the [Graphviz](http://www.graphviz.org/) (<http://www.graphviz.org/>) package is required.

Get user graph

GET /user/graph

Shows the relationships of users and groups.

Query Parameters

- **users** – Comma-separated list of users to include. Default is all users.
- **groups** – Comma-separated list of groups to include. Default is all groups.

Produces

- **image/png** –

Role _administrator

Get user graph as dot file

GET /user/graph/dot

Shows the relationships of users and groups in dot format, for further processing.

Query Parameters

- **users** – Comma-separated list of users to include. Default is all users.
- **groups** – Comma-separated list of groups to include. Default is all groups.

Produces

- **text/plain, text/vnd.graphviz** –

Role _administrator

17.33.2 User access keys

User access keys are long-lived tokens that can be used to authenticate a user. Access keys do not expire, compared to *authentication tokens* that do.

A user can have multiple access keys, and can be used to allow multiple services to use the API without having to share the user password. Individual access keys can also be disabled to revoke access.

Note that the secret will only be shown when a key is first created.

New in version 4.14.

Managing access keys

Retrieve access keys for a user

GET `/user/ (username) /key`

Retrieves the access keys for the specified user.

Produces

- `application/xml`, `application/json` – `AccessKeyListDocument`

Role `_administrator`

Example

```
GET /user/stephen/key
Accept: application/xml

<AccessKeyListDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <hits>1</hits>
  <key>
    <id>VSIDR62PJ4WSMJREGD6Z</id>
    <status>INACTIVE</status>
    <created>2018-06-01T10:31:17.275+02:00</created>
  </key>
</AccessKeyListDocument>
```

Create a new access key for a user

POST `/user/ (username) /key`

Generates a new access key and secret for the specified user. The only time the access key secret will be available is in the response of this request.

Query Parameters

- **name** – A friendly name/description of the key (optional.)

Produces

- `application/xml`, `application/json` – `AccessKeyDocument`

Role `_administrator`

Example

```
POST /user/stephen/key/
Accept: application/xml
```

```
<AccessKeyDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <id>VSID2C56CQTA7DWW7DLF</id>
  <secret>PiFHewzGN3tZ/3lSeAkBVX+5Y0w3wwpHTO2iqIaa</secret>
  <status>ACTIVE</status>
  <created>2018-06-01T10:36:13.891+02:00</created>
</AccessKeyDocument>
```

Retrieve a specific access key

GET `/user/ (username) /key/`
key-id Retrieves a specific access key.

Produces

- `application/xml`, `application/json` – `AccessKeyDocument`

Role `_administrator`

Example

```
GET /user/stephen/key/VSID2C56CQTA7DWW7DLF
Accept: application/xml

<AccessKeyDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <id>VSID2C56CQTA7DWW7DLF</id>
  <status>ACTIVE</status>
  <created>2018-06-01T10:36:13.891+02:00</created>
</AccessKeyDocument>
```

Update a specific access key

PUT `/user/ (username) /key/`
key-id Updates the name and/or status of a specific access key.

Accepts

- `application/xml`, `application/json` – `AccessKeyDocument`

Produces

- `application/xml`, `application/json` – `AccessKeyDocument`

Role `_administrator`

Example

```
PUT /user/stephen/key/VSID2C56CQTA7DWW7DLF
Content-Type: application/xml

<AccessKeyDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <status>INACTIVE</status>
  <name>Public status dashboard</name>
</AccessKeyDocument>
```

```
<AccessKeyDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <id>VSID2C56CQTA7DWW7DLF</id>
  <name>Public status dashboard</name>
  <status>INACTIVE</status>
  <created>2018-06-01T10:36:13.891+02:00</created>
</AccessKeyDocument>
```

Delete a specific access key

DELETE `/user/ (username) /key/`
key-id Removes the specific access key.

Role `_administrator`

Example

```
DELETE /user/stephen/key/VSID2C56CQTA7DWW7DLF
```

```
200 OK
```

17.33.3 User aliases

User aliases can be used to assign multiple usernames to a single user. These additional usernames are called aliases. Use aliases to for example allow a user to authenticate using either the users username or e-mail address.

Aliases are only ever looked up during authentication, and can not be used as a substitute for the usernames. In this way, user aliases are different to *external ids*.

Managing aliases

Create a new alias for a user

PUT `/user/ (username) /alias/`
name Adds a new user alias for the specified user.

Status Codes

- **409 Conflict** – The alias is already used by another user.

Role `_administrator`

Example

```
PUT /user/stephen/alias/stephen@example.com
```

```
200 OK
```

```
GET API/user/stephen
```

```
<UserDocument xmlns="http://xml.vidispine.com/schema/vidispine" disabled="false">
  <userName>stephen</userName>
  <realName>Stephen</realName>
  <alias>stephen@example.com</alias>
</UserDocument>
```

Delete a specific user alias

DELETE `/user/ (username) /alias/ name` Removes the specific user alias.

Role `_administrator`

Example

```
DELETE /user/stephen/alias/stephen@example.com
```

```
200 OK
```

```
GET API/user/stephen
```

```
<UserDocument xmlns="http://xml.vidispine.com/schema/vidispine" disabled="false">
  <userName>stephen</userName>
  <realName>Stephen</realName>
</UserDocument>
```

17.33.4 User authentication tokens

User authentication tokens are short-lived tokens that can be used to authenticate a user. All tokens expire after a certain duration, but may auto-refresh on use to increase the expiration time of the token.

Managing tokens

Get an authentication token

GET `/token`

Creates a authentication token for the calling user. This token can be used for calling the API without specifying username or password.

Useful when users authenticate using an *alias* and the actual username of the user is not known.

New in version 4.14.

Query Parameters

- **seconds** – The duration of the token.
- **autoRefresh** –
 - `false` (default) - The token always expires after `seconds` seconds after the token was created.

- `true` - (New in 4.2.2.) The expiration clock is reset with every API call.

Status Codes

- **409 Conflict** – The user is disabled.

Produces

- `application/xml`, `application/json` – `AuthenticationTokenDocument`: The generated token.
- `text/plain` – The generated token.

Example

```
GET /token
Authorization: basic YWRtaW46YWRtaW4=
```

```
<AuthenticationTokenDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <token>5ay6Fxq2fFnmtVhrQq2owDvX0FE/RmdQG4SkefvW</token>
  <user>admin</user>
</AuthenticationTokenDocument>
```

Get an authentication token for a specific user

GET /user/(username)/token

Creates a authentication token for a user. This token can be used for calling the API without specifying username or password.

The username path parameter must match the calling user's credentials, unless the calling user has `_administrator` role.

Query Parameters

- **seconds** – The duration of the token.
- **autoRefresh** –
 - `false` (default) - The token always expires after `seconds` seconds after the token was created.
 - `true` - The expiration clock is reset with every API call.

Status Codes

- **409 Conflict** – The user is disabled.

Produces

- `text/plain` – The generated token.

Changed in version 4.14: HTTP 409 is now returned when trying to create a token for a disabled user.

Example

```
GET /user/myuser/token
Authorization: basic YWRtaW46YWRtaW4=
```

```
6663e105-828e-45c1-ac54-7dd17f3e8a38
```

```
GET /item
Authorization: token 6663e105-828e-45c1-ac54-7dd17f3e8a38
```

This will return items that user myuser has access to.

Token expiration

The rules for the expiration time depends on configuration property `userTokenMaxInterval` (default 60 seconds). If the expiration time is:

Not specified The token expires after the time entered in the configuration property `userTokenDefaultInterval` (default 60 seconds).

Less than or equal to `userTokenMaxInterval` Always allowed.

Greater than `userTokenMaxInterval` Only allowed if the *calling* user has `_administrator` role.

If `autoRefresh` is `true`, the expiration clock is reset with every API call when the token is used, with one exception. If the time since last reset is less than configuration property `userTokenRefreshInterval` (default 10 seconds), the token is not updated. This is in order to reduce database writes. Example:

1. Token is created, will expire in 60 seconds.
2. 8 seconds later, token is used. Since $8 < 10$, token is not updated.
3. Another 8 seconds later, token is used again. Since $16 > 10$, token is updated, and valid for 60 seconds more.

17.34 Vidinet

17.34.1 Cost estimation

The following resources support cost estimation:

- `POST /item/(item-id)/transcode`
- `POST /item/(item-id)/shape/(shape-id)/analyze`
- `POST /import`
- `POST /storage/(storage-id)/file/(file-id)/import`
- `POST /storage/file/(file-id)/import`

New in version 4.11.

Request cost estimate

POST /cost/(path)

Requests a cost estimate for performing a specific operation.

The same matrix- and query parameters and request body as used by the target request should be specified in the cost estimate request.

No additional roles or permissions are required to request a cost estimate. If a user has permission to for example transcode an item, then that user may also request a cost estimate for that operation.

Produces

- `application/xml`, `application/json` – `CostEstimateDocument`

Retrieve cost estimate results

GET `/cost/estimate/ (id)`
Retrieves the cost estimate.

Produces

- `application/xml`, `application/json` – `CostEstimateDocument`

Examples**Item transcode cost estimation**

Requesting a cost estimate for transcoding an item to `__mp4` using the Vidinet TRANSCODE resource VX-5:

```
POST /cost/item/VX-45/transcode?tag=__mp4&resource=VX-5
```

```
<CostEstimateDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <id>dGVzdA==</id>
  <url>http://localhost:8080/API/cost/estimate/dGVzdA==</url>
</CostEstimateDocument>
```

Retrieving the cost estimate status and amount.

```
GET /cost/estimate/dGVzdA==
```

```
<CostEstimateDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <id>dGVzdA==</id>
  <url>http://localhost:8080/API/cost/estimate/dGVzdA==</url>
  <state>FINISHED</state>
  <service>
    <resource>VX-5</resource>
    <type>TRANSCODER</type>
    <state>ONLINE</state>
  </service>
</CostEstimateDocument>
```

17.35 Vidispine logs

17.35.1 Retrieving log files

New in version 3.3.

If your application has a custom form for reporting issues then you can collect the log files using the `vidispine-logs` resource.

Get log files

GET /vidispine-logs

Retrieves a zip file with the various service log files.

Query Parameters

- **starttime** – Mandatory ISO 8601 start time of time span.
- **endtime** – Mandatory ISO 8601 end time of time span.
- **comment** – Optional detailed description of what the problem is, to be written in zip file.
- **user** – Optional comma-separated list of user names to retrieve information about.
- **storage** – Optional comma-separated list of storage ids to retrieve information about.
- **item** – Optional comma-separated list of item ids to retrieve information about.
- **job** – Optional comma-separated list of job ids to retrieve information about.
- **selftest** – If true, includes the result of a self-test. Default false.

Produces

- **application/zip** – A zip file with various log files collated.
- **multipart/form-data** , **multipart/mixed** – A multi-part response, with parts:
 - `zip` Containing the zip file.
 - `message-text` Containing CRLF-separated list of warnings.
 - `message-json` Containing JSON array list of warnings.

17.35.2 Log retrieval jobs

New in version 4.5.

Instead of a synchronous call, Vidispine can also start a *pseudo-job* that creates the log report in the background. This is not a real Vidispine job, so there are no priorities, notifications, etc.

In case of a restart of Vidispine, the job is aborted. Finished jobs are stored in a temporary location, however.

Start log report job

POST /vidispine-logs/job

Starts a log report job that collects service log files into a zip file.

Query Parameters

- **starttime** – Mandatory ISO 8601 start time of time span.
- **endtime** – Mandatory ISO 8601 end time of time span.
- **comment** – Optional detailed description of what the problem is, to be written in zip file.
- **user** – Optional comma-separated list of user names to retrieve information about.
- **storage** – Optional comma-separated list of storage ids to retrieve information about.
- **item** – Optional comma-separated list of item ids to retrieve information about.
- **job** – Optional comma-separated list of job ids to retrieve information about.

- **selftest** – If true, includes the result of a self-test. Default false.

Produces

- **application/xml**, **application/json** – A [JobDocument](#) that describes the job.

Return all jobs

GET `/vidispine-logs/job`

Return information about all jobs that have not expired.

Produces

- **application/xml**, **application/json** – [JobListDocument](#)

Get job status

GET `/vidispine-logs/job/ (job-id)`

Return information about specified job.

Produces

- **application/xml**, **application/json** – [JobDocument](#)

Get job result

GET `/APIoauth/vidispine-logs/job/ (job-id) .zip`

Returns the zip file generated by a finished job.

Delete job

DELETE `/vidispine-logs/job/ (job-id)`

Deletes a job and the report created.

17.35.3 Upload of logs to Vidispine

New in version 4.5.

If a log has been created by a job, Vidispine can upload it to vidispine.com. In addition, source files referenced by items entered in the log report can be attached. This is a two-phase operation, first query the API of what files there are, then start the job.

Status of upload is included in the log report job, see above.

Get job files

GET `/vidispine-logs/job/ (job-id) /uri`

Return file information about specified job.

Produces

- **application/json** – An array of objects with keys `name`, `displayUri`, `uri`, and `size`

Start upload

POST `/vidispine-logs/job/ (job-id) /upload`

Starts upload.

Accepts

- `application/xml`, `application/json` – A `URIListDocument` with URIs from the list of files in the log.

Abort upload

DELETE `/vidispine-logs/job/ (job-id) /upload`

Aborts upload process.

17.36 Vidispine services

Periodic and background operations are executed internally by Vidispine services. These resources are meant for system administrators or developers that need to troubleshoot or monitor a server.

For a list of available services, see `GET /vidispine-service`. The available Vidispine services may vary from version to version and should not be considered to be part of the stable API.

Note: This is an internal API, and may change in future versions.

17.36.1 Vidispine services

Retrieve list of Vidispine services

GET `/vidispine-service`

Return all Vidispine services and their status and load.

Query Parameters

- `stacktrace` – Return a stack trace for each service.

Produces

- `application/xml`, `application/json` – `VidispineServiceListDocument`

Role `_administrator`

Get Vidispine service

GET `/vidispine-service/service/ (service)`

Return a specific Vidispine service and its status and load.

Query Parameters

- `stacktrace` – Return a stack trace for each service.

Produces

- `application/xml`, `application/json` – `VidispineServiceListDocument`

Role _administrator

17.36.2 Service status

Enable all Vidispine services

PUT /vidispine-service/enable

Enables all disabled services.

Role _administrator

Enable a Vidispine service

PUT /vidispine-service/service/ *(service)* /enable

Enables this service if disabled.

Role _administrator

Disable all Vidispine services

PUT /vidispine-service/disable

Disables all services. No instance in the cluster will run any services.

Role _administrator

Disable a Vidispine service

PUT /vidispine-service/service/ *(service)* /disable

Disables this service. No instance in the cluster will run this service.

Role _administrator

17.36.3 Stack trace

Get service stack trace

GET /vidispine-service/stacktrace

Returns a stack trace from the system.

Produces

- **text/plain** – A stack trace in plain text.

Role _administrator

17.37 Vidispine Server Agents

Vidispine server agents (VSAs) are typically handled with the vidispine-admin and vidispine-agent-admin shell tool. A few API commands are available for control, though.

New in version 4.6.

17.37.1 Managing VSAs

Retrieve all Vidispine server agents

GET `/vxa`

Returns all VSAs.

Produces

- `application/xml`, `application/json` – A `VXAListDocument`

Role `_vxa_read`

Retrieve a specific Vidispine server agent

GET `/vxa/` (*uuid*)

Retrieves a specific VSA. As an alternative to the UUID, the name of the VSA can be used instead. The name syntax only works if the name is unique among the VSAs.

Produces

- `application/xml`, `application/json` – A `VXADocument`

Role `_vxa_read`

Retrieve the VSA configuration

GET `/vxa/` (*uuid*) `/configuration`

Returns the client-side configuration of the VSA.

Produces

- `application/json` – A JSON object with the settings and current status of the VSA.

Role `_vxa_read`

Add a VSA node

PUT `/vxa/enable-ssh`

Registers a new VSA node in the system.

Query Parameters

- **vsip** – The address to which the VSA should connect. Can be specified multiple times for a cluster configuration.
- **vsport** – The port to which the VSA should connect. Can be specified multiple times for a cluster configuration.
- **ws** – The URI to the API endpoint. Used to enable websocket tunneling, as an alternative to vsip/vsport. Can be specified multiple times for a cluster configuration. (New in 4.14.)
- **uuid** – Optional, the UUID of the VSA. If not set, Vidispine will assign a UUID.
- **vxaname** – Optional, the name of the VSA.

Produces

- `text/plain` – A text configuration to be added on the VSA's configuration.

Role `_administrator`

Delete a VSA node

DELETE /vsa/ (uuid)

Removes the VSA from the system

Role _administrator

17.38 XML Schema

This is the XML schema used to define data types in the Vidispine API. For a snapshot of the XML schema, see <http://xml.vidispine.com/schema/vidispine/>

17.38.1 xmlSchema.xsd

API specific schema.

```

1  <?xml version="1.0" encoding="UTF-8"?>
2  <xs:schema xmlns:xs="http://www.w3.org/2001/XMLSchema"
3      targetNamespace="http://xml.vidispine.com/schema/vidispine"
4      elementFormDefault="qualified"
5      xmlns:jaxb="http://java.sun.com/xml/ns/jaxb"
6      jaxb:version="1.0"
7      xmlns:xjc="http://java.sun.com/xml/ns/jaxb/xjc"
8      jaxb:extensionBindingPrefixes="xjc" xmlns:tns="http://xml.vidispine.com/
↵ schema/vidispine">
9
10     <xs:include schemaLocation="common.xsd"/>
11     <xs:include schemaLocation="transcoder.xsd"/>
12
13     <xs:annotation>
14         <xs:appinfo>
15             <jaxb:globalBindings generateIsSetMethod="true">
16                 <xjc:serializable uid="10000"/>
17                 <!--<xjc:typeSubstitution type="complex"/>-->
18             </jaxb:globalBindings>
19         </xs:appinfo>
20     </xs:annotation>
21
22     <xs:complexType name="AmountType">
23         <xs:simpleContent>
24             <xs:extension base="xs:decimal">
25                 <xs:attribute name="unit" type="xs:string"/>
26             </xs:extension>
27         </xs:simpleContent>
28     </xs:complexType>
29
30     <xs:complexType name="AnalyzeAudioJobType">
31         <xs:sequence>
32             <xs:element name="otif" type="tns:OtifPresetType" minOccurs="0" maxOccurs=
↵ "unbounded"/>
33         </xs:sequence>
34     </xs:complexType>
35
36     <xs:complexType name="AnalyzeVideoJobType">
37         <xs:sequence>

```

```

38     <xs:element name="otif" type="tns:OtifPresetType" minOccurs="0" maxOccurs=
↪ "unbounded"/>
39     </xs:sequence>
40 </xs:complexType>

```

AnalyzeJobDocument

```

42 <xs:element name="AnalyzeJobDocument" type="tns:AnalyzeJobType" xmlns:tns="http://
↪ xml.vidispine.com/schema/vidispine"/>
43 <xs:complexType name="AnalyzeJobType">
44 <xs:sequence>
45 <xs:element name="black" minOccurs="0" maxOccurs="1">
46 <xs:complexType>
47 <xs:sequence>
48 <xs:element name="threshold" type="xs:float" minOccurs="1"
↪ maxOccurs="1"/>
49 <xs:element name="percentage" type="xs:int" minOccurs="1"
↪ maxOccurs="1"/>
50 </xs:sequence>
51 </xs:complexType>
52 </xs:element>
53 <xs:element name="bars" minOccurs="0" maxOccurs="1">
54 <xs:complexType>
55 <xs:sequence>
56 <xs:element name="threshold" type="xs:float" minOccurs="1"
↪ maxOccurs="1"/>
57 <xs:element name="percentage" type="xs:int" minOccurs="1"
↪ maxOccurs="1"/>
58 </xs:sequence>
59 </xs:complexType>
60 </xs:element>
61 <xs:element name="freeze" minOccurs="0" maxOccurs="1">
62 <xs:complexType>
63 <xs:sequence>
64 <xs:element name="threshold" type="xs:float" minOccurs="1"
↪ maxOccurs="1"/>
65 <xs:element name="time" type="xs:int" minOccurs="1" maxOccurs=
↪ "1"/>
66 </xs:sequence>
67 </xs:complexType>
68 </xs:element>
69
70 <xs:element name="channel" type="tns:AnalyzeAudioChannelType" minOccurs="0
↪ " maxOccurs="unbounded"/>
71 <xs:element name="audio" type="tns:AnalyzeAudioJobType" minOccurs="0"
↪ maxOccurs="1"/>
72 <xs:element name="video" type="tns:AnalyzeVideoJobType" minOccurs="0"
↪ maxOccurs="1"/>
73 </xs:sequence>
74 </xs:complexType>
75
76 <xs:complexType name="SearchResultEntryTimespanType">
77 <xs:sequence>
78 <xs:element name="field" minOccurs="0" maxOccurs="unbounded">
79 <xs:complexType>
80 <xs:sequence>
81 <xs:element name="name" type="xs:string" minOccurs="1"
↪ maxOccurs="1"/>

```

```

82         <xs:element name="value" type="xs:string" minOccurs="0"
↳maxOccurs="unbounded"/>
83     </xs:sequence>
84 </xs:complexType>
85 </xs:element>
86 </xs:sequence>
87 <xs:attribute name="start" type="xs:string" use="required"/>
88 <xs:attribute name="end" type="xs:string" use="required"/>
89 </xs:complexType>
90
91 <xs:complexType name="SearchResultEntryType">
92     <xs:sequence>
93         <xs:choice>
94             <xs:element name="item" type="tns:ItemType"/>
95             <xs:element name="collection" type="tns:CollectionType"/>
96             <xs:element name="shape" type="tns:ShapeType"/>
97             <xs:element name="file" type="tns:FileType"/>
98         </xs:choice>
99         <xs:element name="timespan" type="tns:SearchResultEntryTimespanType"
↳minOccurs="0" maxOccurs="unbounded"/>
100     </xs:sequence>
101     <xs:attribute name="start" type="xs:string" use="optional"/>
102     <xs:attribute name="end" type="xs:string" use="optional"/>
103     <xs:attribute name="type" type="xs:string" use="optional"/>
104     <xs:attribute name="id" type="xs:string" use="optional"/>
105     <xs:attribute name="parent_type" type="xs:string" use="optional"/>
106     <xs:attribute name="parent_id" type="xs:string" use="optional"/>
107     <xs:attribute name="base" type="xs:string" use="optional"/>
108 </xs:complexType>

```

SearchResultDocument

```

110 <xs:element name="SearchResultDocument" xmlns:tns="http://xml.vidispine.com/
↳schema/vidispine" type="tns:SearchResultType"/>
111 <xs:complexType name="SearchResultType">
112     <xs:sequence>
113         <xs:element name="hits" minOccurs="0" maxOccurs="1" type="xs:int"/>
114         <xs:element name="suggestion" minOccurs="0" maxOccurs="unbounded" type=
↳"tns:SuggestionResultType"/>
115         <xs:element name="autocomplete" minOccurs="0" maxOccurs="unbounded" type=
↳"tns:AutocompleteResponseType"/>
116         <xs:element name="entry" type="tns:SearchResultEntryType" minOccurs="0"
↳maxOccurs="unbounded"/>
117         <xs:element name="facet" minOccurs="0" maxOccurs="unbounded" type="tns:
↳FacetType"/>
118         <xs:element name="nextCursor" type="xs:string" maxOccurs="1" minOccurs="0
↳"/>
119     </xs:sequence>
120 </xs:complexType>

```

MetadataEntryListDocument

```

122 <xs:element name="MetadataEntryListDocument" xmlns:tns="http://xml.vidispine.com/
↳schema/vidispine" type="tns:MetadataEntryListType2"/>
123 <xs:complexType name="MetadataEntryListType2">
124     <xs:sequence>
125         <xs:element name="entry" minOccurs="0" maxOccurs="unbounded">
126             <xs:complexType>

```

```

127         <xs:complexContent>
128             <xs:extension base="tns:MetadataEntryType">
129                 <xs:attribute name="uuid" type="xs:string"/>
130             </xs:extension>
131         </xs:complexContent>
132     </xs:complexType>
133 </xs:element>
134 </xs:sequence>
135 </xs:complexType>

```

MetadataEntryDocument

```

137 <xs:element name="MetadataEntryDocument" xmlns:tns="http://xml.vidispine.com/
↳schema/vidispine" type="tns:MetadataEntryType" />
138 <xs:complexType name="MetadataEntryType">
139     <xs:sequence>
140         <xs:element name="group" type="tns:MetadataGroupValueType" minOccurs="0"
↳maxOccurs="1"/>
141         <xs:element name="field" type="tns:MetadataFieldValueType" minOccurs="0"
↳maxOccurs="1"/>
142         <xs:element name="value" type="tns:MetadataValueType" minOccurs="0"
↳maxOccurs="1"/>
143         <xs:element name="source" minOccurs="0" maxOccurs="1">
144             <xs:complexType>
145                 <xs:sequence>
146                     <xs:element name="id" type="xs:string" minOccurs="1"
↳maxOccurs="1"/>
147                     <xs:element name="type" type="xs:string" minOccurs="1"
↳maxOccurs="1"/>
148                     <xs:element name="loc" type="xs:anyURI" minOccurs="1"
↳maxOccurs="1"/>
149                 </xs:sequence>
150             </xs:complexType>
151         </xs:element>
152     </xs:sequence>
153 </xs:complexType>

```

MetadataSchemaDocument

```

155 <xs:element name="MetadataSchemaDocument" xmlns:tns="http://xml.vidispine.com/
↳schema/vidispine" type="tns:MetadataSchemaType" />
156 <xs:complexType name="MetadataSchemaType">
157     <xs:sequence>
158         <xs:element name="group" minOccurs="0" maxOccurs="unbounded" type="tns:
↳MetadataSchemaGroupType" />
159     </xs:sequence>
160 </xs:complexType>

```

MetadataSchemaGroupDocument

```

162 <xs:element name="MetadataSchemaGroupDocument" xmlns:tns="http://xml.vidispine.
↳com/schema/vidispine" type="tns:MetadataSchemaGroupType" />
163 <xs:complexType name="MetadataSchemaGroupType">
164     <xs:sequence>
165         <xs:element name="group" minOccurs="0" maxOccurs="unbounded" type="tns:
↳MetadataSchemaElementType" />
166         <xs:element name="field" minOccurs="0" maxOccurs="unbounded" type="tns:
↳MetadataSchemaElementType" />

```



```

167     </xs:sequence>
168     <xs:attributeGroup ref="tns:MetadataSchemaAttributes"/>
169 </xs:complexType>

```

BeanCallbackListDocument

```

171     <xs:element name="BeanCallbackListDocument" xmlns:tns="http://xml.vidispine.com/
↪schema/vidispine" type="tns:BeanCallbackListType"/>
172     <xs:complexType name="BeanCallbackListType">
173         <xs:sequence>
174             <xs:element name="callback" type="tns:BeanCallbackType" minOccurs="0"
↪maxOccurs="unbounded"/>
175         </xs:sequence>
176     </xs:complexType>

```

BeanCallbackDocument

```

178     <xs:element name="BeanCallbackDocument" xmlns:tns="http://xml.vidispine.com/
↪schema/vidispine" type="tns:BeanCallbackType"/>
179     <xs:complexType name="BeanCallbackType">
180         <xs:sequence>
181             <xs:element name="sourceBean" type="xs:string" minOccurs="1" maxOccurs="1"
↪"/>
182             <xs:element name="sourceMethod" type="xs:string" minOccurs="1" maxOccurs="
↪1"/>
183             <xs:element name="destinationBean" type="xs:string" minOccurs="1"
↪maxOccurs="1"/>
184             <xs:element name="destinationMethod" type="xs:string" minOccurs="1"
↪maxOccurs="1"/>
185             <xs:element name="lastSuccess" type="xs:dateTime" minOccurs="0" maxOccurs="
↪1"/>
186             <xs:element name="lastFailure" type="xs:dateTime" minOccurs="0" maxOccurs="
↪1"/>
187             <xs:element name="errorMessage" type="xs:string" minOccurs="0" maxOccurs="
↪1"/>
188         </xs:sequence>
189     </xs:complexType>

```

AuditLogDocument

```

191     <xs:element name="AuditLogDocument" xmlns:tns="http://xml.vidispine.com/schema/
↪vidispine" type="tns:AuditLogType"/>
192     <xs:complexType name="AuditLogType">
193         <xs:sequence>
194             <xs:element name="count" type="xs:long" minOccurs="0" maxOccurs="1"/>
195             <xs:element name="entry" type="tns:AuditLogEntryType" minOccurs="0"
↪maxOccurs="unbounded"/>
196         </xs:sequence>
197     </xs:complexType>
198
199     <xs:complexType name="AuditLogEntryType">
200         <xs:sequence>
201             <xs:element name="username" type="xs:string" minOccurs="1" maxOccurs="1"/>
202             <xs:element name="method" type="xs:string" minOccurs="1" maxOccurs="1"/>
203             <xs:element name="path" type="xs:string" minOccurs="1" maxOccurs="1"/>
204             <xs:element name="queryParameters" type="xs:string" minOccurs="1"
↪maxOccurs="1"/>
205             <xs:element name="matrixParameters" type="xs:string" minOccurs="1"
↪maxOccurs="1"/>

```

```

206     <xs:element name="runAs" type="xs:string" minOccurs="0" maxOccurs="1"/>
207     <xs:element name="contentType" type="xs:string" minOccurs="0" maxOccurs="1"
↪"/>
208     <xs:element name="contentLength" type="xs:string" minOccurs="0" maxOccurs=
↪"1"/>
209     <xs:element name="body" type="xs:string" minOccurs="0" maxOccurs="1"/>
210   </xs:sequence>
211   <xs:attribute name="timestamp" type="xs:dateTime" use="required"/>
212 </xs:complexType>

```

ConfigurationPropertyListDocument

```

214   <xs:element name="ConfigurationPropertyListDocument" xmlns:tns="http://xml.
↪vidispine.com/schema/vidispine" type="tns:ConfigurationPropertyListType"/>
215   <xs:complexType name="ConfigurationPropertyListType">
216     <xs:sequence>
217       <xs:element name="property" type="tns:ConfigurationPropertyType"
↪
↪minOccurs="0" maxOccurs="unbounded"/>
218     </xs:sequence>
219   </xs:complexType>

```

ConfigurationPropertyDocument

```

221   <xs:element name="ConfigurationPropertyDocument" xmlns:tns="http://xml.vidispine.
↪com/schema/vidispine" type="tns:ConfigurationPropertyType"/>
222   <xs:complexType name="ConfigurationPropertyType">
223     <xs:sequence>
224       <xs:element name="key" minOccurs="1" maxOccurs="1" type="xs:string"/>
225       <xs:element name="value" minOccurs="0" maxOccurs="1" type="xs:string"/>
226     </xs:sequence>
227     <xs:attribute name="lastChange" type="xs:dateTime" use="optional"/>
228   </xs:complexType>
229
230   <xs:complexType name="CollectionReorderEntryType">
231     <xs:attribute name="id" use="required" type="xs:string"/>
232     <xs:attribute name="before" use="optional" type="xs:string"/>
233     <xs:attribute name="after" use="optional" type="xs:string"/>
234   </xs:complexType>

```

CollectionReorderDocument

```

236   <xs:element name="CollectionReorderDocument" xmlns:tns="http://xml.vidispine.com/
↪schema/vidispine" type="tns:CollectionReorderType"/>
237   <xs:complexType name="CollectionReorderType">
238     <xs:sequence>
239       <xs:element name="item" minOccurs="0" maxOccurs="unbounded" type="tns:
↪CollectionReorderEntryType"/>
240       <xs:element name="collection" minOccurs="0" maxOccurs="unbounded" type=
↪
↪tns:CollectionReorderEntryType"/>
241       <xs:element name="library" minOccurs="0" maxOccurs="unbounded" type="tns:
↪
↪CollectionReorderEntryType"/>
242     </xs:sequence>
243   </xs:complexType>

```

ExternalIdentifierNamespaceListDocument

```

246   <xs:element name="ExternalIdentifierNamespaceListDocument" xmlns:tns="http://xml.
↪vidispine.com/schema/vidispine" type="tns:ExternalIdentifierNamespaceListType"/>

```

```

247 <xs:complexType name="ExternalIdentifierNamespaceListType">
248   <xs:sequence>
249     <xs:element name="namespace" type="tns:ExternalIdentifierNamespaceType" ↵
↵minOccurs="0" maxOccurs="unbounded"/>
250   </xs:sequence>
251 </xs:complexType>

```

ExternalIdentifierNamespaceDocument

```

253 <xs:element name="ExternalIdentifierNamespaceDocument" xmlns:tns="http://xml.
↵vidispine.com/schema/vidispine" type="tns:ExternalIdentifierNamespaceType"/>
254 <xs:complexType name="ExternalIdentifierNamespaceType">
255   <xs:sequence>
256     <xs:element name="name" type="xs:string" minOccurs="0" maxOccurs="1"/>
257     <xs:element name="pattern" type="xs:string" minOccurs="1" maxOccurs="1"/>
258     <xs:element name="priority" type="xs:int" minOccurs="0" maxOccurs="1"/>
259   </xs:sequence>
260 </xs:complexType>

```

ExternalIdentifierListDocument

```

262 <xs:element name="ExternalIdentifierListDocument" xmlns:tns="http://xml.vidispine.
↵com/schema/vidispine" type="tns:ExternalIdentifierListType"/>
263 <xs:complexType name="ExternalIdentifierListType">
264   <xs:sequence>
265     <xs:element name="id" type="tns:ExternalIdentifierType" minOccurs="0" ↵
↵maxOccurs="unbounded"/>
266   </xs:sequence>
267 </xs:complexType>

```

ExternalIdentifierDocument

```

269 <xs:element name="ExternalIdentifierDocument" xmlns:tns="http://xml.vidispine.com/
↵schema/vidispine" type="tns:ExternalIdentifierType"/>
270 <xs:complexType name="ExternalIdentifierType">
271   <xs:sequence>
272     <xs:element name="entityId" type="xs:string" minOccurs="1" maxOccurs="1"/>
273     <xs:element name="entityType" type="xs:string" minOccurs="1" maxOccurs="1"
↵"/>
274     <xs:element name="namespace" type="xs:string" minOccurs="1" maxOccurs="1"/
↵>
275     <xs:element name="externalId" type="xs:string" minOccurs="1" maxOccurs="1"
↵"/>
276   </xs:sequence>
277 </xs:complexType>

```

MetadataFieldResultDocument

```

279 <xs:element name="MetadataFieldResultDocument" xmlns:tns="http://xml.vidispine.
↵com/schema/vidispine" type="tns:MetadataFieldResultType"/>
280
281 <xs:complexType name="MetadataFieldResultType">
282   <xs:sequence>
283     <xs:element name="hits" minOccurs="1" maxOccurs="1" type="xs:int"/>
284     <xs:element name="group" minOccurs="0" maxOccurs="unbounded">
285       <xs:complexType>
286         <xs:sequence>
287           <xs:element name="value" type="tns:MetadataGroupValueType" ↵
↵minOccurs="0" maxOccurs="1"/>

```

```

288         <xs:element name="definition" type="tns:MetadataFieldType
↪ minOccurs="0" maxOccurs="1"/>
289         <xs:element name="source" minOccurs="0" maxOccurs="1">
290             <xs:complexType>
291                 <xs:sequence>
292                     <xs:element name="id" type="xs:string" minOccurs=
↪ "1" maxOccurs="1"/>
293                     <xs:element name="type" type="xs:string"
↪ minOccurs="1" maxOccurs="1"/>
294                     <xs:element name="loc" type="xs:anyURI" minOccurs=
↪ "1" maxOccurs="1"/>
295                 </xs:sequence>
296             </xs:complexType>
297         </xs:element>
298     </xs:sequence>
299     <xs:attribute name="name" type="xs:string" use="required"/>
300     <xs:attribute name="uuid" type="xs:string" use="required"/>
301     <xs:attribute name="start" type="xs:string" use="required"/>
302     <xs:attribute name="end" type="xs:string" use="required"/>
303 </xs:complexType>
304 </xs:element>
305 </xs:sequence>
306 </xs:complexType>

```

MetadataFieldGroupListDocument

```

308     <xs:element name="MetadataFieldGroupListDocument" xmlns:tns="http://xml.vidispine.
↪ com/schema/vidispine" type="tns:MetadataFieldGroupListType"/>
309     <xs:complexType name="MetadataFieldGroupListType">
310         <xs:sequence>
311             <xs:element name="group" type="tns:MetadataFieldType" minOccurs="0"
↪ maxOccurs="unbounded"/>
312         </xs:sequence>
313     </xs:complexType>

```

MetadataFieldGroupDocument

```

315     <xs:element name="MetadataFieldGroupDocument" xmlns:tns="http://xml.vidispine.com/
↪ schema/vidispine" type="tns:MetadataFieldType"/>
316     <xs:complexType name="MetadataFieldGroupType">
317         <xs:sequence>
318             <xs:element name="name" type="xs:string" minOccurs="0" maxOccurs="1"/>
319             <xs:element name="schema" type="tns:MetadataSchemaElementType" minOccurs=
↪ "0" maxOccurs="1"/>
320             <xs:element name="data" minOccurs="0" maxOccurs="unbounded" type="tns:
↪ KeyValuePairType"/>
321             <xs:element name="field" type="tns:MetadataFieldType" minOccurs="0"
↪ maxOccurs="unbounded"/>
322             <xs:element name="group" type="tns:MetadataFieldGroupType" minOccurs="0"
↪ maxOccurs="unbounded"/>
323             <xs:element name="access" minOccurs="0" maxOccurs="unbounded" type="tns:
↪ MetadataFieldAccessType"/>
324             <xs:element name="externalId" type="xs:string" minOccurs="0" maxOccurs=
↪ "unbounded" />
325             <xs:element name="origin" type="xs:string" minOccurs="0" maxOccurs="1" />
326         </xs:sequence>
327         <xs:attribute name="inheritance" type="xs:string" use="optional"/>
328     </xs:complexType>

```

MetadataFieldListDocument

```

330     <xs:element name="MetadataFieldListDocument" xmlns:tns="http://xml.vidispine.com/
↪schema/vidispine" type="tns:MetadataFieldListType"/>
331     <xs:complexType name="MetadataFieldListType">
332         <xs:sequence>
333             <xs:element name="access" minOccurs="0" maxOccurs="unbounded" type="tns:
↪MetadataFieldAccessType"/>
334             <xs:element name="field" minOccurs="0" maxOccurs="unbounded" type="tns:
↪MetadataFieldType"/>
335         </xs:sequence>
336     </xs:complexType>

```

MetadataFieldAccessControlListDocument

```

338     <xs:element name="MetadataFieldAccessControlListDocument" xmlns:tns="http://xml.
↪vidispine.com/schema/vidispine" type="tns:MetadataFieldAccessControlListType"/>
339     <xs:complexType name="MetadataFieldAccessControlListType">
340         <xs:sequence>
341             <xs:element name="access" type="tns:MetadataFieldAccessType"
↪minOccurs="0" maxOccurs="unbounded"/>
342         </xs:sequence>
343     </xs:complexType>

```

MetadataFieldAccessControlDocument

```

345     <xs:element name="MetadataFieldAccessControlDocument" xmlns:tns="http://xml.
↪vidispine.com/schema/vidispine" type="tns:MetadataFieldAccessControlType"/>
346     <xs:complexType name="MetadataFieldAccessControlType">
347         <xs:sequence>
348             <xs:element name="id" type="tns:SiteIdType" minOccurs="0" maxOccurs="1"/>
349             <xs:choice minOccurs="0" maxOccurs="1">
350                 <xs:element name="field" type="xs:string" minOccurs="1" maxOccurs="1"/
↪>
351                 <xs:element name="fieldGroup" type="xs:string" minOccurs="1"
↪maxOccurs="1"/>
352             </xs:choice>
353             <xs:element name="user" type="xs:string" minOccurs="0" maxOccurs="1"/>
354             <xs:element name="group" type="xs:string" minOccurs="0" maxOccurs="1"/>
355             <xs:element name="permission" type="xs:string" minOccurs="1" maxOccurs="1
↪"/>
356         </xs:sequence>
357     </xs:complexType>

```

add

```

359     <xs:element name="add" xmlns:tns="http://xml.vidispine.com/schema/vidispine" type=
↪"tns:SolrAddType"/> <!-- notoc -->
360     <xs:complexType name="SolrAddType"> <!-- notoc -->
361         <xs:sequence>
362             <xs:element name="doc" type="tns:SolrDocumentType" minOccurs="0"
↪maxOccurs="unbounded"/>
363         </xs:sequence>
364     </xs:complexType>

```

doc

```

366     <xs:element name="doc" xmlns:tns="http://xml.vidispine.com/schema/vidispine" type=
↪ "tns:SolrDocumentType"/> <!-- notoc -->
367     <xs:complexType name="SolrDocumentType"> <!-- notoc -->
368         <xs:sequence>
369             <xs:element name="field" minOccurs="0" maxOccurs="unbounded">
370                 <xs:complexType>
371                     <xs:simpleContent>
372                         <xs:extension base="xs:string">
373                             <xs:attribute name="name" type="xs:string" use="required"/
↪ >
374                         </xs:extension>
375                     </xs:simpleContent>
376                 </xs:complexType>
377             </xs:element>
378         </xs:sequence>
379     </xs:complexType>

```

LockDocument

```

381     <xs:element name="LockDocument" xmlns:tns="http://xml.vidispine.com/schema/
↪ vidispine" type="tns:LockType"/>
382     <xs:complexType name="LockType">
383         <xs:sequence>
384             <xs:element name="id" type="tns:SiteIdType" minOccurs="1" maxOccurs="1"/>
385             <xs:element name="user" type="xs:string" minOccurs="1" maxOccurs="1"/>
386             <xs:element name="expires" type="xs:dateTime" minOccurs="1" maxOccurs="1"/
↪ >
387         </xs:sequence>
388     </xs:complexType>

```

ExceptionDocument

```

390     <xs:element name="ExceptionDocument" type="tns:ExceptionType" />
391     <xs:complexType name="ExceptionType">
392         <xs:choice>
393             <xs:element name="notFound" type="tns:NotFoundExceptionType"/>
394             <xs:element name="internalServer" type="tns:InternalServerErrorType"/>
395             <xs:element name="forbidden" type="tns:ForbiddenExceptionType"/>
396             <xs:element name="notYetImplemented" type="tns:
↪ NotYetImplementedExceptionType"/>
397             <xs:element name="conflict" type="tns:ConflictExceptionType"/>
398             <xs:element name="invalidInput" type="tns:InvalidInputExceptionType"/>
399             <xs:element name="licenseFault" type="tns:LicenseExceptionType"/>
400             <xs:element name="fileAlreadyExists" type="tns:
↪ FileAlreadyExistsExceptionType"/>
401             <xs:element name="notAuthorized" type="tns:NotAuthorizedExceptionType"/>
402         </xs:choice>
403     </xs:complexType>
404
405     <xs:complexType name="NotFoundExceptionType">
406         <xs:sequence>
407             <xs:element name="type" minOccurs="0" type="xs:string" />
408             <xs:element name="id" minOccurs="0" type="xs:string" />
409             <xs:element name="context" minOccurs="0" type="xs:string" />
410         </xs:sequence>
411     </xs:complexType>
412
413     <xs:complexType name="LicenseExceptionType">

```

```

414     <xs:sequence>
415       <xs:element name="message" minOccurs="0" type="xs:string" />
416     </xs:sequence>
417   </xs:complexType>
418
419   <xs:complexType name="InternalServerErrorType">
420     <xs:sequence>
421       <xs:element name="message" minOccurs="0" type="xs:string" />
422     </xs:sequence>
423   </xs:complexType>
424
425   <xs:complexType name="ForbiddenExceptionType">
426     <xs:sequence>
427       <xs:element name="context" minOccurs="0" type="xs:string" />
428       <xs:element name="id" minOccurs="0" type="xs:string" />
429       <xs:element name="explanation" minOccurs="0" type="xs:string" />
430     </xs:sequence>
431   </xs:complexType>
432
433   <xs:complexType name="NotYetImplementedExceptionType">
434     <xs:sequence>
435     </xs:sequence>
436   </xs:complexType>
437
438   <xs:complexType name="ConflictExceptionType">
439     <xs:sequence>
440       <xs:element name="context" minOccurs="0" type="xs:string" />
441       <xs:element name="id" minOccurs="0" type="xs:string" />
442       <xs:element name="explanation" minOccurs="0" type="xs:string" />
443       <xs:element name="value" minOccurs="0" type="xs:string" />
444     </xs:sequence>
445   </xs:complexType>
446
447   <xs:complexType name="InvalidInputExceptionType">
448     <xs:sequence>
449       <xs:element name="context" minOccurs="0" type="xs:string" />
450       <xs:element name="id" minOccurs="0" type="xs:string" />
451       <xs:element name="explanation" minOccurs="0" type="xs:string" />
452       <xs:element name="value" minOccurs="0" type="xs:string" />
453     </xs:sequence>
454   </xs:complexType>
455
456   <xs:complexType name="FileAlreadyExistsExceptionType">
457     <xs:sequence>
458       <xs:element name="storageId" minOccurs="0" type="xs:string" />
459       <xs:element name="fileId" minOccurs="0" type="xs:string" />
460       <xs:element name="path" minOccurs="0" type="xs:string" />
461     </xs:sequence>
462   </xs:complexType>
463
464   <xs:complexType name="NotAuthorizedExceptionType">
465     <xs:sequence>
466       <xs:element name="message" minOccurs="0" type="xs:string" />
467     </xs:sequence>
468   </xs:complexType>

```

AccessControlMergedGroupDocument

```

470 <xs:element name="AccessControlMergedGroupDocument" xmlns:tns="http://xml.
↳vidispine.com/schema/vidispine" type="tns:AccessControlMergedGroupType"/>
471 <xs:complexType name="AccessControlMergedGroupType">
472 <xs:sequence>
473 <xs:element name="access" minOccurs="0" maxOccurs="unbounded">
474 <xs:complexType>
475 <xs:sequence>
476 <xs:element name="group" type="xs:string" minOccurs="1"
↳maxOccurs="1"/>
477 <xs:element name="grantor" type="xs:string" minOccurs="0"
↳maxOccurs="1"/>
478 <xs:element name="permission" type="xs:string" minOccurs="1"
↳maxOccurs="1"/>
479 <xs:element name="type" type="xs:string" minOccurs="1"
↳maxOccurs="1"/>
480 <xs:element name="extradata" type="xs:string" minOccurs="0"
↳maxOccurs="1"/>
481 <xs:element name="collection" type="tns:SiteIdType" minOccurs=
↳"0" maxOccurs="1"/>
482 <xs:element name="library" type="tns:SiteIdType" minOccurs="0
↳" maxOccurs="1"/>
483 <xs:element name="originalDisabledGrantor" type="xs:string"
↳minOccurs="0" maxOccurs="unbounded"/>
484 </xs:sequence>
485 <xs:attribute name="priority" use="optional" type="xs:int"/>
486 <xs:attribute name="id" use="optional" type="tns:SiteIdType"/>
487 <xs:attribute name="effectivePermission" use="optional" type="xs:
↳string"/>
488 </xs:complexType>
489 </xs:element>
490 </xs:sequence>
491 </xs:complexType>

```

AccessControlMergedDocument

```

493 <xs:element name="AccessControlMergedDocument" xmlns:tns="http://xml.vidispine.
↳com/schema/vidispine" type="tns:AccessControlMergedType"/>
494 <xs:complexType name="AccessControlMergedType">
495 <xs:sequence>
496 <xs:element name="query" minOccurs="0" maxOccurs="1">
497 <xs:complexType>
498 <xs:sequence>
499 <xs:element name="username" type="xs:string" minOccurs="1"
↳maxOccurs="1"/>
500 <xs:element name="permission" type="xs:string" minOccurs="1"
↳maxOccurs="1"/>
501 <xs:element name="type" type="xs:string" minOccurs="1"
↳maxOccurs="1"/>
502 <xs:element name="extradata" type="xs:string" minOccurs="0"
↳maxOccurs="1"/>
503 <xs:element name="item" type="tns:SiteIdType" minOccurs="1"
↳maxOccurs="1"/>
504 </xs:sequence>
505 </xs:complexType>
506 </xs:element>
507 <xs:element name="access" minOccurs="0" maxOccurs="unbounded">
508 <xs:complexType>
509 <xs:sequence>

```



```

510     <xs:element name="grantor" type="xs:string" minOccurs="0"
↪maxOccurs="1"/>
511     <xs:element name="permission" type="xs:string" minOccurs="1"
↪maxOccurs="1"/>
512     <xs:element name="type" type="xs:string" minOccurs="1"
↪maxOccurs="1"/>
513     <xs:element name="extradata" type="xs:string" minOccurs="0"
↪maxOccurs="1"/>
514     <xs:element name="group" type="xs:string" minOccurs="0"
↪maxOccurs="1"/>
515     <xs:element name="collection" type="tns:SiteIdType" minOccurs=
↪"0" maxOccurs="1"/>
516     <xs:element name="library" type="tns:SiteIdType" minOccurs="0
↪" maxOccurs="1"/>
517     <xs:element name="originalDisabledGrantor" type="xs:string"
↪minOccurs="0" maxOccurs="unbounded"/>
518     </xs:sequence>
519     <xs:attribute name="superUser" use="optional" type="xs:boolean"/>
520     <xs:attribute name="priority" use="required" type="xs:int"/>
521     <xs:attribute name="matches" use="optional" type="xs:boolean"/>
522     <xs:attribute name="id" use="optional" type="tns:SiteIdType"/>
523     <xs:attribute name="username" use="optional" type="xs:string"/>
524     <xs:attribute name="effectivePermission" use="optional" type="xs:
↪string"/>
525     </xs:complexType>
526   </xs:element>
527   <xs:element name="fieldGroup" type="tns:MetadataFieldGroupPermissionType"
↪minOccurs="0" maxOccurs="unbounded"/>
528     <xs:element name="field" type="tns:MetadataFieldPermissionType" minOccurs=
↪"0" maxOccurs="unbounded"/>
529   </xs:sequence>
530 </xs:complexType>
531
532 <xs:complexType name="MetadataFieldGroupPermissionType">
533   <xs:sequence>
534     <xs:element name="name" type="xs:string" minOccurs="1" maxOccurs="1"/>
535     <xs:element name="permission" type="xs:string" minOccurs="1" maxOccurs="1
↪"/>
536     <xs:element name="fieldGroup" type="tns:MetadataFieldGroupPermissionType"
↪minOccurs="0" maxOccurs="unbounded"/>
537     <xs:element name="field" type="tns:MetadataFieldPermissionType" minOccurs=
↪"0" maxOccurs="unbounded"/>
538   </xs:sequence>
539   <xs:attribute name="username" use="required" type="xs:string"/>
540 </xs:complexType>
541
542 <xs:complexType name="MetadataFieldPermissionType">
543   <xs:sequence>
544     <xs:element name="name" type="xs:string" minOccurs="1" maxOccurs="1"/>
545     <xs:element name="permission" type="xs:string" minOccurs="1" maxOccurs="1
↪"/>
546   </xs:sequence>
547   <xs:attribute name="username" use="required" type="xs:string"/>
548 </xs:complexType>

```

ImportSettingsDocument

```

550 <xs:element name="ImportSettingsDocument" xmlns:tns="http://xml.vidispine.com/
↳schema/vidispine" type="tns:ImportSettingsType"/>
551
552 <xs:complexType name="ImportSettingsType">
553 <xs:sequence>
554 <xs:element name="id" type="tns:SiteIdType" minOccurs="0" maxOccurs="1"/>
555 <xs:element name="access" type="tns:AccessControlType" minOccurs="0"
↳maxOccurs="unbounded"/>
556 </xs:sequence>
557 </xs:complexType>

```

ScheduledRequestDocument

```

559 <xs:element name="ScheduledRequestDocument" xmlns:tns="http://xml.vidispine.com/
↳schema/vidispine" type="tns:ScheduledRequestType"/>

```

ScheduledRequestListDocument

```

560 <xs:element name="ScheduledRequestListDocument" xmlns:tns="http://xml.vidispine.
↳com/schema/vidispine" type="tns:ScheduledRequestListType"/>
561
562 <xs:complexType name="ScheduledRequestListType">
563 <xs:sequence>
564 <xs:element name="scheduledRequest" type="tns:ScheduledRequestType"
↳minOccurs="0" maxOccurs="unbounded"/>
565 </xs:sequence>
566 </xs:complexType>
567
568 <xs:complexType name="ScheduledRequestType">
569 <xs:sequence>
570 <xs:element name="id" type="xs:long" minOccurs="1" maxOccurs="1"/>
571 <xs:element name="user" type="xs:string" minOccurs="1" maxOccurs="1"/>
572 <xs:element name="state" type="xs:string" minOccurs="1" maxOccurs="1"/>
573 <xs:element name="date" type="xs:dateTime" minOccurs="1" maxOccurs="1"/>
574 <xs:element name="created" type="xs:dateTime" minOccurs="1" maxOccurs="1"/
↳>
575 <xs:element name="executed" type="xs:dateTime" minOccurs="0" maxOccurs="1
↳"/>
576 <xs:element name="request" minOccurs="1" maxOccurs="1">
577 <xs:complexType>
578 <xs:sequence>
579 <xs:element name="uri" type="xs:string" minOccurs="1"
↳maxOccurs="1"/>
580 <xs:element name="method" type="xs:string" minOccurs="1"
↳maxOccurs="1"/>
581 <xs:element name="body" type="xs:string" minOccurs="0"
↳maxOccurs="1"/>
582 </xs:sequence>
583 </xs:complexType>
584 </xs:element>
585 <xs:element name="response" minOccurs="0" maxOccurs="1">
586 <xs:complexType>
587 <xs:sequence>
588 <xs:element name="statusCode" type="xs:int" minOccurs="1"
↳maxOccurs="1"/>
589 <xs:element name="hasBody" type="xs:boolean" minOccurs="1"
↳maxOccurs="1"/>
590 <xs:element name="contentType" type="xs:string" minOccurs="0"
↳maxOccurs="1"/>

```

```

591         </xs:sequence>
592     </xs:complexType>
593 </xs:element>
594 </xs:sequence>
595 </xs:complexType>

```

LibrarySettingsDocument

```

597 <xs:element name="LibrarySettingsDocument" xmlns:tns="http://xml.vidispine.com/
↳schema/vidispine" type="tns:LibrarySettingsType"/>
598 <xs:complexType name="LibrarySettingsType">
599     <xs:sequence>
600         <xs:element name="id" type="tns:SiteIdType" minOccurs="0" maxOccurs="1"/>
601         <xs:element name="username" type="xs:string" minOccurs="0" maxOccurs="1"/>
602         <xs:element name="updateMode" type="xs:string" minOccurs="0" maxOccurs="1
↳"/>
603         <xs:element name="autoRefresh" type="xs:boolean" minOccurs="0" maxOccurs=
↳"1"/>
604         <xs:element name="updateFrequency" type="xs:int" minOccurs="0" maxOccurs=
↳"1"/>
605         <xs:element name="lastUpdate" type="xs:dateTime" minOccurs="0" maxOccurs=
↳"1"/>
606         <xs:element name="query" type="tns:ItemSearchType" minOccurs="0"
↳maxOccurs="1"/>
607     </xs:sequence>
608 </xs:complexType>

```

ImportAccessControlListDocument

```

610 <xs:element name="ImportAccessControlListDocument" xmlns:tns="http://xml.
↳vidispine.com/schema/vidispine" type="tns:ImportAccessControlListType"/>
611 <xs:complexType name="ImportAccessControlListType">
612     <xs:sequence>
613         <xs:element name="group" minOccurs="0" maxOccurs="unbounded">
614             <xs:complexType>
615                 <xs:sequence>
616                     <xs:element name="name" type="xs:string" minOccurs="1"
↳maxOccurs="1"/>
617                     <xs:element name="permission" type="xs:string" minOccurs="1"
↳maxOccurs="1"/>
618                 </xs:sequence>
619             </xs:complexType>
620         </xs:element>
621     </xs:sequence>
622 </xs:complexType>

```

StorageGroupListDocument

```

624 <xs:element name="StorageGroupListDocument" xmlns:tns="http://xml.vidispine.com/
↳schema/vidispine" type="tns:StorageGroupListType"/>
625 <xs:complexType name="StorageGroupListType">
626     <xs:sequence>
627         <xs:element name="group" type="tns:StorageGroupType" minOccurs="0"
↳maxOccurs="unbounded"/>
628     </xs:sequence>
629 </xs:complexType>

```

StorageGroupDocument

```

631     <xs:element name="StorageGroupDocument" xmlns:tns="http://xml.vidispine.com/
↳ schema/vidispine" type="tns:StorageGroupType" />
632     <xs:complexType name="StorageGroupType">
633         <xs:sequence>
634             <xs:element name="name" type="xs:string" minOccurs="0" maxOccurs="1"/>
635             <xs:element name="data" minOccurs="0" maxOccurs="unbounded">
636                 <xs:complexType>
637                     <xs:sequence>
638                         <xs:element name="key" type="xs:string" minOccurs="1"
↳ maxOccurs="1"/>
639                         <xs:element name="value" type="xs:string" minOccurs="1"
↳ maxOccurs="1"/>
640                     </xs:sequence>
641                 </xs:complexType>
642             </xs:element>
643             <xs:element name="storage" type="tns:StorageType" minOccurs="0" maxOccurs=
↳ "unbounded"/>
644         </xs:sequence>
645     </xs:complexType>

```

ProjectDocument

```

647     <xs:element name="ProjectDocument" xmlns:tns="http://xml.vidispine.com/schema/
↳ vidispine" type="tns:ProjectType"/>
648     <xs:complexType name="ProjectType">
649         <xs:sequence>
650             <xs:element name="name" type="xs:string" minOccurs="0" maxOccurs="1"/>
651             <xs:element name="metadata" type="tns:MetadataType" minOccurs="0"
↳ maxOccurs="1"/>
652         </xs:sequence>
653     </xs:complexType>

```

ProjectVersionDocument

```

655     <xs:element name="ProjectVersionDocument" xmlns:tns="http://xml.vidispine.com/
↳ schema/vidispine" type="tns:ProjectVersionType"/>
656     <xs:complexType name="ProjectVersionType">
657         <xs:sequence>
658             <xs:element name="id" type="tns:SiteIdType" minOccurs="0" maxOccurs="1"/>
659             <xs:element name="item" minOccurs="0" maxOccurs="unbounded">
660                 <xs:complexType>
661                     <xs:sequence>
662                         <xs:element name="id" type="tns:SiteIdType" minOccurs="0"
↳ maxOccurs="1"/>
663                         <xs:element name="externalId" type="xs:string" minOccurs="0"
↳ maxOccurs="1"/>
664                         <xs:element name="uri" type="xs:string" minOccurs="0"
↳ maxOccurs="1"/>
665                     </xs:sequence>
666                 </xs:complexType>
667             </xs:element>
668             <xs:element name="sequence" type="tns:SequenceType" minOccurs="0"
↳ maxOccurs="unbounded"/>
669             <xs:element name="metadata" type="tns:MetadataType" minOccurs="0"
↳ maxOccurs="1"/>
670         </xs:sequence>
671     </xs:complexType>
672

```

```

673 <xs:complexType name="SequenceMediaType">
674 <xs:sequence>
675 <xs:element name="item" minOccurs="1" maxOccurs="1" type="tns:SiteIdType"/
↪>
676 <xs:element name="sourceTrack" minOccurs="1" maxOccurs="1" type="xs:int"/>
677 <xs:element name="in" minOccurs="0" maxOccurs="1" type="tns:TimeCodeType"/
↪>
678 <xs:element name="out" minOccurs="0" maxOccurs="1" type="tns:TimeCodeType
↪"/>
679 <xs:element name="sourceIn" minOccurs="0" maxOccurs="1" type="tns:
↪TimeCodeType"/>
680 <xs:element name="sourceOut" minOccurs="0" maxOccurs="1" type="tns:
↪TimeCodeType"/>
681 <xs:element name="effect" type="tns:EffectType" minOccurs="0" maxOccurs=
↪"unbounded"/>
682 </xs:sequence>
683 </xs:complexType>
684
685 <!-- Like TransitionType, except that it uses in and out points and has user_
↪friendly color values -->
686 <xs:complexType name="SequenceTransitionType">
687 <xs:sequence>
688 <xs:element name="in" type="tns:TimeCodeType" minOccurs="1" maxOccurs="1"/
↪>
689 <xs:element name="out" type="tns:TimeCodeType" minOccurs="1" maxOccurs="1
↪"/>
690 <xs:element name="wipe" type="xs:int" minOccurs="0"/>
691 <xs:element name="transition" type="xs:string"/>
692 <xs:element name="horizRepeat" type="xs:int" minOccurs="0"/>
693 <xs:element name="vertRepeat" type="xs:int" minOccurs="0"/>
694 <xs:element name="startPercentage" type="xs:int" minOccurs="0"/>
695 <xs:element name="endPercentage" type="xs:int" minOccurs="0"/>
696 <xs:element name="reverse" type="xs:boolean" minOccurs="0"/>
697 <xs:element name="borderWidth" type="xs:int" minOccurs="0"/>
698 <xs:element name="borderColor" type="xs:string" minOccurs="0"/>
699 </xs:sequence>
700 </xs:complexType>

```

SequenceListDocument

```

702 <xs:element name="SequenceListDocument" xmlns:tns="http://xml.vidispine.com/
↪schema/vidispine" type="tns:SequenceListType" />
703 <xs:complexType name="SequenceListType">
704 <xs:sequence>
705 <xs:element name="sequence" minOccurs="0" maxOccurs="unbounded">
706 <xs:complexType>
707 <xs:sequence>
708 <xs:element name="id" type="tns:SiteIdType" minOccurs="1"
↪maxOccurs="1"/>
709 <xs:element name="type" type="xs:string" minOccurs="1"
↪maxOccurs="1"/>
710 </xs:sequence>
711 </xs:complexType>
712 </xs:element>
713 </xs:sequence>
714 </xs:complexType>

```

SequenceDocument

```

716 <xs:element name="SequenceDocument" xmlns:tns="http://xml.vidispine.com/schema/
↪vidispine" type="tns:SequenceType" />
717 <xs:complexType name="SequenceType">
718 <xs:sequence>
719 <xs:element name="id" type="tns:SiteIdType" minOccurs="0" maxOccurs="1"/>
720 <xs:element name="track" type="tns:SequenceTrackType" minOccurs="0"
↪maxOccurs="unbounded"/>
721 </xs:sequence>
722 </xs:complexType>
723
724 <xs:complexType name="SequenceTrackType">
725 <xs:sequence>
726 <xs:element name="audio" type="xs:boolean" minOccurs="0" maxOccurs="1"/>
727 <xs:element name="segment" type="tns:SequenceMediaType" minOccurs="0"
↪maxOccurs="unbounded"/>
728 <xs:element name="transition" type="tns:SequenceTransitionType" minOccurs=
↪"0" maxOccurs="unbounded"/>
729 </xs:sequence>
730 </xs:complexType>

```

JobProblemListDocument

```

732 <xs:element name="JobProblemListDocument" xmlns:tns="http://xml.vidispine.com/
↪schema/vidispine" type="tns:JobProblemListType" />
733 <xs:complexType name="JobProblemListType">
734 <xs:sequence>
735 <xs:element name="problem" type="tns:JobProblemType" minOccurs="0"
↪maxOccurs="unbounded"/>
736 </xs:sequence>
737 </xs:complexType>

```

JobProblemDocument

```

738 <xs:element name="JobProblemDocument" xmlns:tns="http://xml.vidispine.com/schema/
↪vidispine" type="tns:JobProblemType" />
739 <xs:complexType name="JobProblemType">
740 <xs:sequence>
741 <xs:element name="id" type="xs:long" minOccurs="1" maxOccurs="1"/>
742 <xs:element name="type" type="xs:string" minOccurs="1" maxOccurs="1"/>
743 <xs:element name="data" type="tns:KeyValueTypes" minOccurs="0" maxOccurs=
↪"unbounded"/>
744 <xs:element name="job" type="tns:SiteIdType" minOccurs="0" maxOccurs=
↪"unbounded"/>
745 </xs:sequence>
746 </xs:complexType>
747
748 <xs:complexType name="KeyValueTypes">
749 <xs:sequence>
750 <xs:element name="key" type="xs:string" minOccurs="1" maxOccurs="1"/>
751 <xs:element name="value" type="xs:string" minOccurs="1" maxOccurs="1"/>
752 </xs:sequence>
753 </xs:complexType>

```

SearchHistoryDocument

```

755 <xs:element name="SearchHistoryDocument" xmlns:tns="http://xml.vidispine.com/
↪schema/vidispine" type="tns:SearchHistoryListType" />
756 <xs:complexType name="SearchHistoryListType">

```

```

757     <xs:sequence>
758       <xs:element name="search" type="tns:SearchHistoryType" minOccurs="0"
↪maxOccurs="unbounded"/>
759     </xs:sequence>
760   </xs:complexType>
761
762   <xs:complexType name="SearchHistoryType">
763     <xs:sequence>
764       <xs:element name="timestamp" type="xs:dateTime" minOccurs="1" maxOccurs="1"
↪"/>
765       <xs:element name="user" type="xs:string" minOccurs="1" maxOccurs="1"/>
766       <xs:element name="query" type="tns:ItemSearchType" minOccurs="1"
↪maxOccurs="1"/>
767     </xs:sequence>
768   </xs:complexType>

```

ImportableFileListDocument

```

770   <xs:element name="ImportableFileListDocument" xmlns:tns="http://xml.vidispine.com/
↪schema/vidispine" type="tns:ImportableFileListType" />
771   <xs:complexType name="ImportableFileListType">
772     <xs:sequence>
773       <xs:element name="hits" minOccurs="0" maxOccurs="1" type="xs:integer" />
774       <xs:element name="element" minOccurs="0" type="tns:ImportableFileType"
↪maxOccurs="unbounded"/>
775       <xs:element name="prefixes" type="tns:FilePrefixType" maxOccurs="1"
↪minOccurs="0"/></xs:element>
776     </xs:sequence>
777   </xs:complexType>

```

ImportableFileDocument

```

779   <xs:element name="ImportableFileDocument" xmlns:tns="http://xml.vidispine.com/
↪schema/vidispine" type="tns:ImportableFileType" />
780   <xs:complexType name="ImportableFileType">
781     <xs:sequence>
782       <xs:element name="file" type="tns:FileType" minOccurs="1" maxOccurs="1"/>
783       <xs:element name="metadata" type="tns:MetadataType" minOccurs="0"
↪maxOccurs="1"/>
784     </xs:sequence>
785   </xs:complexType>

```

AutoImportRuleListDocument

```

787   <xs:element name="AutoImportRuleListDocument" xmlns:tns="http://xml.vidispine.com/
↪schema/vidispine" type="tns:AutoImportRuleListType" />
788   <xs:complexType name="AutoImportRuleListType">
789     <xs:sequence>
790       <xs:element name="rule" type="tns:AutoImportRuleType" minOccurs="0"
↪maxOccurs="unbounded"/>
791     </xs:sequence>
792   </xs:complexType>

```

AutoImportRuleDocument

```

794   <xs:element name="AutoImportRuleDocument" xmlns:tns="http://xml.vidispine.com/
↪schema/vidispine" type="tns:AutoImportRuleType" />
795   <xs:complexType name="AutoImportRuleType">

```

```

796     <xs:sequence>
797       <xs:element name="fileNameAsTitle" type="xs:boolean" minOccurs="0"
↪maxOccurs="1" />
798       <xs:element name="storage" type="tns:SiteIdType" minOccurs="0" maxOccurs=
↪"1"/>
799       <xs:element name="tag" type="xs:string" minOccurs="0" maxOccurs="unbounded
↪"/>
800       <xs:element name="metadata" type="tns:MetadataType" minOccurs="0"
↪maxOccurs="1"/>
801       <xs:element name="jobmetadata" type="tns:SimpleMetadataType" minOccurs="0
↪" maxOccurs="1"/>
802       <xs:element name="settingsId" type="tns:SiteIdType" minOccurs="0"
↪maxOccurs="1"/>
803       <xs:element name="projection" type="xs:string" minOccurs="0" maxOccurs="1
↪" />
804       <xs:element name="excludeFilter" type="tns:FilenameFilterType" minOccurs=
↪"0" maxOccurs="unbounded"/>
805       <xs:element name="shapeTagFilter" type="tns:FilenameFilterType" minOccurs=
↪"0" maxOccurs="unbounded"/>
806       <xs:element name="sequenceDefinition" type="tns:sequenceDefinitionType"
↪minOccurs="0" maxOccurs="1"/>
807       <xs:element name="priority" type="xs:string" minOccurs="0" maxOccurs="1"/>
808       <xs:element name="user" type="xs:string" minOccurs="0" maxOccurs="1" />
809       <xs:element name="ignoreSidecarImport" type="xs:boolean" minOccurs="0"
↪maxOccurs="1" />
810       <xs:element name="disabledSidecarExtensions" type="xs:string" minOccurs="0
↪" maxOccurs="unbounded" />
811       <xs:element name="enabled" type="xs:boolean" minOccurs="0" maxOccurs="1" /
↪>
812       <xs:element name="resourceId" type="tns:SiteIdType" minOccurs="0"
↪maxOccurs="1" />
813     </xs:sequence>
814   </xs:complexType>
815
816   <xs:complexType name="sequenceDefinitionType">
817     <xs:sequence>
818       <xs:element name="sequenceMetadata" type="tns:SequenceMetaDataType"
↪minOccurs="0" maxOccurs="1"/>
819       <xs:element name="fileSequence" type="tns:FileSequestionDefinitionType"
↪minOccurs="1" maxOccurs="1"/>
820     </xs:sequence>
821   </xs:complexType>
822
823   <xs:complexType name="SequenceMetaDataType">
824     <xs:sequence>
825       <xs:element name="regex" type="xs:string" minOccurs="1" maxOccurs="1"/>
826       <xs:element name="idGroup" type="xs:integer" minOccurs="1" maxOccurs="1"/>
827     </xs:sequence>
828   </xs:complexType>
829
830   <xs:complexType name="FileSequestionDefinitionType">
831     <xs:sequence>
832       <xs:element name="regex" type="xs:string" minOccurs="1" maxOccurs="1"/>
833       <xs:element name="idGroup" type="xs:integer" minOccurs="1" maxOccurs="1"/>
834       <xs:element name="numGroup" type="xs:integer" minOccurs="1" maxOccurs="1"/
↪>
835       <xs:element name="timeout" type="xs:integer" minOccurs="1" maxOccurs="1"/>
836       <xs:element name="numFormat" type="xs:string" minOccurs="0" maxOccurs="1"/
↪>

```



```

837     </xs:sequence>
838 </xs:complexType>
839
840 <xs:complexType name="FilenameFilterType">
841   <xs:sequence>
842     <xs:element name="pattern" type="xs:string"/>
843     <xs:element name="tag" type="xs:string" minOccurs="0" maxOccurs="unbounded
↪"/>
844   </xs:sequence>
845 </xs:complexType>
846
847 <xs:simpleType name="WeekDayType">
848   <xs:restriction base="xs:string">
849     <xs:enumeration value="MONDAY"/>
850     <xs:enumeration value="TUESDAY"/>
851     <xs:enumeration value="WEDNESDAY"/>
852     <xs:enumeration value="THURSDAY"/>
853     <xs:enumeration value="FRIDAY"/>
854     <xs:enumeration value="SATURDAY"/>
855     <xs:enumeration value="SUNDAY"/>
856   </xs:restriction>
857 </xs:simpleType>

```

FileSynchronizationInfoDocument

```

859 <xs:element name="FileSynchronizationInfoDocument" type="tns:
↪FileSynchronizationInfoType"/>
860 <xs:complexType name="FileSynchronizationInfoType">
861   <xs:sequence>
862     <xs:element name="id" type="xs:string" minOccurs="1" maxOccurs="1"/>
863     <xs:element name="lastUpdated" type="xs:dateTime" minOccurs="1" maxOccurs=
↪"1"/>
864     <xs:element name="size" type="xs:long" minOccurs="1" maxOccurs="1"/>
865     <xs:element name="state" type="xs:string" minOccurs="1" maxOccurs="1"/>
866     <xs:element name="hash" type="xs:string" minOccurs="0" maxOccurs="1"/>
867   </xs:sequence>
868 </xs:complexType>
869
870 <xs:complexType name="FileSynchronizationScheduleEntryType">
871   <xs:sequence>
872     <xs:element name="day" type="tns:WeekDayType" minOccurs="0" maxOccurs=
↪"unbounded"/>
873     <xs:element name="start" type="xs:string" minOccurs="1" maxOccurs="1"/>
874     <xs:element name="end" type="xs:string" minOccurs="1" maxOccurs="1"/>
875   </xs:sequence>
876 </xs:complexType>
877
878 <xs:complexType name="FileSynchronizationScheduleType">
879   <xs:sequence>
880     <xs:element name="entry" type="tns:FileSynchronizationScheduleEntryType"
↪minOccurs="0" maxOccurs="unbounded"/>
881   </xs:sequence>
882 </xs:complexType>
883
884 <xs:complexType name="FileSynchronizationUriMethodType">
885   <xs:sequence>
886     <xs:element name="scheme" type="xs:string" minOccurs="1" maxOccurs="1"/>
887     <xs:element name="methodType" type="xs:string" minOccurs="0" maxOccurs="1
↪"/>

```

```

888     </xs:sequence>
889 </xs:complexType>
890
891 <xs:complexType name="FileSynchronizationCustomMethodType">
892   <xs:sequence>
893     <xs:element name="bean" type="xs:string" minOccurs="1" maxOccurs="1"/>
894     <xs:element name="additionalParameters" type="tns:SimpleMetadataType"
↳minOccurs="0" maxOccurs="1"/>
895   </xs:sequence>
896 </xs:complexType>
897
898 <xs:complexType name="FileSynchronizationMethodType">
899   <xs:choice>
900     <xs:element name="uri" type="tns:FileSynchronizationUriMethodType"/>
901     <xs:element name="custom" type="tns:FileSynchronizationCustomMethodType"/>
902   </xs:choice>
903 </xs:complexType>

```

FileSynchronizationEntryListDocument

```

905 <xs:element name="FileSynchronizationEntryListDocument" xmlns:tns="http://xml.
↳vidispine.com/schema/vidispine" type="tns:FileSynchronizationEntryListType"/>
906 <xs:complexType name="FileSynchronizationEntryListType">
907   <xs:sequence>
908     <xs:element name="entry" type="tns:FileSynchronizationEntryType"
↳minOccurs="0" maxOccurs="unbounded"/>
909   </xs:sequence>
910 </xs:complexType>
911
912 <xs:complexType name="FileSynchronizationEntryStatusType">
913   <xs:sequence>
914     <xs:element name="bytesWritten" type="xs:long" minOccurs="1" maxOccurs="1
↳"/>
915     <xs:element name="lastWritten" type="xs:dateTime" minOccurs="0" maxOccurs=
↳"1"/>
916     <xs:element name="lastChecked" type="xs:dateTime" minOccurs="1" maxOccurs=
↳"1"/>
917   </xs:sequence>
918 </xs:complexType>
919
920 <xs:complexType name="FileSynchronizationLogEntryType">
921   <xs:simpleContent>
922     <xs:extension base="xs:string">
923       <xs:attribute name="timestamp" type="xs:dateTime" use="required"/>
924     </xs:extension>
925   </xs:simpleContent>
926 </xs:complexType>

```

FileSynchronizationLogDocument

```

928 <xs:element name="FileSynchronizationLogDocument" xmlns:tns="http://xml.vidispine.
↳com/schema/vidispine" type="tns:FileSynchronizationLogType"/>
929 <xs:complexType name="FileSynchronizationLogType">
930   <xs:sequence>
931     <xs:element name="entry" type="tns:FileSynchronizationLogEntryType"
↳minOccurs="0" maxOccurs="unbounded"/>
932   </xs:sequence>
933 </xs:complexType>

```

FileSynchronizationEntryDocument

```

935 <xs:element name="FileSynchronizationEntryDocument" xmlns:tns="http://xml.
↪vidispine.com/schema/vidispine" type="tns:FileSynchronizationEntryType"/>
936 <xs:complexType name="FileSynchronizationEntryType">
937 <xs:sequence>
938 <xs:element name="fileId" type="tns:SiteIdType" minOccurs="1" maxOccurs="1
↪"/>
939 <xs:element name="state" type="xs:string" minOccurs="1" maxOccurs="1"/>
940 <xs:element name="size" type="xs:long" minOccurs="0" maxOccurs="1"/>
941 <xs:element name="hash" type="xs:string" minOccurs="0" maxOccurs="1"/>
942 <xs:element name="sourceSite" type="xs:string" minOccurs="1" maxOccurs="1
↪"/>
943
944 <xs:element name="itemId" type="tns:SiteIdType" minOccurs="1" maxOccurs="1
↪"/>
945 <xs:element name="shapeId" type="tns:SiteIdType" minOccurs="1" maxOccurs=
↪"1"/>
946
947 <xs:element name="status" type="tns:FileSynchronizationEntryStatusType"
↪minOccurs="0" maxOccurs="1"/>
948
949 <xs:element name="log" type="tns:FileSynchronizationLogType" minOccurs="0
↪" maxOccurs="1"/>
950 </xs:sequence>
951 </xs:complexType>

```

FileSynchronizationRuleListDocument

```

953 <xs:element name="FileSynchronizationRuleListDocument" xmlns:tns="http://xml.
↪vidispine.com/schema/vidispine" type="tns:FileSynchronizationRuleListType"/>
954 <xs:complexType name="FileSynchronizationRuleListType">
955 <xs:sequence>
956 <xs:element name="rule" type="tns:FileSynchronizationRuleType" minOccurs=
↪"0" maxOccurs="unbounded"/>
957 </xs:sequence>
958 </xs:complexType>

```

FileSynchronizationRuleDocument

```

960 <xs:element name="FileSynchronizationRuleDocument" xmlns:tns="http://xml.
↪vidispine.com/schema/vidispine" type="tns:FileSynchronizationRuleType"/>
961 <xs:complexType name="FileSynchronizationRuleType">
962 <xs:sequence>
963 <xs:element name="tag" type="xs:string" minOccurs="0" maxOccurs="1"/>
964 <xs:element name="schedule" type="tns:FileSynchronizationScheduleType"
↪minOccurs="0" maxOccurs="1"/>
965 <xs:element name="method" type="tns:FileSynchronizationMethodType"
↪minOccurs="1" maxOccurs="1"/>
966 </xs:sequence>
967 </xs:complexType>
968
969 <xs:simpleType name="SyncPolicyType">
970 <xs:restriction base="xs:string">
971 <xs:enumeration value="ONDEMAND"/>
972 <xs:enumeration value="ALWAYS"/>
973 </xs:restriction>
974 </xs:simpleType>

```

SiteDefinitionDocument

```

976 <xs:element name="SiteDefinitionDocument" xmlns:tns="http://xml.vidispine.com/
↳schema/vidispine" type="tns:SiteDefinitionType"/>
977 <xs:complexType name="SiteDefinitionType">
978 <xs:sequence>
979 <xs:element name="url" type="xs:string"/>
980 <xs:element name="username" type="xs:string"/>
981 <xs:element name="password" type="xs:string"/>
982 <xs:element name="syncPolicy" type="tns:SyncPolicyType"/>
983 </xs:sequence>
984 </xs:complexType>

```

ChangesetUUIDDDocument

```

986 <xs:element name="ChangesetUUIDDDocument" xmlns:tns="http://xml.vidispine.com/
↳schema/vidispine" type="tns:ChangesetUUIDDType" />
987 <xs:complexType name="ChangesetUUIDDType">
988 <xs:sequence>
989 <xs:element name="uuid" type="xs:string"/>
990 <xs:element name="type" type="xs:string"/>
991 <xs:element name="id" type="xs:string"/>
992 <xs:element name="origin" type="xs:string"/>
993 <xs:element name="timestamp" type="xs:dateTime"/>
994 </xs:sequence>
995 </xs:complexType>

```

ChangesetUUIDLlistDocument

```

997 <xs:element name="ChangesetUUIDLlistDocument" xmlns:tns="http://xml.vidispine.com/
↳schema/vidispine" type="tns:ChangesetUUIDLlistType"/>
998 <xs:complexType name="ChangesetUUIDLlistType">
999 <xs:sequence>
1000 <xs:element name="changeset" type="tns:ChangesetUUIDDType" minOccurs="0"
↳maxOccurs="unbounded"/>
1001 </xs:sequence>
1002 </xs:complexType>

```

SiteInitializationStatusDocument

```

1004 <xs:element name="SiteInitializationStatusDocument" xmlns:tns="http://xml.
↳vidispine.com/schema/vidispine" type="tns:SiteInitializationStatusType"/>
1005 <xs:complexType name="SiteInitializationStatusType">
1006 <xs:sequence>
1007 <xs:element name="started" type="xs:dateTime"/>
1008 <xs:element name="itemsProcessed" type="xs:integer"/>
1009 <xs:element name="collectionsProcessed" type="xs:integer"/>
1010 <xs:element name="librariesProcessed" type="xs:integer"/>
1011 <xs:element name="usersProcessed" type="xs:integer"/>
1012 <xs:element name="groupsProcessed" type="xs:integer"/>
1013 </xs:sequence>
1014 </xs:complexType>

```

EntitySynchronizeDocument

```

1017 <xs:element name="EntitySynchronizeDocument" xmlns:tns="http://xml.vidispine.com/
↳schema/vidispine" type="tns:EntitySynchronizeType" />
1018 <xs:complexType name="EntitySynchronizeType">
1019 <xs:sequence>

```

```

1020     <xs:element name="rule" type="tns:SiteRuleType" minOccurs="0"/>
1021     <xs:element name="createFileStatuses" type="xs:boolean" minOccurs="0"
↪maxOccurs="1" />
1022     <xs:element name="timestamp" type="xs:dateTime" minOccurs="1" maxOccurs="1
↪"/>
1023     <xs:element name="type" type="xs:string"/>
1024     <xs:choice>
1025         <xs:element name="item" type="tns:ItemSynchronizeType"/>
1026         <xs:element name="collection" type="tns:CollectionSynchronizeType"/>
1027         <xs:element name="user" type="tns:UserSynchronizeType"/>
1028         <xs:element name="group" type="tns:GroupSynchronizeType"/>
1029         <xs:element name="library" type="tns:LibrarySynchronizeType"/>
1030     </xs:choice>
1031 </xs:sequence>
1032 </xs:complexType>
1033
1034 <xs:complexType name="ItemSynchronizeType">
1035     <xs:sequence>
1036         <xs:element name="delete" type="xs:boolean" />
1037         <xs:element name="create" type="xs:boolean" />
1038         <xs:element name="id" type="tns:SiteIdType" minOccurs="1" maxOccurs="1"/>
1039         <xs:element name="created" type="xs:dateTime" minOccurs="0" maxOccurs="1"/
↪>
1040         <xs:element name="complete" type="xs:boolean" minOccurs="0" maxOccurs="1"/
↪>
1041         <xs:element name="metadata" type="tns:MetadataSynchronizeType" minOccurs=
↪"0" maxOccurs="1"/>
1042         <xs:element name="shape" type="tns:ShapeSynchronizeType" minOccurs="0"
↪maxOccurs="unbounded"/>
1043         <xs:element name="targetStorageId" type="xs:string" minOccurs="0"
↪maxOccurs="1"/>
1044         <xs:element name="file" type="tns:FileSynchronizeType" minOccurs="0"
↪maxOccurs="unbounded"/>
1045         <xs:element name="access" type="tns:AccessControlSynchronizeType"
↪minOccurs="0" maxOccurs="unbounded"/>
1046         <xs:element name="thumbnails" type="tns:ThumbnailsSynchronizeType"
↪minOccurs="0" maxOccurs="1"/>
1047         <xs:element name="partOfCollection" type="tns:SiteIdType" minOccurs="0"
↪maxOccurs="unbounded"/>
1048         <xs:element name="partOfLibrary" type="tns:SiteIdType" minOccurs="0"
↪maxOccurs="unbounded"/>
1049         <xs:element name="metadataGroup" type="tns:MetadataFieldGroupType"
↪minOccurs="0" maxOccurs="unbounded" />
1050     </xs:sequence>
1051 </xs:complexType>
1052
1053 <xs:complexType name="CollectionSynchronizeType">
1054     <xs:sequence>
1055         <xs:element name="delete" type="xs:boolean" />
1056         <xs:element name="create" type="xs:boolean" />
1057         <xs:element name="id" type="tns:SiteIdType" minOccurs="1" maxOccurs="1"/>
1058         <xs:element name="name" type="xs:string" minOccurs="0" maxOccurs="1"/>
1059         <xs:element name="complete" type="xs:boolean" minOccurs="0" maxOccurs="1"/
↪>
1060         <xs:element name="metadata" type="tns:MetadataSynchronizeType" minOccurs=
↪"0" maxOccurs="1"/>
1061         <xs:element name="access" type="tns:AccessControlSynchronizeType"
↪minOccurs="0" maxOccurs="unbounded"/>

```

```

1062     <xs:element name="hasItem" type="tns:HasSubEntityType" minOccurs="0"
↪maxOccurs="unbounded" />
1063     <xs:element name="hasLibrary" type="tns:SiteIdType" minOccurs="0"
↪maxOccurs="unbounded" />
1064     <xs:element name="hasCollection" type="tns:HasSubEntityType" minOccurs="0
↪" maxOccurs="unbounded" />
1065     <xs:element name="partOfCollection" type="tns:SiteIdType" minOccurs="0"
↪maxOccurs="unbounded" />
1066     <xs:element name="deletedHasItem" type="tns:SiteIdType" minOccurs="0"
↪maxOccurs="unbounded" />
1067     <xs:element name="deletedHasLibrary" type="tns:SiteIdType" minOccurs="0"
↪maxOccurs="unbounded" />
1068     <xs:element name="deletedHasCollection" type="tns:SiteIdType" minOccurs="0
↪" maxOccurs="unbounded" />
1069     <xs:element name="metadataGroup" type="tns:MetadataFieldGroupType"
↪minOccurs="0" maxOccurs="unbounded" />
1070     </xs:sequence>
1071 </xs:complexType>
1072
1073 <xs:complexType name="LibrarySynchronizeType">
1074   <xs:sequence>
1075     <xs:element name="delete" type="xs:boolean" />
1076     <xs:element name="create" type="xs:boolean" />
1077     <xs:element name="id" type="tns:SiteIdType" minOccurs="1" maxOccurs="1" />
1078     <xs:element name="complete" type="xs:boolean" minOccurs="0" maxOccurs="1" />
↪>
1079     <xs:element name="access" type="tns:AccessControlSynchronizeType"
↪minOccurs="0" maxOccurs="unbounded" />
1080     <xs:element name="updateMode" type="xs:string" />
1081     <xs:element name="updateFrequency" type="xs:string" minOccurs="0" />
1082     <xs:element name="searchXML" type="xs:string" minOccurs="0" />
1083     <xs:element name="hasItem" type="tns:HasSubEntityType" minOccurs="0"
↪maxOccurs="unbounded" />
1084     <xs:element name="partOfCollection" type="tns:SiteIdType" minOccurs="0"
↪maxOccurs="unbounded" />
1085   </xs:sequence>
1086 </xs:complexType>
1087
1088 <xs:complexType name="HasSubEntityType">
1089   <xs:sequence>
1090     <xs:element name="id" type="xs:string" />
1091     <xs:element name="metadataId" type="xs:string" />
1092   </xs:sequence>
1093 </xs:complexType>
1094
1095 <xs:complexType name="UserSynchronizeType">
1096   <xs:sequence>
1097     <xs:element name="delete" type="xs:boolean" />
1098     <xs:element name="create" type="xs:boolean" />
1099     <xs:element name="user" type="tns:UserType" />
1100   </xs:sequence>
1101 </xs:complexType>
1102
1103 <xs:complexType name="GroupSynchronizeType">
1104   <xs:sequence>
1105     <xs:element name="removedUser" type="xs:string" minOccurs="0" maxOccurs=
↪"unbounded" />
1106     <xs:element name="removedGroup" type="xs:string" minOccurs="0" maxOccurs=
↪"unbounded" />

```

```

1107     <xs:element name="removedRole" type="xs:string" minOccurs="0" maxOccurs=
↪ "unbounded"/>
1108     <xs:element name="delete" type="xs:boolean"/>
1109     <xs:element name="create" type="xs:boolean"/>
1110     <xs:element name="group" type="tns:GroupType"/>
1111   </xs:sequence>
1112 </xs:complexType>
1113
1114 <xs:complexType name="MetadataSynchronizeType">
1115   <xs:sequence>
1116     <xs:element name="id" type="tns:SiteIdType"/>
1117     <xs:element name="changeSet" minOccurs="0" maxOccurs="unbounded">
1118       <xs:complexType>
1119         <xs:sequence>
1120           <xs:element name="id" type="tns:SiteIdType" minOccurs="1"
↪ maxOccurs="1"/>
1121           <xs:element name="metadata" type="tns:MetadataEntryListType"
↪ minOccurs="1" maxOccurs="1"/>
1122         </xs:sequence>
1123       </xs:complexType>
1124     </xs:element>
1125   </xs:sequence>
1126 </xs:complexType>

```

ThumbnailsSynchronizeDocument

```

1128 <xs:element name="ThumbnailsSynchronizeDocument" xmlns:tns="http://xml.vidispine.
↪ com/schema/vidispine" type="tns:ThumbnailsSynchronizeType" />
1129 <xs:complexType name="ThumbnailsSynchronizeType">
1130   <xs:sequence>
1131     <xs:element name="thumbnail" type="tns:ThumbnailSynchronizeType"
↪ minOccurs="0" maxOccurs="unbounded"/>
1132   </xs:sequence>
1133 </xs:complexType>
1134
1135 <xs:complexType name="ThumbnailSynchronizeType">
1136   <xs:sequence>
1137     <xs:element name="operation" type="xs:string"/>
1138     <xs:element name="timecode" type="xs:string"/>
1139     <xs:element name="version" type="xs:integer"/>
1140     <xs:element name="poster" type="xs:boolean"/>
1141     <xs:element name="image" type="xs:string"/>
1142   </xs:sequence>
1143 </xs:complexType>
1144
1145 <xs:complexType name="MetadataEntryListType">
1146   <xs:sequence>
1147     <xs:element name="entry" type="tns:MetadataEntrySyncType" minOccurs="0"
↪ maxOccurs="unbounded"/>
1148   </xs:sequence>
1149 </xs:complexType>
1150
1151 <xs:complexType name="MetadataEntrySyncType">
1152   <xs:sequence>
1153     <xs:element name="value" type="xs:string"/>
1154   </xs:sequence>
1155   <xs:attribute name="id" type="tns:SiteIdType"/>
1156   <xs:attribute name="start" type="xs:string"/>

```

```

1157 <xs:attribute name="end" type="xs:string"/>
1158 <xs:attribute name="name" type="xs:string"/>
1159 <xs:attribute name="parentUuid" type="xs:string"/>
1160 <xs:attribute name="reference" type="xs:boolean"/>
1161 <xs:attribute name="removed" type="xs:boolean"/>
1162 <xs:attribute name="timestamp" type="xs:long"/>
1163 <xs:attribute name="type" type="xs:string"/>
1164 <xs:attribute name="user" type="xs:string"/>
1165 <xs:attribute name="valueUuid" type="xs:string"/>
1166 <xs:attribute name="version" type="xs:integer"/>
1167 <xs:attribute name="metadataId" type="tns:SiteIdType"/>
1168 <xs:attribute name="metadataLeafId" type="tns:SiteIdType"/>
1169 <xs:attribute name="track" type="xs:string"/>
1170 <xs:attribute name="language" type="xs:string"/>
1171 </xs:complexType>
1172
1173 <xs:complexType name="ShapeSynchronizeType">
1174   <xs:sequence>
1175     <xs:element name="delete" type="xs:boolean"/>
1176     <xs:element name="create" type="xs:boolean"/>
1177     <xs:element name="essenceVersion" type="xs:integer" minOccurs="0"
↪maxOccurs="1"/>
1178     <xs:element name="id" type="tns:SiteIdType" minOccurs="1" maxOccurs="1"/>
1179     <xs:element name="component" type="tns:ComponentSynchronizeType"
↪minOccurs="0" maxOccurs="unbounded"/>
1180     <xs:element name="tag" type="tns:ShapeTagSynchronizeType" minOccurs="0"
↪maxOccurs="unbounded"/>
1181     <xs:element name="mimeType" type="xs:string" minOccurs="0" maxOccurs=
↪"unbounded"/>
1182   </xs:sequence>
1183 </xs:complexType>
1184
1185 <xs:simpleType name="ComponentTypeType">
1186   <xs:restriction base="xs:string">
1187     <xs:enumeration value="AUDIO_COMPONENT"/>
1188     <xs:enumeration value="VIDEO_COMPONENT"/>
1189     <xs:enumeration value="CONTAINER_COMPONENT"/>
1190     <xs:enumeration value="BINARY_COMPONENT"/>
1191     <xs:enumeration value="DESCRIPTOR_COMPONENT"/>
1192   </xs:restriction>
1193 </xs:simpleType>
1194
1195 <xs:complexType name="ComponentSynchronizeType">
1196   <xs:sequence>
1197     <xs:element name="id" type="tns:SiteIdType" minOccurs="1" maxOccurs="1"/>
1198     <xs:element name="file" type="tns:SiteIdType" minOccurs="0" maxOccurs=
↪"unbounded"/>
1199     <xs:element name="format" type="xs:string" minOccurs="0" maxOccurs="1"/>
1200     <xs:element name="type" type="tns:ComponentTypeType" minOccurs="1"
↪maxOccurs="1"/>
1201     <xs:choice>
1202       <xs:element name="audio" type="tns:AudioComponentType" minOccurs="0"
↪maxOccurs="1"/>
1203       <xs:element name="container" type="tns:ContainerComponentType"
↪minOccurs="0" maxOccurs="1"/>
1204       <xs:element name="video" type="tns:VideoComponentType" minOccurs="0"
↪maxOccurs="1"/>
1205       <xs:element name="binary" type="tns:BinaryComponentType" minOccurs="0
↪maxOccurs="1"/>

```



```

1206         <xs:element name="descriptor" type="tns:DescriptorComponentType"
↳minOccurs="0" maxOccurs="1"/>
1207     </xs:choice>
1208 </xs:sequence>
1209 </xs:complexType>
1210
1211 <xs:complexType name="ShapeTagSynchronizeType">
1212     <xs:sequence>
1213         <xs:element name="name" type="xs:string" minOccurs="1" maxOccurs="1"/>
1214         <xs:element name="preset" type="tns:TranscodePresetType" minOccurs="1"
↳maxOccurs="1"/>
1215     </xs:sequence>
1216 </xs:complexType>
1217
1218 <xs:complexType name="AccessControlSynchronizeType">
1219     <xs:sequence>
1220         <xs:element name="delete" type="xs:boolean"/>
1221         <xs:element name="create" type="xs:boolean"/>
1222         <xs:element name="document" type="tns:AccessControlType"/>
1223     </xs:sequence>
1224 </xs:complexType>
1225
1226 <xs:complexType name="FileSynchronizeType">
1227     <xs:sequence>
1228         <xs:element name="id" type="tns:SiteIdType" minOccurs="1" maxOccurs="1"/>
1229         <xs:element name="uri" type="xs:string" minOccurs="0" maxOccurs="unbounded
↳"/>
1230         <xs:element name="path" type="xs:string" minOccurs="0" maxOccurs="1"/>
1231     </xs:sequence>
1232 </xs:complexType>

```

FileSiteAvailabilityDocument

```

1234     <xs:element name="FileSiteAvailabilityDocument" type="tns:FileSiteAvailabilityType
↳"/>
1235 <xs:complexType name="FileSiteAvailabilityType">
1236     <xs:sequence>
1237         <xs:element type="xs:string" name="site" minOccurs="0" maxOccurs=
↳"unbounded"/>
1238     </xs:sequence>
1239 </xs:complexType>

```

FileListDocument

```

1241     <xs:element name="FileListDocument" xmlns:tns="http://xml.vidispine.com/schema/
↳vidispine" type="tns:FileListType" />
1242     <xs:complexType name="FileListType">
1243         <xs:sequence>
1244             <xs:element name="hits" type="xs:integer" minOccurs="0" maxOccurs="1"/>
1245             <xs:element name="file" type="tns:FileType" maxOccurs="unbounded"
↳minOccurs="0"></xs:element>
1246             <xs:element name="prefixes" type="tns:FilePrefixType" maxOccurs="1"
↳minOccurs="0"></xs:element>
1247             <xs:element name="nextCursor" type="xs:string" maxOccurs="1" minOccurs="0
↳"></xs:element>
1248         </xs:sequence>
1249     </xs:complexType>
1250

```

```

1251 <xs:complexType name="FilePrefixType">
1252 <xs:sequence>
1253 <xs:element name="prefix" type="xs:string" minOccurs="0" maxOccurs=
↪ "unbounded"/>
1254 </xs:sequence>
1255 </xs:complexType>

```

TransferListDocument

```

1257 <xs:element name="TransferListDocument" xmlns:tns="http://xml.vidispine.com/
↪ schema/vidispine" type="tns:TransferListType"/>
1258 <xs:complexType name="TransferListType">
1259 <xs:sequence>
1260 <xs:element name="transfer" type="tns:TransferType" minOccurs="0"
↪ maxOccurs="unbounded"/>
1261 </xs:sequence>
1262 </xs:complexType>

```

TransferDocument

```

1264 <xs:element name="TransferDocument" xmlns:tns="http://xml.vidispine.com/schema/
↪ vidispine" type="tns:TransferType"/>
1265 <xs:complexType name="TransferType">
1266 <xs:sequence>
1267 <xs:element name="name" type="xs:string" minOccurs="0" maxOccurs="1"/>
1268 <xs:element name="state" type="xs:string" minOccurs="0" maxOccurs="1"/>
1269 <xs:element name="priority" type="xs:string" minOccurs="0" maxOccurs="1"/>
1270 <xs:element name="transferred" type="xs:long" minOccurs="0" maxOccurs="1"/
↪ >
1271 <xs:element name="fileId" type="tns:SiteIdType" minOccurs="0" maxOccurs="1"
↪ "/>
1272 </xs:sequence>
1273 </xs:complexType>

```

TransferLogListDocument

```

1275 <xs:element name="TransferLogListDocument" xmlns:tns="http://xml.vidispine.com/
↪ schema/vidispine" type="tns:TransferLogListType"/>
1276 <xs:complexType name="TransferLogListType">
1277 <xs:sequence>
1278 <xs:element name="count" type="xs:long" minOccurs="0" maxOccurs="1"/>
1279 <xs:element name="transferLogEntry" type="tns:TransferLogEntryType"
↪ minOccurs="0" maxOccurs="unbounded"/>
1280 </xs:sequence>
1281 </xs:complexType>
1282
1283 <xs:complexType name="TransferLogEntryType">
1284 <xs:sequence>
1285 <xs:element name="id" type="xs:long" minOccurs="0" maxOccurs="1"/>
1286 <xs:element name="referredId" type="xs:long" minOccurs="0" maxOccurs="1"/>
1287 <xs:element name="timestamp" type="xs:dateTime" minOccurs="0" maxOccurs="1"
↪ "/>
1288 <xs:element name="method" type="xs:string" minOccurs="0" maxOccurs="1"/>
1289 <xs:element name="sourceUri" type="xs:anyURI" minOccurs="0" maxOccurs="1"/
↪ >
1290 <xs:element name="destinationUri" type="xs:anyURI" minOccurs="0"
↪ maxOccurs="1"/>
1291 <xs:element name="sourceStorage" type="tns:SiteIdType" minOccurs="0"
↪ maxOccurs="1"/>

```

```

1292     <xs:element name="destinationStorage" type="tns:SiteIdType" minOccurs="0"
↳maxOccurs="1"/>
1293     <xs:element name="sourceFile" type="tns:SiteIdType" minOccurs="0"
↳maxOccurs="1"/>
1294     <xs:element name="destinationFile" type="tns:SiteIdType" minOccurs="0"
↳maxOccurs="1"/>
1295     <xs:element name="sourceItem" type="tns:SiteIdType" minOccurs="0"
↳maxOccurs="1"/>
1296     <xs:element name="destinationItem" type="tns:SiteIdType" minOccurs="0"
↳maxOccurs="1"/>
1297     <xs:element name="sourceShape" type="tns:SiteIdType" minOccurs="0"
↳maxOccurs="1"/>
1298     <xs:element name="destinationShape" type="tns:SiteIdType" minOccurs="0"
↳maxOccurs="1"/>
1299     <xs:element name="job" type="tns:SiteIdType" minOccurs="0" maxOccurs="1"/>
1300     <xs:element name="status" type="xs:string" minOccurs="0" maxOccurs="1"/>
1301   </xs:sequence>
1302 </xs:complexType>
1303
1304 <xs:complexType name="FastStartSettingType">
1305   <xs:sequence>
1306     <xs:element name="requireFastStart" type="xs:boolean" minOccurs="0" />
1307     <xs:element name="analyzeDuration" type="xs:boolean" minOccurs="0" />
1308     <xs:element name="fastStartDuration" minOccurs="0">
1309       <xs:complexType>
1310         <xs:complexContent>
1311           <xs:extension base="tns:TimeCodeType">
1312             <xs:attribute name="override" type="xs:boolean" use=
↳"required"/>
1313           </xs:extension>
1314         </xs:complexContent>
1315       </xs:complexType>
1316     </xs:element>
1317   </xs:sequence>
1318 </xs:complexType>

```

TranscodePresetListDocument

```

1320 <xs:element name="TranscodePresetListDocument" xmlns:tns="http://xml.vidispine.
↳com/schema/vidispine" type="tns:TranscodePresetListType"/>
1321 <xs:complexType name="TranscodePresetListType">
1322   <xs:sequence>
1323     <xs:element name="preset" type="tns:TranscodePresetType" minOccurs="0"
↳maxOccurs="unbounded"/>
1324   </xs:sequence>
1325 </xs:complexType>

```

TranscodePresetDocument

```

1327 <xs:element name="TranscodePresetDocument" xmlns:tns="http://xml.vidispine.com/
↳schema/vidispine" type="tns:TranscodePresetType"/>
1328 <xs:complexType name="TranscodePresetType">
1329   <xs:sequence>
1330     <xs:element name="description" type="xs:string" minOccurs="0"/>
1331     <xs:element name="name" type="xs:string" minOccurs="0"/>
1332     <xs:element name="format" type="xs:string" minOccurs="0" maxOccurs="1"/>
1333     <xs:element name="audio" type="tns:AudioTranscodePresetType" minOccurs="0
↳" maxOccurs="1"/>

```

```

1334     <xs:element name="audioTrack" type="tns:AudioTrackTranscodePresetType"
↳minOccurs="0" maxOccurs="unbounded"/>
1335     <xs:element name="video" type="tns:VideoTranscodePresetType" minOccurs="0
↳" maxOccurs="1"/>
1336     <xs:element name="startTimecode" type="xs:string" minOccurs="0" maxOccurs=
↳"1"/>
1337     <xs:element name="fastStartSetting" type="tns:FastStartSettingType"
↳minOccurs="0" maxOccurs="1"/>
1338     <xs:element name="thumbnailResolution" type="tns:ResolutionType"
↳minOccurs="0" maxOccurs="1"/>
1339     <xs:element name="thumbnailBackground" type="xs:string" minOccurs="0"
↳maxOccurs="1"/>
1340     <xs:element name="thumbnailPeriod" type="tns:TimeCodeType" minOccurs="0"
↳maxOccurs="1"/>
1341     <xs:element name="thumbnailPlugin" type="xs:string" minOccurs="0"
↳maxOccurs="1"/>
1342     <xs:element name="posterResolution" type="tns:ResolutionType" minOccurs="0
↳" maxOccurs="1"/>
1343     <xs:element name="posterBackground" type="xs:string" minOccurs="0"
↳maxOccurs="1"/>
1344     <xs:element name="faceDetect" type="xs:boolean" minOccurs="0" maxOccurs="1
↳"/>
1345     <xs:element name="metadata" type="tns:SimpleMetadataType" minOccurs="0"
↳maxOccurs="1" />
1346     <xs:element name="preserveEDL" type="xs:boolean" minOccurs="0" maxOccurs=
↳"1"/>
1347     <xs:element name="addClipName" type="xs:boolean" minOccurs="0" maxOccurs=
↳"1"/>
1348     <xs:element name="overlay" minOccurs="0" maxOccurs="unbounded" type="tns:
↳OverlayType"/>
1349     <xs:element name="textOverlay" minOccurs="0" maxOccurs="unbounded" type=
↳"tns:TextOverlayType"/>
1350     <xs:element name="preferredSourceTag" minOccurs="0" maxOccurs="1" type=
↳"xs:string"/>
1351     <xs:element name="script" type="xs:string" minOccurs="0"/>
1352     <xs:element name="shapeMetadata" type="tns:KeyValuePairType" minOccurs="0
↳" maxOccurs="unbounded"/>
1353     <!-- Controls how the maximum time period that each chunk of samples is
↳going to be, only used for output of QuickTime files (MOV/MP4) -->
1354     <xs:element name="maxChunkDuration" type="tns:TimeCodeType" minOccurs="0"
↳maxOccurs="1"/>
1355     <xs:element name="demuxerSetting" type="tns:KeyValuePairType" minOccurs="0
↳" maxOccurs="unbounded"/>
1356     <xs:element name="muxerSetting" type="tns:KeyValuePairType" minOccurs="0"
↳maxOccurs="unbounded"/>
1357     <xs:element name="sequenceOutput" minOccurs="0" maxOccurs="1">
1358         <xs:complexType>
1359             <xs:sequence>
1360                 <xs:element name="start" type="xs:int" minOccurs="0"
↳maxOccurs="1"/>
1361                 <xs:element name="width" type="xs:int" minOccurs="0"
↳maxOccurs="1"/>
1362             </xs:sequence>
1363         </xs:complexType>
1364     </xs:element>
1365     <xs:element name="mediaconvert" minOccurs="0" maxOccurs="1">
1366         <xs:complexType>
1367             <xs:sequence>

```

```

1368         <xs:element name="inputSetting" type="xs:string" minOccurs="0
↔" maxOccurs="1"/>
1369         <xs:element name="outputSetting" type="xs:string" minOccurs="0
↔" maxOccurs="unbounded"/>
1370         <xs:element name="other" type="xs:string" minOccurs="0"
↔maxOccurs="unbounded"/>
1371         </xs:sequence>
1372     </xs:complexType>
1373 </xs:element>
1374 </xs:sequence>
1375 </xs:complexType>
1376
1377 <xs:complexType name="AudioTranscodePresetType">
1378     <xs:sequence>
1379         <xs:element name="codec" minOccurs="0" maxOccurs="1" type="xs:string"/>
1380         <xs:element name="bitrate" minOccurs="0" maxOccurs="1" type="xs:int"/>
1381         <xs:element name="framerate" minOccurs="0" maxOccurs="1" type="tns:
↔TimeBaseType"/>
1382         <xs:element name="channel" minOccurs="0" maxOccurs="unbounded" type="xs:
↔int"/>
1383         <xs:element name="stream" minOccurs="0" maxOccurs="unbounded" type="xs:int
↔"/>
1384         <xs:element name="preset" type="xs:string" minOccurs="0" maxOccurs=
↔"unbounded" />
1385         <xs:element name="noAudio" type="xs:boolean" minOccurs="0" maxOccurs="1"/>
1386         <xs:element name="setting" type="tns:KeyValuePairType" minOccurs="0"
↔maxOccurs="unbounded"/>
1387         <xs:element name="mix" type="tns:AudioTranscodePresetMixType" minOccurs="0
↔" maxOccurs="unbounded"/>
1388         <xs:element name="otif" type="tns:OtifPresetType" minOccurs="0" maxOccurs=
↔"1"/>
1389         <xs:element name="monoFile" type="xs:boolean" minOccurs="0" maxOccurs="1"/
↔>
1390         <xs:element name="allChannel" type="xs:boolean" minOccurs="0" maxOccurs="1
↔"/>
1391         <xs:element name="output" type="tns:AudioOutputType" minOccurs="0"
↔maxOccurs="unbounded"/>
1392     </xs:sequence>
1393 </xs:complexType>
1394
1395 <xs:complexType name="AudioOutputType">
1396     <xs:sequence>
1397         <xs:element name="format" type="xs:string" minOccurs="0" maxOccurs="1"/>
1398         <xs:element name="codec" minOccurs="0" maxOccurs="1" type="xs:string"/>
1399         <xs:element name="bitrate" minOccurs="0" maxOccurs="1" type="xs:int"/>
1400         <xs:element name="framerate" minOccurs="0" maxOccurs="1" type="tns:
↔TimeBaseType"/>
1401         <xs:element name="channel" minOccurs="0" maxOccurs="unbounded" type="xs:
↔int"/>
1402         <xs:element name="stream" minOccurs="0" maxOccurs="unbounded" type="xs:int
↔"/>
1403     </xs:sequence>
1404 </xs:complexType>
1405
1406 <xs:complexType name="AudioTranscodePresetMixType">
1407     <xs:sequence>
1408         <xs:element name="input" type="tns:AudioTranscodePresetChannelMixType"
↔minOccurs="0" maxOccurs="unbounded"/>

```

```

1409     </xs:sequence>
1410     <xs:attribute name="silence" type="xs:boolean"/>
1411 </xs:complexType>
1412
1413 <xs:complexType name="AudioTranscodePresetChannelMixType">
1414   <xs:attribute name="id" type="xs:int" use="optional"/>
1415   <xs:attribute name="stream" type="xs:unsignedShort" use="optional"/>
1416   <xs:attribute name="channel" type="xs:unsignedShort" use="required"/>
1417   <xs:attribute name="gain" type="xs:float" use="optional"/>
1418 </xs:complexType>
1419
1420 <xs:complexType name="AudioTrackTranscodePresetType">
1421   <xs:sequence>
1422     <xs:element name="codec" minOccurs="0" maxOccurs="1" type="xs:string"/>
1423     <xs:element name="bitrate" minOccurs="0" maxOccurs="1" type="xs:int"/>
1424     <xs:element name="framerate" minOccurs="0" maxOccurs="1" type="tns:
↪TimeBaseType"/>
1425     <xs:element name="channel" minOccurs="0" maxOccurs="unbounded" type="xs:
↪int"/>
1426     <xs:element name="preset" type="xs:string" minOccurs="0" maxOccurs=
↪"unbounded" />
1427     <xs:element name="setting" type="tns:KeyValuePairType" minOccurs="0"
↪maxOccurs="unbounded"/>
1428     <xs:element name="mix" type="tns:AudioTranscodePresetMixType" minOccurs="0"
↪maxOccurs="unbounded"/>
1429   </xs:sequence>
1430 </xs:complexType>
1431
1432 <xs:complexType name="VideoTranscodePresetType">
1433   <xs:sequence>
1434     <xs:element name="scaling" minOccurs="0" maxOccurs="1" type="tns:
↪ScalingType"/>
1435     <xs:element name="codec" minOccurs="0" maxOccurs="1" type="xs:string"/>
1436     <xs:element name="bitrate" minOccurs="0" maxOccurs="1" type="xs:int"/>
1437     <xs:element name="framerate" minOccurs="0" maxOccurs="1" type="tns:
↪TimeBaseType"/>
1438     <xs:element name="resolution" minOccurs="0" maxOccurs="1" type="tns:
↪ResolutionType"/>
1439
1440     <xs:element name="displayWidth" type="tns:RationalType" minOccurs="0"/>
1441     <xs:element name="displayHeight" type="tns:RationalType" minOccurs="0"/>
1442     <xs:element name="displayXOffset" type="tns:RationalType" minOccurs="0"/>
1443     <xs:element name="displayYOffset" type="tns:RationalType" minOccurs="0"/>
1444     <xs:element name="containerSAR" type="tns:AspectRatioType" minOccurs="0"/>
1445
1446     <xs:element name="forceCFR" minOccurs="0" maxOccurs="1" type="xs:boolean"/>
↪>
1447     <xs:element name="gopSize" type="xs:int" minOccurs="0"/>
1448     <xs:element name="maxBFrames" type="xs:int" minOccurs="0"/>
1449     <xs:element name="pixelFormat" type="xs:string" minOccurs="0" />
1450     <xs:element name="preset" type="xs:string" minOccurs="0" maxOccurs=
↪"unbounded" />
1451     <xs:element name="profile" type="xs:string" minOccurs="0" maxOccurs=
↪"unbounded" />
1452     <xs:element name="noVideo" type="xs:boolean" minOccurs="0" maxOccurs="1"/>
1453     <xs:element name="stripParameterSets" type="xs:boolean" minOccurs="0"/>
1454     <xs:element name="addParameterSets" type="xs:boolean" minOccurs="0"/>
1455     <xs:element name="parameterSets" type="xs:hexBinary" minOccurs="0"/>

```

```

1456     <xs:element name="setting" type="tns:KeyValuePairType" minOccurs="0"
↪maxOccurs="unbounded"/>
1457     <xs:element name="burnTimecode" type="xs:boolean" minOccurs="0"/>
1458     <xs:element name="burnSubtitles" type="xs:boolean" minOccurs="0"/>
1459     <xs:element name="imageQuality" type="xs:integer" minOccurs="0"/>
1460     <xs:element name="otif" type="tns:OtifPresetType" minOccurs="0" maxOccurs=
↪"1"/>
1461   </xs:sequence>
1462 </xs:complexType>
1463
1464 <xs:simpleType name="OtifPluginType">
1465   <xs:restriction base="xs:string">
1466     <xs:enumeration value="audio"/>
1467     <xs:enumeration value="video"/>
1468   </xs:restriction>
1469 </xs:simpleType>

```

OtifPresetDocument

```

1471 <xs:element name="OtifPresetDocument" xmlns:tns="http://xml.vidispine.com/schema/
↪vidispine" type="tns:OtifPresetType"/>
1472 <xs:complexType name="OtifPresetType">
1473   <xs:sequence>
1474     <xs:element name="uuid" type="xs:string" minOccurs="1" maxOccurs="1"/>
1475     <xs:element name="versionMajor" type="xs:int" minOccurs="1" maxOccurs="1"/
↪>
1476     <xs:element name="versionMinor" type="xs:int" minOccurs="1" maxOccurs="1"/
↪>
1477     <xs:element name="versionPatch" type="xs:int" minOccurs="1" maxOccurs="1"/
↪>
1478     <xs:element name="configuration" type="tns:KeyValuePairType" minOccurs="0
↪" maxOccurs="unbounded"/>
1479     <xs:element name="resource" type="tns:NameURIPairType" minOccurs="0"
↪maxOccurs="unbounded"/>
1480   </xs:sequence>
1481 </xs:complexType>

```

OtifConfigurationDocument

```

1483 <xs:element name="OtifConfigurationDocument" xmlns:tns="http://xml.vidispine.com/
↪schema/vidispine" type="tns:OtifConfigurationType"/>
1484 <xs:complexType name="OtifConfigurationType">
1485   <xs:sequence>
1486     <xs:element name="id" type="tns:SiteIdType" minOccurs="0" maxOccurs="1"/>
1487     <xs:element name="title" type="xs:string" minOccurs="0" maxOccurs="1"/>
1488     <xs:element name="description" type="xs:string" minOccurs="0" maxOccurs="1
↪"/>
1489     <xs:element name="preset" type="tns:OtifPresetType" minOccurs="0"
↪maxOccurs="1"/>
1490     <xs:element name="instance" type="xs:string" minOccurs="0" maxOccurs="1"/>
1491   </xs:sequence>
1492 </xs:complexType>

```

OtifConfigurationListDocument

```

1494 <xs:element name="OtifConfigurationListDocument" xmlns:tns="http://xml.vidispine.
↪com/schema/vidispine" type="tns:OtifConfigurationListType"/>
1495 <xs:complexType name="OtifConfigurationListType">

```

```

1496     <xs:sequence>
1497         <xs:element name="hits" type="xs:integer" minOccurs="0" maxOccurs="1"/>
1498         <xs:element name="configuration" type="tns:OtifConfigurationType"
↳maxOccurs="unbounded" minOccurs="0"></xs:element>
1499     </xs:sequence>
1500 </xs:complexType>

```

OtifJobConfigurationDocument

```

1502     <xs:element name="OtifJobConfigurationDocument" xmlns:tns="http://xml.vidispine.
↳com/schema/vidispine" type="tns:OtifJobConfigurationType"/>
1503     <xs:complexType name="OtifJobConfigurationType">
1504         <xs:sequence>
1505             <xs:element name="id" type="tns:SiteIdType" minOccurs="0"/>
1506             <xs:element name="title" type="xs:string"/>
1507             <xs:element name="configurations" type="tns:OtifConfigurationListType"/>
1508             <xs:element name="vxa" type="tns:VXAType" minOccurs="1" maxOccurs=
↳"unbounded"/>
1509         </xs:sequence>
1510     </xs:complexType>

```

OtifJobConfigurationListDocument

```

1512     <xs:element name="OtifJobConfigurationListDocument" xmlns:tns="http://xml.
↳vidispine.com/schema/vidispine" type="tns:OtifJobConfigurationListType"/>
1513     <xs:complexType name="OtifJobConfigurationListType">
1514         <xs:sequence>
1515             <xs:element name="hits" type="xs:integer" minOccurs="0" maxOccurs="1" />
1516             <xs:element name="configuration" type="tns:OtifJobConfigurationType"
↳minOccurs="0" maxOccurs="unbounded" />
1517         </xs:sequence>
1518     </xs:complexType>

```

OtifResourceDocument

```

1520     <xs:element name="OtifResourceDocument" xmlns:tns="http://xml.vidispine.com/
↳schema/vidispine" type="tns:OtifResourceType"/>
1521     <xs:complexType name="OtifResourceType">
1522         <xs:sequence>
1523             <xs:element name="name" type="xs:string" minOccurs="1" maxOccurs="1"/>
1524             <xs:element name="size" type="xs:int" minOccurs="1" maxOccurs="1"/>
1525         </xs:sequence>
1526     </xs:complexType>

```

OtifResourceListDocument

```

1528     <xs:element name="OtifResourceListDocument" xmlns:tns="http://xml.vidispine.com/
↳schema/vidispine" type="tns:OtifResourceListType"/>
1529     <xs:complexType name="OtifResourceListType">
1530         <xs:sequence>
1531             <xs:element name="hits" type="xs:integer" minOccurs="0" maxOccurs="1"/>
1532             <xs:element name="resource" type="tns:OtifResourceType" maxOccurs=
↳"unbounded" minOccurs="0"></xs:element>
1533         </xs:sequence>
1534     </xs:complexType>

```

StorageRulesDocument


```

1536 <xs:element name="StorageRulesDocument" xmlns:tns="http://xml.vidispine.com/
↪schema/vidispine" type="tns:StorageRulesType"/>

```

StorageRuleDocument

```

1537 <xs:element name="StorageRuleDocument" xmlns:tns="http://xml.vidispine.com/schema/
↪vidispine" type="tns:StorageRuleType"/>
1538
1539 <xs:complexType name="StorageRulesType">
1540 <xs:sequence>
1541 <xs:element name="default" type="tns:StorageRuleType" minOccurs="0"
↪maxOccurs="1"/>
1542 <xs:element name="tag" minOccurs="0" maxOccurs="unbounded" type="tns:
↪StorageRuleType"/>
1543 </xs:sequence>
1544 </xs:complexType>
1545
1546 <xs:simpleType name="StorageCriteriaType">
1547 <xs:restriction base="xs:string">
1548 <xs:enumeration value="bandwidth"/>
1549 <xs:enumeration value="capacity"/>
1550 </xs:restriction>
1551 </xs:simpleType>
1552
1553 <xs:complexType name="StorageRuleType">
1554 <xs:sequence>
1555 <xs:element name="storageCount" type="xs:integer" minOccurs="0" maxOccurs=
↪"1"/>
1556 <xs:element name="priority" minOccurs="0" maxOccurs="unbounded">
1557 <xs:complexType>
1558 <xs:simpleContent>
1559 <xs:extension base="tns:StorageCriteriaType">
1560 <xs:attribute name="level" type="xs:integer" use="required
↪"/>
1561 </xs:extension>
1562 </xs:simpleContent>
1563 </xs:complexType>
1564 </xs:element>
1565 <xs:element name="inherited" type="xs:boolean" minOccurs="0" maxOccurs="1
↪"/>
1566 <xs:element name="storage" type="tns:SiteIdType" minOccurs="0" maxOccurs=
↪"unbounded"/>
1567 <xs:element name="group" type="xs:string" minOccurs="0" maxOccurs=
↪"unbounded"/>
1568 <xs:element name="not" minOccurs="0" maxOccurs="1">
1569 <xs:complexType>
1570 <xs:sequence>
1571 <xs:element name="storage" type="tns:SiteIdType" minOccurs="0
↪" maxOccurs="unbounded"/>
1572 <xs:element name="group" type="xs:string" minOccurs="0"
↪maxOccurs="unbounded"/>
1573 <xs:element name="any" type="tns:EmptyString" minOccurs="0"
↪maxOccurs="1"/>
1574 </xs:sequence>
1575 </xs:complexType>
1576 </xs:element>
1577 <xs:element name="pool" minOccurs="0" maxOccurs="1">
1578 <xs:complexType>

```

```

1579         <xs:sequence>
1580             <xs:element name="storage" type="tns:SiteIdType" minOccurs="0
↪" maxOccurs="unbounded"/>
1581             <xs:element name="group" type="xs:string" minOccurs="0"
↪maxOccurs="unbounded"/>
1582         </xs:sequence>
1583     </xs:complexType>
1584 </xs:element>
1585 <xs:element name="appliesTo" minOccurs="0" maxOccurs="1">
1586     <xs:complexType>
1587         <xs:sequence>
1588             <xs:element name="id" type="xs:string" minOccurs="0"
↪
↪maxOccurs="1"/>
1589             <xs:element name="type" type="xs:string" minOccurs="0"
↪
↪maxOccurs="1"/>
1590         </xs:sequence>
1591     </xs:complexType>
1592 </xs:element>
1593 <xs:element name="precedence" type="xs:string" minOccurs="0" maxOccurs="1
↪"/>
1594 </xs:sequence>
1595 <xs:attribute name="id" type="xs:string" use="optional"/>
1596 </xs:complexType>
1597
1598 <xs:simpleType name="EmptyString">
1599     <xs:restriction base="xs:string">
1600         <xs:length value="0"/>
1601     </xs:restriction>
1602 </xs:simpleType>
1603
1604 <xs:simpleType name="IntegerOrEmpty">
1605     <!--xs:union memberTypes="xs:int tns:EmptyString"/-->
1606     <xs:restriction base="xs:string">
1607         <xs:pattern value="[0-9]{0,40}"/>
1608     </xs:restriction>
1609 </xs:simpleType>
1610
1611 <!-- START GENERIC ITEM TYPES -->

```

ItemDocument

```

1613     <xs:element name="ItemDocument" xmlns:tns="http://xml.vidispine.com/schema/
↪vidispine" type="tns:ItemType"/>
1614     <xs:complexType name="ItemType">
1615         <xs:sequence>
1616             <xs:element name="metadata" type="tns:MetadataType" minOccurs="0"
↪
↪maxOccurs="1"/>
1617             <xs:element name="thumbnails" type="tns:URIListType" minOccurs="0"
↪
↪maxOccurs="1"/>
1618             <xs:element name="posters" type="tns:URIListType" minOccurs="0" maxOccurs=
↪
↪"1"/>
1619             <xs:element name="files" type="tns:URIListType" minOccurs="0" maxOccurs="1
↪
↪"/>
1620             <xs:element name="terse" type="tns:GenericType" minOccurs="0" maxOccurs="1
↪
↪"/>
1621             <xs:element name="shape" type="tns:ShapeType" minOccurs="0" maxOccurs=
↪
↪"unbounded"/>
1622             <xs:element name="merged-access" type="tns:AccessControlMergedType"
↪
↪minOccurs="0" maxOccurs="1"/>

```

```

1623     <xs:element name="access" minOccurs="0" maxOccurs="unbounded">
1624       <xs:complexType>
1625         <xs:sequence>
1626           <xs:element name="type" type="xs:string" minOccurs="1"
↳maxOccurs="1"/>
1627           <xs:element name="permission" type="xs:string" minOccurs="1"
↳maxOccurs="1"/>
1628         </xs:sequence>
1629       </xs:complexType>
1630     </xs:element>
1631     <xs:element name="timespan" maxOccurs="unbounded" minOccurs="0">
1632       <xs:complexType>
1633         <xs:sequence>
1634           <xs:element name="field" minOccurs="0" maxOccurs="unbounded">
1635             <xs:complexType>
1636               <xs:sequence>
1637                 <xs:element name="name" type="xs:string"
↳minOccurs="1" maxOccurs="1"/>
1638                 <xs:element name="value" type="xs:string"
↳minOccurs="0" maxOccurs="unbounded"/>
1639               </xs:sequence>
1640             </xs:complexType>
1641           </xs:element>
1642         </xs:sequence>
1643         <xs:attribute name="start" type="xs:string" use="required"/>
1644         <xs:attribute name="end" type="xs:string" use="required"/>
1645       </xs:complexType>
1646     </xs:element>
1647     <xs:element name="externalId" type="tns:ExternalIdentifierType" minOccurs=
↳"0" maxOccurs="unbounded"/>
1648   </xs:sequence>
1649   <xs:attribute name="id" type="tns:SiteIdType" use="optional"/>
1650   <xs:attribute name="start" type="xs:string" use="optional"/>
1651   <xs:attribute name="end" type="xs:string" use="optional"/>
1652   <xs:attribute name="base" type="xs:string" use="optional"/>
1653 </xs:complexType>
1654
1655 <!--<xs:element name="TerseDocument" xmlns:tns="http://xml.vidispine.com/schema/
↳vidispine" type="tns:GenericType"/>
1656 <xs:complexType name="TestType">
1657   <xs:sequence>
1658     <xs:element name="terse" type="vididyn:TerseType" minOccurs="0" maxOccurs=
↳"1"/>
1659   </xs:sequence>
1660 </xs:complexType-->

```

TerseMetadataDocument

```

1662 <xs:element name="TerseMetadataDocument" xmlns:tns="http://xml.vidispine.com/
↳schema/vidispine" type="tns:GenericType"/>

```

TerseMetadataListDocument

```

1664 <xs:element name="TerseMetadataListDocument" xmlns:tns="http://xml.vidispine.com/
↳schema/vidispine" type="tns:TerseMetadataListType"/>
1665 <xs:complexType name="TerseMetadataListType">
1666   <xs:sequence>
1667     <xs:element name="item" minOccurs="0" maxOccurs="unbounded">

```

```

1668         <xs:complexType>
1669             <xs:complexContent>
1670                 <xs:extension base="tns:GenericType">
1671                     <xs:attribute name="id" type="tns:SiteIdType" use=
↪ "required" />
1672                 </xs:extension>
1673             </xs:complexContent>
1674         </xs:complexType>
1675     </xs:element>
1676 </xs:sequence>
1677 </xs:complexType>
1678
1679 <xs:complexType name="GenericType">
1680     <xs:sequence>
1681         <xs:any namespace="##any" minOccurs="0" maxOccurs="unbounded"
↪ processContents="skip" />
1682     </xs:sequence>
1683 </xs:complexType>
1684
1685 <!-- END GENERIC ITEM TYPES -->
1686
1687 <!-- START ACCESS CONTROL TYPES -->

```

AccessControlListDocument

```

1688     <xs:element name="AccessControlListDocument" xmlns:tns="http://xml.vidispine.com/
↪ schema/vidispine" type="tns:AccessControlListType" />
1689     <xs:complexType name="AccessControlListType">
1690         <xs:sequence>
1691             <xs:element name="access" type="tns:AccessControlType" minOccurs="0"
↪ maxOccurs="unbounded" />
1692         </xs:sequence>
1693     </xs:complexType>

```

AccessControlDocument

```

1695     <xs:element name="AccessControlDocument" xmlns:tns="http://xml.vidispine.com/
↪ schema/vidispine" type="tns:AccessControlType" />
1696     <xs:complexType name="AccessControlType">
1697         <xs:sequence>
1698             <xs:element name="loc" type="xs:anyURI" minOccurs="0" />
1699             <xs:element name="grantor" type="xs:string" minOccurs="0" maxOccurs="1" />
1700             <xs:element name="recursive" type="xs:boolean" minOccurs="0" maxOccurs="1"
↪ />
1701             <xs:element name="appliesTo" minOccurs="0" maxOccurs="unbounded">
1702                 <xs:simpleType>
1703                     <xs:restriction base="xs:string">
1704                         <xs:enumeration value="all" />
1705                         <xs:enumeration value="self" />
1706                         <xs:enumeration value="collection" />
1707                         <xs:enumeration value="library" />
1708                         <xs:enumeration value="item" />
1709                     </xs:restriction>
1710                 </xs:simpleType>
1711             </xs:element>
1712             <xs:element name="permission" type="xs:string" minOccurs="1" maxOccurs="1"
↪ />
1713             <xs:element name="priority" type="xs:int" minOccurs="0" maxOccurs="1" />

```

```

1714     <xs:element name="operation" minOccurs="0" maxOccurs="1">
1715         <xs:complexType>
1716             <xs:choice>
1717                 <xs:element name="metadata" type="tns:
↪AccessControlMetadataType" minOccurs="1" maxOccurs="1"/>
1718                 <xs:element name="shape" type="tns:AccessControlShapeType"
↪minOccurs="1" maxOccurs="1"/>
1719                 <xs:element name="uri" type="tns:AccessControlUriType"
↪minOccurs="1" maxOccurs="1"/>
1720             </xs:choice>
1721         </xs:complexType>
1722     </xs:element>
1723     <xs:choice>
1724         <xs:element name="group" type="xs:string" minOccurs="1" maxOccurs="1"/
↪>
1725         <xs:element name="user" type="xs:string" minOccurs="1" maxOccurs="1"/>
1726     </xs:choice>
1727 </xs:sequence>
1728 <xs:attribute name="id" type="tns:SiteIdType"/>
1729 </xs:complexType>
1730
1731 <xs:complexType name="AccessControlUriType">
1732     <xs:sequence>
1733         <xs:element name="type" type="xs:string" minOccurs="0" maxOccurs="1"/>
1734     </xs:sequence>
1735 </xs:complexType>
1736
1737 <xs:complexType name="AccessControlShapeType">
1738     <xs:sequence>
1739         <xs:element name="tag" type="xs:string" minOccurs="0" maxOccurs="1"/>
1740     </xs:sequence>
1741 </xs:complexType>
1742
1743 <xs:complexType name="AccessControlMetadataType">
1744     <xs:sequence>
1745         <xs:element name="field" type="xs:string" minOccurs="0" maxOccurs="1"/>
1746     </xs:sequence>
1747 </xs:complexType>
1748 <!-- END ACCESS CONTROL TYPES -->

```

TaskDefinitionListDocument

```

1750     <xs:element name="TaskDefinitionListDocument" xmlns:tns="http://xml.vidispine.com/
↪schema/vidispine" type="tns:TaskDefinitionListType"/>
1751     <xs:complexType name="TaskDefinitionListType">
1752         <xs:sequence>
1753             <xs:element name="task" type="tns:TaskDefinitionType" minOccurs="0"
↪maxOccurs="unbounded"/>
1754             <xs:element name="metadata" type="tns:SimpleMetadataType" minOccurs="0"
↪maxOccurs="1"/>
1755         </xs:sequence>
1756     </xs:complexType>
1757
1758     <xs:complexType name="TaskDefinitionDependency">
1759         <xs:sequence>
1760             <xs:element name="step" type="xs:integer" minOccurs="0" maxOccurs="1"/>
1761             <xs:element name="previous" type="xs:boolean" minOccurs="0" maxOccurs="1"/
↪>

```

```

1762     <xs:element name="allPrevious" type="xs:boolean" minOccurs="0" maxOccurs=
↪ "1"/>
1763   </xs:sequence>
1764 </xs:complexType>

```

TaskDefinitionDocument

```

1768   <xs:element name="TaskDefinitionDocument" xmlns:tns="http://xml.vidispine.com/
↪ schema/vidispine" type="tns:TaskDefinitionType"/>
1769   <xs:complexType name="TaskDefinitionType">
1770     <xs:sequence>
1771       <!-- Optional -->
1772       <xs:element name="description" type="xs:string" minOccurs="0" maxOccurs="1
↪ "/>
1773       <xs:element name="extradata" type="xs:string" minOccurs="0" maxOccurs="1"/
↪ >
1774       <xs:element name="flags" type="xs:integer" minOccurs="0" maxOccurs="1"/>
1775       <!-- Required -->
1776       <xs:choice>
1777         <xs:sequence>
1778           <xs:element name="bean" type="xs:string" minOccurs="1" maxOccurs=
↪ "1"/> <!-- required if not a script step -->
1779           <xs:element name="method" type="xs:string" minOccurs="1"
↪ maxOccurs="1"/> <!-- required if not a script step -->
1780           <xs:element name="plugin" type="xs:boolean" minOccurs="0"
↪ maxOccurs="1"/> <!-- default false -->
1781         </xs:sequence>
1782         <xs:element name="script" type="xs:string" minOccurs="1" maxOccurs="1
↪ "/>
1783         <xs:element name="metadata" type="tns:SimpleMetadataType" minOccurs="0
↪ " maxOccurs="1"/>
1784       </xs:choice>
1785       <xs:element name="step" type="xs:integer" minOccurs="0" maxOccurs="1"/>
1786       <xs:element name="dependency" type="tns:TaskDefinitionDependency"
↪ minOccurs="0" maxOccurs="1"/>
1787       <xs:element name="parallelDependency" type="tns:TaskDefinitionDependency"
↪ minOccurs="0" maxOccurs="1"/>
1788       <xs:element name="jobType" type="xs:string" minOccurs="0" maxOccurs="1"/>
1789       <xs:element name="cleanup" type="xs:boolean" minOccurs="0" maxOccurs="1"/>
1790       <xs:element name="critical" type="xs:boolean" minOccurs="0" maxOccurs="1"/
↪ > <!-- default critical -->
1791     </xs:sequence>
1792     <xs:attribute name="id" type="xs:integer" use="optional"/>
1793   </xs:complexType>
1794
1795   <!-- START NOTIFICATION TYPES -->

```

NotificationDocument

```

1800   <xs:element name="NotificationDocument" type="tns:NotificationType" xmlns:tns=
↪ "http://xml.vidispine.com/schema/vidispine"/>
1801   <xs:complexType name="NotificationType">
1802     <xs:sequence>
1803       <xs:element name="action" minOccurs="1" maxOccurs="1"/>

```

```

1804         <xs:complexType>
1805             <xs:choice>
1806                 <xs:element name="http" type="tns:NotificationHttpActionType"/
↪>
1807                 <xs:element name="ejb" type="tns:NotificationEjbActionType"/>
1808                 <xs:element name="jms" type="tns:NotificationJmsActionType"/>
1809                 <xs:element name="javascript" type="tns:
↪NotificationJavaScriptActionType"/>
1810                 <xs:element name="sqs" type="tns:NotificationSQSActionType"/>
1811             </xs:choice>
1812         </xs:complexType>
1813     </xs:element>
1814     <xs:element name="trigger" minOccurs="1" maxOccurs="1">
1815         <xs:complexType>
1816             <xs:choice>
1817                 <xs:element name="job" type="tns:NotificationJobTriggerType"/>
1818                 <xs:element name="metadata" type="tns:
↪NotificationMetadataTriggerType"/>
1819                 <xs:element name="item" type="tns:NotificationItemTriggerType
↪"/>
1820                 <xs:element name="collection" type="tns:
↪NotificationCollectionTriggerType"/>
1821                 <xs:element name="storage" type="tns:
↪NotificationStorageTriggerType"/>
1822                 <xs:element name="file" type="tns:NotificationFileTriggerType
↪"/>
1823                 <xs:element name="group" type="tns:
↪NotificationGroupTriggerType"/>
1824                 <xs:element name="access" type="tns:
↪NotificationAccessTriggerType"/>
1825                 <xs:element name="shape" type="tns:
↪NotificationShapeTriggerType"/>
1826                 <xs:element name="quota" type="tns:
↪NotificationQuotaTriggerType"/>
1827                 <xs:element name="document" type="tns:
↪NotificationDocumentTriggerType"/>
1828                 <xs:element name="deletionLock" type="tns:
↪NotificationDeletionLockTriggerType"/>
1829             </xs:choice>
1830         </xs:complexType>
1831     </xs:element>
1832 </xs:sequence>
1833 </xs:complexType>
1834
1835 <!-- START NOTIFICATION ACTION TYPES -->
1836 <xs:complexType name="NotificationActionType">
1837     <xs:sequence>
1838         <xs:element name="extradata" type="xs:string" minOccurs="0" maxOccurs="1"/
↪>
1839         <xs:element name="retry" type="xs:integer" minOccurs="0" maxOccurs="1"/>
1840     </xs:sequence>
1841     <xs:attribute name="synchronous" type="xs:boolean" use="required"/>
1842     <xs:attribute name="group" type="xs:string" use="optional"/>
1843 </xs:complexType>
1844 <xs:complexType name="NotificationHttpActionType">
1845     <xs:complexContent>
1846         <xs:extension base="tns:NotificationActionType">
1847             <xs:sequence>

```

```

1848         <xs:element name="contentType" type="xs:string" minOccurs="0"
↳maxOccurs="1"/> <!-- application/xml, application/json, text/plain -->
1849         <xs:element name="url" type="xs:string" maxOccurs="1" minOccurs="1
↳"/>
1850         <xs:element name="method" type="xs:string" maxOccurs="1"
↳minOccurs="0"/> <!-- defaults to GET -->
1851         <xs:element name="timeout" type="xs:string" maxOccurs="1"
↳minOccurs="1"/> <!-- either seconds or "none" -->
1852         </xs:sequence>
1853     </xs:extension>
1854 </xs:complexContent>
1855 </xs:complexType>
1856 <xs:complexType name="NotificationJmsActionType">
1857     <xs:complexContent>
1858         <xs:extension base="tns:NotificationActionType">
1859             <xs:sequence>
1860                 <xs:element name="contentType" type="xs:string" minOccurs="0"
↳maxOccurs="1"/> <!-- application/xml, application/x-java-serialized-object
↳ (default) -->
1861                 <xs:element name="queueFactory" type="xs:string" maxOccurs="1"
↳minOccurs="1"/>
1862                 <xs:element name="queue" type="xs:string" maxOccurs="1" minOccurs=
↳"1"/>
1863                 <xs:element name="username" type="xs:string" maxOccurs="1"
↳minOccurs="0"/>
1864                 <xs:element name="password" type="xs:string" maxOccurs="1"
↳minOccurs="0"/>
1865             </xs:sequence>
1866         </xs:extension>
1867     </xs:complexContent>
1868 </xs:complexType>
1869 <xs:complexType name="NotificationEjbActionType">
1870     <xs:complexContent>
1871         <xs:extension base="tns:NotificationActionType">
1872             <xs:sequence>
1873                 <xs:element name="bean" type="xs:string" maxOccurs="1" minOccurs=
↳"1"/>
1874                 <xs:element name="method" type="xs:string" maxOccurs="1"
↳minOccurs="1"/>
1875                 <xs:element name="data" type="tns:KeyValuePairType" minOccurs="0"
↳maxOccurs="unbounded"/>
1876             </xs:sequence>
1877         </xs:extension>
1878     </xs:complexContent>
1879 </xs:complexType>
1880 <xs:complexType name="NotificationJavaScriptActionType">
1881     <xs:complexContent>
1882         <xs:extension base="tns:NotificationActionType">
1883             <xs:sequence>
1884                 <xs:element name="script" type="xs:string" maxOccurs="1"
↳minOccurs="1"/>
1885             </xs:sequence>
1886         </xs:extension>
1887     </xs:complexContent>
1888 </xs:complexType>
1889
1890 <xs:complexType name="NotificationSQSActionType">
1891     <xs:complexContent>

```



```

1892     <xs:extension base="tns:NotificationActionType">
1893         <xs:sequence>
1894             <xs:element name="contentType" type="xs:string" minOccurs="0"
↳maxOccurs="1"/>
1895             <xs:element name="endpoint" type="xs:string" maxOccurs="1"
↳minOccurs="1"/>
1896             <xs:element name="queue" type="xs:string" maxOccurs="1" minOccurs=
↳"1"/>
1897             <xs:element name="secret" type="xs:string" maxOccurs="1"
↳minOccurs="0"/>
1898             <xs:element name="accessKey" type="xs:string" maxOccurs="1"
↳minOccurs="0"/>
1899         </xs:sequence>
1900     </xs:extension>
1901 </xs:complexContent>
1902 </xs:complexType>
1903 <!-- END NOTIFICATION ACTION TYPES -->
1904
1905 <!-- START NOTIFICATION TRIGGER TYPES -->

```

NotificationTriggerDocument

```

1906 <xs:element name="NotificationTriggerDocument" type="tns:NotificationTriggerType"
↳xmlns:tns="http://xml.vidispine.com/schema/vidispine"/>
1907
1908 <xs:complexType name="NotificationTriggerType">
1909     <xs:sequence>
1910         <xs:element name="type" type="xs:string" minOccurs="0" maxOccurs="1"/> <!--
↳- type, e.g. job -->
1911     </xs:sequence>
1912 </xs:complexType>
1913
1914 <xs:complexType name="NotificationJobTriggerType">
1915     <xs:complexContent>
1916         <xs:extension base="tns:NotificationTriggerType">
1917             <xs:sequence>
1918                 <xs:choice>
1919                     <xs:element name="update" type="xs:string"/>
1920                     <xs:element name="stop" type="xs:string"/>
1921                     <xs:element name="finished" type="xs:string"/>
1922                     <xs:element name="fail" type="xs:string"/>
1923                     <xs:element name="create" type="xs:string"/>
1924                 </xs:choice>
1925                 <xs:element type="xs:boolean" name="placeholder" minOccurs="0"
↳maxOccurs="1"/>
1926
1927                 <xs:element name="contentFilters" minOccurs="0">
1928                     <xs:complexType>
1929                         <xs:sequence>
1930                             <xs:element name="contentFilter" minOccurs="0"
↳maxOccurs="unbounded" type="tns:jobNotificationContentFilter"/>
1931                         </xs:sequence>
1932                     </xs:complexType>
1933                 </xs:element>
1934
1935                 <xs:element name="filter" minOccurs="0">
1936                     <xs:complexType>
1937                         <xs:sequence>

```

```

1938         <xs:element name="type" type="xs:string" minOccurs="0
↪ " maxOccurs="1" />
1939         <xs:element name="step" type="xs:int" minOccurs="0"
↪ maxOccurs="1" />
1940         <xs:element name="jobdata" minOccurs="0" maxOccurs="1
↪ ">
1941             <xs:complexType>
1942                 <xs:sequence>
1943                     <xs:choice>
1944                         <xs:element name="key" type="xs:string
↪ " />
1945                         <xs:element name="key-regex" type="xs:
↪ string" />
1946                     </xs:choice>
1947                     <xs:choice>
1948                         <xs:element name="value" type="xs:
↪ string" />
1949                         <xs:element name="value-regex" type=
↪ "xs:string" />
1950                     </xs:choice>
1951                 </xs:sequence>
1952             </xs:complexType>
1953         </xs:element>
1954     </xs:sequence>
1955 </xs:complexType>
1956 </xs:element>
1957 </xs:sequence>
1958 </xs:extension>
1959 </xs:complexContent>
1960 </xs:complexType>
1961
1962 <xs:simpleType name="jobNotificationContentFilter">
1963     <xs:restriction base="xs:string">
1964         <xs:enumeration value="jobId"/>
1965         <xs:enumeration value="jobState"/>
1966         <xs:enumeration value="user"/>
1967         <xs:enumeration value="startTime"/>
1968         <xs:enumeration value="jobType"/>
1969         <xs:enumeration value="jobData"/>
1970         <xs:enumeration value="errorMessage"/>
1971         <xs:enumeration value="itemId"/>
1972         <xs:enumeration value="totalSteps"/>
1973         <xs:enumeration value="currentStep"/>
1974     </xs:restriction>
1975 </xs:simpleType>
1976
1977 <xs:complexType name="NotificationMetadataTriggerType">
1978     <xs:complexContent>
1979         <xs:extension base="tns:NotificationTriggerType">
1980             <xs:choice>
1981                 <xs:element name="modify">
1982                     <xs:complexType>
1983                         <xs:sequence>
1984                             <!-- Unset elements mean "all" -->
1985                             <xs:element name="field" type="xs:string" minOccurs="0
↪ " maxOccurs="1" />
1986                             <xs:element name="track" type="xs:string" minOccurs="0
↪ " maxOccurs="1" />

```

```

1987         <xs:element name="language" type="xs:string"
↳minOccurs="0" maxOccurs="1"/>
1988         <xs:element name="interval" type="xs:string"
↳minOccurs="0" maxOccurs="1"/>
1989         </xs:sequence>
1990     </xs:complexType>
1991 </xs:element>
1992 </xs:choice>
1993 </xs:extension>
1994 </xs:complexContent>
1995 </xs:complexType>
1996 <xs:complexType name="NotificationItemTriggerType">
1997     <xs:complexContent>
1998         <xs:extension base="tns:NotificationTriggerType">
1999             <xs:choice>
2000                 <xs:element name="modify" type="xs:string"/>
2001                 <xs:element name="delete" type="xs:string"/>
2002                 <xs:element name="create" type="xs:string"/>
2003             </xs:choice>
2004         </xs:extension>
2005     </xs:complexContent>
2006 </xs:complexType>
2007 <xs:complexType name="NotificationCollectionTriggerType">
2008     <xs:complexContent>
2009         <xs:extension base="tns:NotificationTriggerType">
2010             <xs:choice>
2011                 <xs:element name="create" type="xs:string"/>
2012                 <xs:element name="delete" type="xs:string"/>
2013                 <xs:element name="modify" type="xs:string"/>
2014                 <xs:element name="item" type="tns:NotificationItemTriggerType"/>
2015                 <xs:element name="metadata" type="tns:
↳NotificationMetadataTriggerType"/>
2016             </xs:choice>
2017         </xs:extension>
2018     </xs:complexContent>
2019 </xs:complexType>
2020 <xs:complexType name="NotificationStorageTriggerType">
2021     <xs:complexContent>
2022         <xs:extension base="tns:NotificationTriggerType">
2023             <xs:choice>
2024                 <xs:element name="delete" type="xs:string"/>
2025                 <xs:element name="create" type="xs:string"/>
2026                 <xs:element name="filename" type="xs:string"/>
2027             </xs:choice>
2028         </xs:extension>
2029     </xs:complexContent>
2030 </xs:complexType>
2031 <xs:complexType name="NotificationFileTriggerType">
2032     <xs:complexContent>
2033         <xs:extension base="tns:NotificationTriggerType">
2034             <xs:sequence>
2035                 <xs:element name="storage" type="tns:SiteIdType" minOccurs="0" />
2036             <xs:choice>
2037                 <xs:element name="new" type="xs:string" />
2038                 <xs:element name="delete" type="xs:string"/>
2039                 <xs:element name="change" type="xs:string"/>
2040                 <xs:element name="hash" type="xs:string"/>
2041                 <xs:element name="close" type="xs:string"/>

```

```

2042         </xs:choice>
2043     </xs:sequence>
2044 </xs:extension>
2045 </xs:complexContent>
2046 </xs:complexType>
2047
2048 <xs:complexType name="NotificationGroupTriggerType">
2049     <xs:complexContent>
2050         <xs:extension base="tns:NotificationTriggerType">
2051             <xs:choice>
2052                 <xs:element name="modify" type="xs:string" />
2053                 <xs:element name="create" type="xs:string"/>
2054                 <xs:element name="delete" type="xs:string"/>
2055             </xs:choice>
2056         </xs:extension>
2057     </xs:complexContent>
2058 </xs:complexType>
2059
2060 <xs:complexType name="NotificationAccessTriggerType">
2061     <xs:complexContent>
2062         <xs:extension base="tns:NotificationTriggerType">
2063             <xs:choice>
2064                 <xs:element name="create" type="xs:string"/>
2065                 <xs:element name="delete" type="xs:string"/>
2066                 <xs:element name="change" type="xs:string"/>
2067             </xs:choice>
2068         </xs:extension>
2069     </xs:complexContent>
2070 </xs:complexType>
2071
2072 <xs:complexType name="NotificationShapeTriggerType">
2073     <xs:complexContent>
2074         <xs:extension base="tns:NotificationTriggerType">
2075             <xs:choice>
2076                 <xs:element name="modify" type="xs:string"/>
2077                 <xs:element name="create" type="xs:string"/>
2078                 <xs:element name="delete" type="xs:string"/>
2079             </xs:choice>
2080         </xs:extension>
2081     </xs:complexContent>
2082 </xs:complexType>
2083
2084 <xs:complexType name="NotificationQuotaTriggerType">
2085     <xs:complexContent>
2086         <xs:extension base="tns:NotificationTriggerType">
2087             <xs:choice>
2088                 <xs:element name="create" type="xs:string"/>
2089                 <xs:element name="delete" type="xs:string"/>
2090                 <xs:element name="warning" type="xs:string"/>
2091             </xs:choice>
2092         </xs:extension>
2093     </xs:complexContent>
2094 </xs:complexType>
2095
2096 <xs:complexType name="NotificationDocumentTriggerType">
2097     <xs:complexContent>
2098         <xs:extension base="tns:NotificationMetadataTriggerType">
2099             <xs:choice>

```

```

2100         <xs:element name="create" type="xs:string"/>
2101         <xs:element name="delete" type="xs:string"/>
2102     </xs:choice>
2103 </xs:extension>
2104 </xs:complexContent>
2105 </xs:complexType>
2106
2107 <xs:complexType name="NotificationDeletionLockTriggerType">
2108     <xs:complexContent>
2109         <xs:extension base="tns:NotificationTriggerType">
2110             <xs:choice>
2111                 <xs:element name="create" type="xs:string"/>
2112                 <xs:element name="delete" type="xs:string"/>
2113                 <xs:element name="modify" type="xs:string"/>
2114                 <xs:element name="effective" type="xs:string"/>
2115                 <xs:element name="expire" type="xs:string"/>
2116             </xs:choice>
2117         </xs:extension>
2118     </xs:complexContent>
2119 </xs:complexType>
2120
2121 <!-- END NOTIFICATION TRIGGER TYPES -->
2122
2123 <!-- END NOTIFICATION TYPES -->

```

```

2125     <xs:element name="SupportedProtocolsDocument" xmlns:tns="http://xml.vidispine.
↳com/schema/vidispine" type="tns:SupportedProtocolsType" />
2126     <xs:complexType name="SupportedProtocolsType">
2127         <xs:sequence>
2128             <xs:element name="source" minOccurs="1" maxOccurs="1">
2129                 <xs:complexType>
2130                     <xs:sequence>
2131                         <xs:element name="protocol" type="xs:string" minOccurs="0"
↳maxOccurs="unbounded"/>
2132                     </xs:sequence>
2133                 </xs:complexType>
2134             </xs:element>
2135             <xs:element name="output" minOccurs="0" maxOccurs="unbounded">
2136                 <xs:complexType>
2137                     <xs:sequence>
2138                         <xs:element name="protocol" type="xs:string" minOccurs="0"
↳maxOccurs="unbounded"/>
2139                     </xs:sequence>
2140                     <xs:attribute name="shape" type="tns:SiteIdType" use="required"/>
2141                 </xs:complexType>
2142             </xs:element>
2143         </xs:sequence>
2144     </xs:complexType>

```

ItemRelationDocument

```

2146     <xs:element name="ItemRelationDocument" xmlns:tns="http://xml.vidispine.com/
↳schema/vidispine" type="tns:ItemRelationType" />
2147     <xs:complexType name="ItemRelationType">
2148         <xs:sequence>
2149             <xs:element name="id" maxOccurs="1" minOccurs="1" type="xs:string" />
2150             <xs:element name="direction" maxOccurs="1" minOccurs="1">
2151                 <xs:complexType>

```

```

2152         <xs:sequence>
2153             <xs:element name="source" type="xs:string" maxOccurs="1"
↳minOccurs="1"/>
2154             <xs:element name="target" type="xs:string" maxOccurs="1"
↳minOccurs="1"/>
2155         </xs:sequence>
2156         <xs:attribute name="type" type="xs:string" use="required"/>
2157     </xs:complexType>
2158 </xs:element>
2159 <xs:element name="value" maxOccurs="unbounded" minOccurs="0">
2160     <xs:complexType>
2161         <xs:simpleContent>
2162             <xs:extension base="xs:string">
2163                 <xs:attribute name="key" type="xs:string" use="required"/>
2164             </xs:extension>
2165         </xs:simpleContent>
2166     </xs:complexType>
2167 </xs:element>
2168 </xs:sequence>
2169 </xs:complexType>
2170
2171 <xs:simpleType name="SortingOrderType">
2172     <xs:restriction base="xs:string">
2173         <xs:enumeration value="ascending"/>
2174         <xs:enumeration value="descending"/>
2175     </xs:restriction>
2176 </xs:simpleType>

```

ItemRelationListDocument

```

2178     <xs:element name="ItemRelationListDocument" xmlns:tns="http://xml.vidispine.com/
↳schema/vidispine" type="tns:ItemRelationListType" />
2179     <xs:complexType name="ItemRelationListType">
2180         <xs:sequence>
2181             <xs:element name="relation" maxOccurs="unbounded" minOccurs="0" type="tns:
↳ItemRelationType" />
2182         </xs:sequence>
2183     </xs:complexType>
2184
2185     <xs:complexType name="ItemSearchValueType">
2186         <xs:simpleContent>
2187             <xs:extension base="xs:string">
2188                 <xs:attribute name="minimum" type="xs:boolean" use="optional"/>
2189                 <xs:attribute name="maximum" type="xs:boolean" use="optional"/>
2190                 <xs:attribute name="noescape" type="xs:boolean" use="optional"/>
2191                 <xs:attribute name="boost" type="xs:float" use="optional"/>
2192             </xs:extension>
2193         </xs:simpleContent>
2194     </xs:complexType>
2195
2196
2197     <xs:complexType name="SearchOperatorType">
2198         <xs:sequence>
2199             <xs:element name="text" type="tns:ItemSearchTextValueType" maxOccurs=
↳"unbounded" minOccurs="0"/>
2200             <xs:element name="operator" minOccurs="0" maxOccurs="unbounded" type="tns:
↳SearchOperatorType"/>
2201             <xs:element name="field" minOccurs="0" maxOccurs="unbounded" type="tns:
↳SearchFieldType"/>

```

```

2202     <xs:element name="group" minOccurs="0" maxOccurs="unbounded" type="tns:
↪SearchGroupType"/>
2203     <xs:element name="reference" type="xs:string" minOccurs="0" maxOccurs=
↪"unbounded"/>
2204     <xs:element name="item" type="tns:ItemCriterionType" minOccurs="0"
↪maxOccurs="1"/>
2205     <xs:element name="shape" type="tns:ShapeCriterionType" minOccurs="0"
↪maxOccurs="1"/>
2206     <xs:element name="file" type="tns:CriterionType" minOccurs="0" maxOccurs=
↪"1"/>
2207   </xs:sequence>
2208   <xs:attribute name="operation" type="tns:SearchOperationType" use="required"/>
2209 </xs:complexType>
2210
2211 <xs:simpleType name="SearchOperationType">
2212   <xs:restriction base="xs:string">
2213     <xs:enumeration value="AND"/>
2214     <xs:enumeration value="OR"/>
2215     <xs:enumeration value="NOT"/>
2216   </xs:restriction>
2217 </xs:simpleType>
2218
2219 <xs:complexType name="SearchFieldType">
2220   <xs:sequence>
2221     <xs:element name="name" type="xs:string" maxOccurs="1" minOccurs="1" />
2222     <xs:element name="value" type="tns:ItemSearchValueType" maxOccurs=
↪"unbounded" minOccurs="0" />
2223     <xs:element name="range" maxOccurs="unbounded" minOccurs="0">
2224       <xs:complexType>
2225         <xs:sequence>
2226           <xs:element name="value" type="tns:ItemSearchValueType"
↪maxOccurs="2" minOccurs="2" />
2227         </xs:sequence>
2228         <xs:attribute name="exclusiveMinimum" type="xs:boolean" use=
↪"optional"/>
2229         <xs:attribute name="exclusiveMaximum" type="xs:boolean" use=
↪"optional"/>
2230       </xs:complexType>
2231     </xs:element>
2232   </xs:sequence>
2233   <xs:attribute name="target" type="tns:SearchTargetType"/>
2234 </xs:complexType>
2235
2236 <xs:simpleType name="SearchTargetType">
2237   <xs:restriction base="xs:string">
2238     <xs:enumeration value="item"/>
2239     <xs:enumeration value="shape"/>
2240     <xs:enumeration value="file"/>
2241   </xs:restriction>
2242 </xs:simpleType>

```

MetadataFieldGroupSearchDocument

```

2244   <xs:element name="MetadataFieldGroupSearchDocument" xmlns:tns="http://xml.
↪vidispine.com/schema/vidispine" type="tns:ItemSearchType"/>
2245
2246   <xs:complexType name="SearchGroupType">
2247     <xs:sequence>

```

```

2248     <xs:element name="name" type="xs:string" minOccurs="0" maxOccurs="1"/>
2249     <!--<xs:element name="referenced" type="tns:MetadataReferencedType"
↪minOccurs="0" maxOccurs="1"/>-->
2250     <xs:element name="operator" type="tns:SearchOperatorType" minOccurs="0"
↪maxOccurs="1"/>
2251     <xs:choice>
2252       <xs:sequence>
2253         <xs:element name="field" type="tns:SearchFieldType" minOccurs="0"
↪maxOccurs="unbounded"/>
2254         <xs:element name="group" type="tns:SearchGroupType" minOccurs="0"
↪maxOccurs="unbounded"/>
2255       </xs:sequence>
2256     <xs:sequence>
2257       <xs:element name="reference" type="xs:string" minOccurs="0"
↪maxOccurs="1"/>
2258     </xs:sequence>
2259   </xs:choice>
2260 </xs:sequence>
2261 </xs:complexType>
2262
2263 <xs:simpleType name="SearchIntervalsType">
2264   <xs:restriction base="xs:string">
2265     <xs:enumeration value="all"/>
2266     <xs:enumeration value="generic"/>
2267     <xs:enumeration value="timed"/>
2268   </xs:restriction>
2269 </xs:simpleType>

```

AutocompleteResponseDocument

```

2271 <xs:element name="AutocompleteResponseDocument" xmlns:tns="http://xml.vidispine.
↪com/schema/vidispine" type="tns:AutocompleteResponseType"/>
2272 <xs:complexType name="AutocompleteResponseType">
2273   <xs:sequence>
2274     <xs:element name="field" minOccurs="0" maxOccurs="1" type="xs:string"/>
2275     <xs:element name="suggestion" minOccurs="0" maxOccurs="unbounded" type=
↪"xs:string"/>
2276   </xs:sequence>
2277 </xs:complexType>

```

AutocompleteRequestDocument

```

2279 <xs:element name="AutocompleteRequestDocument" xmlns:tns="http://xml.vidispine.
↪com/schema/vidispine" type="tns:AutocompleteRequestType"/>
2280 <xs:complexType name="AutocompleteRequestType">
2281   <xs:sequence>
2282     <xs:element name="text" minOccurs="1" maxOccurs="1" type="xs:string"/>
2283     <xs:element name="field" minOccurs="0" maxOccurs="1" type="xs:string"/>
2284     <xs:element name="maximumSuggestions" minOccurs="0" maxOccurs="1" type=
↪"xs:int"/>
2285   </xs:sequence>
2286 </xs:complexType>
2287
2288 <xs:complexType name="SuggestionSearchType">
2289   <xs:sequence>
2290     <xs:element name="maximumSuggestions" type="xs:int" minOccurs="0"
↪maxOccurs="1"/>
2291     <xs:element name="accuracy" type="xs:double" minOccurs="0" maxOccurs="1"/>

```



```

2292     </xs:sequence>
2293 </xs:complexType>
2294
2295 <xs:complexType name="SuggestionResultType">
2296   <xs:sequence>
2297     <xs:element name="term" minOccurs="1" maxOccurs="1" type="xs:string"/>
2298     <xs:element name="suggestion" minOccurs="0" maxOccurs="unbounded" type=
↪ "xs:string"/>
2299   </xs:sequence>
2300 </xs:complexType>

```

GroupSearchDocument

```

2302 <xs:element name="GroupSearchDocument" xmlns:tns="http://xml.vidispine.com/schema/
↪ vidispine" type="tns:SimpleSearchType" />

```

UserSearchDocument

```

2303 <xs:element name="UserSearchDocument" xmlns:tns="http://xml.vidispine.com/schema/
↪ vidispine" type="tns:SimpleSearchType" />
2304 <xs:complexType name="SimpleSearchType">
2305   <xs:sequence>
2306     <xs:element name="sort" minOccurs="0" maxOccurs="unbounded">
2307       <xs:complexType>
2308         <xs:sequence>
2309           <xs:element name="field" minOccurs="1" maxOccurs="1" type="xs:
↪ string"/>
2310           <xs:element name="order" minOccurs="1" maxOccurs="1" type=
↪ "tns:SortingOrderType"/>
2311         </xs:sequence>
2312       </xs:complexType>
2313     </xs:element>
2314     <xs:element name="field" type="tns:SimpleSearchFieldType" maxOccurs=
↪ "unbounded" minOccurs="0"/>
2315     <xs:element name="operator" type="tns:SimpleSearchOperatorType" minOccurs=
↪ "0" maxOccurs="1"/>
2316   </xs:sequence>
2317 </xs:complexType>
2318
2319 <xs:complexType name="SimpleSearchOperatorType">
2320   <xs:sequence>
2321 <!-- <xs:element name="operator" minOccurs="0" maxOccurs="unbounded" type=
↪ "tns:SimpleSearchOperatorType"/>-->
2322     <xs:element name="field" minOccurs="0" maxOccurs="unbounded" type="tns:
↪ SimpleSearchFieldType"/>
2323   </xs:sequence>
2324   <xs:attribute name="operation" type="tns:SimpleSearchOperationType" use=
↪ "required"/>
2325 </xs:complexType>
2326
2327 <xs:complexType name="SimpleSearchFieldType">
2328   <xs:sequence>
2329     <xs:element name="name" type="xs:string" maxOccurs="1" minOccurs="1" />
2330     <xs:element name="value" type="xs:string" maxOccurs="1" minOccurs="1" />
2331   </xs:sequence>
2332 </xs:complexType>
2333
2334 <xs:simpleType name="SimpleSearchOperationType">

```

```

2335     <xs:restriction base="xs:string">
2336         <xs:enumeration value="AND"/>
2337         <xs:enumeration value="OR"/>
2338     </xs:restriction>
2339 </xs:simpleType>

```

ShapeSearchDocument

```

2341     <xs:element name="ShapeSearchDocument" xmlns:tns="http://xml.vidispine.com/schema/
↳vidispine" type="tns:ShapeSearchType" />
2342     <xs:complexType name="ShapeSearchType">
2343         <xs:complexContent>
2344             <xs:extension base="tns:ItemSearchType">
2345             </xs:extension>
2346         </xs:complexContent>
2347     </xs:complexType>

```

FileSearchDocument

```

2349     <xs:element name="FileSearchDocument" xmlns:tns="http://xml.vidispine.com/schema/
↳vidispine" type="tns:FileSearchType" />
2350     <xs:complexType name="FileSearchType">
2351         <xs:complexContent>
2352             <xs:extension base="tns:ItemSearchType">
2353             </xs:extension>
2354         </xs:complexContent>
2355     </xs:complexType>
2356
2357     <xs:complexType name="ItemSearchTextValueType">
2358         <xs:simpleContent>
2359             <xs:extension base="xs:string">
2360                 <xs:attribute name="noescape" type="xs:boolean" use="optional"/>
2361                 <xs:attribute name="boost" type="xs:float" use="optional"/>
2362             </xs:extension>
2363         </xs:simpleContent>
2364     </xs:complexType>
2365
2366     <xs:complexType name="SearchFilterType">
2367         <xs:sequence>
2368             <xs:element name="operator" minOccurs="0" maxOccurs="unbounded" type="tns:
↳SearchOperatorType"/>
2369             <xs:element name="field" minOccurs="0" maxOccurs="unbounded" type="tns:
↳SearchFieldType"/>
2370             <xs:element name="group" minOccurs="0" maxOccurs="unbounded" type="tns:
↳SearchGroupType"/>
2371             <xs:element name="reference" type="xs:string" minOccurs="0" maxOccurs=
↳"unbounded"/>
2372             <xs:element name="item" type="tns:ItemCriterionType" minOccurs="0" maxOccurs=
↳"1"/>
2373             <xs:element name="shape" type="tns:ShapeCriterionType" minOccurs="0"
↳maxOccurs="1"/>
2374             <xs:element name="file" type="tns:CriterionType" minOccurs="0" maxOccurs="1"/>
2375         </xs:sequence>
2376         <xs:attribute name="operation" type="tns:SearchOperationType" default="AND"/>
2377         <xs:attribute name="name" type="xs:string"/>
2378     </xs:complexType>

```

ItemSearchDocument

```

2380 <xs:element name="ItemSearchDocument" xmlns:tns="http://xml.vidispine.com/schema/
↳vidispine" type="tns:ItemSearchType" />
2381 <xs:complexType name="ItemSearchType">
2382 <xs:sequence>
2383 <xs:element name="text" type="tns:ItemSearchTextValueType" maxOccurs=
↳"unbounded" minOccurs="0"/>
2384 <xs:element name="field" type="tns:SearchFieldType" maxOccurs="unbounded"
↳minOccurs="0"/>
2385 <xs:element name="group" type="tns:SearchGroupType" minOccurs="0"
↳maxOccurs="unbounded"/>
2386 <xs:element name="intervals" type="tns:SearchIntervalsType" minOccurs="0"
↳maxOccurs="1"/>
2387 <xs:element name="reference" type="xs:string" minOccurs="0" maxOccurs=
↳"unbounded"/>
2388 <xs:element name="operator" type="tns:SearchOperatorType" minOccurs="0
↳" maxOccurs="1"/>
2389 <xs:element name="filter" type="tns:SearchFilterType" minOccurs="0"
↳maxOccurs="unbounded"/>
2390
2391 <xs:element name="item" type="tns:ItemCriterionType" minOccurs="0"
↳maxOccurs="1"/>
2392 <xs:element name="shape" type="tns:ShapeCriterionType" minOccurs="0"
↳maxOccurs="1"/>
2393 <xs:element name="file" type="tns:CriterionType" minOccurs="0" maxOccurs=
↳"1"/>
2394
2395 <xs:element name="facetFilter" minOccurs="0" maxOccurs="unbounded">
2396 <xs:complexType>
2397 <xs:sequence>
2398 <xs:element name="field" minOccurs="1" maxOccurs="1" type="xs:string"
↳/>
2399 <xs:choice>
2400 <xs:element name="range" minOccurs="1" maxOccurs="1" type="tns:
↳FacetRangeType" />
2401 <xs:element name="value" minOccurs="1" maxOccurs="1" type="xs:string
↳" />
2402 </xs:choice>
2403 </xs:sequence>
2404 </xs:complexType>
2405 </xs:element>
2406 <xs:element name="facet" minOccurs="0" maxOccurs="unbounded">
2407 <xs:complexType>
2408 <xs:sequence>
2409 <xs:element name="field" minOccurs="1" maxOccurs="1" type="xs:
↳string" />
2410 <xs:element name="range" minOccurs="0" maxOccurs="unbounded" type=
↳"tns:FacetRangeType" />
2411 <xs:element name="exclude" minOccurs="0" maxOccurs="unbounded"
↳type="xs:string" />
2412 </xs:sequence>
2413 <xs:attribute name="count" default="false" type="xs:boolean" />
2414 <xs:attribute name="minCount" type="xs:integer" />
2415 <xs:attribute name="maxResults" type="xs:integer" />
2416 <xs:attribute name="name" type="xs:string" />
2417 </xs:complexType>
2418 </xs:element>
2419 <xs:element name="sort" minOccurs="0" maxOccurs="unbounded">
2420 <xs:complexType>

```

```

2421         <xs:sequence>
2422             <xs:element name="field" minOccurs="1" maxOccurs="1" type="xs:
↳string" />
2423             <xs:element name="order" minOccurs="1" maxOccurs="1" type="tns:
↳SortingOrderType" />
2424         </xs:sequence>
2425     </xs:complexType>
2426 </xs:element>
2427     <xs:element name="highlight" minOccurs="0" maxOccurs="1">
2428         <xs:complexType>
2429             <xs:sequence>
2430                 <xs:element name="field" type="xs:string" minOccurs="0" maxOccurs=
↳"unbounded" />
2431                 <xs:element name="matchingOnly" type="xs:boolean" minOccurs="0"
↳
↳maxOccurs="1" />
2432                 <xs:element name="prefix" type="xs:string" minOccurs="0"
↳
↳maxOccurs="1" />
2433                 <xs:element name="suffix" type="xs:string" minOccurs="0"
↳
↳maxOccurs="1" />
2434             </xs:sequence>
2435         </xs:complexType>
2436     </xs:element>
2437     <xs:element name="suggestion" minOccurs="0" maxOccurs="1" type="tns:
↳SuggestionSearchType"/>
2438     <xs:element name="autocomplete" minOccurs="0" maxOccurs="unbounded"
↳
↳type="tns:AutocompleteRequestType"/>
2439     <xs:element name="cursor" type="xs:string" maxOccurs="1" minOccurs="0">
↳</xs:element>
2440 </xs:sequence>
2441     <xs:attribute name="version" type="xs:int" use="optional"/>
2442 </xs:complexType>
2443
2444     <xs:complexType name="CriterionType">
2445         <xs:sequence>
2446             <xs:element name="field" type="tns:SearchFieldType" maxOccurs="unbounded"
↳
↳minOccurs="0"/>
2447             <xs:element name="group" type="tns:SearchGroupType" minOccurs="0" maxOccurs=
↳
↳"unbounded"/>
2448             <xs:element name="operator" type="tns:SearchOperatorType" minOccurs="0"
↳
↳maxOccurs="1"/>
2449         </xs:sequence>
2450     </xs:complexType>
2451
2452     <xs:complexType name="ItemCriterionType">
2453         <xs:complexContent>
2454             <xs:extension base="tns:CriterionType">
2455                 <xs:sequence>
2456                     <xs:element name="shape" type="tns:ShapeCriterionType" minOccurs="0"
↳
↳maxOccurs="1"/>
2457                     <xs:element name="file" type="tns:CriterionType" minOccurs="0" maxOccurs=
↳
↳"1"/>
2458                 </xs:sequence>
2459             </xs:extension>
2460         </xs:complexContent>
2461     </xs:complexType>
2462
2463     <xs:complexType name="ShapeCriterionType">
2464         <xs:complexContent>

```

```

2465     <xs:extension base="tns:CriterionType">
2466       <xs:sequence>
2467         <xs:element name="file" type="tns:CriterionType" minOccurs="0" maxOccurs=
↪ "1" />
2468       </xs:sequence>
2469     </xs:extension>
2470   </xs:complexContent>
2471 </xs:complexType>

```

ItemListDocument

```

2473   <xs:element name="ItemListDocument" xmlns:tns="http://xml.vidispine.com/schema/
↪ vidispine" type="tns:ItemListType" />
2474   <xs:complexType name="ItemListType">
2475     <xs:sequence>
2476       <xs:element name="hits" type="xs:integer" minOccurs="0" maxOccurs="1" />
2477       <xs:element name="library" type="xs:string" minOccurs="0" maxOccurs="1" />
2478       <xs:element name="item" minOccurs="0" maxOccurs="unbounded" type="tns:
↪ ItemType" />
2479       <xs:element name="facet" minOccurs="0" maxOccurs="unbounded" type="tns:
↪ FacetType" />
2480       <xs:element name="suggestion" minOccurs="0" maxOccurs="unbounded" type=
↪ "tns:SuggestionResultType" />
2481       <xs:element name="autocomplete" minOccurs="0" maxOccurs="unbounded" type=
↪ "tns:AutocompleteResponseType" />
2482       <xs:element name="nextCursor" type="xs:string" maxOccurs="1" minOccurs="0
↪ " /></xs:element>
2483     </xs:sequence>
2484   </xs:complexType>
2485
2486   <xs:element name="ShapeListDocument" xmlns:tns="http://xml.vidispine.com/
↪ schema/vidispine" type="tns:ShapeListType" />
2487   <xs:complexType name="ShapeListType">
2488     <xs:sequence>
2489       <xs:element name="hits" type="xs:integer" minOccurs="0" maxOccurs="1" />
2490       <xs:element name="shape" minOccurs="0" maxOccurs="unbounded" type="tns:
↪ ShapeType" />
2491       <xs:element name="facet" minOccurs="0" maxOccurs="unbounded" type=
↪ "tns:FacetType" />
2492       <xs:element name="suggestion" minOccurs="0" maxOccurs="unbounded"
↪ type="tns:SuggestionResultType" />
2493     </xs:sequence>
2494   </xs:complexType>
2495
2496   <xs:complexType name="FacetType">
2497     <xs:sequence>
2498       <xs:element name="field" type="xs:string" minOccurs="1" maxOccurs="1" />
2499       <xs:element name="count" minOccurs="0" maxOccurs="unbounded" type="tns:
↪ FacetCountType" />
2500       <xs:element name="range" minOccurs="0" maxOccurs="unbounded" type="tns:
↪ FacetRangeType" />
2501     </xs:sequence>
2502     <xs:attribute name="name" type="xs:string" />
2503   </xs:complexType>
2504
2505   <xs:complexType name="FacetCountType">
2506     <xs:simpleContent>
2507     <xs:extension base="xs:long">

```

```

2508     <xs:attribute name="fieldValue" type="xs:string" use="required"/>
2509   </xs:extension>
2510 </xs:simpleContent>
2511 </xs:complexType>
2512
2513 <xs:complexType name="FacetRangeType">
2514   <xs:simpleContent>
2515     <xs:extension base="tns:IntegerOrEmpty">
2516       <xs:attribute name="start" type="xs:string" use="required"/>
2517       <xs:attribute name="end" type="xs:string" use="required"/>
2518     </xs:extension>
2519   </xs:simpleContent>
2520 </xs:complexType>

```

MetadataChangeSetDocument

```

2522 <xs:element name="MetadataChangeSetDocument" xmlns:tns="http://xml.vidispine.com/
↳schema/vidispine" type="tns:MetadataChangeSetType" />
2523
2524
2525 <xs:complexType name="MetadataChangeSetType">
2526   <xs:sequence>
2527     <xs:element name="changeSet" minOccurs="0" maxOccurs="unbounded">
2528       <xs:complexType>
2529         <xs:sequence>
2530           <xs:element name="id" type="tns:SiteIdType" minOccurs="1"
↳maxOccurs="1"/>
2531           <xs:element name="metadata" type="tns:MetadataType" minOccurs=
↳"1" maxOccurs="1"/>
2532         </xs:sequence>
2533       </xs:complexType>
2534     </xs:element>
2535   </xs:sequence>
2536 </xs:complexType>

```

JobListDocument

```

2538 <xs:element name="JobListDocument" xmlns:tns="http://xml.vidispine.com/schema/
↳vidispine" type="tns:JobListType" />
2539 <xs:complexType name="JobListType">
2540   <xs:sequence>
2541     <xs:element name="hits" type="xs:integer" minOccurs="0" maxOccurs="1"/>
2542     <xs:element name="job" type="tns:JobType" minOccurs="0" maxOccurs=
↳"unbounded"/>
2543   </xs:sequence>
2544 </xs:complexType>

```

JobDocument

```

2546 <xs:element name="JobDocument" xmlns:tns="http://xml.vidispine.com/schema/
↳vidispine" type="tns:JobType" />
2547 <xs:complexType name="JobType">
2548   <xs:sequence>
2549     <xs:element name="jobId" type="tns:SiteIdType" minOccurs="1" maxOccurs="1
↳"/>
2550     <xs:element name="user" type="xs:string" minOccurs="0" maxOccurs="1"/>
2551     <xs:element name="started" type="xs:dateTime" minOccurs="0" maxOccurs="1"/
↳>

```

```

2552     <xs:element name="finished" type="xs:dateTime" minOccurs="0" maxOccurs="1
↳"/>
2553     <xs:element name="status" type="xs:string" minOccurs="1" maxOccurs="1"/>
2554     <xs:element name="type" type="xs:string" minOccurs="1" maxOccurs="1"/>
2555     <xs:element name="subJob" type="tns:JobType" minOccurs="0" maxOccurs=
↳"unbounded"/>
2556     <xs:element name="priority" type="xs:string" minOccurs="1" maxOccurs="1"/>
2557     <xs:element name="waiting" minOccurs="0" maxOccurs="1">
2558         <xs:complexType>
2559             <xs:sequence>
2560                 <xs:element name="resourceId" type="tns:SiteIdType" minOccurs=
↳"0" maxOccurs="1"/>
2561                 <xs:element name="resourceType" type="xs:string" minOccurs="0
↳" maxOccurs="1"/>
2562                 <xs:element name="requirement" type="xs:string" minOccurs="0"
↳maxOccurs="1"/>
2563             </xs:sequence>
2564         </xs:complexType>
2565     </xs:element>
2566     <xs:element name="currentStep" minOccurs="0" maxOccurs="1">
2567         <xs:complexType>
2568             <xs:sequence>
2569                 <xs:element name="description" type="xs:string" minOccurs="1"
↳maxOccurs="1"/>
2570                 <xs:element name="number" type="xs:int" minOccurs="1"
↳maxOccurs="1"/>
2571                 <xs:element name="status" type="xs:string" minOccurs="1"
↳maxOccurs="1"/>
2572             </xs:sequence>
2573         </xs:complexType>
2574     </xs:element>
2575     <xs:element name="data" minOccurs="0" maxOccurs="unbounded">
2576         <xs:complexType>
2577             <xs:sequence>
2578                 <xs:element name="key" type="xs:string" minOccurs="1"
↳maxOccurs="1"/>
2579                 <xs:element name="value" type="xs:string" minOccurs="1"
↳maxOccurs="1"/>
2580             </xs:sequence>
2581         </xs:complexType>
2582     </xs:element>
2583     <xs:element name="totalSteps" type="xs:int" minOccurs="0" maxOccurs="1"/>
2584     <xs:element name="log" minOccurs="0" maxOccurs="1">
2585         <xs:complexType>
2586             <xs:sequence>
2587                 <xs:element name="task" type="tns:JobTaskType" minOccurs="0"
↳maxOccurs="unbounded"/>
2588             </xs:sequence>
2589         </xs:complexType>
2590     </xs:element>
2591 </xs:sequence>
2592 </xs:complexType>
2593
2594 <xs:complexType name="JobTaskType">
2595     <xs:sequence>
2596         <xs:element name="step" type="xs:int" minOccurs="1" maxOccurs="1"/>
2597         <xs:element name="attempts" type="xs:int" minOccurs="1" maxOccurs="1"/>
2598         <xs:element name="status" type="xs:string" minOccurs="1" maxOccurs="1"/>

```

```

2599     <xs:element name="timestamp" type="xs:dateTime" minOccurs="1" maxOccurs="1
↪"/>
2600     <xs:element name="description" type="xs:string" minOccurs="0" maxOccurs="1
↪"/>
2601     <xs:element name="progress" type="tns:JobTaskProgressType" minOccurs="0"
↪maxOccurs="1"/>
2602         <xs:element name="subStep" minOccurs="0" maxOccurs="unbounded">
2603             <xs:complexType>
2604                 <xs:sequence>
2605                     <xs:element name="timestamp" type="xs:dateTime" minOccurs="1"
↪maxOccurs="1"/>
2606                     <xs:element name="description" type="xs:string" minOccurs="1"
↪maxOccurs="1"/>
2607                 </xs:sequence>
2608             </xs:complexType>
2609         </xs:element>
2610         <xs:element name="errorMessage" type="xs:string" minOccurs="0" maxOccurs=
↪"1"/>
2611         <xs:element name="totalSubTasks" type="xs:int" minOccurs="0" maxOccurs="1
↪"/>
2612         <xs:element name="subTask" type="tns:JobTaskType" minOccurs="0" maxOccurs=
↪"unbounded"/>
2613     </xs:sequence>
2614     <xs:attribute name="id" type="xs:int" use="optional"/>
2615 </xs:complexType>
2616
2617 <xs:complexType name="JobTaskProgressType">
2618     <xs:simpleContent>
2619         <xs:extension base="xs:decimal">
2620             <xs:attribute name="total" type="xs:long" use="optional"/>
2621             <xs:attribute name="unit" type="tns:JobTaskProgressType_unit" use=
↪"optional"/>
2622         </xs:extension>
2623     </xs:simpleContent>
2624 </xs:complexType>
2625
2626 <xs:simpleType name="JobTaskProgressType_unit">
2627     <xs:restriction base="xs:string">
2628         <xs:enumeration value="bytes"/>
2629         <xs:enumeration value="percent"/>
2630     </xs:restriction>
2631 </xs:simpleType>

```

StorageMethodListDocument

```

2633     <xs:element name="StorageMethodListDocument" xmlns:tns="http://xml.vidispine.com/
↪schema/vidispine" type="tns:StorageMethodListType"/>
2634     <xs:complexType name="StorageMethodListType">
2635         <xs:sequence>
2636             <xs:element name="method" type="tns:StorageMethodType" minOccurs="0"
↪maxOccurs="unbounded"/>
2637         </xs:sequence>
2638     </xs:complexType>
2639
2640     <xs:complexType name="StorageMethodType">
2641         <xs:sequence maxOccurs="1" minOccurs="1">
2642             <xs:element name="loc" type="xs:anyURI" minOccurs="0"/>
2643             <xs:element name="id" type="tns:SiteIdType" minOccurs="0"/>

```



```

2644     <xs:element name="uri" type="xs:anyURI"/>
2645     <xs:element name="bandwidth" minOccurs="0" type="xs:long"/>
2646     <xs:element name="read" minOccurs="1" type="xs:boolean"/>
2647     <xs:element name="write" minOccurs="1" type="xs:boolean"/>
2648     <xs:element name="browse" minOccurs="1" type="xs:boolean"/>
2649     <xs:element name="lastSuccess" type="xs:dateTime" minOccurs="0" maxOccurs=
↪ "1"/>
2650     <xs:element name="lastFailure" type="xs:dateTime" minOccurs="0" maxOccurs=
↪ "1"/>
2651     <xs:element name="failureMessage" type="xs:string" minOccurs="0"
↪ maxOccurs="1"/>
2652     <xs:element name="type" type="xs:string" minOccurs="0" maxOccurs="1"/>
2653     <xs:element name="metadata" type="tns:SimpleMetadataType" minOccurs="0"
↪ maxOccurs="1" />
2654     </xs:sequence>
2655 </xs:complexType>

```

StorageDocument

```

2657     <xs:element name="StorageDocument" xmlns:tns="http://xml.vidispine.com/schema/
↪ vidispine" type="tns:StorageType" />
2658     <xs:complexType name="StorageType">
2659         <xs:sequence maxOccurs="1" minOccurs="1">
2660             <xs:element name="id" type="tns:SiteIdType" minOccurs="0" maxOccurs="1"/>
2661             <xs:element name="state" type="xs:string" minOccurs="0" maxOccurs="1"/>
2662             <xs:element name="priority" type="xs:string" minOccurs="0" maxOccurs="1"/>
2663             <xs:element name="type" type="xs:string" minOccurs="0" maxOccurs="1"/>
2664             <xs:element name="capacity" type="xs:long" minOccurs="0" maxOccurs="1"/>
2665             <xs:element name="freeCapacity" minOccurs="0" type="xs:long"/>
2666             <xs:element name="bandwidth" minOccurs="0" type="xs:long"/>
2667             <xs:element name="timestamp" minOccurs="0" type="xs:dateTime"/>
2668             <xs:element name="method" type="tns:StorageMethodType" maxOccurs=
↪ "unbounded" minOccurs="0"/>
2669             <xs:element name="metadata" type="tns:SimpleMetadataType" minOccurs="0"
↪ maxOccurs="1" />
2670             <xs:element name="lowWatermark" type="xs:long" minOccurs="0" maxOccurs="1
↪ "/>
2671             <xs:element name="highWatermark" type="xs:long" minOccurs="0" maxOccurs="1
↪ "/>
2672             <xs:element name="lowWatermarkPercentage" type="xs:int" minOccurs="0"
↪ maxOccurs="1"/>
2673             <xs:element name="highWatermarkPercentage" type="xs:int" minOccurs="0"
↪ maxOccurs="1"/>
2674             <xs:element name="autoDetect" type="xs:boolean" minOccurs="0" maxOccurs="1
↪ "/>
2675             <xs:element name="bean" type="xs:string" minOccurs="0" maxOccurs="1"/>
2676             <xs:element name="showImportables" type="xs:boolean" minOccurs="0"
↪ maxOccurs="1"/>
2677             <xs:element name="projection" type="xs:string" minOccurs="0" maxOccurs="1
↪ "/>
2678             <xs:element name="scanInterval" type="xs:int" minOccurs="0" maxOccurs="1"/
↪ >
2679             <xs:element name="archiveScript" type="xs:string" minOccurs="0" maxOccurs=
↪ "1"/>
2680             <xs:element name="sequence" type="tns:StorageFileSequenceType" minOccurs=
↪ "0" maxOccurs="unbounded"/>
2681             <xs:element name="sequenceTimeout" type="xs:int" minOccurs="0" maxOccurs=
↪ "1"/>

```

```

2682     </xs:sequence>
2683 </xs:complexType>
2684
2685 <xs:complexType name="StorageFileSequenceType">
2686   <xs:sequence maxOccurs="1" minOccurs="1">
2687     <xs:element name="regex" type="xs:string" minOccurs="1" maxOccurs="1"/>
2688     <xs:element name="numGroup" type="xs:int" minOccurs="0" maxOccurs="1"/>
2689   </xs:sequence>
2690 </xs:complexType>

```

StorageListDocument

```

2692 <xs:element name="StorageListDocument" xmlns:tns="http://xml.vidispine.com/schema/
↳vidispine" type="tns:StorageListType"/>
2693 <xs:complexType name="StorageListType">
2694   <xs:sequence>
2695     <xs:element name="hits" type="xs:integer" minOccurs="0" maxOccurs="1"/>
2696     <xs:element name="storage" type="tns:StorageType" maxOccurs="unbounded"
↳minOccurs="0"/></xs:element>
2697   </xs:sequence>
2698 </xs:complexType>
2699
2700 <xs:simpleType name="VXAStatus">
2701   <xs:restriction base="xs:string">
2702     <xs:enumeration value="OFFLINE"/>
2703     <xs:enumeration value="ONLINE"/>
2704   </xs:restriction>
2705 </xs:simpleType>
2706
2707 <xs:complexType name="VXAStorageType">
2708   <xs:sequence minOccurs="1" maxOccurs="1">
2709     <xs:element name="name" type="xs:string" minOccurs="1"/>
2710     <xs:element name="id" type="xs:string" minOccurs="1"/>
2711     <xs:element name="path" type="xs:string" minOccurs="1"/>
2712     <xs:element name="isCollectionStorage" type="xs:string" minOccurs="0"/>
2713     <xs:element name="createProxiesStorage" type="xs:string" minOccurs="0"/>
2714   </xs:sequence>
2715 </xs:complexType>
2716
2717 <xs:complexType name="VXAVSInstanceType">
2718   <xs:sequence minOccurs="1" maxOccurs="1">
2719     <xs:element name="vsClusterAddress" type="xs:string" minOccurs="0"
↳maxOccurs="1"/> <!-- from VS, status only -->
2720     <xs:element name="uri" type="xs:string" minOccurs="0" maxOccurs="1"/>
2721     <xs:element name="status" type="tns:VXAStatus" minOccurs="0" maxOccurs="1
↳"/>
2722     <xs:element name="lastSeen" type="xs:dateTime" minOccurs="0" maxOccurs="1
↳"/>
2723   </xs:sequence>
2724 </xs:complexType>

```

VXADocument

```

2726 <xs:element name="VXADocument" xmlns:tns="http://xml.vidispine.com/schema/
↳vidispine" type="tns:VXAType" />
2727 <xs:complexType name="VXAType">
2728   <xs:sequence maxOccurs="1" minOccurs="1">
2729     <xs:element name="uuid" type="xs:string" minOccurs="1" maxOccurs="1"/>

```

```

2730     <xs:element name="user" type="xs:string" minOccurs="0" maxOccurs="1"/>
2731     <xs:element name="allStorages" type="xs:boolean" minOccurs="0" maxOccurs=
↪ "1"/>
2732     <xs:element name="storage" type="tns:VXAStorageType" minOccurs="0"
↪ maxOccurs="unbounded"/>
2733     <xs:element name="file" type="xs:string" minOccurs="0" maxOccurs=
↪ "unbounded"/>
2734     <xs:element name="name" type="xs:string" minOccurs="0" maxOccurs="1"/>
2735     <xs:element name="instance" type="xs:string" minOccurs="0" maxOccurs="1"/>
2736     <xs:element name="vxaVersion" type="xs:string" minOccurs="1" maxOccurs="1
↪ "/>
2737     <xs:element name="s3CredentialType" type="tns:S3CredentialType" minOccurs=
↪ "0" maxOccurs="1"/>
2738     <xs:element name="transcoderVersion" type="xs:string" minOccurs="1"
↪ maxOccurs="1"/>
2739     <xs:element name="uri" type="xs:string" minOccurs="0" maxOccurs="1"/>
2740     <xs:element name="port" type="xs:int" minOccurs="0" maxOccurs="1"/>
2741     <xs:element name="status" type="tns:VXAStatus" minOccurs="0" maxOccurs="1
↪ "/>
2742     <xs:element name="lastSeen" type="xs:dateTime" minOccurs="0" maxOccurs="1
↪ "/>
2743     <xs:element name="mode" type="xs:string" minOccurs="0" maxOccurs="1"/>
2744     <xs:element name="publicKey" type="xs:string" minOccurs="0" maxOccurs="1"/
↪ >
2745     <xs:element name="vsClusterAddress" type="xs:string" minOccurs="0"
↪ maxOccurs="1"/> <!-- from VS to VSA -->
2746     <xs:element name="vsInstance" type="tns:VXAVSInstanceType" minOccurs="0"
↪ maxOccurs="unbounded"/> <!-- from VS, status only -->
2747     <xs:element name="transcoder" type="tns:TranscoderType" minOccurs="0"
↪ maxOccurs="unbounded"/>
2748     </xs:sequence>
2749     </xs:complexType>
2750
2751     <xs:simpleType name="S3CredentialType">
2752     <xs:restriction base="xs:string">
2753     <xs:enumeration value="none"/>
2754     <xs:enumeration value="temporary"/>
2755     <xs:enumeration value="secretkey"/>
2756     </xs:restriction>
2757     </xs:simpleType>

```

VXAListDocument

```

2759     <xs:element name="VXAListDocument" xmlns:tns="http://xml.vidispine.com/schema/
↪ vidispine" type="tns:VXAListType"/>
2760     <xs:complexType name="VXAListType">
2761     <xs:sequence>
2762     <xs:element name="hits" type="xs:integer" minOccurs="0" maxOccurs="1"/>
2763     <xs:element name="vxa" type="tns:VXAType" maxOccurs="unbounded" minOccurs=
↪ "0"/></xs:element>
2764     </xs:sequence>
2765     </xs:complexType>
2766
2767     <xs:simpleType name="OSName">
2768     <xs:restriction base="xs:string">
2769     <xs:enumeration value="DEBIAN32"/>
2770     <xs:enumeration value="DEBIAN64"/>
2771     <xs:enumeration value="REDHAT32"/>

```

```

2772     <xs:enumeration value="REDHAT64"/>
2773     <xs:enumeration value="WINDOWS32"/>
2774     <xs:enumeration value="WINDOWS64"/>
2775     <xs:enumeration value="MACOSX32"/>
2776     <xs:enumeration value="MACOSX64"/>
2777     </xs:restriction>
2778 </xs:simpleType>

```

OtifOSDocument

```

2780     <xs:element name="OtifOSDocument" xmlns:tns="http://xml.vidispine.com/schema/
↳vidispine" type="tns:OtifOSType"/>
2781     <xs:complexType name="OtifOSType">
2782         <xs:sequence>
2783             <xs:element name="name" type="tns:OSName" minOccurs="1" maxOccurs="1"/>
2784             <xs:element name="file" type="xs:string" minOccurs="1" maxOccurs=
↳"unbounded"/>
2785         </xs:sequence>
2786     </xs:complexType>

```

OtifTranscoderPluginDocment

```

2788     <xs:element name="OtifTranscoderPluginDocment" xmlns:tns="http://xml.vidispine.
↳com/schema/vidispine" type="tns:OtifTranscoderPluginType"/>
2789     <xs:complexType name="OtifTranscoderPluginType">
2790         <xs:sequence>
2791             <xs:element name="pluginType" type="tns:OtifPluginType" minOccurs="1"
↳maxOccurs="1"/>
2792             <xs:element name="os" type="tns:OtifOSType" minOccurs="0" maxOccurs=
↳"unbounded"/>
2793             <xs:element name="file" type="xs:string" minOccurs="0" maxOccurs=
↳"unbounded"/>
2794         </xs:sequence>
2795     </xs:complexType>

```

OtifVxaPluginDocment

```

2797     <xs:element name="OtifVxaPluginDocment" xmlns:tns="http://xml.vidispine.com/
↳schema/vidispine" type="tns:OtifVxaPluginType"/>
2798     <xs:complexType name="OtifVxaPluginType">
2799         <xs:sequence>
2800             <xs:element name="file" type="xs:string" minOccurs="1" maxOccurs="1"/>
2801         </xs:sequence>
2802     </xs:complexType>

```

OtifDocument

```

2804     <xs:element name="OtifDocument" xmlns:tns="http://xml.vidispine.com/schema/
↳vidispine" type="tns:OtifType" />
2805     <xs:complexType name="OtifType">
2806         <xs:sequence maxOccurs="1" minOccurs="1">
2807             <!-- UUID used in presets/analyze/complex-jobs to tell which plugin to
↳use -->
2808             <xs:element name="uuid" type="xs:string" minOccurs="1" maxOccurs="1"/>
2809             <!-- pluginName - human readable name of plugin -->
2810             <xs:element name="pluginName" type="xs:string" minOccurs="1" maxOccurs="1
↳"/>
2811             <!-- vendorName Plugin vendor name -->

```

```

2812     <xs:element name="vendorName" type="xs:string" minOccurs="1" maxOccurs="1"
↳"/>
2813     <xs:element name="versionMajor" type="xs:int" minOccurs="1" maxOccurs="1"/
↳>
2814     <xs:element name="versionMinor" type="xs:int" minOccurs="1" maxOccurs="1"/
↳>
2815     <xs:element name="versionPatch" type="xs:int" minOccurs="1" maxOccurs="1"/
↳>
2816     <!-- Optional transcoderPlugin, at least one of transcoderPlugin and
↳vxaPlugin must be present -->
2817     <xs:element name="transcoderPlugin" type="tns:OtifTranscoderPluginType"
↳minOccurs="0" maxOccurs="1"/>
2818     <!-- Optional vxaPlugin, at least one of transcoderPlugin and vxaPlugin
↳must be present -->
2819     <xs:element name="vxaPlugin" type="tns:OtifVxaPluginType" minOccurs="0"
↳maxOccurs="1"/>
2820     </xs:sequence>
2821 </xs:complexType>

```

OtifListDocument

```

2823     <xs:element name="OtifListDocument" xmlns:tns="http://xml.vidispine.com/schema/
↳vidispine" type="tns:OtifListType"/>
2824     <xs:complexType name="OtifListType">
2825         <xs:sequence>
2826             <xs:element name="hits" type="xs:integer" minOccurs="0" maxOccurs="1"/>
2827             <xs:element name="otif" type="tns:OtifType" maxOccurs="unbounded"
↳minOccurs="0"/></xs:element>
2828         </xs:sequence>
2829     </xs:complexType>

```

VXAStorageCapacityDocument

```

2831     <xs:element name="VXAStorageCapacityDocument" xmlns:tns="http://xml.vidispine.com/
↳schema/vidispine" type="tns:VXAStorageCapacityType" />
2832     <xs:complexType name="VXAStorageCapacityType">
2833         <xs:sequence minOccurs="1" maxOccurs="1">
2834             <xs:element name="free" type="xs:long" minOccurs="0" maxOccurs="1"/>
2835             <xs:element name="total" type="xs:long" minOccurs="0" maxOccurs="1"/>
2836             <xs:element name="used" type="xs:long" minOccurs="0" maxOccurs="1"/>
2837         </xs:sequence>
2838     </xs:complexType>

```

QuotaRuleListDocument

```

2840     <xs:element name="QuotaRuleListDocument" xmlns:tns="http://xml.vidispine.com/
↳schema/vidispine" type="tns:QuotaRuleListType"/>
2841     <xs:complexType name="QuotaRuleListType">
2842         <xs:sequence>
2843             <xs:element name="rule" type="tns:QuotaRuleType" minOccurs="0" maxOccurs=
↳"unbounded"/></xs:element>
2844         </xs:sequence>
2845     </xs:complexType>

```

QuotaRuleDocument

```

2847     <xs:element name="QuotaRuleDocument" xmlns:tns="http://xml.vidispine.com/schema/
↳vidispine" type="tns:QuotaRuleType"/>

```

```

2848 <xs:complexType name="QuotaRuleType">
2849   <xs:sequence>
2850     <xs:element name="id" type="tns:SiteIdType" minOccurs="0" maxOccurs="1"/>
2851     <xs:element name="description" type="xs:string" minOccurs="0" maxOccurs="1
↳"/>
2852
2853     <!-- Filters -->
2854     <xs:choice minOccurs="0">
2855       <xs:element name="user" type="xs:string"/>
2856       <xs:element name="group" type="xs:string"/>
2857     </xs:choice>
2858     <xs:choice minOccurs="0">
2859       <xs:element name="collection" type="tns:SiteIdType"/>
2860       <xs:element name="library" type="tns:SiteIdType"/>
2861     </xs:choice>
2862     <xs:choice minOccurs="0">
2863       <xs:element name="storage" type="tns:SiteIdType"/>
2864       <xs:element name="storageGroup" type="tns:SiteIdType"/>
2865     </xs:choice>
2866     <xs:element name="tag" type="xs:string" minOccurs="0" maxOccurs="1"/>
2867
2868     <!-- Resource Limits -->
2869     <xs:element name="resource" minOccurs="1" maxOccurs="unbounded">
2870       <xs:complexType>
2871         <xs:sequence>
2872           <xs:element name="name" type="tns:QuotaResourceType"
↳minOccurs="1" maxOccurs="1"/>
2873           <xs:element name="limit" type="xs:long" minOccurs="1"
↳maxOccurs="1"/>
2874           <xs:element name="usage" type="xs:long" minOccurs="0"
↳maxOccurs="1"/>
2875         </xs:sequence>
2876       </xs:complexType>
2877     </xs:element>
2878
2879     <!-- Other -->
2880     <xs:element name="updateFrequency" type="xs:int" minOccurs="0" maxOccurs=
↳"1"/>
2881     <xs:element name="lastUpdate" type="xs:dateTime" minOccurs="0" maxOccurs=
↳"1"/>
2882     <xs:element name="externalId" type="tns:ExternalIdentifierType" minOccurs=
↳"0" maxOccurs="unbounded"/>
2883   </xs:sequence>
2884 </xs:complexType>
2885
2886 <xs:simpleType name="QuotaResourceType">
2887   <xs:restriction base="xs:string">
2888     <xs:enumeration value="item"/>
2889     <xs:enumeration value="storage"/>
2890   </xs:restriction>
2891 </xs:simpleType>
2892
2893 <xs:complexType name="TranscoderDirectAccess">
2894   <xs:sequence>
2895     <xs:element name="filter" type="xs:string" minOccurs="1" maxOccurs="1"/>
2896     <xs:element name="rewrite" minOccurs="0" maxOccurs="unbounded">
2897       <xs:complexType>
2898         <xs:sequence>

```

```

2899         <xs:element type="xs:string" name="pattern" minOccurs="1"
↪maxOccurs="1" />
2900         <xs:element type="xs:string" name="replacement" minOccurs="1"
↪maxOccurs="1" />
2901     </xs:sequence>
2902 </xs:complexType>
2903 </xs:element>
2904 </xs:sequence>
2905 </xs:complexType>
2906
2907 <xs:complexType name="TranscoderType">
2908     <xs:sequence minOccurs="1" maxOccurs="1">
2909         <xs:element name="type" minOccurs="0" maxOccurs="1" default="TRANSCODER">
2910             <xs:simpleType>
2911                 <xs:restriction base="xs:string">
2912                     <xs:enumeration value="TRANSCODER"/>
2913                     <xs:enumeration value="DIRECTORY"/>
2914                 </xs:restriction>
2915             </xs:simpleType>
2916         </xs:element>
2917         <xs:element name="url" type="xs:anyURI"></xs:element>
2918         <xs:element name="version" type="xs:string" minOccurs="0"></xs:element>
2919         <xs:element name="reverseAddress" type="xs:string" minOccurs="0"></xs:
↪element>
2920         <xs:element name="reverseAddressDetected" type="xs:string" minOccurs="0">
↪</xs:element>
2921         <xs:element name="directAccess" type="tns:TranscoderDirectAccess"
↪minOccurs="0" maxOccurs="unbounded"/>
2922         <xs:element name="state" type="xs:string" minOccurs="0" maxOccurs="1"/>
2923         <xs:element name="job" type="tns:JobStatusType" minOccurs="0" maxOccurs=
↪"unbounded"/>
2924         <xs:element name="configuration" type="tns:TranscoderConfigurationType"
↪minOccurs="0" maxOccurs="1" />
2925         <xs:element name="transcoder" type="tns:TranscoderType" minOccurs="0"
↪maxOccurs="unbounded"/>
2926         <xs:element name="weight" type="xs:int" minOccurs="0" maxOccurs="1"/>
2927         <xs:element name="maxJob" type="xs:int" minOccurs="0" maxOccurs="1"/>
2928     </xs:sequence>
2929 </xs:complexType>
2930
2931 <xs:complexType name="FinalCutServerType">
2932     <xs:sequence minOccurs="1" maxOccurs="1">
2933         <xs:element name="url" type="xs:anyURI"></xs:element>
2934         <xs:element name="tag" type="xs:string"></xs:element>
2935         <xs:element name="state" type="xs:string" minOccurs="0" maxOccurs="1" />
2936         <xs:element name="metadata" type="tns:SimpleMetadataType" minOccurs="0"
↪maxOccurs="1" />
2937         <xs:element name="description" type="xs:string" minOccurs="0" />
2938     </xs:sequence>
2939 </xs:complexType>
2940
2941 <xs:complexType name="MXFServerResourceType">
2942     <xs:sequence minOccurs="1" maxOccurs="1">
2943         <xs:element name="url" type="xs:anyURI"></xs:element>
2944         <xs:element name="workspaceUrl" type="xs:anyURI"></xs:element>
2945         <xs:element name="userWorkspaceUrl" type="xs:anyURI"></xs:element>
2946         <xs:element name="mxfServerWorkspacePath" type="xs:string"></xs:element>
2947         <xs:element name="mxfServerUserId" type="xs:integer"></xs:element>

```

```

2948     <xs:element name="mxfServerPathToStorage" type="xs:anyURI"></xs:element>
2949     <xs:element name="databaseName" type="xs:string"/>
2950     <xs:element name="storageId" type="tns:SiteIdType"></xs:element>
2951     <xs:element name="metadata" type="tns:SimpleMetadataType" minOccurs="0"
↳maxOccurs="1" />
2952     <xs:element name="description" type="xs:string" minOccurs="0" />
2953     <xs:element name="atomShapes" type="xs:string" minOccurs="0" />
2954     <xs:element name="importShapes" type="xs:string" minOccurs="0" />
2955     <xs:element name="detectAtom" type="xs:boolean" minOccurs="0" />
2956     <xs:element name="enforceQuota" type="xs:boolean" minOccurs="0" />
2957     <xs:element name="fileImportPattern" type="xs:string" minOccurs="0" />
2958   </xs:sequence>
2959 </xs:complexType>
2960
2961 <xs:complexType name="SigniantType">
2962   <xs:sequence maxOccurs="1" minOccurs="1">
2963     <xs:element name="tag" type="xs:string" />
2964     <xs:element name="url" type="xs:anyURI" />
2965     <xs:element name="username" type="xs:string" />
2966     <xs:element name="password" type="xs:string" />
2967     <xs:element name="description" type="xs:string" minOccurs="0" />
2968   </xs:sequence>
2969 </xs:complexType>
2970
2971 <xs:complexType name="NetworkType">
2972   <xs:sequence maxOccurs="1" minOccurs="1">
2973     <xs:element name="netmask" type="xs:anyURI"></xs:element>
2974     <xs:element name="bandwidth" minOccurs="0" type="xs:long"/>
2975   </xs:sequence>
2976 </xs:complexType>
2977
2978 <xs:complexType name="ThumbnailServiceType">
2979   <xs:sequence maxOccurs="1" minOccurs="1">
2980     <xs:element name="path" type="xs:string"/>
2981     <xs:element name="state" type="xs:string" minOccurs="1" maxOccurs="1"/>
2982     <xs:element name="lastSuccess" type="xs:dateTime" minOccurs="0" maxOccurs=
↳"1" />
2983     <xs:element name="lastFailure" type="xs:dateTime" minOccurs="0" maxOccurs=
↳"1" />
2984     <xs:element name="failureMessage" type="xs:string" minOccurs="0"
↳maxOccurs="1"/>
2985     <xs:element name="mode" type="xs:string" minOccurs="0" maxOccurs="1"/>
2986   </xs:sequence>
2987 </xs:complexType>
2988
2989 <xs:complexType name="LDAPImportType">
2990   <xs:sequence>
2991     <xs:element name="interval" type="xs:long" minOccurs="0" maxOccurs="1"/>
2992     <xs:element name="importOrganizationalUnits" type="xs:boolean" minOccurs=
↳"0" maxOccurs="1"/>
2993
2994     <xs:sequence minOccurs="0" maxOccurs="1">
2995       <xs:element name="plugin" type="xs:string" minOccurs="1" maxOccurs="1"
↳"/>
2996       <xs:element name="pluginParameters" type="tns:SimpleMetadataType"
↳minOccurs="1" maxOccurs="1"/>
2997     </xs:sequence>
2998   </xs:sequence>

```



```

2999     </xs:complexType>
3000
3001     <xs:complexType name="LDAPSyncType">
3002         <xs:complexContent>
3003             <xs:extension base="tns:LDAPImportType">
3004                 <xs:sequence>
3005                     <xs:element name="createUsers" type="xs:boolean" minOccurs="0"
↪maxOccurs="1"/>
3006                     <xs:element name="createGroups" type="xs:boolean" minOccurs="0"
↪maxOccurs="1"/>
3007                 </xs:sequence>
3008             </xs:extension>
3009         </xs:complexContent>
3010     </xs:complexType>
3011
3012     <xs:complexType name="LDAPResourceType">
3013         <xs:sequence>
3014             <!-- Required -->
3015             <xs:element name="url" type="xs:string" minOccurs="1" maxOccurs="unbounded
↪"/>
3016             <xs:element name="useStartTLS" type="xs:boolean" minOccurs="1" maxOccurs=
↪"1"/>
3017             <xs:element name="userDN" type="xs:string" minOccurs="1" maxOccurs="1"/>
3018             <xs:element name="usernameAttribute" type="xs:string" minOccurs="1"
↪maxOccurs="1"/>
3019
3020             <!-- Optional -->
3021             <xs:element name="userSearchFilter" type="xs:string" minOccurs="0"
↪maxOccurs="1"/>
3022             <xs:element name="bindDN" type="xs:string" minOccurs="0" maxOccurs="1"/>
3023             <xs:element name="bindPassword" type="xs:string" minOccurs="0" maxOccurs=
↪"1"/>
3024             <xs:element name="cacheLifetime" type="xs:long" minOccurs="0" maxOccurs="1
↪"/>
3025
3026             <xs:element name="groupDN" type="xs:string" minOccurs="0" maxOccurs="1"/>
3027             <xs:element name="groupSearchFilter" type="xs:string" minOccurs="0"
↪maxOccurs="1"/>
3028             <xs:element name="realNameAttribute" type="xs:string" minOccurs="0"
↪maxOccurs="1"/>
3029             <xs:element name="groupnameAttribute" type="xs:string" minOccurs="0"
↪maxOccurs="1"/>
3030             <xs:element name="usernameFormat" type="xs:string" minOccurs="0"
↪maxOccurs="1"/>
3031
3032             <xs:element name="sync" type="tns:LDAPSyncType" minOccurs="0" maxOccurs="1"/>
3033
3034             <!-- Deprecated. Use sync instead -->
3035             <xs:element name="import" type="tns:LDAPImportType" minOccurs="0"
↪maxOccurs="1"/>
3036         </xs:sequence>
3037     </xs:complexType>
3038
3039     <xs:complexType name="ExternalTranscoderType">
3040         <xs:sequence>
3041             <xs:element name="source" type="xs:string" maxOccurs="1" minOccurs="1"/>
3042             <xs:element name="destination" type="xs:string" maxOccurs="1" minOccurs="1
↪"/>

```

```

3043     <xs:element name="shapeTag" type="xs:string" maxOccurs="1" minOccurs="1"/>
3044     <xs:element name="timeout" type="xs:long" maxOccurs="1" minOccurs="0"/>
3045     <xs:element name="interval" type="xs:long" maxOccurs="1" minOccurs="0"/>
3046     <xs:element name="checks" type="xs:int" maxOccurs="1" minOccurs="0"/>
3047     <xs:element name="regex" type="xs:string" maxOccurs="1" minOccurs="1"/>
3048   </xs:sequence>
3049 </xs:complexType>
3050
3051 <xs:complexType name="CerifyType">
3052   <xs:sequence>
3053     <xs:element name="address" type="xs:string" maxOccurs="1" minOccurs="1"/>
3054     <xs:element name="mediaLocation" maxOccurs="unbounded" minOccurs="1">
3055       <xs:complexType>
3056         <xs:sequence>
3057           <xs:element name="name" type="xs:string" maxOccurs="1"
↪minOccurs="1"/>
3058           <xs:element name="storageMethod" type="tns:SiteIdType"
↪maxOccurs="unbounded" minOccurs="1"/>
3059         </xs:sequence>
3060       </xs:complexType>
3061     </xs:element>
3062     <xs:element name="cleanup" type="xs:boolean" maxOccurs="1" minOccurs="0"/>
3063   </xs:sequence>
3064 </xs:complexType>

```

ExternalTranscodeJobDocument

```

3066   <xs:element name="ExternalTranscodeJobDocument" xmlns:tns="http://xml.vidispine.
↪com/schema/vidispine" type="tns:ExternalTranscodeJobType"/>
3067   <xs:complexType name="ExternalTranscodeJobType">
3068     <xs:sequence>
3069       <xs:element name="sourceUri" type="xs:string" maxOccurs="1" minOccurs="1"/>
↪>
3070       <xs:element name="format" type="xs:string" maxOccurs="1" minOccurs="1"/>
3071       <xs:element name="transcoder" type="tns:ExternalTranscoderType" maxOccurs=
↪"1" minOccurs="1"/>
3072       <xs:element name="regex" type="xs:string" maxOccurs="1" minOccurs="1"/>
3073       <xs:element name="storageId" type="xs:string" maxOccurs="1" minOccurs="1"/>
↪>
3074       <xs:element name="username" type="xs:string" maxOccurs="1" minOccurs="1"/>
3075     </xs:sequence>
3076   </xs:complexType>
3077
3078   <xs:complexType name="VidinetServiceType">
3079     <xs:sequence>
3080       <xs:element name="url" type="xs:anyURI" maxOccurs="1" minOccurs="1"/>
3081       <xs:element name="name" type="xs:string" maxOccurs="1" minOccurs="0"/>
3082       <xs:element name="endpoint" type="xs:anyURI" maxOccurs="1" minOccurs="0"/>
3083       <xs:element name="type" type="xs:string" maxOccurs="1" minOccurs="1"/>
3084       <xs:element name="state" type="xs:string" minOccurs="0" maxOccurs="1"/>
3085       <xs:element name="scheme" type="xs:string" minOccurs="0" maxOccurs=
↪"unbounded"/>
3086     </xs:sequence>
3087   </xs:complexType>

```

ResourceDocument

```

3091 <xs:element name="ResourceDocument" xmlns:tns="http://xml.vidispine.com/schema/
↳vidispine" type="tns:ResourceType" />
3092 <xs:complexType name="ResourceType">
3093 <xs:sequence maxOccurs="1" minOccurs="1">
3094 <xs:element name="id" type="tns:SiteIdType" minOccurs="0"/>
3095 <xs:element name="state" type="xs:string" minOccurs="0"/>
3096 <xs:choice>
3097 <xs:element name="network" type="tns:NetworkType"></xs:element>
3098 <xs:element name="transcoder" type="tns:TranscoderType"></xs:element>
3099 <xs:element name="externalTranscoder" type="tns:ExternalTranscoderType
↳"></xs:element>
3100 <xs:element name="cerify" type="tns:CerifyType"></xs:element>
3101 <xs:element name="thumbnail" type="tns:ThumbnailServiceType"></xs:
↳element>
3102 <xs:element name="finalcutserver" type="tns:FinalCutServerType"></xs:
↳element>
3103 <xs:element name="mxfserver" type="tns:MXFServerResourceType"></xs:
↳element>
3104 <xs:element name="signiant" type="tns:SigniantType"></xs:element>
3105 <xs:element name="ldap" type="tns:LDAPResourceType"/>
3106 <xs:element name="unknown" type="xs:string"></xs:element>
3107 <xs:element name="cloudconvert" type="tns:CloudConvertType"></xs:
↳element>
3108 <xs:element name="vidinet" type="tns:VidinetServiceType"></xs:element>
3109 <xs:element name="eidr" type="tns:EidrType"></xs:element>
3110 </xs:choice>
3111 </xs:sequence>
3112 </xs:complexType>
3113
3114 <xs:complexType name="CloudConvertType">
3115 <xs:sequence maxOccurs="1" minOccurs="1">
3116 <xs:element name="apiKey" type="xs:string"></xs:element>
3117 <xs:element name="apiHost" type="xs:string"></xs:element>
3118 <xs:element name="script" type="xs:string"></xs:element>
3119 <xs:element name="inputMethod" type="xs:string"></xs:element>
3120 <xs:element name="publicAddress" type="xs:anyURI"></xs:element>
3121 </xs:sequence>
3122 </xs:complexType>

```

EidrDocument

```

3124 <xs:element name="EidrDocument" xmlns:tns="http://xml.vidispine.com/schema/
↳vidispine" type="tns:EidrType" />
3125 <xs:complexType name="EidrType">
3126 <xs:sequence>
3127 <xs:element name="url" type="xs:anyURI" maxOccurs="1" minOccurs="1"/>
3128 <xs:element name="include" type="xs:string" maxOccurs="unbounded"
↳minOccurs="0"/> <!-- default:"eidr_base"-->
3129 <xs:element name="partyId" type="xs:string" maxOccurs="1" minOccurs="0"/>
3130 <xs:element name="userId" type="xs:string" maxOccurs="1" minOccurs="0"/>
3131 <xs:element name="password" type="xs:string" maxOccurs="1" minOccurs="0"/>
3132 </xs:sequence>
3133 </xs:complexType>

```

ResourceListDocument

```

3135 <xs:element name="ResourceListDocument" xmlns:tns="http://xml.vidispine.com/
↳schema/vidispine" type="tns:ResourceListType" />

```

```

3136 <xs:complexType name="ResourceListType">
3137   <xs:sequence>
3138     <xs:element name="resource" type="tns:ResourceType" maxOccurs=
↪ "unbounded" minOccurs="0"></xs:element>
3139   </xs:sequence>
3140 </xs:complexType>

```

ResourceTypeListDocument

```

3142 <xs:element name="ResourceTypeListDocument" xmlns:tns="http://xml.vidispine.com/
↪ schema/vidispine" type="tns:ResourceTypeListType" />
3143 <xs:complexType name="ResourceTypeListType">
3144   <xs:sequence>
3145     <xs:element name="resourcetype" maxOccurs="unbounded" minOccurs="0">
3146       <xs:complexType>
3147         <xs:sequence>
3148           <xs:element name="type" type="xs:string"></xs:element>
3149           <xs:element name="url" type="xs:anyURI" minOccurs="0"></
↪ xs:element>
3150         </xs:sequence>
3151       </xs:complexType>
3152     </xs:element>
3153   </xs:sequence>
3154 </xs:complexType>

```

CostEstimateDocument

```

3156 <xs:element name="CostEstimateDocument" xmlns:tns="http://xml.vidispine.com/
↪ schema/vidispine" type="tns:CostEstimateType" />
3157 <xs:complexType name="CostEstimateType">
3158   <xs:sequence maxOccurs="1" minOccurs="1">
3159     <xs:element name="id" type="tns:SiteIdType" minOccurs="0"/>
3160     <xs:element name="url" type="xs:anyURI" minOccurs="0"/>
3161     <xs:element name="state" type="xs:string" minOccurs="0"/>
3162     <xs:element name="service" minOccurs="0" maxOccurs="unbounded">
3163       <xs:complexType>
3164         <xs:sequence>
3165           <xs:element name="resource" type="tns:SiteIdType"/>
3166           <xs:element name="name" type="xs:string" minOccurs="0"/>
3167           <xs:element name="type" type="xs:string" minOccurs="0"/>
3168           <xs:element name="state" type="xs:string" minOccurs="0" />
3169           <xs:element name="status" type="xs:string" minOccurs="0" />
3170           <xs:element name="message" type="xs:string" minOccurs="0" />
3171           <xs:element name="cost" type="tns:AmountType" minOccurs="0"/>
3172         </xs:sequence>
3173       </xs:complexType>
3174     </xs:element>
3175   </xs:sequence>
3176 </xs:complexType>

```

MetadataListDocument

```

3178 <xs:element name="MetadataListDocument" xmlns:tns="http://xml.vidispine.com/
↪ schema/vidispine" type="tns:MetadataListType" />
3179 <xs:complexType name="MetadataListType">
3180   <xs:sequence>
3181     <xs:element name="item" minOccurs="0" maxOccurs="unbounded">
3182       <xs:complexType>

```

```

3183         <xs:sequence>
3184             <xs:element name="metadata" minOccurs="0" maxOccurs="1" type=
↪ "tns:MetadataType"/>
3185         </xs:sequence>
3186         <xs:attribute name="id" type="tns:SiteIdType" />
3187     </xs:complexType>
3188 </xs:element>
3189 </xs:sequence>
3190 </xs:complexType>

```

MetadataLockDocument

```

3192 <xs:element name="MetadataLockDocument" xmlns:tns="http://xml.vidispine.com/
↪ schema/vidispine" type="tns:MetadataLockType"/>
3193 <xs:complexType name="MetadataLockType">
3194     <xs:sequence>
3195         <xs:element name="id" type="xs:string"/></xs:element>
3196         <xs:element name="user" type="xs:string"/></xs:element>
3197         <xs:element name="expires" type="xs:dateTime"/></xs:element>
3198         <xs:element name="field" type="xs:string" maxOccurs="unbounded" minOccurs=
↪ "0"/></xs:element>
3199     </xs:sequence>
3200 </xs:complexType>

```

MetadataLockListDocument

```

3202 <xs:element name="MetadataLockListDocument" xmlns:tns="http://xml.vidispine.com/
↪ schema/vidispine" type="tns:MetadataLockListType"/>
3203
3204 <xs:complexType name="MetadataLockListType">
3205     <xs:sequence>
3206         <xs:element name="lock" type="tns:MetadataLockType" maxOccurs="unbounded"
↪ minOccurs="0"/></xs:element>
3207     </xs:sequence>
3208 </xs:complexType>

```

CollectionListDocument

```

3210 <xs:element name="CollectionListDocument" xmlns:tns="http://xml.vidispine.com/
↪ schema/vidispine" type="tns:CollectionListType" />
3211 <xs:complexType name="CollectionListType">
3212     <xs:sequence>
3213         <xs:element name="hits" minOccurs="0" maxOccurs="1" type="xs:integer" />
3214         <xs:element name="collection" minOccurs="0" maxOccurs="unbounded" type=
↪ "tns:CollectionType"/>
3215         <xs:element name="facet" minOccurs="0" maxOccurs="unbounded" type="tns:
↪ FacetType"/>
3216         <xs:element name="suggestion" minOccurs="0" maxOccurs="unbounded" type=
↪ "tns:SuggestionResultType"/>
3217         <xs:element name="autocomplete" minOccurs="0" maxOccurs="unbounded" type=
↪ "tns:AutocompleteResponseType"/>
3218         <xs:element name="nextCursor" type="xs:string" maxOccurs="1" minOccurs="0
↪ "></xs:element>
3219     </xs:sequence>
3220 </xs:complexType>

```

CollectionDocument

```

3222 <xs:element name="CollectionDocument" xmlns:tns="http://xml.vidispine.com/schema/
↪vidispine" type="tns:CollectionType" />
3223 <xs:complexType name="CollectionType">
3224 <xs:sequence>
3225 <xs:element name="loc" type="xs:anyURI" minOccurs="0"/>
3226 <xs:element name="id" type="tns:SiteIdType"/>
3227 <xs:element name="name" type="xs:string" minOccurs="0"/>
3228 <xs:element name="content" type="tns:CollectionContentType" minOccurs="0"
↪maxOccurs="unbounded"/>
3229 <xs:element name="project" type="tns:ProjectType" minOccurs="0" maxOccurs=
↪"1"/>
3230 <xs:element name="sequence" type="tns:SequenceType" minOccurs="0"
↪maxOccurs="unbounded"/>
3231 <xs:element name="metadata" type="tns:MetadataType" minOccurs="0"
↪maxOccurs="1"/>
3232 <xs:element name="terse" type="tns:GenericType" minOccurs="0" maxOccurs="1"
↪"/>
3233 <xs:element name="merged-access" type="tns:AccessControlMergedType"
↪minOccurs="0" maxOccurs="1"/>
3234 <xs:element name="externalId" type="tns:ExternalIdentifierType" minOccurs=
↪"0" maxOccurs="unbounded"/>
3235 </xs:sequence>
3236 </xs:complexType>
3237
3238 <xs:complexType name="CollectionContentType">
3239 <xs:sequence>
3240 <xs:element name="id" type="xs:string" minOccurs="0" maxOccurs="1"/>
3241 <xs:element name="uri" type="xs:string" minOccurs="0" maxOccurs="1"/>
3242 <xs:element name="type" type="tns:CollectionContentEntityTypeType"
↪minOccurs="0" maxOccurs="1"/>
3243 <xs:element name="metadata" type="tns:SimpleMetadataType" minOccurs="0"
↪maxOccurs="1"/>
3244 </xs:sequence>
3245 <xs:attribute name="mode" type="tns:CollectionContentModeType" use="optional"/
↪>
3246 <xs:attribute name="before" type="xs:string" use="optional"/>
3247 <xs:attribute name="after" type="xs:string" use="optional"/>
3248 <xs:attribute name="addItem" type="xs:boolean" use="optional"/>
3249 </xs:complexType>
3250
3251 <xs:simpleType name="CollectionContentModeType">
3252 <xs:restriction base="xs:string">
3253 <xs:enumeration value="add"/>
3254 <xs:enumeration value="remove"/>
3255 <xs:enumeration value="move"/>
3256 </xs:restriction>
3257 </xs:simpleType>
3258
3259 <xs:simpleType name="CollectionContentEntityTypeType">
3260 <xs:restriction base="xs:string">
3261 <xs:enumeration value="item"/>
3262 <xs:enumeration value="library"/>
3263 <xs:enumeration value="collection"/>
3264 </xs:restriction>
3265 </xs:simpleType>

```

UserDocument

```

3267 <xs:element name="UserDocument" xmlns:tns="http://xml.vidispine.com/schema/
↳vidispine" type="tns:UserType" />
3268 <xs:complexType name="UserType">
3269 <xs:sequence>
3270 <xs:element name="id" type="xs:string" minOccurs="0" maxOccurs="1"/>
3271 <xs:element name="loc" type="xs:anyURI" minOccurs="0" /> <!-- output↳
↳only -->
3272 <xs:element name="userName" type="xs:string"></xs:element>
3273 <xs:element name="realName" type="xs:string" minOccurs="0"></xs:element>
3274 <xs:element name="alias" type="xs:string" minOccurs="0" maxOccurs=
↳"unbounded"/>
3275 <xs:element name="password" type="xs:string" minOccurs="0"></xs:element>
3276 <xs:element name="salt" type="xs:string" minOccurs="0" maxOccurs="1" />
3277 <xs:element name="groupList" type="tns:GroupListType" maxOccurs="1"↳
↳minOccurs="0"></xs:element>
3278 <xs:element name="metadata" type="tns:SimpleMetadataType" minOccurs="0"↳
↳maxOccurs="1" />
3279 <xs:element name="origin" type="xs:string" minOccurs="0" maxOccurs="1" />
3280 </xs:sequence>
3281 <xs:attribute name="disabled" type="xs:boolean" use="optional"/>
3282 <xs:attribute name="accessPreserved" type="xs:boolean" use="optional"/>
3283 <xs:attribute name="remove" type="xs:boolean" use="optional"/>
3284 </xs:complexType>

```

UserListDocument

```

3286 <xs:element name="UserListDocument" xmlns:tns="http://xml.vidispine.com/schema/
↳vidispine" type="tns:UserListType"/>
3287 <xs:complexType name="UserListType">
3288 <xs:sequence>
3289 <xs:element name="hits" type="xs:integer" minOccurs="0" maxOccurs="1"/>
3290 <xs:element name="user" type="tns:UserType" maxOccurs="unbounded"↳
↳minOccurs="0"></xs:element>
3291 </xs:sequence>
3292 </xs:complexType>

```

GroupDocument

```

3294 <xs:element name="GroupDocument" xmlns:tns="http://xml.vidispine.com/schema/
↳vidispine" type="tns:GroupType" />
3295 <xs:complexType name="GroupType">
3296 <xs:sequence>
3297 <xs:element name="id" type="xs:string" minOccurs="0" maxOccurs="1"/>
3298 <xs:element name="loc" type="xs:anyURI" minOccurs="0" maxOccurs="1" /> <!--
↳- output only -->
3299 <xs:element name="groupName" type="xs:string" minOccurs="0" maxOccurs="1"/
↳>
3300 <xs:element name="description" type="xs:string" minOccurs="0" maxOccurs="1
↳"/>
3301 <xs:element name="role" type="xs:boolean" minOccurs="0" maxOccurs="1"/>
3302 <xs:element name="childGroupList" type="tns:GroupListType" maxOccurs="1"↳
↳minOccurs="0"></xs:element>
3303 <xs:element name="parentGroupList" type="tns:GroupListType" maxOccurs="1"↳
↳minOccurs="0"></xs:element>
3304 <xs:element name="userList" type="tns:UserListType" maxOccurs="1"↳
↳minOccurs="0"></xs:element>
3305 <xs:element name="metadata" type="tns:SimpleMetadataType" minOccurs="0"↳
↳maxOccurs="1" />

```

```

3306     <xs:element name="origin" type="xs:string" minOccurs="0" maxOccurs="1" />
3307   </xs:sequence>
3308   <xs:attribute name="remove" type="xs:boolean" use="optional"/>
3309 </xs:complexType>

```

GroupListDocument

```

3311   <xs:element name="GroupListDocument" xmlns:tns="http://xml.vidispine.com/schema/
↪vidispine" type="tns:GroupListType" />
3312   <xs:complexType name="GroupListType">
3313     <xs:sequence>
3314       <xs:element name="hits" type="xs:integer" minOccurs="0" maxOccurs="1"/>
3315       <xs:element name="group" type="tns:GroupType" maxOccurs="unbounded"
↪minOccurs="0"/></xs:element>
3316     </xs:sequence>
3317   </xs:complexType>

```

AuthenticationTokenDocument

```

3319   <xs:element name="AuthenticationTokenDocument" xmlns:tns="http://xml.vidispine.
↪com/schema/vidispine" type="tns:AuthenticationTokenType" />
3320   <xs:complexType name="AuthenticationTokenType">
3321     <xs:sequence>
3322       <xs:element name="token" type="xs:string" minOccurs="1" maxOccurs="1"/>
3323       <xs:element name="user" type="xs:string" minOccurs="1" maxOccurs="1"/>
3324     </xs:sequence>
3325   </xs:complexType>

```

AccessKeyListDocument

```

3327   <xs:element name="AccessKeyListDocument" xmlns:tns="http://xml.vidispine.com/
↪schema/vidispine" type="tns:AccessKeyListType" />
3328   <xs:complexType name="AccessKeyListType">
3329     <xs:sequence>
3330       <xs:element name="hits" type="xs:integer" minOccurs="0" maxOccurs="1"/>
3331       <xs:element name="key" type="tns:AccessKeyType" maxOccurs="unbounded"
↪minOccurs="0"/>
3332     </xs:sequence>
3333   </xs:complexType>

```

AccessKeyDocument

```

3335   <xs:element name="AccessKeyDocument" xmlns:tns="http://xml.vidispine.com/schema/
↪vidispine" type="tns:AccessKeyType" />
3336   <xs:complexType name="AccessKeyType">
3337     <xs:sequence>
3338       <xs:element name="id" type="xs:string" minOccurs="0" maxOccurs="1"/>
3339       <xs:element name="name" type="xs:string" minOccurs="0" maxOccurs="1"/>
3340       <xs:element name="secret" type="xs:string" minOccurs="0" maxOccurs="1"/>
3341       <xs:element name="status" minOccurs="1" maxOccurs="1">
3342         <xs:simpleType>
3343           <xs:restriction base="xs:string">
3344             <xs:enumeration value="ACTIVE"/>
3345             <xs:enumeration value="INACTIVE"/>
3346           </xs:restriction>
3347         </xs:simpleType>
3348       </xs:element>
3349       <xs:element name="created" type="xs:dateTime" minOccurs="1" maxOccurs="1"/
↪

```



```

3350     </xs:sequence>
3351 </xs:complexType>

```

SimpleMetadataDocument

```

3353 <xs:element name="SimpleMetadataDocument" xmlns:tns="http://xml.vidispine.com/
↪schema/vidispine" type="tns:SimpleMetadataType" />

```

ConformDocument

```

3355 <xs:element name="ConformDocument" xmlns:tns="http://xml.vidispine.com/schema/
↪vidispine" type="tns:ConformType" />
3356
3357 <xs:complexType name="ConformType">
3358   <xs:sequence>
3359     <xs:element name="timeBase" type="tns:TimeBaseType" minOccurs="0"
↪maxOccurs="1" />
3360     <xs:element name="timeline" type="tns:ConformTimelineType" minOccurs="1"
↪maxOccurs="1" />
3361     <xs:element name="overlay" type="tns:ConformOverlayType" minOccurs="0"
↪maxOccurs="unbounded" />
3362     <xs:element name="textOverlay" type="tns:TextOverlayType" minOccurs="0"
↪maxOccurs="unbounded" />
3363   </xs:sequence>
3364 </xs:complexType>
3365
3366 <xs:complexType name="ConformOverlayType">
3367   <xs:sequence>
3368     <xs:element name="id" type="tns:SiteIdType" minOccurs="1" maxOccurs="1"/>
3369     <xs:element name="x" type="xs:int" minOccurs="1" maxOccurs="1"/>
3370     <xs:element name="y" type="xs:int" minOccurs="1" maxOccurs="1"/>
3371     <xs:element name="interval" type="tns:TimeIntervalType" minOccurs="0"/>
3372   </xs:sequence>
3373 </xs:complexType>
3374
3375 <xs:complexType name="ConformTimelineType">
3376   <xs:sequence>
3377     <xs:element name="segment" type="tns:ConformSegmentType" minOccurs="0"
↪maxOccurs="unbounded" />
3378   </xs:sequence>
3379 </xs:complexType>
3380
3381 <xs:complexType name="ConformSegmentType">
3382   <xs:sequence>
3383     <xs:element name="source" type="tns:ConformSourceType" minOccurs="1"
↪maxOccurs="1" />
3384     <xs:element name="destination" type="tns:ConformDestinationType"
↪minOccurs="0" maxOccurs="1" />
3385   </xs:sequence>
3386 </xs:complexType>
3387
3388 <xs:complexType name="ConformSourceType">
3389   <xs:sequence>
3390     <xs:element name="id" type="tns:SiteIdType" minOccurs="1" maxOccurs="1" />
3391     <xs:element name="interval" type="tns:ConformIntervalType" minOccurs="0"
↪maxOccurs="1" />
3392   </xs:sequence>
3393 </xs:complexType>

```

```

3394
3395     <xs:complexType name="ConformDestinationType">
3396         <xs:sequence>
3397             <xs:element name="interval" type="tns:ConformIntervalType" minOccurs="1"
↪maxOccurs="1" />
3398         </xs:sequence>
3399     </xs:complexType>
3400
3401     <xs:complexType name="ConformIntervalType">
3402         <xs:sequence>
3403             <xs:element name="start" type="tns:ConformTimePointType" minOccurs="1"
↪maxOccurs="1" />
3404             <xs:element name="end" type="tns:ConformTimePointType" minOccurs="0"
↪maxOccurs="1" />
3405         </xs:sequence>
3406     </xs:complexType>
3407
3408     <xs:complexType name="ConformTimePointType">
3409         <xs:sequence>
3410             <xs:element name="samples" type="xs:integer" minOccurs="1" maxOccurs="1" /
↪>
3411             <xs:element name="timeBase" type="tns:TimeBaseType" minOccurs="0"
↪maxOccurs="1" />
3412         </xs:sequence>
3413     </xs:complexType>

```

JobPoolDocument

```

3415     <xs:element name="JobPoolDocument" xmlns:tns="http://xml.vidispine.com/schema/
↪vidispine" type="tns:JobPoolType" />
3416     <xs:complexType name="JobPoolType">
3417         <xs:sequence>
3418             <xs:element name="priorityThreshold" type="xs:string" minOccurs="1"
↪maxOccurs="1"/>
3419             <xs:element name="size" type="xs:int" minOccurs="1" maxOccurs="1"/>
3420         </xs:sequence>
3421     </xs:complexType>

```

MetricsConfigurationDocument

```

3423     <xs:element name="MetricsConfigurationDocument" xmlns:tns="http://xml.vidispine.
↪com/schema/vidispine" type="tns:MetricsConfigurationType" />
3424     <xs:complexType name="MetricsConfigurationType">
3425         <xs:sequence>
3426             <xs:element name="statsd" type="tns:StatsdReporterType" minOccurs="0"
↪maxOccurs="1"/>
3427         </xs:sequence>
3428     </xs:complexType>
3429
3430     <xs:complexType name="StatsdReporterType">
3431         <xs:complexContent>
3432             <xs:extension base="tns:MetricsReporterType">
3433                 <xs:sequence maxOccurs="1" minOccurs="1">
3434                     <xs:element name="host" type="xs:string" minOccurs="0" maxOccurs=
↪"1" />
3435                     <xs:element name="port" type="xs:int" minOccurs="0" maxOccurs="1"/
↪>
3436                     <xs:element name="prefix" type="xs:string" minOccurs="0"
↪maxOccurs="1"/>

```

```

3437         <xs:element name="tags" type="xs:boolean" minOccurs="0" maxOccurs=
↪ "1" />
3438     </xs:sequence>
3439 </xs:extension>
3440 </xs:complexContent>
3441 </xs:complexType>
3442
3443 <xs:complexType name="MetricsReporterType">
3444     <xs:sequence>
3445         <xs:element name="exclude" type="xs:string" minOccurs="0" maxOccurs=
↪ "unbounded" />
3446         <xs:element name="include" type="xs:string" minOccurs="0" maxOccurs=
↪ "unbounded" />
3447     </xs:sequence>
3448 </xs:complexType>

```

IndexingConfigurationDocument

```

3450 <xs:element name="IndexingConfigurationDocument" xmlns:tns="http://xml.vidispine.
↪ com/schema/vidispine" type="tns:IndexingConfigurationType" />
3451 <xs:complexType name="IndexingConfigurationType">
3452     <xs:sequence>
3453         <xs:choice>
3454             <xs:sequence>
3455                 <xs:element name="solrPath" type="xs:string" minOccurs="1"
↪ maxOccurs="1" />
3456             </xs:sequence>
3457             <xs:sequence>
3458                 <xs:element name="solrCollection" type="xs:string" minOccurs="1"
↪ maxOccurs="1" />
3459                 <xs:element name="zookeeperHost" type="xs:string" minOccurs="1"
↪ maxOccurs="unbounded" />
3460             </xs:sequence>
3461             <xs:sequence>
3462                 <xs:element name="elasticsearchPath" type="xs:string" minOccurs="1"
↪ maxOccurs="1" />
3463             </xs:sequence>
3464         </xs:choice>
3465         <xs:element name="commitInterval" type="xs:int" minOccurs="0" maxOccurs="1"
↪ />
3466         <xs:element name="softCommitInterval" type="xs:int" minOccurs="0"
↪ maxOccurs="1" />
3467         <xs:element name="autoSoftCommit" type="xs:boolean" minOccurs="0"
↪ maxOccurs="1" />
3468
3469         <xs:element name="pingAttempts" type="xs:int" minOccurs="0" maxOccurs="1" /
↪ >
3470         <xs:element name="pingTimeout" type="xs:int" minOccurs="0" maxOccurs="1" />
3471         <xs:element name="queryTimeout" type="xs:int" minOccurs="0" maxOccurs="1" /
↪ >
3472
3473         <xs:element name="fieldDefault" minOccurs="0" maxOccurs="unbounded">
3474             <xs:complexType>
3475                 <xs:sequence>
3476                     <xs:element name="name" type="xs:string" minOccurs="1"
↪ maxOccurs="1" />
3477                     <xs:element name="fullText" type="xs:boolean" minOccurs="1"
↪ maxOccurs="1" />

```

```

3478         </xs:sequence>
3479     </xs:complexType>
3480 </xs:element>
3481 </xs:sequence>
3482 </xs:complexType>

```

PathAliasConfigurationDocument

```

3484 <xs:element name="PathAliasConfigurationDocument" xmlns:tns="http://xml.vidispine.
↪com/schema/vidispine" type="tns:PathAliasConfigurationType" />
3485 <xs:complexType name="PathAliasConfigurationType">
3486     <xs:sequence maxOccurs="1" minOccurs="1">
3487         <xs:element name="alias" type="xs:string" minOccurs="0" maxOccurs=
↪"unbounded"/>
3488     </xs:sequence>
3489 </xs:complexType>

```

JobPoolListDocument

```

3491 <xs:element name="JobPoolListDocument" xmlns:tns="http://xml.vidispine.com/schema/
↪vidispine" type="tns:JobPoolListType" />
3492 <xs:complexType name="JobPoolListType">
3493     <xs:sequence>
3494         <xs:element name="concurrentJobs" type="xs:int" minOccurs="0" maxOccurs="1
↪"/>
3495         <xs:element name="pool" type="tns:JobPoolType" minOccurs="0" maxOccurs=
↪"unbounded"/>
3496     </xs:sequence>
3497 </xs:complexType>

```

FtpPoolConfigurationDocument

```

3499 <xs:element name="FtpPoolConfigurationDocument" xmlns:tns="http://xml.vidispine.
↪com/schema/vidispine" type="tns:FtpPoolConfigurationType" />
3500 <xs:complexType name="FtpPoolConfigurationType">
3501     <xs:sequence maxOccurs="1" minOccurs="1">
3502         <xs:element name="pool" type="tns:ConnectionPoolType" minOccurs="0"
↪maxOccurs="1"/>
3503     </xs:sequence>
3504 </xs:complexType>

```

TaskGroupListDocument

```

3506 <xs:element name="TaskGroupListDocument" xmlns:tns="http://xml.vidispine.com/
↪schema/vidispine" type="tns:TaskGroupListType" />
3507 <xs:complexType name="TaskGroupListType">
3508     <xs:sequence>
3509         <xs:element name="group" type="tns:TaskGroupType" minOccurs="0" maxOccurs=
↪"unbounded"/>
3510     </xs:sequence>
3511 </xs:complexType>

```

TaskGroupDocument

```

3513 <xs:element name="TaskGroupDocument" xmlns:tns="http://xml.vidispine.com/schema/
↪vidispine" type="tns:TaskGroupType" />
3514 <xs:complexType name="TaskGroupType">
3515     <xs:sequence>

```

```

3516     <xs:element name="loc" type="xs:anyURI" minOccurs="0" maxOccurs="1"/>
3517     <xs:element name="name" type="xs:string" minOccurs="1" maxOccurs="1"/>
3518     <xs:element name="job" minOccurs="0" maxOccurs="unbounded">
3519         <xs:complexType>
3520             <xs:sequence>
3521                 <xs:element name="type" type="xs:string" minOccurs="0"
↪maxOccurs="unbounded"/>
3522                 <xs:element name="priority" type="xs:string" minOccurs="0"
↪maxOccurs="unbounded"/>
3523                 <xs:element name="user" type="xs:string" minOccurs="0"
↪maxOccurs="unbounded"/>
3524                 <xs:element name="group" type="xs:string" minOccurs="0"
↪maxOccurs="unbounded"/>
3525                 <xs:element name="data" minOccurs="0" maxOccurs="unbounded">
3526                     <xs:complexType>
3527                         <xs:sequence>
3528                             <xs:element name="key" type="xs:string" minOccurs=
↪"1" maxOccurs="1"/>
3529                             <xs:element name="value" type="xs:string"
↪minOccurs="0" maxOccurs="1"/>
3530                         </xs:sequence>
3531                     </xs:complexType>
3532                 </xs:element>
3533             </xs:sequence>
3534         </xs:complexType>
3535     </xs:element>
3536     <xs:element name="transcoder" minOccurs="0" maxOccurs="unbounded">
3537         <xs:complexType>
3538             <xs:sequence>
3539                 <xs:element name="id" type="xs:string" minOccurs="1"
↪maxOccurs="1"/>
3540             </xs:sequence>
3541         </xs:complexType>
3542     </xs:element>
3543     <xs:element name="metadata" type="tns:SimpleMetadataType" minOccurs="0"
↪maxOccurs="1" />
3544     <xs:element name="priority" type="xs:string" minOccurs="0" maxOccurs="1"/>
3545 </xs:sequence>
3546 </xs:complexType>
3547
3548 <xs:complexType name="ConnectionPoolType">
3549     <xs:sequence maxOccurs="1" minOccurs="1">
3550         <xs:element name="minSize" type="xs:int" />
3551         <xs:element name="maxSize" type="xs:int" minOccurs="0" />
3552         <xs:element name="evictionInterval" type="xs:int" minOccurs="0" />
3553         <xs:element name="minIdleTime" type="xs:int" minOccurs="0" />
3554     </xs:sequence>
3555 </xs:complexType>

```

SiteRuleDocument

```

3557     <xs:element name="SiteRuleDocument" xmlns:tns="http://xml.vidispine.com/schema/
↪vidispine" type="tns:SiteRuleType" />
3558     <xs:complexType name="SiteRuleType">
3559         <xs:sequence>
3560             <xs:element name="id" type="tns:SiteIdType" minOccurs="0" />
3561             <xs:element name="site" type="xs:string" minOccurs="0" />
3562             <xs:element name="metadata" type="xs:boolean" minOccurs="0" maxOccurs="1"/>
↪

```

```

3563     <xs:element name="shape" type="xs:string" minOccurs="0" maxOccurs=
↪ "unbounded" />
3564     <xs:element name="groups" type="xs:boolean" minOccurs="0" maxOccurs="1" />
3565     <xs:element name="access" type="xs:boolean" minOccurs="0" maxOccurs="1" />
3566     <xs:element name="files" type="xs:boolean" minOccurs="0" maxOccurs="1" />
3567     <xs:element name="targetStorage" type="xs:string" minOccurs="0" maxOccurs=
↪ "1" />
3568     <xs:element name="localTargetStorage" type="xs:string" minOccurs="0"
↪ maxOccurs="1" />
3569     <xs:element name="deleted" type="xs:boolean" minOccurs="0" maxOccurs="1"/>
3570     </xs:sequence>
3571 </xs:complexType>

```

SiteRuleListDocument

```

3573 <xs:element name="SiteRuleListDocument" xmlns:tns="http://xml.vidispine.com/
↪ schema/vidispine" type="tns:SiteRuleListType" />
3574
3575 <xs:complexType name="SiteRuleListType">
3576   <xs:sequence>
3577     <xs:element name="siteRule" type="tns:SiteRuleType" minOccurs="0"
↪ maxOccurs="unbounded" />
3578   </xs:sequence>
3579 </xs:complexType>

```

StorageImportDocument

```

3582 <xs:element name="StorageImportDocument" xmlns:tns="http://xml.vidispine.com/
↪ schema/vidispine" type="tns:StorageImportType" />
3583 <xs:complexType name="StorageImportType">
3584   <xs:sequence>
3585     <xs:element name="file" type="tns:FileImportDefType" minOccurs="0"
↪ maxOccurs="unbounded" />
3586   </xs:sequence>
3587 </xs:complexType>
3588
3589 <xs:complexType name="FileImportDefType" xmlns:tns="http://xml.vidispine.com/
↪ schema/vidispine">
3590   <xs:sequence>
3591     <xs:element name="fileId" type="tns:SiteIdType"/>
3592     <xs:element name="path" type="xs:string" />
3593     <xs:element name="size" type="xs:long" />
3594     <xs:element name="component" type="tns:SiteIdType" minOccurs="0"
↪ maxOccurs="unbounded" />
3595   </xs:sequence>
3596 </xs:complexType>

```

VersionDocument

```

3599 <xs:element name="VersionDocument" xmlns:tns="http://xml.vidispine.com/schema/
↪ vidispine" type="tns:VersionType"/>
3600
3601 <xs:complexType name="VersionType" xmlns:tns="http://xml.vidispine.com/schema/
↪ vidispine">
3602   <xs:sequence maxOccurs="1" minOccurs="1">
3603     <xs:element name="component" type="tns:CompType" minOccurs="0" maxOccurs=
↪ "unbounded" />
3604     <xs:element name="systemInfo" type="tns:SystemInfoType" minOccurs="0"
↪ maxOccurs="1" />

```

```

3605     <xs:element name="licenseInfo" type="tns:LicenseType" minOccurs="0"/>
3606   </xs:sequence>
3607 </xs:complexType>
3608
3609   <xs:complexType name="SystemInfoType" xmlns:tns="http://xml.vidispine.com/schema/
↪vidispine">
3610     <xs:sequence minOccurs="1" maxOccurs="1" minOccurs="0">
3611       <xs:element name="macaddress" type="xs:string" maxOccurs="unbounded" ↪
↪minOccurs="0"/>
3612       <xs:element name="databaseSize" type="xs:long" minOccurs="0"/>
3613     </xs:sequence>
3614   </xs:complexType>
3615
3616   <xs:complexType name="CompType" xmlns:tns="http://xml.vidispine.com/schema/
↪vidispine">
3617     <xs:sequence minOccurs="1" maxOccurs="1" minOccurs="1">
3618       <xs:element name="name" type="xs:string" minOccurs="1" maxOccurs="1"/>
3619       <xs:element name="siteId" type="xs:string" minOccurs="0" maxOccurs="1"/>
3620       <xs:element name="version" type="xs:string" minOccurs="1" maxOccurs="1"/>
3621     </xs:sequence>
3622   </xs:complexType>
3623
3624   <xs:complexType name="LicenseType" xmlns:tns="http://xml.vidispine.com/schema/
↪vidispine">
3625     <xs:sequence minOccurs="1" maxOccurs="1" minOccurs="1">
3626       <xs:element name="expiryDate" type="xs:string" minOccurs="0"/>
3627       <xs:element name="macaddresses" type="tns:SystemInfoType" minOccurs="0" ↪
↪maxOccurs="1"/>
3628       <xs:element name="fileStatus" type="xs:string" minOccurs="0" maxOccurs="1
↪"/>
3629       <xs:element name="storageNumber" type="tns:LicenseNumberType" minOccurs="0
↪"/>
3630       <xs:element name="userNumber" type="tns:LicenseNumberType" minOccurs="0"/>
3631       <xs:element name="itemNumber" type="tns:LicenseNumberType" minOccurs="0"/>
3632       <xs:element name="transcoderNumber" type="tns:LicenseNumberType" ↪
↪minOccurs="0"/>
3633       <xs:element name="endCustomerCompanyname" type="xs:string" minOccurs="0"/>
3634       <xs:element name="endCustomerCompanyContactEmail" type="xs:string" ↪
↪minOccurs="0"/>
3635       <xs:element name="resellerCompanyName" type="xs:string" minOccurs="0"/>
3636       <xs:element name="resellerCompanyContactEmail" type="xs:string" minOccurs=
↪"0"/>
3637       <xs:element name="licenseStatus" type="xs:string" minOccurs="0" maxOccurs=
↪"1"/>
3638       <xs:element name="codecStatus" type="tns:CodecStatusType" minOccurs="0"/>
3639       <xs:element name="licenseErrorStatus" type="tns:LicenseErrorType" ↪
↪minOccurs="0"/>
3640       <xs:element name="licenseType" type="xs:string" minOccurs="0" maxOccurs="1
↪"/>
3641     </xs:sequence>
3642   </xs:complexType>

```

MasterLicenseDocument

```

3644   <xs:element name="MasterLicenseDocument" xmlns:tns="http://xml.vidispine.com/
↪schema/vidispine" type="tns:MasterLicenseType" />
3645   <xs:complexType name="MasterLicenseType" xmlns:tns="http://xml.vidispine.com/
↪schema/vidispine">

```

```

3646     <xs:complexContent>
3647         <xs:extension base="tns:LicenseType">
3648             <xs:sequence maxOccurs="1" minOccurs="1">
3649                 <xs:element name="masterIdentifier" type="xs:string" minOccurs="1
↪ " maxOccurs="1"/>
3650             </xs:sequence>
3651         </xs:extension>
3652     </xs:complexContent>
3653 </xs:complexType>

```

SlaveLicenseDocument

```

3655     <xs:element name="SlaveLicenseDocument" xmlns:tns="http://xml.vidispine.com/
↪ schema/vidispine" type="tns:SlaveLicenseType" />
3656     <xs:complexType name="SlaveLicenseType" xmlns:tns="http://xml.vidispine.com/
↪ schema/vidispine">
3657         <xs:complexContent>
3658             <xs:extension base="tns:LicenseType">
3659                 <xs:sequence maxOccurs="1" minOccurs="1">
3660                     <xs:element name="masterIdentifier" type="xs:string" minOccurs="0
↪ " maxOccurs="1"/>
3661                     <xs:element name="slaveIdentifier" type="xs:string" minOccurs="0"
↪ maxOccurs="1"/>
3662                     <xs:element name="slaveInstances" type="xs:integer" minOccurs="0"
↪ maxOccurs="1"/>
3663                     <xs:element name="validityTime" type="xs:dateTime" minOccurs="0"
↪ maxOccurs="1"/>
3664                     <xs:element name="validityPeriod" type="xs:integer" minOccurs="0"
↪ maxOccurs="1"/>
3665                     <xs:element name="id" type="xs:string" minOccurs="0" maxOccurs="1
↪ "/>
3666                 </xs:sequence>
3667             </xs:extension>
3668         </xs:complexContent>
3669     </xs:complexType>

```

SlaveLicenseListDocument

```

3671     <xs:element name="SlaveLicenseListDocument" xmlns:tns="http://xml.vidispine.com/
↪ schema/vidispine" type="tns:SlaveLicenseListType" />
3672     <xs:complexType name="SlaveLicenseListType" xmlns:tns="http://xml.vidispine.com/
↪ schema/vidispine">
3673         <xs:sequence maxOccurs="1" minOccurs="1">
3674             <xs:element name="slaveLicense" type="tns:SlaveLicenseType" maxOccurs=
↪ "unbounded" minOccurs="0"/>
3675         </xs:sequence>
3676     </xs:complexType>

```

SlaveAuthDocument

```

3678     <xs:element name="SlaveAuthDocument" xmlns:tns="http://xml.vidispine.com/schema/
↪ vidispine" type="tns:SlaveAuthType" />
3679     <xs:complexType name="SlaveAuthType" xmlns:tns="http://xml.vidispine.com/schema/
↪ vidispine">
3680         <xs:sequence maxOccurs="1" minOccurs="1">
3681             <xs:element name="slaveId" type="xs:string" minOccurs="1" maxOccurs="1"/>
3682             <xs:element name="slaveIp" type="xs:string" minOccurs="1" maxOccurs="1"/>
3683             <xs:element name="slaveMac" type="xs:string" minOccurs="1" maxOccurs="1"/>

```



```

3684     <xs:element name="requestSourceIp" type="xs:string" minOccurs="0"
↪maxOccurs="1"/>
3685     <xs:element name="slaveInstanceName" type="xs:string" minOccurs="0"
↪maxOccurs="1"/>
3686     <xs:element name="hostname" type="xs:string" minOccurs="0" maxOccurs="1"/>
3687     <xs:element name="licenseStatus" type="tns:VersionType" minOccurs="0"
↪maxOccurs="1"/>
3688     </xs:sequence>
3689 </xs:complexType>

```

SlaveListDocument

```

3691     <xs:element name="SlaveListDocument" xmlns:tns="http://xml.vidispine.com/schema/
↪vidispine" type="tns:SlaveListType" />
3692     <xs:complexType name="SlaveListType">
3693         <xs:sequence>
3694             <xs:element name="slave" type="tns:SlaveType" minOccurs="0" maxOccurs=
↪"unbounded" />
3695         </xs:sequence>
3696     </xs:complexType>
3697
3698     <xs:complexType name="SlaveType" xmlns:tns="http://xml.vidispine.com/schema/
↪vidispine">
3699         <xs:sequence maxOccurs="1" minOccurs="1">
3700             <xs:element name="Id" type="xs:string" minOccurs="1" maxOccurs="1"/>
3701             <xs:element name="slaveId" type="xs:string" minOccurs="1" maxOccurs="1"/>
3702             <xs:element name="slaveIp" type="xs:string" minOccurs="1" maxOccurs="1"/>
3703             <xs:element name="slaveMac" type="xs:string" minOccurs="1" maxOccurs="1"/>
3704             <xs:element name="requestSourceIp" type="xs:string" minOccurs="0"
↪maxOccurs="1"/>
3705             <xs:element name="slaveInstanceName" type="xs:string" minOccurs="0"
↪maxOccurs="1"/>
3706             <xs:element name="hostname" type="xs:string" minOccurs="0" maxOccurs="1"/>
3707             <xs:element name="lastUpdated" type="xs:dateTime" minOccurs="1" maxOccurs=
↪"1"/>
3708         </xs:sequence>
3709     </xs:complexType>

```

SlaveAuthInfoDocument

```

3711     <xs:element name="SlaveAuthInfoDocument" xmlns:tns="http://xml.vidispine.com/
↪schema/vidispine" type="tns:SlaveAuthInfoType" />
3712     <xs:complexType name="SlaveAuthInfoType" xmlns:tns="http://xml.vidispine.com/
↪schema/vidispine">
3713         <xs:sequence maxOccurs="1" minOccurs="1">
3714             <xs:element name="masterHost" type="xs:string" minOccurs="1" maxOccurs=
↪"unbounded"/>
3715             <xs:element name="slaveId" type="xs:string" minOccurs="1" maxOccurs="1"/>
3716         </xs:sequence>
3717     </xs:complexType>
3718
3719     <xs:complexType name="LicenseNumberType">
3720         <xs:sequence minOccurs="0" maxOccurs="1">
3721             <xs:element name="allowed" type="xs:string" minOccurs="0" maxOccurs="1"/>
3722             <xs:element name="current" type="xs:string" minOccurs="0" maxOccurs="1"/>
3723         </xs:sequence>
3724     </xs:complexType>
3725

```

```

3726     <xs:complexType name="CodecStatusType" xmlns:tns="http://xml.vidispine.com/schema/
↳vidispine">
3727         <xs:sequence>
3728             <xs:element name="codec" type="tns:CodecType" minOccurs="0" maxOccurs=
↳"unbounded"/>
3729             <xs:element name="codecExtraTags" type="xs:string" minOccurs="0"
↳maxOccurs="1" />
3730         </xs:sequence>
3731     </xs:complexType>
3732
3733     <xs:complexType name="CodecType">
3734         <xs:sequence>
3735             <xs:element name="encode" type="xs:boolean" minOccurs="0" maxOccurs="1"/>
3736             <xs:element name="decode" type="xs:boolean" minOccurs="0" maxOccurs="1"/>
3737         </xs:sequence>
3738         <xs:attribute name="name" type="xs:string"/>
3739     </xs:complexType>
3740
3741     <xs:complexType name="EncodeDecodeType">
3742         <xs:sequence maxOccurs="1" minOccurs="0">
3743             <xs:element name="encode" type="xs:boolean" minOccurs="0" maxOccurs="1"/>
3744             <xs:element name="decode" type="xs:boolean" minOccurs="0" maxOccurs="1"/>
3745         </xs:sequence>
3746     </xs:complexType>
3747
3748
3749     <xs:complexType name="LicenseErrorType" xmlns:tns="http://xml.vidispine.com/
↳schema/vidispine">
3750         <xs:sequence maxOccurs="1" minOccurs="1">
3751             <xs:element name="licenseError" type="xs:string" minOccurs="0"/>
3752         </xs:sequence>
3753     </xs:complexType>
3754
3755     <!-- START PROJECT TYPES -->

```

ProjectFileDocument

```

3757     <xs:element name="ProjectFileDocument" xmlns:tns="http://xml.vidispine.com/schema/
↳vidispine" type="tns:ProjectFileType" />
3758     <xs:complexType name="ProjectFileType">
3759         <xs:sequence>
3760             <xs:element name="location" type="xs:anyURI"/>
3761             <xs:element name="type" type="xs:string" minOccurs="0"/>
3762             <xs:element name="asset" minOccurs="0" maxOccurs="unbounded">
3763                 <xs:complexType>
3764                     <xs:sequence>
3765                         <xs:element name="id" type="xs:string"/>
3766                         <xs:element name="name" type="xs:string"/>
3767                         <xs:element name="type" type="xs:string"/>
3768                         <xs:element name="status" type="xs:string" minOccurs="0"/>
3769                         <xs:element name="item" minOccurs="0" maxOccurs="unbounded">
3770                             <xs:complexType>
3771                                 <xs:attribute name="id" type="tns:SiteIdType"/>
3772                                 <xs:attribute name="shape" type="tns:SiteIdType" use=
↳"optional"/>
3773                                 <xs:attribute name="match" type="xs:string"/>
3774                                 <xs:attribute name="permission" type="xs:string"/>
3775                             </xs:complexType>

```

```

3776         </xs:element>
3777         <xs:element name="file" type="tns:FileReferenceType"
↪minOccurs="0" maxOccurs="unbounded" />
3778         </xs:sequence>
3779         </xs:complexType>
3780     </xs:element>
3781 </xs:sequence>
3782 </xs:complexType>
3783
3784 <xs:complexType name="FileReferenceType">
3785     <xs:sequence>
3786         <!-- Either an id or path will be available, depending on the NLE -->
3787         <xs:choice>
3788             <xs:element name="id" type="xs:string" />
3789             <xs:element name="path" type="xs:anyURI" />
3790         </xs:choice>
3791         <xs:element name="hash" type="xs:string" minOccurs="0" />
3792         <xs:element name="status" type="xs:string" minOccurs="0" />
3793         <xs:element name="file" type="tns:FileType" minOccurs="0" maxOccurs=
↪"unbounded" />
3794     </xs:sequence>
3795 </xs:complexType>

```

ExportRequestDocument

```

3797 <xs:element name="ExportRequestDocument" xmlns:tns="http://xml.vidispine.com/
↪schema/vidispine" type="tns:ExportRequestType" />
3798 <xs:complexType name="ExportRequestType">
3799     <xs:sequence>
3800         <xs:element name="tag" type="xs:string" minOccurs="0" maxOccurs="1" />
3801         <xs:element name="format" type="xs:string" minOccurs="0" maxOccurs="1" />
3802         <xs:element name="content" type="xs:string" minOccurs="0" maxOccurs=
↪"unbounded" />
3803         <xs:element name="storage" minOccurs="0" maxOccurs="unbounded">
3804             <xs:complexType>
3805                 <xs:sequence>
3806                     <xs:element name="id" type="tns:SiteIdType" minOccurs="1"
↪maxOccurs="1" />
3807                     <xs:element name="path" type="xs:anyURI" minOccurs="0"
↪maxOccurs="1" />
3808                 </xs:sequence>
3809             </xs:complexType>
3810         </xs:element>
3811         <xs:element name="item" minOccurs="0" maxOccurs="unbounded">
3812             <xs:complexType>
3813                 <xs:sequence>
3814                     <xs:element name="id" type="tns:SiteIdType" minOccurs="1"
↪maxOccurs="1" />
3815                     <xs:element name="path" type="xs:anyURI" minOccurs="1"
↪maxOccurs="1" />
3816                 </xs:sequence>
3817             </xs:complexType>
3818         </xs:element>
3819         <xs:element name="sequence" type="tns:SequenceType" minOccurs="0"
↪maxOccurs="1" />
3820     </xs:sequence>
3821 </xs:complexType>

```

ExportResponseDocument

```

3823 <xs:element name="ExportResponseDocument" xmlns:tns="http://xml.vidispine.com/
↳schema/vidispine" type="tns:ExportResponseType" />
3824 <xs:complexType name="ExportResponseType">
3825 <xs:sequence>
3826 <xs:element name="problem" type="tns:ExportProblemType" minOccurs="0"
↳maxOccurs="unbounded"/>
3827 <xs:element name="mappings" type="tns:EssenceMappingsType" minOccurs="1"/>
3828 </xs:sequence>
3829 </xs:complexType>

```

ExportStatusDocument

```

3831 <xs:element name="ExportStatusDocument" xmlns:tns="http://xml.vidispine.com/
↳schema/vidispine" type="tns:ExportStatusType" />
3832 <xs:complexType name="ExportStatusType">
3833 <xs:sequence>
3834 <xs:element name="problem" type="tns:ExportProblemType" minOccurs="0"
↳maxOccurs="unbounded"/>
3835 </xs:sequence>
3836 </xs:complexType>
3837
3838 <xs:complexType name="ExportProblemType">
3839 <xs:sequence>
3840 <xs:element name="type" type="xs:string" minOccurs="1" maxOccurs="1"/>
3841 <xs:element name="message" type="xs:string"/>
3842 <xs:element name="asset" type="xs:string" minOccurs="0"/>
3843 <xs:element name="parameter" type="tns:KeyValuePairType" minOccurs="0"
↳maxOccurs="unbounded"/>
3844 </xs:sequence>
3845 </xs:complexType>

```

EssenceMappingsDocument

```

3847 <xs:element name="EssenceMappingsDocument" xmlns:tns="http://xml.vidispine.com/
↳schema/vidispine" type="tns:EssenceMappingsType" />
3848 <xs:complexType name="EssenceMappingsType">
3849 <xs:sequence>
3850 <xs:element name="asset" type="tns:AssetMappingType" minOccurs="0"
↳maxOccurs="unbounded"/>
3851 <xs:element name="file" type="tns:FileMappingType" minOccurs="0"
↳maxOccurs="unbounded"/>
3852 <xs:element name="storage" type="tns:StorageMappingType" minOccurs="0"
↳maxOccurs="unbounded"/>
3853 </xs:sequence>
3854 </xs:complexType>
3855
3856 <xs:complexType name="AssetMappingType">
3857 <xs:attribute name="id" type="xs:string" use="required"/>
3858 <xs:attribute name="item" type="tns:SiteIdType" use="required"/>
3859 <xs:attribute name="shape" type="tns:SiteIdType" use="optional"/>
3860 </xs:complexType>
3861
3862 <xs:complexType name="StorageMappingType">
3863 <xs:attribute name="path" type="xs:string" use="required"/>
3864 <xs:attribute name="id" type="tns:SiteIdType" use="required"/>
3865 </xs:complexType>
3866

```

```

3867 <xs:complexType name="FileMappingType">
3868   <!-- Either an id or path should be provided, depending on the NLE -->
3869   <xs:attribute name="id" type="xs:string" use="optional"/>
3870   <xs:attribute name="path" type="xs:anyURI" use="optional"/>
3871   <xs:attribute name="hash" type="xs:string" use="optional"/>
3872   <xs:attribute name="size" type="xs:long" use="optional"/>
3873   <xs:attribute name="timestamp" type="xs:dateTime" use="optional"/>
3874 </xs:complexType>
3875
3876 <!-- END PROJECT TYPES -->

```

ReindexRequestDocument

```

3878 <xs:element name="ReindexRequestDocument" xmlns:tns="http://xml.vidispine.com/
↪schema/vidispine" type="tns:ReindexRequestType"/>
3879 <xs:complexType name="ReindexRequestType" xmlns:tns="http://xml.vidispine.com/
↪schema/vidispine">
3880   <xs:sequence maxOccurs="1" minOccurs="1">
3881     <xs:element name="index" type="xs:string" />
3882     <xs:element name="priority" type="xs:int" />
3883     <xs:element name="status" type="xs:string" />
3884     <xs:element name="start" type="xs:dateTime" minOccurs="0" maxOccurs="1"/>
3885     <xs:element name="finish" type="xs:dateTime" minOccurs="0" maxOccurs="1"/>
3886     <xs:element name="indexesDone" type="xs:integer" minOccurs="0" maxOccurs=
↪"1"/>
3887     <xs:element name="indexesTotal" type="xs:integer" minOccurs="0" maxOccurs=
↪"1"/>
3888   </xs:sequence>
3889 </xs:complexType>

```

PlaceholderImportRequestDocument

```

3891 <xs:element name="PlaceholderImportRequestDocument" xmlns:tns="http://xml.
↪vidispine.com/schema/vidispine" type="tns:PlaceholderImportRequestType"/>
3892 <xs:complexType name="PlaceholderImportRequestType" xmlns:tns="http://xml.
↪vidispine.com/schema/vidispine">
3893   <xs:sequence maxOccurs="1" minOccurs="1">
3894     <xs:element name="container" type="xs:anyURI" minOccurs="0" maxOccurs="1"/
↪>
3895     <xs:element name="video" type="xs:anyURI" minOccurs="0" maxOccurs=
↪"unbounded"/>
3896     <xs:element name="audio" type="xs:anyURI" minOccurs="0" maxOccurs=
↪"unbounded"/>
3897     <xs:element name="binary" type="xs:anyURI" minOccurs="0" maxOccurs=
↪"unbounded"/>
3898     <!--<xs:element name="metadata" type="tns:MetadataType" minOccurs="0"
↪maxOccurs="1"/>-->
3899   </xs:sequence>
3900 </xs:complexType>

```

ConformRequestDocument

```

3902 <xs:element name="ConformRequestDocument" xmlns:tns="http://xml.vidispine.com/
↪schema/vidispine" type="tns:ConformRequestType"/>
3903 <xs:complexType name="ConformRequestType" xmlns:tns="http://xml.vidispine.com/
↪schema/vidispine">
3904   <xs:sequence maxOccurs="1" minOccurs="1">
3905     <xs:element name="conform" type="tns:ConformType" minOccurs="1" maxOccurs=
↪"1"/>

```

```

3906     <xs:element name="metadata" type="tns:MetadataType" minOccurs="0"
↪maxOccurs="1"/>
3907     </xs:sequence>
3908 </xs:complexType>

```

SequenceRenderRequestDocument

```

3910     <xs:element name="SequenceRenderRequestDocument" xmlns:tns="http://xml.vidispine.
↪com/schema/vidispine" type="tns:SequenceRenderRequestType"/>
3911     <xs:complexType name="SequenceRenderRequestType" xmlns:tns="http://xml.vidispine.
↪com/schema/vidispine">
3912         <xs:sequence minOccurs="1" maxOccurs="1">
3913             <xs:element name="sequence" type="tns:SequenceType" minOccurs="1"
↪maxOccurs="1"/>
3914             <xs:element name="metadata" type="tns:MetadataType" minOccurs="0"
↪maxOccurs="1"/>
3915         </xs:sequence>
3916     </xs:complexType>

```

VidispineServiceListDocument

```

3918     <xs:element name="VidispineServiceListDocument" xmlns:tns="http://xml.vidispine.
↪com/schema/vidispine" type="tns:VidispineServiceListType" />
3919     <xs:complexType name="VidispineServiceListType">
3920         <xs:sequence>
3921             <xs:element name="service" type="tns:VidispineServiceType" minOccurs="0"
↪maxOccurs="unbounded"/>
3922         </xs:sequence>
3923     </xs:complexType>

```

VidispineServiceDocument

```

3925     <xs:element name="VidispineServiceDocument" xmlns:tns="http://xml.vidispine.com/
↪schema/vidispine" type="tns:VidispineServiceType"/>
3926     <xs:complexType name="VidispineServiceType" xmlns:tns="http://xml.vidispine.com/
↪schema/vidispine">
3927         <xs:sequence>
3928             <xs:element name="id" type="xs:string" minOccurs="0" maxOccurs="1"/>
3929             <xs:element name="name" type="xs:string" minOccurs="0" maxOccurs="1"/>
3930             <xs:element name="class" type="xs:string" minOccurs="0" maxOccurs="1"/>
3931             <xs:element name="arguments" type="xs:string" minOccurs="0" maxOccurs="1"/
↪>
3932             <xs:element name="isEnabled" type="xs:boolean" minOccurs="0" maxOccurs="1
↪"/>
3933             <xs:element name="isRunning" type="xs:boolean" minOccurs="0" maxOccurs="1
↪"/>
3934             <xs:element name="exception" type="xs:string" minOccurs="0" maxOccurs="1"/
↪>
3935             <xs:element name="exceptionTimestamp" type="xs:string" minOccurs="0"
↪maxOccurs="1"/>
3936             <xs:element name="thread" type="xs:string" minOccurs="0" maxOccurs="1"/>
3937             <xs:element name="threadStatus" type="xs:string" minOccurs="0" maxOccurs="
↪1"/>
3938             <xs:element name="load5" type="xs:double" minOccurs="0" maxOccurs="1"/>
3939             <xs:element name="load60" type="xs:double" minOccurs="0" maxOccurs="1"/>
3940         </xs:sequence>
3941     </xs:complexType>

```

ExportLocationListDocument

```

3943 <xs:element name="ExportLocationListDocument" xmlns:tns="http://xml.vidispine.com/
↪schema/vidispine" type="tns:ExportLocationListType"/>
3944 <xs:complexType name="ExportLocationListType" xmlns:tns="http://xml.vidispine.com/
↪schema/vidispine">
3945 <xs:sequence>
3946 <xs:element name="exportLocation" type="tns:ExportLocationType" minOccurs=
↪"0" maxOccurs="unbounded"/>
3947 </xs:sequence>
3948 </xs:complexType>

```

ExportLocationDocument

```

3950 <xs:element name="ExportLocationDocument" xmlns:tns="http://xml.vidispine.com/
↪schema/vidispine" type="tns:ExportLocationType"/>
3951 <xs:complexType name="ExportLocationType" xmlns:tns="http://xml.vidispine.com/
↪schema/vidispine">
3952 <xs:sequence>
3953 <xs:element name="name" type="xs:string" minOccurs="0" />
3954 <xs:element name="uri" type="xs:string" minOccurs="0" /> <!-- preserved_
↪for backwards compatibility -->
3955 <xs:element name="uriList" type="xs:string" minOccurs="0" maxOccurs=
↪"unbounded" />
3956 <xs:element name="projection" type="xs:string" minOccurs="0" />
3957 <xs:element name="tag" type="xs:string" minOccurs="0" maxOccurs="unbounded
↪"/>
3958 <xs:element name="script" type="xs:string" minOccurs="0" maxOccurs="1"/>
3959 </xs:sequence>
3960 </xs:complexType>
3961
3962
3963 <!-- SELF TEST DOCUMENTS -->
3964
3965 <xs:element name="SelfTestDocument" xmlns:tns="http://xml.vidispine.com/
↪schema/vidispine" type="tns:SelfTestType"/>
3966 <xs:complexType name="SelfTestType">
3967 <xs:sequence>
3968 <xs:element name="message" type="xs:string" minOccurs="0"
↪maxOccurs="unbounded"/>
3969 <xs:element name="test" type="tns:SelfTestType" minOccurs="0"
↪maxOccurs="unbounded"/>
3970 </xs:sequence>
3971 <xs:attribute name="name" type="xs:string" use="optional"/>
3972 <xs:attribute name="description" type="xs:string" use="optional"/>
3973 <xs:attribute name="status" type="xs:string" use="required"/>
3974 <xs:attribute name="took" type="xs:string" use="optional"/>
3975 </xs:complexType>
3976
3977 <xs:complexType name="LoudnessMixType" xmlns:tns="http://xml.vidispine.com/schema/
↪vidispine">
3978 <xs:sequence>
3979 <xs:element name="name" type="xs:string" minOccurs="0" />
3980 <xs:element name="weightdB" type="xs:double" minOccurs="0" />
3981 <xs:element name="sourceItemTrack" type="xs:string" minOccurs="0" />
3982 <xs:element name="sourceStream" type="xs:int" minOccurs="0" />
3983 <xs:element name="sourceChannel" type="xs:int" minOccurs="0" />
3984 </xs:sequence>
3985 </xs:complexType>

```

LoudnessDocument

```

3987 <xs:element name="LoudnessDocument" xmlns:tns="http://xml.vidispine.com/schema/
↳vidispine" type="tns:LoudnessType"/>
3988 <xs:complexType name="LoudnessType" xmlns:tns="http://xml.vidispine.com/schema/
↳vidispine">
3989 <xs:sequence>
3990 <xs:element name="id" type="tns:SiteIdType" minOccurs="0" />
3991 <xs:element name="shape" type="tns:SiteIdType" minOccurs="0" />
3992 <xs:element name="shapeTag" type="xs:string" minOccurs="0" />
3993 <xs:element name="mix" type="tns:LoudnessMixType" minOccurs="0" maxOccurs=
↳"unbounded" />
3994 <xs:element name="start" type="xs:string" minOccurs="0" />
3995 <xs:element name="end" type="xs:string" minOccurs="0" />
3996 <xs:element name="startLoudness" type="xs:string" minOccurs="0" />
3997 <xs:element name="endLoudness" type="xs:string" minOccurs="0" />
3998 <xs:element name="startRange" type="xs:string" minOccurs="0" />
3999 <xs:element name="endRange" type="xs:string" minOccurs="0" />
4000 <xs:element name="loudnessLU" type="xs:double" minOccurs="0" />
4001 <xs:element name="loudnessRangeLU" type="xs:double" minOccurs="0" />
4002 </xs:sequence>
4003 </xs:complexType>

```

AutoProjectionRuleDocument

```

4005 <xs:element name="AutoProjectionRuleDocument" xmlns:tns="http://xml.vidispine.com/
↳schema/vidispine" type="tns:AutoProjectionRuleType"/>
4006
4007 <xs:complexType name="AutoProjectionRuleType">
4008 <xs:sequence>
4009 <xs:element name="step" type="tns:AutoProjectionStepType" minOccurs="0"
↳maxOccurs="unbounded"/>
4010 <xs:element name="name" type="xs:string" minOccurs="0" maxOccurs="1"/>
4011 <xs:element name="description" type="xs:string" minOccurs="0" maxOccurs="1"
↳"/>
4012 <xs:element name="inputFilters" minOccurs="0">
4013 <xs:complexType>
4014 <xs:sequence>
4015 <xs:element name="inputFilter" minOccurs="0" maxOccurs=
↳"unbounded" type="tns:AutoProjectionInputFilterType"/>
4016 <xs:element name="bulkyMetadataKeysRegex" minOccurs="0"
↳maxOccurs="1" type="xs:string"/>
4017 </xs:sequence>
4018 </xs:complexType>
4019 </xs:element>
4020 <xs:element name="triggers" minOccurs="0">
4021 <xs:complexType>
4022 <xs:sequence>
4023 <xs:element name="trigger" minOccurs="0" maxOccurs="unbounded
↳" type="tns:AutoProjectionTriggerType"/>
4024 </xs:sequence>
4025 </xs:complexType>
4026 </xs:element>
4027 </xs:sequence>
4028 </xs:complexType>
4029
4030 <xs:simpleType name="AutoProjectionTriggerType">

```



```

4031     <xs:restriction base="xs:string">
4032         <xs:enumeration value="shapeMetadata"/>
4033         <xs:enumeration value="itemMetadata"/>
4034         <xs:enumeration value="bulkyMetadata"/>
4035     </xs:restriction>
4036 </xs:simpleType>
4037
4038 <xs:simpleType name="AutoProjectionInputFilterType">
4039     <xs:restriction base="xs:string">
4040         <xs:enumeration value="oldMetadata"/>
4041         <xs:enumeration value="shapeDocument"/>
4042     </xs:restriction>
4043 </xs:simpleType>
4044
4045 <xs:complexType name="AutoProjectionStepType">
4046     <xs:sequence>
4047         <xs:element name="order" type="xs:integer" default="1" minOccurs="0"
↪maxOccurs="1"/>
4048         <xs:element name="description" type="xs:string" minOccurs="0" maxOccurs="1
↪"/>
4049         <xs:sequence>
4050             <xs:choice>
4051                 <xs:element name="script" type="xs:string" minOccurs="0" maxOccurs="1
↪"/>
4052                 <xs:element name="xslt" type="xs:string" minOccurs="0" maxOccurs="1"/>
4053             </xs:choice>
4054         </xs:sequence>
4055     </xs:sequence>
4056 </xs:complexType>

```

MetadataWrapperDocument

```

4058     <xs:element name="MetadataWrapperDocument" xmlns:tns="http://xml.vidispine.com/
↪schema/vidispine" type="tns:MetadataWrapperType"/>
4059     <xs:complexType name="MetadataWrapperType">
4060         <xs:sequence>
4061             <xs:element name="metadata" type="tns:MetadataType" minOccurs="1"
↪maxOccurs="1"/>
4062             <xs:element name="oldMetadata" type="tns:MetadataListType" minOccurs="0"
↪maxOccurs="1"/>
4063             <xs:element name="shape" type="tns:ShapeType" minOccurs="0" maxOccurs=
↪"unbounded"/>
4064             <xs:element name="shapeMetadata" type="tns:SimpleMetadataType" minOccurs=
↪"0" maxOccurs="1"/>
4065             <xs:element name="bulkyMetadata" type="tns:BulkyMetadataType" minOccurs="1
↪" maxOccurs="1"/>
4066             <xs:element name="oldBulkyMetadata" type="tns:BulkyMetadataType"
↪minOccurs="0" maxOccurs="1"/>
4067             <xs:element name="targetId" type="xs:string" minOccurs="0" maxOccurs="1"/>
4068         </xs:sequence>
4069     </xs:complexType>

```

ErrorLogListDocument

```

4071     <xs:element name="ErrorLogListDocument" xmlns:tns="http://xml.vidispine.com/
↪schema/vidispine" type="tns:ErrorLogListType" />
4072     <xs:complexType name="ErrorLogListType">
4073         <xs:sequence>

```

```

4074     <xs:element name="errorLog" minOccurs="0" maxOccurs="unbounded" type="tns:
↪ErrorLogType"/>
4075     </xs:sequence>
4076 </xs:complexType>

```

ErrorLogDocument

```

4078     <xs:element name="ErrorLogDocument" xmlns:tns="http://xml.vidispine.com/schema/
↪vidispine" type="tns:ErrorLogType"/>
4079     <xs:complexType name="ErrorLogType">
4080         <xs:sequence>
4081             <xs:element name="id" type="xs:long" minOccurs="0" maxOccurs="1"/>
4082             <xs:element name="timestamp" type="xs:dateTime" minOccurs="0" maxOccurs="1
↪"/>
4083             <xs:element name="description" type="xs:string" minOccurs="0" maxOccurs="1
↪"/>
4084             <xs:element name="type" type="xs:string" minOccurs="0" maxOccurs="1"/>
4085             <xs:element name="entityType" type="xs:string" minOccurs="0" maxOccurs="1
↪"/>
4086             <xs:element name="entityId" type="xs:string" minOccurs="0" maxOccurs="1"/>
4087         </xs:sequence>
4088     </xs:complexType>

```

vsXSLTVersion

```

4090     <xs:element name="vsXSLTVersion" type="xs:integer"/>

```

ExportInformationDocument

```

4091     <xs:element name="ExportInformationDocument" xmlns:tns="http://xml.vidispine.com/
↪schema/vidispine" type="tns:ExportInformationType"/>
4092     <xs:complexType name="ExportInformationType">
4093         <xs:sequence>
4094             <xs:element name="metadataList" type="tns:MetadataListType" minOccurs="0"
↪maxOccurs="1"/>
4095             <xs:element name="job" type="tns:JobType" minOccurs="0" maxOccurs="1"/>
4096         </xs:sequence>
4097     </xs:complexType>

```

MetadataSchemaMigrationListDocument

```

4099     <xs:element name="MetadataSchemaMigrationListDocument" xmlns:tns="http://xml.
↪vidispine.com/schema/vidispine" type="tns:MetadataSchemaMigrationListType"/>
4100     <xs:complexType name="MetadataSchemaMigrationListType">
4101         <xs:sequence>
4102             <xs:element name="migration" type="tns:MetadataSchemaMigrationType"
↪minOccurs="0" maxOccurs="unbounded"/>
4103         </xs:sequence>
4104     </xs:complexType>

```

MetadataSchemaMigrationDocument

```

4106     <xs:element name="MetadataSchemaMigrationDocument" xmlns:tns="http://xml.
↪vidispine.com/schema/vidispine" type="tns:MetadataSchemaMigrationType"/>
4107     <xs:complexType name="MetadataSchemaMigrationType">
4108         <xs:sequence>
4109             <xs:element name="done" type="xs:boolean" minOccurs="0"/>
4110             <xs:element name="migrationsLeft" type="xs:integer" minOccurs="0"/>

```

```

4111     <xs:element name="move" type="tns:MetadataSchemaMoveOperationType"
↳minOccurs="0" maxOccurs="unbounded"/>
4112     <xs:element name="rename" type="tns:MetadataSchemaRenameOperationType"
↳minOccurs="0" maxOccurs="unbounded"/>
4113     <xs:element name="delete" type="tns:MetadataSchemaDeleteOperationType"
↳minOccurs="0" maxOccurs="unbounded"/>
4114     </xs:sequence>
4115     <xs:attribute name="id" type="xs:integer"/>
4116 </xs:complexType>
4117
4118 <xs:complexType name="MetadataSchemaMoveOperationType">
4119     <xs:sequence>
4120     <xs:element name="from" type="tns:MetadataSchemaHierarchyType" minOccurs=
↳"1" maxOccurs="1"/>
4121     <xs:element name="to" type="tns:MetadataSchemaHierarchyType" minOccurs="1
↳" maxOccurs="1"/>
4122     </xs:sequence>
4123     <xs:attribute name="type" type="xs:string"/>
4124 </xs:complexType>
4125
4126 <xs:complexType name="MetadataSchemaDeleteOperationType">
4127     <xs:sequence>
4128     <xs:element name="target" type="tns:MetadataSchemaHierarchyType"
↳minOccurs="1" maxOccurs="1"/>
4129     </xs:sequence>
4130     <xs:attribute name="type" type="xs:string"/>
4131 </xs:complexType>
4132
4133 <xs:complexType name="MetadataSchemaRenameOperationType">
4134     <xs:sequence>
4135     <xs:element name="from" type="tns:MetadataSchemaHierarchyType" minOccurs=
↳"1" maxOccurs="1"/>
4136     <xs:element name="to" type="xs:string" minOccurs="1" maxOccurs="1"/>
4137     </xs:sequence>
4138 </xs:complexType>
4139
4140 <xs:complexType name="MetadataSchemaHierarchyType">
4141     <xs:choice>
4142     <xs:element name="group" type="tns:MetadataFieldGroupType"/>
4143     <xs:element name="field" type="tns:MetadataFieldType"/>
4144     </xs:choice>
4145 </xs:complexType>
4146     <xs:element name="EssenceVersionListDocument" xmlns:tns="http://xml.vidispine.
↳com/schema/vidispine" type="tns:EssenceVersionListType"/>
4147     <xs:complexType name="EssenceVersionListType">
4148     <xs:sequence>
4149     <xs:element name="version" minOccurs="0" maxOccurs="unbounded">
4150     <xs:complexType>
4151     <xs:sequence>
4152     <xs:element name="id" type="xs:int"
↳minOccurs="1" maxOccurs="1" />
4153     <xs:element name="uri" type="xs:string"
↳minOccurs="1" maxOccurs="1" />
4154     <xs:element name="created" type="xs:
↳dateTime" minOccurs="0" maxOccurs="1" />
4155     </xs:sequence>
4156     </xs:complexType>
4157 </xs:element>

```

```

4158         </xs:sequence>
4159     </xs:complexType>
4160
4161     <xs:element name="EssenceVersionDocument" xmlns:tns="http://xml.vidispine.com/
↪schema/vidispine" type="tns:EssenceVersionType"/>
4162     <xs:complexType name="EssenceVersionType">
4163         <xs:sequence>
4164             <xs:element name="created" type="xs:dateTime" minOccurs="0"
↪maxOccurs="1" />
4165             <xs:element name="shape" type="tns:ShapeType" minOccurs="0"
↪maxOccurs="unbounded" />
4166         </xs:sequence>
4167     </xs:complexType>
4168
4169     <xs:element name="DocumentListDocument" xmlns:tns="http://xml.vidispine.com/schema/
↪vidispine" type="tns:DocumentListType"/>
4170     <xs:complexType name="DocumentListType">
4171         <xs:sequence>
4172             <xs:element name="hits" type="xs:integer" minOccurs="0" maxOccurs="1"/>
4173             <xs:element name="document" minOccurs="0" maxOccurs="unbounded">
4174                 <xs:complexType>
4175                     <xs:sequence>
4176                         <xs:element name="name" type="xs:string" minOccurs="1" maxOccurs="1" />
4177                         <xs:element name="uri" type="xs:string" minOccurs="1" maxOccurs="1" />
4178                     </xs:sequence>
4179                 </xs:complexType>
4180             </xs:element>
4181         </xs:sequence>
4182     </xs:complexType>

```

VXAJobListDocument

```

4184     <xs:element name="VXAJobListDocument" type="tns:VXAJobListType"/>
4185     <xs:complexType name="VXAJobListType">
4186         <xs:sequence>
4187             <xs:element name="hits" type="xs:integer"/>
4188             <xs:element name="job" type="tns:VXAJobType" minOccurs="0" maxOccurs=
↪"unbounded"/>
4189         </xs:sequence>
4190     </xs:complexType>

```

VXAJobDocument

```

4192     <xs:element name="VXAJobDocument" type="tns:VXAJobType"/>
4193     <xs:complexType name="VXAJobType">
4194         <xs:sequence>
4195             <xs:element name="vxaId" type="xs:string"/>
4196             <xs:element name="vxaName" type="xs:string"/>
4197             <xs:element name="user" type="xs:string"/>
4198             <xs:element name="jobId" type="xs:long"/>
4199             <xs:element name="uuid" type="xs:string"/>
4200             <xs:element name="type" type="xs:string"/>
4201             <xs:element name="instance" type="xs:string"/>
4202             <xs:element name="status" type="xs:string"/>
4203             <xs:element name="errorMessage" type="xs:string"/>
4204             <xs:element name="progress" type="xs:double"/>
4205             <xs:element name="itemId" type="xs:string"/>
4206             <xs:element name="filename" type="xs:string"/>

```

```

4207     <xs:element name="startTime" type="xs:dateTime"/>
4208     <xs:element name="plugin" maxOccurs="unbounded">
4209         <xs:complexType>
4210             <xs:simpleContent>
4211                 <xs:extension base="xs:string">
4212                     <xs:attribute name="name" type="xs:string"/>
4213                 </xs:extension>
4214             </xs:simpleContent>
4215         </xs:complexType>
4216     </xs:element>
4217     <xs:element name="jobConfiguration" type="xs:string" minOccurs="0"
↵maxOccurs="1"/>
4218     <xs:element name="configuration" type="xs:string" minOccurs="0" maxOccurs=
↵"unbounded"/>
4219     </xs:sequence>
4220 </xs:complexType>

```

WebsocketUpdateListDocument

```

4222     <xs:element name="WebsocketUpdateListDocument" type="tns:WebsocketUpdateListType"/
↵>
4223     <xs:complexType name="WebsocketUpdateListType">
4224         <xs:sequence>
4225             <xs:element name="entry" type="tns:WebsocketUpdateType" minOccurs="0"
↵maxOccurs="unbounded"/>
4226         </xs:sequence>
4227     </xs:complexType>

```

WebsocketUpdateDocument

```

4229     <xs:element name="WebsocketUpdateDocument" type="tns:WebsocketUpdateType"/>
4230     <xs:complexType name="WebsocketUpdateType">
4231         <xs:choice>
4232             <xs:element name="item" type="tns:ItemType"/>
4233             <xs:element name="job" type="tns:JobType"/>
4234             <xs:element name="vxaJob" type="tns:VXAJobType"/>
4235             <xs:element name="quota" type="tns:QuotaRuleType"/>
4236             <xs:element name="storage" type="tns:StorageType"/>
4237             <xs:element name="vxa" type="tns:VXAUpdateType"/>
4238         </xs:choice>
4239     </xs:complexType>
4240

```

WebsocketUpdateRequestDocument

```

4241     <xs:element name="WebsocketUpdateRequestDocument" type="tns:
↵WebsocketUpdateRequestType"/>
4242     <xs:complexType name="WebsocketUpdateRequestType">
4243         <xs:sequence>
4244             <xs:element name="item" type="tns:ItemSearchType" minOccurs="0"/>
4245             <xs:element name="job" type="tns:JobFilterType" minOccurs="0"/>
4246             <xs:element name="vxaJob" type="tns:JobFilterType" minOccurs="0"/>
4247             <xs:element name="quota" type="tns:QuotaFilterType" minOccurs="0"/>
4248             <xs:element name="storage" type="tns:StorageFilterType" minOccurs="0"/>
4249             <xs:element name="vxa" type="tns:IDFilterType" minOccurs="0"/>
4250         </xs:sequence>
4251     </xs:complexType>
4252

```

```

4253     <xs:complexType name="JobFilterType">
4254         <xs:sequence>
4255             <xs:element name="type" type="xs:string" minOccurs="0" maxOccurs=
↳ "unbounded"/>
4256             <xs:element name="username" type="xs:string" minOccurs="0" maxOccurs=
↳ "unbounded"/>
4257             <xs:element name="state" type="xs:string" minOccurs="0" maxOccurs=
↳ "unbounded"/>
4258             <xs:element name="jobmetadata" type="tns:SimpleMetadataType" minOccurs="0
↳ " maxOccurs="1"/>
4259         </xs:sequence>
4260     </xs:complexType>
4261
4262     <xs:complexType name="QuotaFilterType">
4263         <xs:sequence>
4264             <xs:element name="username" type="xs:string" minOccurs="0" maxOccurs=
↳ "unbounded"/>
4265             <xs:element name="groupname" type="xs:string" minOccurs="0" maxOccurs=
↳ "unbounded"/>
4266             <xs:element name="exceeded" type="xs:boolean" minOccurs="0"/>
4267         </xs:sequence>
4268     </xs:complexType>
4269
4270     <xs:complexType name="StorageFilterType">
4271         <xs:sequence>
4272             <xs:element name="id" type="xs:string" minOccurs="0" maxOccurs="unbounded
↳ "/>
4273             <xs:element name="vxaId" type="xs:string" minOccurs="0" maxOccurs=
↳ "unbounded"/>
4274         </xs:sequence>
4275     </xs:complexType>
4276
4277     <xs:complexType name="IDFilterType">
4278         <xs:sequence>
4279             <xs:element name="id" type="xs:string" minOccurs="0" maxOccurs="unbounded
↳ "/>
4280         </xs:sequence>
4281     </xs:complexType>

```

VXAUpdateDocument

```

4283     <xs:element name="VXAUpdateDocument" xmlns:tns="http://xml.vidispine.com/schema/
↳ vidispine" type="tns:VXAUpdateType" />
4284     <xs:complexType name="VXAUpdateType">
4285         <xs:sequence>
4286             <xs:element name="vxaId" type="xs:string" minOccurs="1" maxOccurs="1"/>
4287             <xs:element name="user" type="xs:string" minOccurs="0" maxOccurs="1"/>
4288             <xs:element name="added" type="xs:boolean" minOccurs="0" maxOccurs="1"/>
4289             <xs:element name="deleted" type="xs:boolean" minOccurs="0" maxOccurs="1"/>
4290             <xs:element name="removedShare" type="xs:string" minOccurs="0" maxOccurs=
↳ "unbounded"/>
4291             <xs:element name="addedShare" type="xs:string" minOccurs="0" maxOccurs=
↳ "unbounded"/>
4292         </xs:sequence>
4293     </xs:complexType>
4294
4295     <xs:simpleType name="ExportTemplateArchiveType">
4296         <xs:restriction base="xs:string">

```

```

4297     <xs:enumeration value="ZIP"/>
4298     <xs:enumeration value="TAR"/>
4299   </xs:restriction>
4300 </xs:simpleType>
4301
4302 <xs:simpleType name="ExportTemplateCompressType">
4303   <xs:restriction base="xs:string">
4304     <xs:enumeration value="GZ"/>
4305     <xs:enumeration value="BZIP2"/>
4306   </xs:restriction>
4307 </xs:simpleType>
4308
4309 <xs:group name="ExportTemplateChoiceGroup">
4310 <xs:choice>
4311   <xs:element name="archive" type="tns:ExportTemplateArchive" />
4312   <xs:element name="collection" type="tns:ExportTemplateCollection" />
4313   <xs:element name="component" type="tns:ExportTemplateComponent" />
4314   <xs:element name="componentfile" type="tns:ExportTemplateComponentFile" />
4315   <xs:element name="compress" type="tns:ExportTemplateCompress" />
4316   <xs:element name="dummy" type="tns:ExportTemplateDummy" />
4317   <xs:element name="external" type="tns:ExportTemplateExternal" />
4318   <xs:element name="folder" type="tns:ExportTemplateFolder" />
4319   <xs:element name="item" type="tns:ExportTemplateItem" />
4320   <xs:element name="iterate" type="tns:ExportTemplateIterate" />
4321   <xs:element name="library" type="tns:ExportTemplateLibrary" />
4322   <xs:element name="sequence" type="tns:ExportTemplateSequence" />
4323   <xs:element name="shape" type="tns:ExportTemplateShape" />
4324   <xs:element name="text" type="tns:ExportTemplateText" />
4325 </xs:choice>
4326 </xs:group>
4327
4328 <xs:complexType name="ExportTemplateType">
4329   <xs:sequence>
4330     <xs:element name="tag" type="xs:string" minOccurs="0" maxOccurs="unbounded
↵"/>
4331     <xs:element name="dependency" type="xs:string" minOccurs="0" maxOccurs=
↵"unbounded"/>
4332     <xs:element name="filter" type="xs:string" minOccurs="0"/>
4333     <xs:element name="pre" type="tns:ExportTemplateScript" minOccurs="0"/>
4334     <xs:element name="preRender" type="tns:ExportTemplateScript" minOccurs="0
↵"/>
4335     <xs:group ref="tns:ExportTemplateChoiceGroup" minOccurs="0" maxOccurs=
↵"unbounded"/>
4336   </xs:sequence>
4337   <xs:attribute name="path" type="xs:string" use="optional"/>
4338 </xs:complexType>
4339
4340 <xs:complexType name="ExportTemplateFolder">
4341   <xs:complexContent>
4342     <xs:extension base="tns:ExportTemplateType"/>
4343   </xs:complexContent>
4344 </xs:complexType>
4345
4346 <xs:complexType name="ExportTemplateArchive">
4347   <xs:complexContent>
4348     <xs:extension base="tns:ExportTemplateType">
4349       <xs:attribute name="method" type="tns:ExportTemplateArchiveType" use=
↵"required"/>

```

```

4350     </xs:extension>
4351   </xs:complexContent>
4352 </xs:complexType>
4353
4354 <xs:complexType name="ExportTemplateCollection">
4355   <xs:complexContent>
4356     <xs:extension base="tns:ExportTemplateType">
4357       <xs:sequence>
4358         <xs:element name="collectionId" type="tns:SiteIdType" minOccurs="0
↳ " maxOccurs="unbounded" />
4359       </xs:sequence>
4360     </xs:extension>
4361   </xs:complexContent>
4362 </xs:complexType>
4363
4364 <xs:complexType name="ExportTemplateLibrary">
4365   <xs:complexContent>
4366     <xs:extension base="tns:ExportTemplateType">
4367       <xs:sequence>
4368         <xs:element name="libraryId" type="tns:SiteIdType" minOccurs="0"
↳ maxOccurs="unbounded" />
4369       </xs:sequence>
4370     </xs:extension>
4371   </xs:complexContent>
4372 </xs:complexType>
4373
4374 <xs:complexType name="ExportTemplateCompress">
4375   <xs:complexContent>
4376     <xs:extension base="tns:ExportTemplateType">
4377       <xs:attribute name="method" type="tns:ExportTemplateCompressType" use=
↳ "required" />
4378     </xs:extension>
4379   </xs:complexContent>
4380 </xs:complexType>
4381
4382 <xs:complexType name="ExportTemplateItem">
4383   <xs:complexContent>
4384     <xs:extension base="tns:ExportTemplateType">
4385       <xs:sequence>
4386         <xs:element name="itemId" type="tns:SiteIdType" minOccurs="0"
↳ maxOccurs="unbounded" />
4387       </xs:sequence>
4388     </xs:extension>
4389   </xs:complexContent>
4390 </xs:complexType>
4391
4392 <xs:complexType name="ExportTemplateIterate">
4393   <xs:complexContent>
4394     <xs:extension base="tns:ExportTemplateType">
4395       <xs:sequence>
4396         <xs:element name="value" type="tns:ExportTemplateScript"
↳ minOccurs="0" maxOccurs="unbounded" />
4397       </xs:sequence>
4398     </xs:extension>
4399   </xs:complexContent>
4400 </xs:complexType>
4401
4402 <xs:complexType name="ExportTemplateShape">

```



```

4403     <xs:complexContent>
4404         <xs:extension base="tns:ExportTemplateType">
4405             <xs:sequence>
4406                 <xs:element name="shapeTag" type="xs:string" minOccurs="0"
↪maxOccurs="1"/>
4407                 <xs:element name="generate" type="xs:boolean" minOccurs="0"
↪maxOccurs="1"/>
4408             </xs:sequence>
4409         </xs:extension>
4410     </xs:complexContent>
4411 </xs:complexType>
4412
4413 <xs:complexType name="ExportTemplateComponent">
4414     <xs:complexContent>
4415         <xs:extension base="tns:ExportTemplateType">
4416             <xs:sequence>
4417                 </xs:sequence>
4418             </xs:extension>
4419         </xs:complexContent>
4420     </xs:complexType>
4421
4422 <xs:complexType name="ExportTemplateComponentFile">
4423     <xs:complexContent>
4424         <xs:extension base="tns:ExportTemplateType">
4425             <xs:sequence>
4426                 </xs:sequence>
4427             </xs:extension>
4428         </xs:complexContent>
4429     </xs:complexType>
4430
4431 <xs:complexType name="ExportTemplateSequence">
4432     <xs:complexContent>
4433         <xs:extension base="tns:ExportTemplateType">
4434             <xs:sequence>
4435                 <xs:element name="document" type="tns:ExportTemplateTextContent"
↪minOccurs="0" maxOccurs="1"/>
4436                 <xs:element name="generate" type="xs:boolean" minOccurs="0"
↪maxOccurs="1"/>
4437             </xs:sequence>
4438         </xs:extension>
4439     </xs:complexContent>
4440 </xs:complexType>
4441
4442 <xs:simpleType name="ExportTemplateScript">
4443     <xs:restriction base="xs:string"/>
4444 </xs:simpleType>
4445
4446 <xs:complexType name="ExportTemplateTextContent" mixed="true">
4447     <xs:group ref="tns:ExportTemplateChoiceGroup" minOccurs="0" maxOccurs=
↪"unbounded"/>
4448     <xs:attribute name="scripttags" type="xs:boolean" use="optional"/>
4449 </xs:complexType>
4450
4451 <xs:complexType name="ExportTemplateText">
4452     <xs:complexContent>
4453         <xs:extension base="tns:ExportTemplateType">
4454             <xs:sequence>
4455                 <xs:element name="content" minOccurs="0" maxOccurs="1" type="tns:
↪ExportTemplateTextContent"/>

```

```

4456         <xs:element name="xslt" type="xs:string" minOccurs="0" maxOccurs=
↳ "1" />
4457         <xs:element name="script" type="xs:string" minOccurs="0"
↳ maxOccurs="1" />
4458         <xs:element name="xml" minOccurs="0" maxOccurs="1">
4459             <xs:complexType>
4460                 <xs:sequence>
4461                     <xs:any minOccurs="1" maxOccurs="1" processContents=
↳ "lax" />
4462                 </xs:sequence>
4463                 <xs:attribute name="indent" type="xs:int" use="optional"/>
4464             </xs:complexType>
4465         </xs:element>
4466     </xs:sequence>
4467     <xs:attribute name="charset" type="xs:string" use="optional"/>
4468 </xs:extension>
4469 </xs:complexContent>
4470 </xs:complexType>
4471
4472 <xs:complexType name="ExportTemplateExternal">
4473     <xs:complexContent>
4474         <xs:extension base="tns:ExportTemplateType">
4475             <xs:sequence>
4476                 <xs:element name="uri" type="xs:anyURI" minOccurs="0" maxOccurs=
↳ "unbounded" />
4477             </xs:sequence>
4478         </xs:extension>
4479     </xs:complexContent>
4480 </xs:complexType>
4481
4482 <xs:complexType name="ExportTemplateDummy">
4483     <xs:complexContent>
4484         <xs:extension base="tns:ExportTemplateType"/>
4485     </xs:complexContent>
4486 </xs:complexType>

```

ExportTemplateDocument

```

4488 <xs:element name="ExportTemplateDocument" type="tns:ExportTemplateType"/>

```

LogReportConfigurationDocument

```

4490 <xs:element name="LogReportConfigurationDocument" xmlns:tns="http://xml.vidispine.
↳ com/schema/vidispine" type="tns:LogReportConfigurationType" />
4491 <xs:complexType name="LogReportConfigurationType">
4492     <xs:sequence>
4493         <xs:element name="path" type="xs:string" minOccurs="0" maxOccurs="1"/> <!--
↳ default: /tmp/LogReport, %TEMP%/LogReport -->
4494         <xs:element name="expiryTime" type="xs:double" minOccurs="0" maxOccurs="1"
↳ /> <!-- default: 7 days -->
4495         <xs:element name="uploadUri" type="xs:anyURI" minOccurs="0" maxOccurs="1"/
↳ >
4496         <xs:element name="certificate" type="xs:string" minOccurs="0" maxOccurs="1"
↳ />
4497         <xs:element name="clientKey" type="xs:string" minOccurs="0" maxOccurs="1"/
↳ >
4498         <xs:element name="clientCertificate" type="xs:string" minOccurs="0"
↳ maxOccurs="unbounded" />

```

```

4499     </xs:sequence>
4500 </xs:complexType>

```

WaveformDataDocument

```

4502     <xs:element name="WaveformDataDocument" xmlns:tns="http://xml.vidispine.com/
↳ schema/vidispine" type="tns:WaveformDataType" />
4503     <xs:complexType name="WaveformDataType">
4504         <xs:sequence>
4505             <xs:element name="value" minOccurs="0" maxOccurs="unbounded">
4506                 <xs:complexType>
4507                     <xs:sequence>
4508                         <xs:element name="data" type="xs:double" minOccurs="0"
↳ maxOccurs="unbounded"/>
4509                         <xs:element name="stream" type="xs:int" minOccurs="0"
↳ maxOccurs="1"/>
4510                         <xs:element name="channel" type="xs:int" minOccurs="0"
↳ maxOccurs="1"/>
4511                         <xs:element name="itemTrack" type="xs:string" minOccurs="0"
↳ maxOccurs="1"/>
4512                         <xs:element name="fileId" type="tns:SiteIdType" minOccurs="0"
↳ maxOccurs="unbounded"/>
4513                         <xs:element name="filePath" type="xs:string" minOccurs="0"
↳ maxOccurs="unbounded"/>
4514                     </xs:sequence>
4515                 </xs:complexType>
4516             </xs:element>
4517         </xs:sequence>
4518     </xs:complexType>

```

ConstraintValueListDocument

```

4520     <xs:element name="ConstraintValueListDocument" xmlns:tns="http://xml.vidispine.
↳ com/schema/vidispine" type="tns:ConstraintValueListType" />
4521     <xs:complexType name="ConstraintValueListType">
4522         <xs:sequence>
4523             <xs:element name="value" type="tns:constraintValueType" minOccurs="0"
↳ maxOccurs="unbounded"/>
4524         </xs:sequence>
4525     </xs:complexType>
4526
4527     <xs:complexType name="constraintValueType">
4528         <xs:simpleContent>
4529             <xs:extension base="xs:string">
4530                 <xs:attribute name="id" type="xs:string" use="required"/>
4531             </xs:extension>
4532         </xs:simpleContent>
4533     </xs:complexType>

```

MetadataFieldValidationDocument

```

4535     <xs:element name="MetadataFieldValidationDocument" xmlns:tns="http://xml.
↳ vidispine.com/schema/vidispine" type="tns:MetadataFieldValidationType" />
4536     <xs:complexType name="MetadataFieldValidationType">
4537         <xs:sequence>
4538             <xs:element name="field" type="tns:MetadataFieldValueType" minOccurs="0"
↳ maxOccurs="1"/>
4539             <xs:element name="constraint" minOccurs="0" maxOccurs="1">

```

```

4540     <xs:complexType>
4541       <xs:sequence>
4542         <xs:element name="field" type="tns:MetadataFieldValueType"
↳minOccurs="0" maxOccurs="unbounded" />
4543       </xs:sequence>
4544     </xs:complexType>
4545   </xs:element>
4546 </xs:sequence>
4547 </xs:complexType>

```

MetadataFieldValueConstraintListDocument

```

4549   <xs:element name="MetadataFieldValueConstraintListDocument" xmlns:tns="http://xml.
↳vidispine.com/schema/vidispine" type="tns:MetadataFieldValueConstraintListType" />
4550   <xs:complexType name="MetadataFieldValueConstraintListType">
4551     <xs:sequence>
4552       <xs:element name="constraint" type="tns:MetadataFieldValueConstraintType"
↳minOccurs="0" maxOccurs="unbounded" />
4553     </xs:sequence>
4554   </xs:complexType>
4555
4556   <xs:complexType name="MetadataFieldValueConstraintType">
4557     <xs:sequence>
4558       <xs:element name="field" type="xs:string" minOccurs="0" maxOccurs="1" />
4559       <xs:element name="value" type="xs:string" minOccurs="0" maxOccurs="1" />
4560       <xs:element name="id" type="xs:string" minOccurs="0" maxOccurs="1" />
4561     </xs:sequence>
4562   </xs:complexType>

```

MetadataDatasetListDocument

```

4564   <xs:element name="MetadataDatasetListDocument" xmlns:tns="http://xml.vidispine.
↳com/schema/vidispine" type="tns:MetadataDatasetListType" />
4565   <xs:complexType name="MetadataDatasetListType">
4566     <xs:sequence>
4567       <xs:element name="hits" type="xs:integer" minOccurs="0" maxOccurs="1" />
4568       <xs:element name="dataset" minOccurs="0" maxOccurs="unbounded">
4569         <xs:complexType>
4570           <xs:sequence>
4571             <xs:element name="name" type="xs:string" minOccurs="1"
↳maxOccurs="1" />
4572             <xs:element name="uri" type="xs:string" minOccurs="1"
↳maxOccurs="1" />
4573           </xs:sequence>
4574         </xs:complexType>
4575       </xs:element>
4576     </xs:sequence>
4577   </xs:complexType>

```

CORSConfigurationDocument

```

4579   <xs:element name="CORSConfigurationDocument" xmlns:tns="http://xml.vidispine.com/
↳schema/vidispine" type="tns:CORSConfigurationType" />
4580   <xs:complexType name="CORSConfigurationType">
4581     <xs:sequence>
4582       <xs:element name="entry" type="tns:CORSConfigurationEntry" minOccurs="0"
↳maxOccurs="unbounded" />
4583     </xs:sequence>

```

```

4584 </xs:complexType>
4585 <xs:complexType name="CORSConfigurationEntry">
4586   <xs:sequence>
4587     <xs:element name="request" type="tns:CORSConfigurationEntryRequest"
↳minOccurs="1" maxOccurs="unbounded"/>
4588     <xs:element name="response" type="tns:CORSConfigurationEntryResponse"
↳minOccurs="1" maxOccurs="1"/>
4589   </xs:sequence>
4590 </xs:complexType>
4591 <xs:complexType name="CORSConfigurationEntryRequest">
4592   <xs:sequence>
4593     <xs:element name="method" type="xs:string" minOccurs="0" maxOccurs=
↳"unbounded"/>
4594     <xs:element name="origin" type="xs:string" minOccurs="0" maxOccurs=
↳"unbounded"/>
4595     <xs:element name="originRegex" type="xs:string" minOccurs="0" maxOccurs=
↳"unbounded"/>
4596     <xs:element name="pathRegex" type="xs:string" minOccurs="0" maxOccurs=
↳"unbounded"/>
4597     <xs:element name="headerRegex" type="tns:KeyValuePairType" minOccurs="0"
↳maxOccurs="unbounded"/>
4598   </xs:sequence>
4599 </xs:complexType>
4600 <xs:complexType name="CORSConfigurationEntryResponse">
4601   <xs:sequence>
4602     <xs:element name="allowOrigin" type="xs:string" minOccurs="1" maxOccurs="1
↳"/>
4603     <xs:element name="allowMethods" type="xs:string" minOccurs="0" maxOccurs=
↳"unbounded"/>
4604     <xs:element name="allowHeaders" type="xs:string" minOccurs="0" maxOccurs=
↳"unbounded"/>
4605     <xs:element name="allowMaxAge" type="xs:int" minOccurs="0" maxOccurs="1"/>
4606     <xs:element name="allowOtherHeader" type="tns:KeyValuePairType" minOccurs=
↳"0" maxOccurs="unbounded"/>
4607   </xs:sequence>
4608 </xs:complexType>

```

DatabasePurgingConfigurationDocument

```

4610 <xs:element name="DatabasePurgingConfigurationDocument" xmlns:tns="http://xml.
↳vidispine.com/schema/vidispine" type="tns:DatabasePurgingConfigurationType" />
4611 <xs:complexType name="DatabasePurgingConfigurationType">
4612   <xs:sequence>
4613     <xs:element name="changeLog" minOccurs="0" maxOccurs="1">
4614       <xs:complexType>
4615         <xs:sequence>
4616           <xs:element name="age" minOccurs="0" maxOccurs="1" type="xs:
↳int"/> <!-- remove processed entries older than this number of minutes -->
4617           <xs:element name="forceAge" minOccurs="0" maxOccurs="1" type=
↳"xs:int"/> <!-- remove any entries older than this number of minutes -->
4618         </xs:sequence>
4619       </xs:complexType>
4620     </xs:element>
4621     <xs:element name="auditTrail" minOccurs="0" maxOccurs="1">
4622       <xs:complexType>
4623         <xs:sequence>
4624           <xs:element name="age" minOccurs="0" maxOccurs="1" type="xs:
↳int"/> <!-- remove entries older than this number of minutes -->

```

```

4625         <xs:element name="uri" minOccurs="0" maxOccurs="1" type="xs:
↳anyURI"/> <!-- store to this URI -->
4626         <xs:element name="compress" minOccurs="0" maxOccurs="1" type=
↳"xs:boolean"/> <!-- store in compressed form, default true -->
4627         <xs:element name="batch" minOccurs="0" maxOccurs="1" type="xs:
↳int"/> <!-- process this number of entries each time, default 10000 (if this many,
↳number of entries do not exist, purging will pause -->
4628         </xs:sequence>
4629     </xs:complexType>
4630 </xs:element>
4631 <xs:element name="job" minOccurs="0" maxOccurs="1">
4632     <xs:complexType>
4633         <xs:sequence>
4634             <xs:element name="age" minOccurs="0" maxOccurs="1" type="xs:
↳int"/> <!-- remove entries older than this number of minutes -->
4635             <xs:element name="uri" minOccurs="0" maxOccurs="1" type="xs:
↳anyURI"/> <!-- store to this URI -->
4636             <xs:element name="compress" minOccurs="0" maxOccurs="1" type=
↳"xs:boolean"/> <!-- store in compressed form, default true -->
4637             </xs:sequence>
4638         </xs:complexType>
4639     </xs:element>
4640 <xs:element name="transferLog" minOccurs="0" maxOccurs="1">
4641     <xs:complexType>
4642         <xs:sequence>
4643             <xs:element name="age" minOccurs="0" maxOccurs="1" type="xs:
↳int"/> <!-- remove finished entries older than this number of minutes -->
4644             <xs:element name="forceAge" minOccurs="0" maxOccurs="1" type=
↳"xs:int"/> <!-- remove any entries older than this number of minutes, default same,
↳as above -->
4645             <xs:element name="uri" minOccurs="0" maxOccurs="1" type="xs:
↳anyURI"/> <!-- store to this URI -->
4646             <xs:element name="compress" minOccurs="0" maxOccurs="1" type=
↳"xs:boolean"/> <!-- store in compressed form, default true -->
4647             <xs:element name="batch" minOccurs="0" maxOccurs="1" type="xs:
↳int"/> <!-- process this number of entries each time, default 10000 (if this many,
↳number of entries do not exist, purging will pause -->
4648             </xs:sequence>
4649         </xs:complexType>
4650     </xs:element>
4651 </xs:sequence>
4652 </xs:complexType>
4653

```

DeletionLockDocument

```

4654 <xs:element name="DeletionLockDocument" xmlns:tns="http://xml.vidispine.com/
↳schema/vidispine" type="tns:DeletionLockType" />
4655 <xs:complexType name="DeletionLockType">
4656     <xs:sequence>
4657         <xs:element name="id" type="xs:string" minOccurs="1" maxOccurs="1"/>
4658         <xs:element name="user" type="xs:string" minOccurs="1" maxOccurs="1"/>
4659         <xs:element name="expiryTime" type="xs:dateTime" minOccurs="1" maxOccurs=
↳"1"/>
4660         <xs:element name="modified" type="xs:dateTime" minOccurs="1" maxOccurs="1
↳"/>
4661         <xs:element name="entityType" type="xs:string" minOccurs="1" maxOccurs="1
↳"/>

```

```

4662     <xs:element name="entityId" type="xs:string" minOccurs="1" maxOccurs="1"/>
4663     <xs:element name="metadata" type="tns:SimpleMetadataType" minOccurs="0"
↳maxOccurs="1"/>
4664   </xs:sequence>
4665   <xs:attribute name="isEffective" type="xs:boolean" default="false"/>
4666   <xs:attribute name="isInherited" type="xs:boolean" default="false"/>
4667   <xs:attribute name="isExpired" type="xs:boolean" default="false"/>
4668 </xs:complexType>

```

DeletionLockListDocument

```

4670   <xs:element name="DeletionLockListDocument" xmlns:tns="http://xml.vidispine.com/
↳schema/vidispine" type="tns:DeletionLockListType" />
4671   <xs:complexType name="DeletionLockListType">
4672     <xs:sequence>
4673       <xs:element name="lock" type="tns:DeletionLockType" minOccurs="0"
↳maxOccurs="unbounded"/>
4674     </xs:sequence>
4675   </xs:complexType>

```

OAuth2ConfigurationDocument

```

4677   <xs:element name="OAuth2ConfigurationDocument" xmlns:tns="http://xml.vidispine.
↳com/schema/vidispine" type="tns:OAuth2ConfigurationType" />
4678   <xs:complexType name="OAuth2ConfigurationType">
4679     <xs:sequence>
4680       <xs:element name="federationMetadataURI" type="xs:string" minOccurs="0"
↳maxOccurs="1"/>
4681       <xs:element name="federationMetadataInterval" type="xs:int" minOccurs="0"
↳maxOccurs="1"/>
4682       <xs:element name="expectedAudience" type="xs:string" minOccurs="0"
↳maxOccurs="1"/>
4683       <xs:element name="validationEndpoint" type="xs:string" minOccurs="0"
↳maxOccurs="1"/>
4684       <xs:element name="tokenUser" type="xs:string" minOccurs="0" maxOccurs="1"/
↳>
4685       <xs:element name="x509Certificate" type="xs:string" minOccurs="0"
↳maxOccurs="1"/>
4686     </xs:sequence>
4687   </xs:complexType>
4688 </xs:schema>
4689

```

17.38.2 common.xsd

Common elements to API and Transcoder.

```

1  <?xml version="1.0" encoding="UTF-8"?>
2  <xs:schema xmlns:xs="http://www.w3.org/2001/XMLSchema"
3    targetNamespace="http://xml.vidispine.com/schema/vidispine"
4    elementFormDefault="qualified"
5    xmlns:jaxb="http://java.sun.com/xml/ns/jaxb"
6    jaxb:version="1.0"
7    xmlns:xjc="http://java.sun.com/xml/ns/jaxb/xjc"
8    jaxb:extensionBindingPrefixes="xjc" xmlns:tns="http://xml.vidispine.com/schema/
↳vidispine">

```

```

9
10 <xs:simpleType name="SiteIdType">
11   <xs:restriction base="xs:string">
12     <xs:pattern value="([_A-Za-z]+)?([A-Za-z_][A-Za-z0-9_]*-|(([_A-Za-z_][A-
↵Za-z0-9_]*)?\*))([0-9]{1}[0-9]{0,31})"/>
13   </xs:restriction>
14 </xs:simpleType>
15
16 <xs:simpleType name="UUIDType">
17   <xs:restriction base="xs:string">
18     <xs:pattern value="[A-Fa-f0-9]{8}-[A-Fa-f0-9]{4}-[A-Fa-f0-9]{4}-[A-Fa-f0-
↵9]{4}-[A-Fa-f0-9]{12}"/>
19   </xs:restriction>
20 </xs:simpleType>

```

URIListDocument

```

22 <xs:element name="URIListDocument" xmlns:tns="http://xml.vidispine.com/schema/
↵vidispine" type="tns:URIListType" />
23 <xs:complexType name="URIListType">
24   <xs:sequence>
25     <xs:element name="hits" type="xs:integer" minOccurs="0" maxOccurs="1"/>
26     <xs:element name="uri" type="xs:anyURI" maxOccurs="unbounded" minOccurs="0
↵"/></xs:element>
27   </xs:sequence>
28 </xs:complexType>
29
30 <xs:complexType name="MetadataSchemaElementType">
31   <xs:attributeGroup ref="tns:MetadataSchemaAttributes"/>
32   <xs:attribute name="reference" type="xs:boolean" use="optional"/>
33 </xs:complexType>
34
35 <xs:attributeGroup name="MetadataSchemaAttributes">
36   <!-- Minimum number of elements -->
37   <xs:attribute name="min" type="xs:int" use="required"/>
38   <!-- Maximum number of elements. A negative number is regarded as infinity. --
↵>
39   <xs:attribute name="max" type="xs:int" use="required"/>
40   <xs:attribute name="name" type="xs:string" use="optional"/>
41 </xs:attributeGroup>

```

FileDocument

```

43 <xs:element name="FileDocument" xmlns:tns="http://xml.vidispine.com/schema/
↵vidispine" type="tns:FileType" />
44 <xs:complexType name="FileType">
45   <xs:sequence minOccurs="1" maxOccurs="1">
46     <xs:element name="id" type="tns:SiteIdType" minOccurs="0"/>
47     <xs:element name="path" type="xs:string" minOccurs="0" maxOccurs="1"/>
48     <xs:element name="uri" type="xs:anyURI" minOccurs="0" maxOccurs="
↵unbounded"/>
49     <xs:element name="state" type="xs:string"/>
50     <xs:element name="size" type="xs:long" minOccurs="0"/>
51     <xs:element name="hash" type="xs:string" minOccurs="0"/>
52     <xs:element name="timestamp" type="xs:dateTime" minOccurs="0"/>
53     <xs:element name="refreshFlag" type="xs:int" minOccurs="0"/>
54     <xs:element name="sequence" type="xs:boolean" minOccurs="0" maxOccurs="1"/
↵>

```



```

55     <xs:element name="storage" type="tns:SiteIdType" minOccurs="0"/>
56     <xs:element name="storageDefinition" type="tns:StorageType" minOccurs="0"/
↪>
57     <xs:element name="item" minOccurs="0" maxOccurs="unbounded">
58         <xs:complexType>
59             <xs:sequence>
60                 <xs:element name="id" type="tns:SiteIdType" minOccurs="0" ↪
↪maxOccurs="1"/>
61                 <xs:element name="shape" minOccurs="0" maxOccurs="unbounded">
62                     <xs:complexType>
63                         <xs:sequence>
64                             <xs:element name="id" type="tns:SiteIdType" ↪
↪minOccurs="0" maxOccurs="1"/>
65                             <xs:element name="component" minOccurs="0" ↪
↪maxOccurs="unbounded">
66                                 <xs:complexType>
67                                     <xs:sequence>
68                                         <xs:element name="id" type="tns:
↪SiteIdType" minOccurs="0" maxOccurs="1"/>
69                                         </xs:sequence>
70                                     </xs:complexType>
71                                 </xs:element>
72                             </xs:sequence>
73                         </xs:complexType>
74                     </xs:element>
75                 </xs:sequence>
76             </xs:complexType>
77         </xs:element>
78         <xs:element name="metadata" type="tns:SimpleMetadataType" minOccurs="0" ↪
↪maxOccurs="1" />
79         <xs:element name="range" minOccurs="0" maxOccurs="unbounded">
80             <xs:complexType>
81                 <xs:attribute name="start" type="xs:string" use="required"/>
82                 <xs:attribute name="count" type="xs:long" use="required"/>
83             </xs:complexType>
84         </xs:element>
85         <xs:element name="type" type="xs:string" minOccurs="0" maxOccurs="1"/>
86     </xs:sequence>
87 </xs:complexType>
88
89     <!-- Stuff for Shape starts here -->
90     <xs:complexType name="ResolutionType">
91         <xs:sequence>
92             <xs:element name="width" type="xs:unsignedInt"/>
93             <xs:element name="height" type="xs:unsignedInt"/>
94         </xs:sequence>
95     </xs:complexType>
96     <xs:complexType name="RationalType">
97         <xs:sequence>
98             <xs:element name="numerator" type="xs:int"/>
99             <xs:element name="denominator" type="xs:int"/>
100         </xs:sequence>
101     </xs:complexType>
102     <xs:complexType name="TimeBaseType">
103         <xs:complexContent>
104             <xs:extension xmlns:tns="http://xml.vidispine.com/schema/vidispine" base=
↪"tns:RationalType"/>
105         </xs:complexContent>

```

```

106     </xs:complexType>
107     <xs:complexType name="FrameRateType">
108         <xs:complexContent>
109             <xs:extension xmlns:tns="http://xml.vidispine.com/schema/vidispine" base=
↪ "tns:RationalType"/>
110         </xs:complexContent>
111     </xs:complexType>
112     <xs:complexType name="TimeCodeType">
113         <xs:sequence>
114             <xs:element name="samples" type="xs:long"/>
115             <xs:element name="timeBase" type="tns:TimeBaseType"/>
116         </xs:sequence>
117     </xs:complexType>
118     <xs:complexType name="TimeIntervalType">
119         <xs:sequence>
120             <xs:element name="start" type="tns:TimeCodeType" minOccurs="0"/>
121             <xs:element name="end" type="tns:TimeCodeType" minOccurs="0"/>
122         </xs:sequence>
123     </xs:complexType>
124     <xs:complexType name="AspectRatioType">
125         <xs:sequence>
126             <xs:element name="horizontal" type="xs:unsignedInt"/>
127             <xs:element name="vertical" type="xs:unsignedInt"/>
128         </xs:sequence>
129     </xs:complexType>

```

ComponentListDocument

```

131     <xs:element name="ComponentListDocument" xmlns:tns="http://xml.vidispine.com/
↪ schema/vidispine" type="tns:ComponentListType" />
132
133     <xs:complexType name = "ComponentListType">
134         <xs:sequence>
135             <xs:element name="component" minOccurs="0" maxOccurs="unbounded" type=
↪ "tns:ComponentType" />
136         </xs:sequence>
137     </xs:complexType>

```

ComponentDocument

```

139     <xs:element name="ComponentDocument" xmlns:tns="http://xml.vidispine.com/schema/
↪ vidispine" type="tns:ComponentType" />
140     <xs:complexType name="ComponentType">
141         <xs:sequence>
142             <xs:element name="file" type="tns:FileType" minOccurs="0" maxOccurs=
↪ "unbounded"/>
143             <xs:element name="id" type="tns:SiteIdType" minOccurs="0"/>
144
145             <!-- Flat metadata, meaning a simple list of key-value pairs.
146                 This has been put in ComponentType since both ContainerComponent and
↪ the MediaComponents
147                 have metadata. In other words, files can have both global and stream-
↪ specific metadata.
148                 -->
149             <xs:element name="metadata" type="tns:KeyValuePairType" minOccurs="0"
↪ maxOccurs="unbounded"/>
150         </xs:sequence>
151     </xs:complexType>

```

BinaryComponentDocument

```

153 <xs:element name="BinaryComponentDocument" xmlns:tns="http://xml.vidispine.com/
↳ schema/vidispine" type="tns:BinaryComponentType" />
154 <xs:complexType name="BinaryComponentType">
155 <xs:complexContent>
156 <xs:extension xmlns:tns="http://xml.vidispine.com/schema/vidispine" base=
↳ "tns:ComponentType">
157 <xs:sequence>
158 <xs:element name="format" type="xs:string" minOccurs="0"/> <!--
↳ -- Example: idv3 -->
159 <xs:element name="encoding" type="xs:string" minOccurs="0"/> <!--
↳ -- Example: base64, gzip -->
160 <xs:element name="offset" type="xs:long" minOccurs="0"/>
161 <xs:element name="length" type="xs:long" minOccurs="0"/>
162 <xs:element name="mediaInfo" type="tns:BaseMediaInfoType"
↳ minOccurs="0"/>
163 </xs:sequence>
164 </xs:extension>
165 </xs:complexContent>
166 </xs:complexType>

```

ContainerComponentDocument

```

167 <xs:element name="ContainerComponentDocument" xmlns:tns="http://xml.vidispine.com/
↳ schema/vidispine" type="tns:ContainerComponentType" />
168 <xs:complexType name="ContainerComponentType">
169 <xs:complexContent>
170 <xs:extension xmlns:tns="http://xml.vidispine.com/schema/vidispine" base=
↳ "tns:ComponentType">
171 <xs:sequence>
172 <xs:element name="duration" type="tns:TimeCodeType" minOccurs="0"/>
↳ >
173 <xs:element name="format" type="xs:string" minOccurs="0"/>
174
175 <!-- Sub format.
176 This field was created for transcoder ticket #186.
177 Its exact function isn't set in stone yet.
178 Possible values:
179
180 * Unset
181 * "mxf_d10"
182 -->
183 <xs:element name="subFormat" type="xs:string" minOccurs="0"/>
184
185 <xs:element name="firstSMPTETimecode" type="xs:string" minOccurs=
↳ "0"/>
186
187 <!-- Corresponds to StartTimecode in TimecodeComponent in MXF -->
188 <xs:element name="startTimecode" type="xs:long" minOccurs="0"/>
189
190 <!-- First timestamp in container -->
191 <xs:element name="startTimestamp" type="tns:TimeCodeType"
↳ minOccurs="0"/>
192
193 <!-- Corresponds to RoundedTimeBase in TimecodeComponent in MXF --
↳ >
194 <xs:element name="roundedTimeBase" type="xs:int" minOccurs="0"/>
195

```

```

196         <!-- Corresponds to DropFrame in TimecodeComponent in MXF -->
197         <xs:element name="dropFrame" type="xs:boolean" minOccurs="0"/>
198         <xs:element name="timeCodeTimeBase" type="tns:TimeBaseType"
↪minOccurs="0" />
199         <xs:element name="mediaInfo" type="tns:BaseMediaInfoType"
↪minOccurs="0"/>
200         </xs:sequence>
201     </xs:extension>
202 </xs:complexContent>
203 </xs:complexType>

```

DescriptorComponentDocument

```

205     <xs:element name="DescriptorComponentDocument" xmlns:tns="http://xml.vidispine.
↪com/schema/vidispine" type="tns:DescriptorComponentType" />
206     <xs:complexType name="DescriptorComponentType">
207         <xs:complexContent>
208             <xs:extension xmlns:tns="http://xml.vidispine.com/schema/vidispine" base=
↪"tns:ComponentType">
209                 <xs:sequence>
210                     <xs:element name="description" minOccurs="0" maxOccurs="unbounded
↪">
211                         <xs:complexType>
212                             <xs:simpleContent>
213                                 <xs:extension base="xs:string">
214                                     <xs:attribute name="type" type="xs:string" use=
↪"required"/>
215                                 </xs:extension>
216                             </xs:simpleContent>
217                         </xs:complexType>
218                     </xs:element>
219                 </xs:sequence>
220             </xs:extension>
221         </xs:complexContent>
222     </xs:complexType>

```

SubtitleComponentDocument

```

224     <xs:element name="SubtitleComponentDocument" xmlns:tns="http://xml.vidispine.com/
↪schema/vidispine" type="tns:SubtitleComponentType" />
225     <xs:complexType name="SubtitleComponentType">
226         <xs:complexContent>
227             <xs:extension xmlns:tns="http://xml.vidispine.com/schema/vidispine" base=
↪"tns:MediaComponentType">
228                 <!--<xs:sequence>
229                     <xs:element name="description" minOccurs="0" maxOccurs="unbounded
↪">
230                         <xs:complexType>
231                             <xs:simpleContent>
232                                 <xs:extension base="xs:string">
233                                     <xs:attribute name="type" type="xs:string" use=
↪"required"/>
234                                 </xs:extension>
235                             </xs:simpleContent>
236                         </xs:complexType>
237                     </xs:element>
238                 </xs:sequence>-->
239             </xs:extension>

```

```

240     </xs:complexContent>
241 </xs:complexType>
242
243
244 <xs:complexType name="EDLType">
245   <xs:sequence>
246     <!-- MOV specifies length in terms of the mvhd time scale, which is
↳ simply an integer.
247         In other words, NTSC files have a time scale of 2997, not 30000/1001.
248         The transcoder fixes up timestamps given from mov.c, so 1700@2997
↳ becomes 17@NTSC and stores the corrected time scale here.
249     -->
250     <xs:element name="timeScale" type="tns:TimeBaseType"/>
251     <!-- Explicit time base for EDLEntryType.start values.
252         The purpose of this field is to reduce confusion where exactly the
↳ time base for the start values is taken from.
253         Using this field also removes the need for running a shape deduction
↳ step in order to figure out the time base for each stream.
254         In other words: not using this field results in hairy behavior.
255         See T#208.
256     -->
257     <xs:element name="timeBase" type="tns:TimeBaseType" minOccurs="0"/>
258     <xs:element name="entry" type="tns:EDLEntryType" minOccurs="0" maxOccurs=
↳ "unbounded"/>
259   </xs:sequence>
260 </xs:complexType>
261
262 <xs:complexType name="EDLEntryType">
263   <xs:attribute name="start" type="xs:long" use="required"/> <!-- In
↳ MediaComponentType/timeBase units -->
264   <xs:attribute name="length" type="xs:long" use="required"/> <!-- In
↳ EDLType/timeScale units -->
265   <xs:attribute name="mediaRate" type="xs:int" use="required"/> <!-- 16.16
↳ fixed-point, meaning divide by 65536 to get the actual rate. Non-float to promote
↳ losslessness. Should be > 0 -->
266 </xs:complexType>
267
268 <xs:complexType name="MediaComponentType">
269   <xs:complexContent>
270     <xs:extension xmlns:tns="http://xml.vidispine.com/schema/vidispine" base=
↳ "tns:ComponentType">
271       <xs:sequence>
272         <xs:element name="codec" type="xs:string" minOccurs="0"/>
273         <xs:element name="timeBase" type="tns:TimeBaseType" minOccurs="0"/
↳ >
274         <xs:element name="itemTrack" type="xs:string" minOccurs="0"/>
275         <xs:element name="essenceStreamId" type="xs:unsignedShort"
↳ minOccurs="0"/>
276         <xs:element name="interval" type="tns:TimeIntervalType" minOccurs=
↳ "0"/>
277         <xs:element name="bitrate" type="xs:unsignedInt" minOccurs="0"/>
278         <xs:element name="numberOfPackets" type="xs:long" minOccurs="0"/>
279         <xs:element name="extradata" type="xs:hexBinary" minOccurs="0"/>
280         <xs:element name="pid" type="xs:int" minOccurs="0"/>
281         <xs:element name="duration" type="tns:TimeCodeType" minOccurs="0"/
↳ >
282         <!-- Length of stream - may be different among components in the same
↳ file -->
283         <xs:element name="profile" type="xs:int" minOccurs="0"/>
↳
284         <!-- Corresponds to AVCodecContext::profile -->

```

```

283         <xs:element name="level" type="xs:int" minOccurs="0"/>
↳      <!-- Corresponds to AVCodecContext::level -->
284         <xs:element name="edl" type="tns:EDLType" minOccurs="0"/>
↳      <!-- Edit Decision List - derived from elst tags -->
285         <xs:element name="startTimeStamp" type="tns:TimeCodeType"
↳minOccurs="0"/> <!-- First timestamp in media -->
286         <xs:element name="repeatCount" type="xs:unsignedLong" minOccurs="0
↳"/>
287         <xs:element name="trackOrder" type="xs:int" minOccurs="0"/>
288         <xs:element name="segment" type="xs:int" minOccurs="0"/>
289     </xs:sequence>
290 </xs:extension>
291 </xs:complexContent>
292 </xs:complexType>
293
294 <!-- Returns various fields parsed by libmediainfo -->
295 <xs:complexType name="BaseMediaInfoType">
296     <xs:sequence>
297         <xs:element name="Bit_rate_mode" type="xs:string" minOccurs="0"/>
↳      <!-- "Bit rate mode" like "CBR" or "VBR" -->
298         <xs:element name="Source" type="xs:string" minOccurs="0"/>
↳      <!-- "Source". QT-ref source media file, like "media.dir/foo.m2v" -->
299         <xs:element name="property" type="tns:KeyValuePairType" minOccurs="0"
↳maxOccurs="unbounded"/>
300     </xs:sequence>
301 </xs:complexType>
302
303 <xs:complexType name="AudioMediaInfoType">
304     <xs:complexContent>
305         <xs:extension xmlns:tns="http://xml.vidispine.com/schema/vidispine" base=
↳"tns:BaseMediaInfoType">
306             <xs:sequence/>
307         </xs:extension>
308     </xs:complexContent>
309 </xs:complexType>
310
311 <xs:complexType name="VideoMediaInfoType">
312     <xs:complexContent>
313         <xs:extension xmlns:tns="http://xml.vidispine.com/schema/vidispine" base=
↳"tns:BaseMediaInfoType">
314             <xs:sequence>
315                 <xs:element name="Format_Settings_GOP" type="xs:string" minOccurs=
↳"0"/>
↳                 <!-- "Format settings, GOP0" like "N=1" (intra-only) or "M=2, N=60" --
↳>
316                 <xs:element name="intra_dc_precision" type="xs:int" minOccurs="0"/
↳>
↳                 <!-- "intra_dc_precision". 8, 9, 10 or 11 if set -->
317             </xs:sequence>
318         </xs:extension>
319     </xs:complexContent>
320 </xs:complexType>

```

AudioComponentDocument

```

322 <xs:element name="AudioComponentDocument" xmlns:tns="http://xml.vidispine.com/
↳schema/vidispine" type="tns:AudioComponentType" />
323 <xs:complexType name="AudioComponentType">
324     <xs:complexContent>
325         <xs:extension xmlns:tns="http://xml.vidispine.com/schema/vidispine" base=
↳"tns:MediaComponentType">

```

```

326         <xs:sequence>
327             <xs:element name="channelCount" type="xs:unsignedShort"/>
328             <xs:element name="channelLayout" type="xs:long" minOccurs="0"/>
329             <xs:element name="sampleFormat" type="xs:string" minOccurs="0"/>
330             <xs:element name="frameSize" type="xs:unsignedInt" minOccurs="0"/>
331             <xs:element name="blockAlign" type="xs:unsignedInt" minOccurs="0"/>
332         </xs:sequence>
333         <xs:element name="mediaInfo" type="tns:AudioMediaInfoType"
334             minOccurs="0"/>
335     </xs:extension>
336 </xs:complexType>
337 </xs:complexType>

```

VideoComponentDocument

```

338 <xs:element name="VideoComponentDocument" xmlns:tns="http://xml.vidispine.com/
339     schema/vidispine" type="tns:VideoComponentType" />
340 <xs:complexType name="VideoComponentType">
341     <xs:complexContent>
342         <xs:extension xmlns:tns="http://xml.vidispine.com/schema/vidispine" base=
343             "tns:MediaComponentType">
344             <xs:sequence>
345                 <xs:element name="videoStandard" minOccurs="0" maxOccurs="1">
346                     <xs:complexType>
347                         <xs:simpleContent>
348                             <xs:extension base="xs:string">
349                                 <xs:attribute name="type" type="xs:string" use=
350                                     "required"/>
351                             </xs:extension>
352                         </xs:simpleContent>
353                     </xs:complexType>
354                 </xs:element>
355                 <xs:element name="resolution" type="tns:ResolutionType" minOccurs=
356                     "0"/>
357                 <xs:element name="pixelFormat" type="xs:string" minOccurs="0"/>
358                 <xs:element name="maxBFrames" type="xs:unsignedShort" minOccurs="0"
359                     />
360                 <xs:element name="pixelAspectRatio" type="tns:AspectRatioType"
361                     minOccurs="0"/>
362                 <!-- Field order
363                     "progressive" for progressive video
364                     "F1" for interlaced in "top field first" order
365                     "F2" for interlaced in "bottom field first" order
366
367                     Note that the meaning of F1 and F2 are opposite to S314m
368                     where Field 1 is the bottom (odd) field and vice versa.
369                     This was not known when this element was introduced, and
370                     changing this is likely to result in problems.
371                 -->
372                 <xs:element name="fieldOrder" type="xs:string" minOccurs="0"/>
373                 <xs:element name="codecTimeBase" type="tns:TimeBaseType"
374                     minOccurs="0"/>
375                 <xs:element name="averageFrameRate" type="tns:TimeBaseType"
376                     minOccurs="0"/>
377                 <xs:element name="realBaseFrameRate" type="tns:TimeBaseType"
378                     minOccurs="0"/>

```

```

369         <!-- MXF-ish display rectangle.
370             This means values straight from CDCIDescriptor for MXF,
371             but scaled down by SAR for clap in MOV.
372             In other words, "to display" space, not "displayed" (aka
373 ↪ raster) space.
374         -->
375         <xs:element name="displayWidth" type="tns:RationalType" minOccurs=
376 ↪ "0"/>
377         <xs:element name="displayHeight" type="tns:RationalType"
378 ↪ minOccurs="0"/>
379         <xs:element name="displayXOffset" type="tns:RationalType"
380 ↪ minOccurs="0"/>
381         <xs:element name="displayYOffset" type="tns:RationalType"
382 ↪ minOccurs="0"/>
383         <!-- DAR = displayWidth/displayHeight * containerSAR -->
384         <xs:element name="containerSAR" type="tns:AspectRatioType"
385 ↪ minOccurs="0"/>
386         <xs:element name="colr_primaries" type="xs:int" minOccurs="0"/>
387         <xs:element name="colr_transfer_function" type="xs:int" minOccurs=
388 ↪ "0"/>
389         <xs:element name="colr_matrix" type="xs:int" minOccurs="0"/>
390         <xs:element name="max_packet_size" type="xs:int" minOccurs="0"/>
391         <!-- Codec-level time code information - typically set from the
392 ↪ 25-bit value in the first MPEG-2 GOP header.
393             Use averageFrameRate in lieu of RoundedTimeBase.
394         -->
395         <xs:element name="startTimecode" type="xs:long" minOccurs="0"/>
396         <xs:element name="dropFrame" type="xs:boolean" minOccurs="0"/>
397         <!-- needed to get H.264 decoding working properly in some cases -
398 ↪ -->
399         <xs:element name="ticks_per_frame" type="xs:int" minOccurs="0"/>
400         <!-- Added for T#135 -->
401         <!-- Bit depth (default 8) -->
402         <xs:element name="bitDepth" type="xs:int" minOccurs="0"/>
403         <xs:element name="bitsPerPixel" type="xs:int" minOccurs="0"/>
404         <!-- Color primaries in string form (c.f. colr_primaries above --
405 ↪ -->
406         <xs:element name="colorPrimaries" type="xs:string" minOccurs="0"/>
407         <xs:element name="mediaInfo" type="tns:VideoMediaInfoType"
408 ↪ minOccurs="0"/>
409     </xs:sequence>
410 </xs:extension>
411 </xs:complexType>

```

ShapeDocument

```

410 <xs:element name="ShapeDocument" xmlns:tns="http://xml.vidispine.com/schema/
411 ↪ vidispine" type="tns:ShapeType"/>
412 <xs:complexType name="ShapeType">

```



```

412     <xs:sequence>
413         <xs:element name="id" type="tns:SiteIdType" minOccurs="0"/>
414         <xs:element name="created" type="xs:dateTime" minOccurs="0" maxOccurs="1"
↳ />
415         <xs:element name="essenceVersion" type="xs:int" minOccurs="0" maxOccurs="1
↳ "/>
416         <xs:element name="tag" type="xs:string" minOccurs="0" maxOccurs="unbounded
↳ "/>
417         <xs:element name="mimeType" type="xs:string" minOccurs="0" maxOccurs=
↳ "unbounded"/>
418         <xs:element name="uuid" type="tns:UUIDType" minOccurs="0" maxOccurs="1"/>
419         <xs:element name="binaryComponent" type="tns:BinaryComponentType"
↳ minOccurs="0" maxOccurs="unbounded"/>
420         <!-- container is optional since we might create a ShapeType which merely
↳ helps point to source material -->
421         <xs:element name="containerComponent" type="tns:ContainerComponentType"
↳ minOccurs="0"/>
422         <xs:element name="descriptorComponent" type="tns:DescriptorComponentType"
↳ minOccurs="0" maxOccurs="unbounded"/>
423         <xs:element name="audioComponent" type="tns:AudioComponentType" minOccurs=
↳ "0" maxOccurs="unbounded"/>
424         <xs:element name="videoComponent" type="tns:VideoComponentType" minOccurs=
↳ "0" maxOccurs="unbounded"/>
425         <xs:element name="subtitleComponent" type="tns:SubtitleComponentType"
↳ minOccurs="0" maxOccurs="unbounded"/>
426         <xs:element name="metadata" minOccurs="0" maxOccurs="1" type="tns:
↳ SimpleMetadataType"/>
427         <xs:element name="item" minOccurs="0" maxOccurs="unbounded">
428             <xs:complexType>
429                 <xs:sequence>
430                     <xs:element name="id" type="tns:SiteIdType" minOccurs="0"
↳ maxOccurs="1"/>
431                 </xs:sequence>
432             </xs:complexType>
433         </xs:element>
434     </xs:sequence>
435 </xs:complexType>
436
437 <!-- Types for bulky metadata -->

```

BulkyMetadataDocument

```

438     <xs:element name="BulkyMetadataDocument" xmlns:tns="http://xml.vidispine.com/
↳ schema/vidispine" type="tns:BulkyMetadataType"/>
439     <xs:complexType name="BulkyMetadataType">
440         <xs:sequence>
441             <xs:element name="field" type="tns:BulkyMetadataPairType" minOccurs="0"
↳ maxOccurs="unbounded"/>
442         </xs:sequence>
443         <xs:attribute name="id" type="tns:SiteIdType" use="optional"/>
444     </xs:complexType>
445     <xs:complexType name="BulkyMetadataPairType">
446         <xs:sequence>
447             <xs:element name="key" type="xs:string" minOccurs="1" maxOccurs="1"/>
448             <xs:choice>
449                 <xs:element name="value" type="xs:string" minOccurs="1" maxOccurs="1"/
↳ >
450             <xs:element name="maps" type="tns:BulkyMapListType" minOccurs="1"
↳ maxOccurs="1"/>

```

```

451     </xs:choice>
452   </xs:sequence>
453   <xs:attribute name="start" type="xs:string" use="optional"/>
454   <xs:attribute name="end" type="xs:string" use="optional"/>
455   <xs:attribute name="stream" type="xs:int" use="optional"/>
456   <xs:attribute name="channel" type="xs:int" use="optional"/>
457   <xs:attribute name="itemTrack" type="xs:string" use="optional"/>
458 </xs:complexType>

```

BulkyMapListDocument

```

460   <xs:element name="BulkyMapListDocument" xmlns:tns="http://xml.vidispine.com/
↳ schema/vidispine" type="tns:BulkyMapListType"/>
461   <xs:complexType name="BulkyMapListType">
462     <xs:sequence>
463       <xs:element name="map" type="tns:BulkyMapType" minOccurs="1" maxOccurs=
↳ "unbounded"/>
464     </xs:sequence>
465   </xs:complexType>
466   <xs:complexType name="BulkyMapType">
467     <xs:sequence>
468       <xs:element name="entry" type="tns:BulkyMapEntryType" minOccurs="1"
↳ maxOccurs="unbounded"/>
469     </xs:sequence>
470   </xs:complexType>
471   <xs:complexType name="BulkyMapEntryType">
472     <xs:simpleContent>
473       <xs:extension base="xs:string">
474         <xs:attribute name="key" type="xs:string" use="required"/>
475       </xs:extension>
476     </xs:simpleContent>
477   </xs:complexType>
478
479
480
481   <!-- Types for requesting merging according to a timeline (aka pasting together
↳ resources) -->

```

TimelineJobRequestDocument

```

482   <xs:element name="TimelineJobRequestDocument" xmlns:tns="http://xml.vidispine.com/
↳ schema/vidispine" type="tns:TimelineJobRequestType" />
483   <xs:complexType name="TimelineJobRequestType">
484     <xs:complexContent>
485       <xs:extension base="tns:TranscoderJobType">
486         <xs:sequence>
487           <xs:element name="outputUri" type="xs:anyURI"/>
488           <xs:element name="containerFormat" type="xs:string"/>
489           <xs:element name="stream" maxOccurs="unbounded">
490             <xs:complexType>
491               <xs:sequence>
492                 <xs:element name="input" maxOccurs="unbounded">
493                   <xs:complexType>
494                     <xs:sequence>
495                       <xs:element name="uri" type="xs:anyURI"/>
496                       <xs:element name="stream" type="xs:unsignedShort"/
↳ >
497                     <xs:element name="interval" type="tns:
↳ TimeIntervalType"/>

```

```

498         </xs:sequence>
499     </xs:complexType>
500 </xs:element>
501 </xs:sequence>
502 </xs:complexType>
503
504 </xs:element>
505
506 <!--xs:choice>
507     <xs:element name="simpleTimeline" type="tns:SimpleTimelineType"/>
508     <xs:element name="timeline" type="tns:TimelineType"/>
509 </xs:choice>
510 <xs:element name="thumbnailResourceUri" type="xs:anyURI" minOccurs="0"
↳maxOccurs="unbounded"/-->
511 </xs:sequence>
512 </xs:extension>
513 </xs:complexContent>
514 </xs:complexType>
515
516 <xs:complexType name="ComplexJobOTIFType">
517     <xs:sequence>
518         <xs:element name="trackerPlugin" type="xs:string" minOccurs="1"/>
519         <xs:element name="versionMajor" type="xs:int" minOccurs="1"/>
520         <xs:element name="versionMinor" type="xs:int" minOccurs="1"/>
521         <xs:element name="versionPatch" type="xs:int" minOccurs="1"/>
522         <xs:element name="bulkyMetadataURI" type="xs:anyURI" minOccurs="0"
↳maxOccurs="1" />
523         <xs:element name="configuration" type="tns:KeyValuePairType" minOccurs="0
↳" maxOccurs="unbounded"/>
524         <xs:element name="resource" type="tns:NameURIPairType" minOccurs="0"
↳maxOccurs="unbounded"/>
525     </xs:sequence>
526 </xs:complexType>
527
528 <!-- Types for requesting a more complex "map this to that" type of transcode job
↳-->
529 <xs:complexType name="ComplexJobOutputType">
530     <xs:sequence>
531         <!-- Use multiple id element to multiplex the encoded data to multiple
532             files without having to encode more than once
533         -->
534         <xs:element name="id" type="xs:int" minOccurs="0" maxOccurs="unbounded"/>
535         <xs:element name="start" type="tns:TimeCodeType" minOccurs="0"/>
536         <xs:element name="codec" type="xs:string" minOccurs="0"/>
537
538         <!-- FOURCC. Corresponds to codec_tag in libav* terms,
539             hence the name. Typically a four-character ASCII string.
540             May need to be fairly arbitrary constants though, so
541             an xs:string is insufficient. Hence an int is used.
542
543             An earlier way of setting the codecTag for four-character
544             strings was to set the first character as the LSB and so on.
545             In other words:
546             "ai55" -> 'a' + ('i' << 8) + ('5' << 16) + ('5' << 24)
547             However, this use has been deprecated.
548
549             Instead, just set the codecTagString to the character string, as in
550             <codecTagString>ai55</codecTagString>

```

```

551     -->
552     <xs:element name="codecTag" type="xs:unsignedInt" minOccurs="0"/>
553     <xs:element name="codecTagString" type="xs:string" minOccurs="0"/>
554
555     <!-- Name that the muxer should use in the output file for the codec.
556          Corresponds to codec_name in libav*.
557     -->
558     <xs:element name="codecName" type="xs:string" minOccurs="0"/>
559
560     <xs:element name="bitrate" type="xs:unsignedInt" minOccurs="0"/>
561     <xs:element name="timeBase" type="tns:TimeBaseType" minOccurs="0"/>
562
563     <!-- Profile/presets to use.
564          MainConcept examples: "ipod", "baseline", "main", "high".
565          For libavcodec, see presets/ directory. Examples: "main", "normal",
↪ "hq".
566     -->
567     <xs:element name="preset" type="xs:string" minOccurs="0" maxOccurs=
↪ "unbounded"/>
568
569     <!-- Edit Decision List -->
570     <xs:element name="edl" type="tns:EDLType" minOccurs="0"/>
571
572     <xs:element name="setting" type="tns:KeyValuePairType" minOccurs="0"
↪ maxOccurs="unbounded"/>
573
574     <xs:element name="objectTracking" type="tns:ComplexJobOTIType" minOccurs=
↪ "0" maxOccurs="1"/>
575
576     <xs:element name="metadata" type="tns:KeyValuePairType" minOccurs="0"
↪ maxOccurs="unbounded"/>
577     </xs:sequence>
578     </xs:complexType>
579
580     <xs:complexType name="ComplexJobAudioOutputType">
581       <xs:complexContent>
582         <xs:extension xmlns:tns="http://xml.vidispine.com/schema/vidispine" base=
↪ "tns:ComplexJobOutputType">
583           <xs:sequence>
584             <!-- See generateThumbnails/uri -->
585             <xs:element name="thumbnailUri" type="xs:anyURI" minOccurs="0"
↪ maxOccurs="unbounded"/> <!-- If set, upload thumbnail to specified URIs -->
586           </xs:sequence>
587         </xs:extension>
588       </xs:complexContent>
589     </xs:complexType>
590
591     <xs:complexType name="OverlayType">
592       <xs:sequence>
593         <!-- URI for image to overlay
594              Should use a pixel format suitable for alpha blending,
595              like 8-bit RGBA.
596         -->
597         <xs:element name="uri" type="xs:anyURI" maxOccurs="unbounded"/>
598         <xs:element name="range" type="tns:SequenceRangeType" maxOccurs="unbounded
↪ "/>
599
600         <xs:element name="id" minOccurs="0" maxOccurs="1" type="tns:SiteIdType"/>

```

```

601     <!-- Coordinates in video to place overlay at. Can be negative -->
602     <xs:element name="x" type="xs:int"/>
603     <xs:element name="y" type="xs:int"/>
604
605     <!-- Optional: time interval to perform overlay in -->
606     <xs:element name="interval" type="tns:TimeIntervalType" minOccurs="0"/>
607     <xs:element name="opacity" minOccurs="0" maxOccurs="1" type="xs:int"/>
608   </xs:sequence>
609 </xs:complexType>
610
611 <xs:complexType name="TextOverlayType">
612   <xs:sequence>
613     <xs:element name="text" type="tns:TextRenditionType"/>
614
615     <!-- Optional: time interval to perform overlay in -->
616     <xs:element name="interval" type="tns:TimeIntervalType" minOccurs="0"/>
617     <xs:element name="opacity" minOccurs="0" maxOccurs="1" type="xs:int"/>
618   </xs:sequence>
619 </xs:complexType>
620
621 <xs:complexType name="ComplexJobVideoOutputType">
622   <xs:complexContent>
623     <xs:extension xmlns:tns="http://xml.vidispine.com/schema/vidispine" base=
↪ "tns:ComplexJobOutputType">
624       <xs:sequence>
625         <xs:element name="scaling" minOccurs="0" maxOccurs="1" type="tns:
↪ ScalingType"/>
626
627         <!-- Deprecated. Use <scaling> instead -->
628         <xs:element name="resolution" type="tns:ResolutionType" minOccurs=
↪ "0"/>
629
630         <!-- Pixel format to use, like "yuv420p", "yuv422p", "uyvy422"
↪ etc. -->
631         <xs:element name="pixelFormat" type="xs:string" minOccurs="0"/>
632
633         <xs:element name="gopSize" type="xs:unsignedShort" minOccurs="0"/>
634         <xs:element name="maxBFrames" type="xs:unsignedShort" minOccurs="0"
↪ "/>
635
636         <!-- rc_buffer_size, size of VBV buffer -->
637         <xs:element name="rcBufferSize" type="xs:unsignedInt" minOccurs="0"
↪ "/>
638
639         <!-- rc_initial_buffer_occupancy. Should equal rc_buffer_size
640              when encoding CBR
641              -->
642         <xs:element name="rcInitialBufferOccupancy" type="xs:unsignedInt"
↪
↪ minOccurs="0"/>
643
644         <!-- Minimum and maximum bitrate. Typically used for CBR output.
645              Note that for CBR, such as IMX50, you must also set
646              rcBufferSize and rcInitialOccupancy appropriately.
647              In the IMX50 case they should both be at least 2 Mbit
648              and equal.
649              -->
650         <xs:element name="minBitrate" type="xs:unsignedInt" minOccurs="0"/
↪
↪ >

```

```

651         <xs:element name="maxBitrate" type="xs:unsignedInt" minOccurs="0"/
↳>
652
653         <xs:element name="colorSiting" type="xs:unsignedShort" minOccurs=
↳"0"/>    <!-- Color Siting info for MXF output, see SMPTE 377M, E.2.35 -->
654         <xs:element name="generateThumbnails" minOccurs="0">
655             <xs:complexType>
656                 <xs:sequence>
657                     <!-- If set, send thumbnails to the specified URI,
↳replacing "callback" with the licensing IP.
658                         For example, if the transcoder has been given a
↳license by 12.34.56.78 then setting this to
659
660                             http://callback:8080/API/item/VX-1234/thumbnail
661
662                             results in a thumbnail at 0@PAL being PUT to:
663
664                             http://12.34.56.78:8080/API/item/VX-1234/
↳thumbnail/0@PAL
665
666                         -->
667                     <xs:element name="uri" type="xs:anyURI" maxOccurs=
↳"unbounded"/>
668                     <xs:element name="minDelay" type="tns:TimeCodeType"
↳minOccurs="0"/>
669                     <xs:element name="maxDelay" type="tns:TimeCodeType"
↳minOccurs="0"/>
670                     <xs:element name="background" type="xs:string"
↳minOccurs="0" maxOccurs="1"/>
671                     <!-- If set, use scene change detection instead of
↳grabbing one frame every 10th second.
672                         This only has to be set - its value can be
↳anything, even the empty string.
673                         It should really be an optional boolean, but we
↳keep it as an optional string for backward compatibility.
674                         -->
675                     <xs:element name="detectorPlugin" type="xs:string"
↳minOccurs="0"/>
676                     <xs:element name="resolution" type="tns:ResolutionType"
↳minOccurs="0" maxOccurs="1"/>
677                     <xs:element name="period" type="tns:TimeCodeType"
↳minOccurs="0" maxOccurs="1"/>
678                     <xs:element name="bulkyMetadataURI" type="xs:anyURI"
↳minOccurs="0" maxOccurs="1" />
679                 </xs:sequence>
680             </xs:complexType>
681         </xs:element>
682         <xs:element name="generatePosters" minOccurs="0">
683             <xs:complexType>
684                 <xs:sequence>
685                     <xs:element name="background" type="xs:string"
↳minOccurs="0" maxOccurs="1"/>
686                     <xs:element name="resolution" type="tns:ResolutionType"
↳minOccurs="0" maxOccurs="1"/>
687
688                     <!-- See generateThumbnails/uri -->
689                     <xs:element name="uri" type="xs:anyURI" maxOccurs=
↳"unbounded"/>
690
691                     <xs:element name="timeCode" type="tns:TimeCodeType"
↳maxOccurs="unbounded"/>

```

```

689         <xs:element name="format" type="xs:string" minOccurs=
↳ "0" maxOccurs="1"/>
690         <xs:element name="setting" type="tns:KeyValuePairType
↳ " minOccurs="0" maxOccurs="unbounded"/>
691         </xs:sequence>
692         <xs:attribute name="smallPosters" type="xs:boolean" use=
↳ "optional"/>
693     </xs:complexType>
694 </xs:element>
695 <xs:element name="detectFaces" minOccurs="0">
696     <xs:complexType>
697     <xs:sequence>
698     <xs:element name="metadataUri" type="xs:anyURI"/>
699     <xs:element name="faceDetectorPlugin" type="xs:string
↳ "/> <!-- maps to TranscoderConfigurationDocument/faceDetectorPlugin/alias -->
700     </xs:sequence>
701     </xs:complexType>
702 </xs:element>
703 <xs:element name="overlay" type="tns:OverlayType" minOccurs="0"
↳ maxOccurs="unbounded"/>
704 <xs:element name="textOverlay" type="tns:TextOverlayType"
↳ minOccurs="0" maxOccurs="unbounded"/>
705
706     <!-- If set, strip SPS/PPS from packets before handing them off
↳ to the muxer.
707         This is required when muxing AVC-Intra for Avid Media
↳ Composer, and possibly FCP.
708     -->
709     <xs:element name="stripParameterSets" type="xs:boolean" minOccurs=
↳ "0"/>
710
711     <!-- If set, add SPS/PPS to the first packet output by the
↳ demuxer for this stream.
712         The data is taken from extradata - set extradata as well if
↳ it is not
713         present or if it is incorrect
714     -->
715     <xs:element name="addParameterSets" type="xs:boolean" minOccurs="0
↳ "/>
716
717     <!-- If set, explicitly use this for the parameter set data.
718         If not set, then whatever the demuxer reports as extradata
↳ for this stream will be used.
719     -->
720     <xs:element name="parameterSets" type="xs:hexBinary" minOccurs="0
↳ "/>
721
722     <!-- If set, use this level.
723         For H.264, the value of this should be ten times the decimal
↳ value of the level.
724         In other words, 1.0 -> 10, 5.1 -> 51 etc.
725         This applies for both libx264 and MainConcept.
726         If used, then profile should also be set (via <preset>).
727     -->
728     <xs:element name="level" type="xs:int" minOccurs="0"/>
729
730     <!-- Deprecated -->
731     <xs:element name="disableFrameDupDrop" type="xs:boolean"
↳ minOccurs="0" />

```

```

732         <!-- Use <forceCFR> to force the output to be CFR, according to
733         ↪<timeBase>.
734         For instance, if timeBase = 1/25 then the transcoder will
735         ↪take all frames
736         from the input and make all of them 40 ms long.
737         This is useful for formats where the first few frames have
738         ↪bad durations,
739         or where the framerate of the entire file is demonstrably
740         ↪wrong.
741         Not used when remuxing.
742         -->
743         <xs:element name="forceCFR" type="xs:boolean" minOccurs="0" />
744
745         <!-- If true, burn the input file's timecode in the output -->
746         <xs:element name="burnTimecode" type="xs:boolean" minOccurs="0" />
747
748         <!-- Only used for image transcodes -->
749         <xs:element name="imageQuality" type="xs:integer" minOccurs="0" />
750
751         <!-- MXF-ish display rectangle.
752         This means values straight from CDCIDescriptor for MXF,
753         but scaled down by SAR for clap in MOV.
754         In other words, "to display" space, not "displayed" (aka
755         ↪raster) space.
756         -->
757         <xs:element name="displayWidth" type="tns:RationalType" minOccurs=
758         ↪"0"/>
759         <xs:element name="displayHeight" type="tns:RationalType"
760         ↪minOccurs="0"/>
761         <xs:element name="displayXOffset" type="tns:RationalType"
762         ↪minOccurs="0"/>
763         <xs:element name="displayYOffset" type="tns:RationalType"
764         ↪minOccurs="0"/>
765
766         <!-- DAR = displayWidth/displayHeight * containerSAR -->
767         <xs:element name="containerSAR" type="tns:AspectRatioType"
768         ↪minOccurs="0"/>
769     </xs:sequence>
770 </xs:extension>
771 </xs:complexContent>
772 </xs:complexType>
773
774 <!--
775     ScalingType
776
777     Used to set cropping and scaling parameters to the transcoder.
778
779     By default, the transcoder will attempt to maintain the display aspect
780     ratio (DAR) of the cropped input. Use targetDAR to specify a different
781     DAR to maintain.
782
783     The transcoder will typically try to adjust the PAR so that the cropped
784     picture ends up with the correct DAR. This minimizes the amount of
785     processing required. Use pixelAspectRatio to set the PAR explicitly, in
786     which case either width or height will be adjusted to maintain DAR.
787
788     Use width and height to scale in those dimensions. If only one of them
789 
```


is set and PAR is set, the other one will be adjusted so the result matches the target DAR. If both are set and and PAR is set, the transcoder will take them as is.

Setting neither width nor height while PAR is set results in undefined behavior.

The transcoder will always double-check the resulting dimensions and PAR against the desired DAR. If there's a mismatch, the job will fail. If you want to force the transcoder to accept your settings, set targetDAR manually to the resulting DAR.

```

780     is set and PAR is set, the other one will be adjusted so the result
781     matches the target DAR. If both are set and and PAR is set, the
782     transcoder will take them as is.
783
784     Setting neither width nor height while PAR is set results in undefined
785     behavior.
786
787     The transcoder will always double-check the resulting dimensions and PAR
788     against the desired DAR. If there's a mismatch, the job will fail. If
789     you want to force the transcoder to accept your settings, set targetDAR
790     manually to the resulting DAR.
791     -->
792     <xs:complexType name="ScalingType">
793       <xs:sequence>
794         <xs:element name="width" minOccurs="0" maxOccurs="1" type="xs:unsignedInt
↪"/>
795         <xs:element name="height" minOccurs="0" maxOccurs="1" type="xs:unsignedInt
↪"/>
796
797         <!-- Specifies the number of pixels to crop out of each side.
798             Be careful when cropping odd numbers of pixels in any dimension
799             that is subsampled. For instance, cropping an odd number of
800             lines in YUV 4:2:0. This will cause the chroma siting to shift.
801         -->
802         <xs:element name="top" minOccurs="0" maxOccurs="1" type="xs:int"/>
803         <xs:element name="bottom" minOccurs="0" maxOccurs="1" type="xs:int"/>
804         <xs:element name="left" minOccurs="0" maxOccurs="1" type="xs:int"/>
805         <xs:element name="right" minOccurs="0" maxOccurs="1" type="xs:int"/>
806         <xs:element name="padColor" minOccurs="0" maxOccurs="1" type="xs:string"/>
↪ <!-- HTML (#rrggbb), if crop is negative -->
807
808         <!-- Specifies rotation. If no resolution/PAR is set, the PAR
809             and resolution of the input is inverted to (hopefully)
810             result in a pixel-to-pixel accurate flipping.
811             Valid values are "left", "right" and "upsidedown" for 90, -90 and
812             180 degrees rotation, respectively
813         -->
814         <xs:element name="rotate" minOccurs="0" maxOccurs="1" type="xs:string"/>
815
816         <!-- PAR -->
817         <xs:element name="pixelAspectRatio" minOccurs="0" maxOccurs="1" type="tns:
↪AspectRatioType"/>
818
819         <!-- Desired display aspect ratio -->
820         <xs:element name="targetDAR" minOccurs="0" maxOccurs="1" type="tns:
↪AspectRatioType"/>
821       </xs:sequence>
822     </xs:complexType>
823
824     <xs:complexType name="ComplexJobSubtitleOutputType">
825       <xs:complexContent>
826         <xs:extension xmlns:tns="http://xml.vidispine.com/schema/vidispine" base=
↪"tns:ComplexJobOutputType">
827           <xs:sequence/>
828         </xs:extension>
829       </xs:complexContent>
830     </xs:complexType>
831

```

```

832 <xs:complexType name="BorderType">
833   <!-- Alpha + RGB color of border -->
834   <xs:attribute name="a" type="xs:unsignedByte" use="required"/>
835   <xs:attribute name="r" type="xs:unsignedByte" use="required"/>
836   <xs:attribute name="g" type="xs:unsignedByte" use="required"/>
837   <xs:attribute name="b" type="xs:unsignedByte" use="required"/>
838
839   <!-- Width of border in pixels in display space -->
840   <xs:attribute name="width" type="xs:unsignedByte" use="required"/>
841 </xs:complexType>
842
843 <xs:complexType name="TransitionType">
844   <xs:sequence>
845     <xs:element name="duration" type="tns:TimeCodeType"/>
846     <xs:choice>
847       <!-- SMPTE wipe code (see S258m) -->
848       <xs:element name="wipe" type="xs:int"/>
849
850       <!-- Other transition, like "CrossDissolve". Corresponds to Fabric's
851 ↪ transitionSubTypeType -->
852       <xs:element name="transition" type="xs:string"/>
853     </xs:choice>
854     <xs:element name="horizRepeat" type="xs:int" minOccurs="0"/>
855     <xs:element name="vertRepeat" type="xs:int" minOccurs="0"/>
856
857     <!-- startPercentage and endPercentage can optionally be used to override
858 ↪ the normal 0-100% transition range -->
859     <xs:element name="startPercentage" type="xs:int" minOccurs="0"/>
860     <xs:element name="endPercentage" type="xs:int" minOccurs="0"/>
861
862     <!-- If set and true, reverse the direction of the wipe -->
863     <xs:element name="reverse" type="xs:boolean" minOccurs="0"/>
864
865     <xs:element name="border" type="tns:BorderType" minOccurs="0"/>
866   </xs:sequence>
867 </xs:complexType>
868
869 <!-- Generic "I want this stream from that input" type. Works for both audio and
870 ↪ video -->
871 <xs:complexType name="ComplexJobInputType">
872   <xs:sequence>
873     <xs:element name="id" type="xs:int"/>
874     <xs:element name="stream" type="xs:unsignedShort"/>
875
876     <!-- Optional: transition effect to use when this input is followed by
877 ↪ another input in a timeline -->
878     <xs:element name="transition" type="tns:TransitionType" minOccurs="0"/>
879
880     <!-- Optional: Use this to set settings for decoders -->
881     <xs:element name="setting" type="tns:KeyValuePairType" minOccurs="0"
882 ↪ maxOccurs="unbounded"/>
883   </xs:sequence>
884 </xs:complexType>
885
886 <!--
887   Input type for grabbing a specific channel from an input audio stream.
888   Several of these as inputs in a connection make it possible to create a new
889 ↪ stream from M existing channels in N input streams.

```

```

884     -->
885     <xs:complexType name="ComplexJobAudioChannelMapInputType">
886         <xs:complexContent>
887             <xs:extension xmlns:tns="http://xml.vidispine.com/schema/vidispine" base=
↳ "tns:ComplexJobInputType">
888                 <xs:sequence>
889                     <xs:element name="channel" type="xs:unsignedShort"/>
890                 </xs:sequence>
891             </xs:extension>
892         </xs:complexContent>
893     </xs:complexType>
894
895     <!-- Input type for joining together several mono audio sequences
896          In other words, this type defines a mono timeline.
897          The mono intervals specified by each ComplexJobAudioChannelMapInputType
898          element in this type are joined together to produce the output.
899
900          Several ComplexJobAudioChannelSequenceInputType elements are used in
901          ComplexJobType to produce a full timeline - one for each channel.
902
903          Note that if no channels need to be extracted separately a
904          ComplexJobInputType array should be use instead (see
905          ComplexJobType/connection/input).
906     -->
907     <xs:complexType name="ComplexJobAudioChannelSequenceInputType">
908         <xs:sequence>
909             <xs:element name="input" type="tns:ComplexJobAudioChannelMapInputType"
↳ minOccurs="1" maxOccurs="unbounded"/>
910         </xs:sequence>
911     </xs:complexType>
912
913     <xs:complexType name="ComplexJobMixType">
914         <xs:attribute name="id" type="xs:int" use="required"/>
915         <xs:attribute name="stream" type="xs:unsignedShort" use="required"/>
916         <xs:attribute name="channel" type="xs:unsignedShort" use="required"/>
917         <xs:attribute name="gain" type="xs:float" use="required"/>
918     </xs:complexType>
919
920     <xs:complexType name="ComplexJobMixInputType">
921         <xs:sequence>
922             <xs:element name="mix" type="tns:ComplexJobMixType" minOccurs="1"
↳ maxOccurs="unbounded"/>
923         </xs:sequence>
924     </xs:complexType>
925
926     <!-- Used to request extraction of various types of metadata from input files to
927     ↳ be reported to a resource as BulkyMetadata -->
928     <xs:complexType name="ComplexJobBulkyMetadataRequestType">
929         <xs:sequence>
930             <xs:element name="targetUri" type="xs:anyURI"/>
931             <!-- URI to write BulkyMetadata to -->
932             <xs:element name="failIfTimecodeNotPresent" type="xs:boolean" minOccurs="0
↳ "/>
933             <!-- If true, fail the job if we didn't find a single timecode -->
934         </xs:sequence>
935     </xs:complexType>
936
937     <!-- Information needed by the PartialFileDemuxer -->

```

```

935     <xs:complexType name="PartialFileDemuxerInfoType">
936         <xs:sequence>
937             <!-- The user can either use a full descriptor or give a URI pointing to
↳one -->
938             <xs:choice>
939                 <xs:element name="descriptor" type="tns:PartialFileDescriptorType"/>
940                 <xs:element name="descriptorLocation" type="xs:anyURI"/>
941             </xs:choice>
942
943             <!-- Offset into original file that ComplexJobType/input/uri
944                 consists of. In other words, how far into the file the binary
945                 blob was cut.
946             -->
947             <xs:element name="byteOffset" type="xs:long" minOccurs="0"/>
948             <xs:element name="adjustForPTSPredecessors" type="xs:boolean" minOccurs="0
↳" />
949         </xs:sequence>
950     </xs:complexType>
951
952     <xs:complexType name="ComplexJobAtomType">
953         <xs:attribute name="uri" type="xs:anyURI" use="required"/>
954
955         <!-- generated if not set -->
956         <xs:attribute name="sourcePackageID" type="tns:UMIDType" use="optional"/>
957     </xs:complexType>
958
959     <xs:complexType name="AnalyzeAudioChannelType">
960         <xs:sequence>
961             <xs:element name="tone" type="xs:float" minOccurs="0" maxOccurs="unbounded
↳"/>
962         </xs:sequence>
963
964         <!-- Which channel in which stream to use these tones and thresholds for -->
965         <xs:attribute name="stream" type="xs:unsignedShort" use="required"/>
966         <xs:attribute name="channel" type="xs:unsignedShort" use="required"/>
967
968         <!-- Silence threshold. Linear value proportional to maximum sample value.
969             In other words:
970             0.0 = -inf dB
971             0.001= -30 dB (default)
972             1.0 = 0 dB
973         -->
974         <xs:attribute name="thresh" type="xs:float" use="optional"/>
975     </xs:complexType>
976
977     <xs:complexType name="AnalyzeAudioType">
978         <xs:sequence>
979             <xs:element name="otif" type="tns:ComplexJobOTIFType" minOccurs="0"
↳maxOccurs="unbounded"/>
980         </xs:sequence>
981     </xs:complexType>
982
983     <xs:complexType name="AnalyzeVideoType">
984         <xs:sequence>
985             <xs:element name="otif" type="tns:ComplexJobOTIFType" minOccurs="0"
↳maxOccurs="unbounded"/>
986         </xs:sequence>
987     </xs:complexType>

```

```

988     <!-- Used for analyzing input video. See transcoder tickets #82 and #83 -->
989     <xs:complexType name="ComplexJobAnalyzeType">
990         <xs:sequence>
991             <xs:element name="channel" type="tns:AnalyzeAudioChannelType" minOccurs="0
992 ↪" maxOccurs="unbounded"/>
993             <xs:element name="audio" type="tns:AnalyzeAudioType" minOccurs="0"
994 ↪maxOccurs="1"/>
995             <xs:element name="video" type="tns:AnalyzeVideoType" minOccurs="0"
996 ↪maxOccurs="1"/>
997         </xs:sequence>
998         <xs:attribute name="metadataUri" type="xs:anyURI" use="required"/>
999
1000     <!-- Thresholds are relative to the maximum pixel value, meaning values
1001 ↪around 0-0.1 are reasonable -->
1002     <xs:attribute name="blackThresh" type="xs:float" use="optional"/>
1003     <xs:attribute name="blackPercentage" type="xs:int" use="optional"/>
1004     <xs:attribute name="barsThresh" type="xs:float" use="optional"/>
1005     <xs:attribute name="barsPercentage" type="xs:int" use="optional"/>
1006     <xs:attribute name="freezeThresh" type="xs:float" use="optional"/>
1007     <xs:attribute name="freezeTime" type="xs:float" use="optional"/>
1008 </xs:complexType>
1009
1010 <!-- Used for pairing a resource with a name in the OTIF type -->
1011 <xs:complexType name="NameURIPairType">
1012     <xs:sequence>
1013         <xs:element name="name" minOccurs="1" maxOccurs="1" type="xs:string"/>
1014         <xs:element name="uri" minOccurs="1" maxOccurs="1" type="xs:anyURI"/>
1015     </xs:sequence>
1016 </xs:complexType>
1017
1018 <xs:complexType name="TranscoderJobType">
1019     <xs:sequence>
1020         </xs:sequence>
1021 </xs:complexType>
1022
1023 <xs:complexType name="ComplexJobOutputFormatType">
1024     <xs:sequence>
1025         <xs:element name="id" type="xs:int"/>
1026
1027         <xs:choice>
1028             <!-- Normal single-file output -->
1029             <xs:element name="uri" type="xs:anyURI"/>
1030
1031             <xs:element name="range" type="tns:SequenceRangeType"/>
1032             <!-- For multi-OPAtom output (mxf_multiatom*)
1033             The number of connections to the muxer must equal the number of
1034 ↪atom elements here
1035             -->
1036             <xs:element name="atom" type="tns:ComplexJobAtomType" maxOccurs=
1037 ↪"unbounded"/>
1038         </xs:choice>
1039
1040         <xs:element name="containerFormat" type="xs:string"/>
1041         <xs:element name="overlay" type="tns:OverlayType" minOccurs="0" maxOccurs=
1042 ↪"unbounded"/>
1043         <xs:element name="textOverlay" type="tns:TextOverlayType" minOccurs="0"
1044 ↪maxOccurs="unbounded"/>

```

```

1038     <xs:element name="dms1Source" minOccurs="0">
1039         <xs:complexType>
1040             <xs:choice>
1041                 <xs:element name="demuxerId" type="xs:int"/>
1042                 <xs:element name="metadata" type="tns:DMS1Type"/>
1043             </xs:choice>
1044         </xs:complexType>
1045     </xs:element>
1046     <!-- DEPRECATED: String representation of the SMPTE 12M time code to use
↳for the first frame -->
1047     <xs:element name="initialSMPTETimecode" type="xs:string" minOccurs="0"/>
1048
1049     <!-- Corresponds to StartTimecode in TimecodeComponent in MXF -->
1050     <xs:element name="startTimecode" type="xs:long" minOccurs="0"/>
1051
1052     <!-- Corresponds to RoundedTimeBase in TimecodeComponent in MXF -->
1053     <xs:element name="roundedTimeBase" type="xs:int" minOccurs="0"/>
1054
1055     <!-- Corresponds to DropFrame in TimecodeComponent in MXF -->
1056     <xs:element name="dropFrame" type="xs:boolean" minOccurs="0"/>
1057
1058     <!-- Set to true if muxing MOV and the user wants the job to fail if any
↳stream lacks an estimate for numberOfPackets -->
1059     <xs:element name="requireFaststart" type="xs:boolean" minOccurs="0"/>
1060     <!-- Set to desired bitrate for CBR muxing: Mainly used for mpegts -->
1061     <xs:element name="muxrate" type="xs:unsignedInt" minOccurs="0"/>
1062
1063     <!-- If using a muxer that supports outputting a
↳PartialFileDescriptorDocument,
1064         setting this causes the resulting document to be written
1065         to the specified URI when the job finishes.
1066     -->
1067     <xs:element name="pfdTargetUri" type="xs:anyURI" minOccurs="0"/>
1068
1069     <!-- Material and tape packages to use in the file -->
1070     <xs:element name="mxfpackages" type="tns:MXFPackagesType" minOccurs="0"/>
1071
1072     <!-- Global flat metadata -->
1073     <xs:element name="metadata" type="tns:KeyValuePairType" minOccurs="0"
↳maxOccurs="unbounded"/>
1074
1075     <!-- MaterialPackage -> Name for MXF.
1076         Not applicable to most other formats (except maybe MOV).
1077     -->
1078     <xs:element name="clipName" type="xs:string" minOccurs="0"/>
1079
1080     <!-- Controls how the maximum time period that each chunk of samples is
↳going to be, only used for output of QuickTime files (MOV/MP4) -->
1081     <xs:element name="maxChunkDuration" type="tns:TimeCodeType" minOccurs="0"/>
1082     ↳>
1083
1084     <xs:element name="setting" type="tns:KeyValuePairType" minOccurs="0"
↳maxOccurs="unbounded"/>
1085     </xs:sequence>
1086 </xs:complexType>

```

ComplexJobDocument

```

1088 <xs:element name="ComplexJobDocument" xmlns:tns="http://xml.vidispine.com/schema/
↳vidispine" type="tns:ComplexJobType" />

```

ImageJobDocument

```

1089 <xs:element name="ImageJobDocument" xmlns:tns="http://xml.vidispine.com/schema/
↳vidispine" type="tns:ComplexJobType" />
1090 <xs:complexType name="ComplexJobType">
1091 <xs:complexContent>
1092 <xs:extension base="tns:TranscoderJobType">
1093 <xs:sequence>
1094 <xs:element name="input" maxOccurs="unbounded">
1095 <xs:complexType>
1096 <xs:sequence>
1097 <xs:element name="id" type="xs:int"/>
1098
1099 <!-- Use multiple URIs if transcoding image sequences -->
1100 <xs:element name="uri" type="xs:anyURI" maxOccurs="unbounded"/
↳>
1101
1102 <xs:element name="range" type="tns:SequenceRangeType"
↳
↳maxOccurs="unbounded"/>
1103
1104 <xs:element name="partialFile" type="tns:
↳PartialFileDemuxerInfoType" minOccurs="0"/>
1105 <xs:element name="interval" type="tns:TimeIntervalType"
↳
↳minOccurs="0"/>
1106
1107 <!-- If set to true, then interval applies to DTS, not PTS.
1108 This may be useful if remuxing and the input file lacks
↳
↳PTS:es.
1109 We almost always want to filter frames/packets on PTS
↳
↳though.
1110 Use of this is discouraged for now.
1111 -->
1112 <xs:element name="intervalIsDts" type="xs:boolean" minOccurs=
↳
↳"0"/>
1113
1114 <xs:element name="dmslTargetUri" type="xs:anyURI" minOccurs="0
↳
↳"/>
1115 <!-- faststartDuration is needed if muxing MOV and faststart
↳
↳is desired and the number of packets for each stream in the input is unknown or
↳
↳wrong.
1116 The transcoder will make an estimate for the number of
↳
↳packets and the muxer will use that to reserve space in the header for the moov tag.
1117 Set this value to the length of the input if known
↳
↳through some other means or failing that, set it to a high value like ten hours.
1118
1119 The override attribute should be set to true if the
↳
↳transcoder is wrong regarding the duration of the input or the number of packets
↳
↳for some stream.
1120 -->
1121 <xs:element name="faststartDuration" minOccurs="0">
1122 <xs:complexType>
1123 <xs:complexContent>
1124 <xs:extension base="tns:TimeCodeType">
1125 <xs:attribute name="override" type="xs:boolean
↳
↳" use="required"/>

```

```

1126         </xs:extension>
1127         </xs:complexContent>
1128     </xs:complexType>
1129 </xs:element>
1130 <xs:element name="bulkyMetadataRequest" type="tns:
↪ComplexJobBulkyMetadataRequestType" minOccurs="0"/>
1131     <!-- Both of these elemets are hacks to handle broken files.
↪The integer is the index of the videostream to which the hack should be applied. -->
1132     <xs:element name="scanForStartPTS" type="xs:int" minOccurs="0
↪" />
1133     <xs:element name="doubleDurationHack" type="xs:int" minOccurs=
↪"0" />
1134
1135     <!-- Optional: Use this to set settings for demuxers -->
1136     <xs:element name="demuxerSetting" type="tns:KeyValuePairType"
↪minOccurs="0" maxOccurs="unbounded"/>
1137
1138     <xs:element name="analyze" type="tns:ComplexJobAnalyzeType"
↪minOccurs="0"/>
1139
1140     <!-- Use for setting a page number (in PDFs) -->
1141     <xs:element name="pageno" type="xs:int" minOccurs="0"
↪maxOccurs="1"/>
1142 </xs:sequence>
1143 </xs:complexType>
1144 </xs:element>
1145 <xs:element name="output" minOccurs="0" maxOccurs="unbounded">
1146     <xs:complexType>
1147         <xs:complexContent>
1148             <xs:extension xmlns:tns="http://xml.vidispine.com/schema/
↪vidispine" base="tns:ComplexJobOutputFormatType"/>
1149         </xs:complexContent>
1150     </xs:complexType>
1151 </xs:element>
1152 <xs:element name="connection" minOccurs="0" maxOccurs="unbounded">
1153     <xs:complexType>
1154         <xs:sequence>
1155             <xs:choice>
1156                 <!-- Use of more than one input means that the streams
↪should be concatenated -->
1157                 <xs:element name="input" type="tns:ComplexJobInputType"
↪minOccurs="1" maxOccurs="unbounded"/>
1158                 <!-- Used to extract and interleave channels from
↪multiple input streams into this audio stream -->
1159                 <xs:element name="audioChannelMapInput" type="tns:
↪ComplexJobAudioChannelMapInputType" minOccurs="1" maxOccurs="unbounded"/>
1160                 <!-- Used to interleave several mono timelines into this
↪audio stream -->
1161                 <xs:element name="audioChannelSequenceInput" type="tns:
↪ComplexJobAudioChannelSequenceInputType" minOccurs="1" maxOccurs="unbounded"/>
1162                 <!-- Used to mix several mono streams into one multi-
↪channel stream
1163                 <!-- Each audioMixInput element specifies the mix matrix
↪for one mono channel in this stream -->
1164                 <xs:element name="audioMixInput" type="tns:
↪ComplexJobMixInputType" minOccurs="1" maxOccurs="unbounded"/>
1165             </xs:choice>
1166         </xs:choice>

```



```

1167         <xs:element name="audioOutput" type="tns:
↪ComplexJobAudioOutputType"/>
1168         <xs:element name="videoOutput" type="tns:
↪ComplexJobVideoOutputType"/>
1169         <xs:element name="subtitleOutput" type="tns:
↪ComplexJobSubtitleOutputType"/>
1170     </xs:choice>
1171     <!-- PID, or similar per-stream ID for use by the muxer -->
1172     <xs:element name="pid" type="xs:int" minOccurs="0"/>
1173 </xs:sequence>
1174 </xs:complexType>
1175 </xs:element>
1176 </xs:sequence>
1177 </xs:extension>
1178 </xs:complexContent>
1179 </xs:complexType>
1180
1181 <xs:complexType name="XMPReadOperation">
1182     <xs:sequence>
1183         <xs:element name="id" type="xs:string" minOccurs="0" maxOccurs="1"/>
1184         <xs:element name="uri" type="xs:anyURI" minOccurs="1" maxOccurs="1"/>
1185         <xs:element name="setting" type="tns:KeyValuePairType" minOccurs="0"
↪maxOccurs="unbounded"/>
1186     </xs:sequence>
1187 </xs:complexType>
1188
1189 <xs:complexType name="XMPWriteOperation">
1190     <xs:sequence>
1191         <xs:element name="id" type="xs:string" minOccurs="0" maxOccurs="1"/>
1192         <xs:element name="uri" type="xs:anyURI" minOccurs="1" maxOccurs="1"/>
1193         <xs:element name="setting" type="tns:KeyValuePairType" minOccurs="0"
↪maxOccurs="unbounded"/>
1194         <xs:element name="xmp" type="xs:string" minOccurs="1" maxOccurs="1"/>
1195     </xs:sequence>
1196 </xs:complexType>

```

XMPJobDocument

```

1198     <xs:element name="XMPJobDocument" xmlns:tns="http://xml.vidispine.com/schema/
↪vidispine" type="tns:XMPJobType" />
1199     <xs:complexType name="XMPJobType">
1200         <xs:complexContent>
1201             <xs:extension base="tns:TranscoderJobType">
1202                 <xs:sequence>
1203                     <xs:element name="read" type="tns:XMPReadOperation" minOccurs="0"
↪maxOccurs="unbounded" />
1204                     <xs:element name="write" type="tns:XMPWriteOperation" minOccurs="0
↪" maxOccurs="unbounded" />
1205                 </xs:sequence>
1206             </xs:extension>
1207         </xs:complexContent>
1208     </xs:complexType>
1209
1210     <xs:complexType name="TransferOperation">
1211         <xs:sequence>
1212             <xs:element name="id" type="xs:string" minOccurs="0" maxOccurs="1"/>
1213             <xs:element name="sourceUri" type="xs:anyURI" minOccurs="1" maxOccurs=
↪"unbounded"/>

```

```

1214     <xs:element name="destinationUri" type="xs:anyURI" minOccurs="1"
↳maxOccurs="unbounded" />
1215     <xs:element name="setting" type="tns:KeyValuePairType" minOccurs="0"
↳maxOccurs="unbounded" />
1216   </xs:sequence>
1217 </xs:complexType>

```

TransferJobDocument

```

1219   <xs:element name="TransferJobDocument" xmlns:tns="http://xml.vidispine.com/schema/
↳vidispine" type="tns:TransferJobType" />
1220   <xs:complexType name="TransferJobType">
1221     <xs:complexContent>
1222       <xs:extension base="tns:TranscoderJobType">
1223         <xs:sequence>
1224           <xs:element name="transfer" type="tns:TransferOperation"
↳minOccurs="0" maxOccurs="unbounded" />
1225         </xs:sequence>
1226       </xs:extension>
1227     </xs:complexContent>
1228   </xs:complexType>
1229
1230   <xs:complexType name="HashComputeOperation">
1231     <xs:sequence>
1232       <xs:element name="id" type="xs:string" minOccurs="0" maxOccurs="1"/>
1233       <xs:element name="uri" type="xs:anyURI" minOccurs="1" maxOccurs="1"/>
1234       <xs:element name="function" type="xs:string" minOccurs="0" maxOccurs="1"/>
1235       <xs:element name="setting" type="tns:KeyValuePairType" minOccurs="0"
↳maxOccurs="unbounded" />
1236     </xs:sequence>
1237   </xs:complexType>

```

HashJobDocument

```

1239   <xs:element name="HashJobDocument" xmlns:tns="http://xml.vidispine.com/schema/
↳vidispine" type="tns:HashJobType" />
1240   <xs:complexType name="HashJobType">
1241     <xs:complexContent>
1242       <xs:extension base="tns:TranscoderJobType">
1243         <xs:sequence>
1244           <xs:element name="compute" type="tns:HashComputeOperation"
↳minOccurs="0" maxOccurs="unbounded" />
1245         </xs:sequence>
1246       </xs:extension>
1247     </xs:complexContent>
1248   </xs:complexType>

```

ShapeDeductionJobDocument

```

1250   <xs:element name="ShapeDeductionJobDocument" xmlns:tns="http://xml.vidispine.com/
↳schema/vidispine" type="tns:ShapeDeductionJobType" />
1251   <xs:complexType name="ShapeDeductionJobType">
1252     <xs:complexContent>
1253       <xs:extension base="tns:TranscoderJobType">
1254         <xs:sequence>
1255           <xs:element name="input" maxOccurs="unbounded">
1256             <xs:complexType>
1257               <xs:sequence>

```

```

1258         <xs:element name="id" type="xs:string" minOccurs="0"
↪maxOccurs="1"/>
1259         <xs:element name="uri" type="xs:anyURI" minOccurs="0"
↪maxOccurs="1"/>
1260         <xs:element name="range" type="tns:SequenceRangeType"
↪maxOccurs="unbounded"/>
1261         <xs:element name="image" type="xs:boolean" minOccurs="0"
↪maxOccurs="1"/>
1262         <xs:element name="useMediaInfo" type="xs:boolean" minOccurs="0
↪" maxOccurs="1"/>
1263         <xs:element name="verbose" type="xs:boolean" minOccurs="0"
↪maxOccurs="1"/>
1264         <xs:element name="setting" type="tns:KeyValuePairType"
↪minOccurs="0" maxOccurs="unbounded"/>
1265         <!-- Use for setting a page number (in PDFs) -->
1266         <xs:element name="pageno" type="xs:int" minOccurs="0"
↪maxOccurs="1"/>
1267         </xs:sequence>
1268         </xs:complexType>
1269         </xs:element>
1270     </xs:sequence>
1271     </xs:extension>
1272     </xs:complexContent>
1273 </xs:complexType>

```

DurationJobDocument

```

1275     <xs:element name="DurationJobDocument" xmlns:tns="http://xml.vidispine.com/schema/
↪vidispine" type="tns:DurationJobType" />
1276     <xs:complexType name="DurationJobType">
1277         <xs:complexContent>
1278             <xs:extension base="tns:TranscoderJobType">
1279                 <xs:sequence>
1280                     <xs:element name="input" maxOccurs="unbounded">
1281                         <xs:complexType>
1282                             <xs:sequence>
1283                                 <xs:element name="id" type="xs:string" minOccurs="0"
↪maxOccurs="1"/>
1284                                 <xs:element name="uri" type="xs:anyURI" minOccurs="1"
↪maxOccurs="1"/>
1285                                 <xs:element name="setting" type="tns:KeyValuePairType"
↪minOccurs="0" maxOccurs="unbounded"/>
1286                             </xs:sequence>
1287                         </xs:complexType>
1288                     </xs:element>
1289                 </xs:sequence>
1290             </xs:extension>
1291         </xs:complexContent>
1292     </xs:complexType>
1293
1294     <!-- Types used for defining a MOV index generation job -->

```

MOVIndexJobDocument

```

1295     <xs:element name="MOVIndexJobDocument" xmlns:tns="http://xml.vidispine.com/schema/
↪vidispine" type="tns:MOVIndexJobType"/>
1296     <xs:complexType name="MOVIndexJobType">
1297         <xs:complexContent>

```

```

1298     <xs:extension base="tns:TranscoderJobType">
1299     <xs:sequence>
1300     <xs:element name="targetUri" type="xs:anyURI"/>           <!-- http://
↳example.com/index.mov -->
1301     <xs:element name="source" maxOccurs="unbounded">
1302     <xs:complexType>
1303     <xs:sequence>
1304     <xs:element name="uri" type="xs:anyURI"/> <!-- absolute URI
↳to derive index from. example: http://example.com/essence/video.m2v -->
1305     <xs:element name="alias" type="xs:anyURI" minOccurs="0"/> <!--
↳ relative URI to write to file. example:     essence/video.m2v -->
1306     <xs:element name="absoluteAlias" type="xs:anyURI" minOccurs="0
↳"/> <!-- absolute URI to write to file. example:     /mnt/something/essence/video.
↳m2v -->
1307     <xs:element name="setting" type="tns:KeyValuePairType"
↳minOccurs="0" maxOccurs="unbounded"/>
1308     </xs:sequence>
1309     </xs:complexType>
1310     </xs:element>
1311     </xs:sequence>
1312     </xs:extension>
1313     </xs:complexContent>
1314 </xs:complexType>

```

MXFTimecodeExtractionJobDocument

```

1316     <xs:element name="MXFTimecodeExtractionJobDocument" xmlns:tns="http://xml.
↳vidispine.com/schema/vidispine" type="tns:MXFTimecodeExtractionJobType"/>
1317     <xs:complexType name="MXFTimecodeExtractionJobType">
1318     <xs:complexContent>
1319     <xs:extension base="tns:TranscoderJobType">
1320     <xs:sequence>
1321     <xs:element name="sourceUri" type="xs:anyURI"/>           <!-- URI to read
↳MXF from -->
1322     <xs:element name="targetUri" type="xs:anyURI"/>           <!-- URI to write
↳BulkyMetadata to -->
1323     </xs:sequence>
1324     </xs:extension>
1325     </xs:complexContent>
1326     </xs:complexType>
1327
1328     <!-- Generates an Oplb MXF file that points to several pieces of external essence
↳-->

```

MXFOplbJobDocument

```

1329     <xs:element name="MXFOplbJobDocument" xmlns:tns="http://xml.vidispine.com/schema/
↳vidispine" type="tns:MXFOplbJobType"/>
1330     <xs:complexType name="MXFOplbJobType">
1331     <xs:complexContent>
1332     <xs:extension base="tns:TranscoderJobType">
1333     <xs:sequence>
1334     <xs:element name="output" type="xs:anyURI"/>           <!-- URI to write to -
↳-->
1335     <xs:element name="reference" maxOccurs="unbounded">
1336     <xs:complexType>
1337     <xs:sequence>
1338     <!-- URI to read metadata from. Usually equal to locator[0] --
↳-->

```

```

1339     <xs:element name="source" type="xs:anyURI"/>
1340     <!-- List of stream the user wants to include in this_
↳reference -->
1341     <xs:element name="stream" type="xs:unsignedShort" maxOccurs=
↳"unbounded"/>
1342     <!--
1343         locator: List of network locators (URIs) to external_
↳essence, ordered by preference.
1344         Relative URIs should go first, absolute URIs as_
↳fallbacks near the end.
1345         Ex.: <locator>essence/video.m2v</locator>
1346         <locator>ftp://example.com/essence/video.m2v</
↳locator>
1347     -->
1348     <xs:element name="locator" type="xs:anyURI" maxOccurs=
↳"unbounded"/>
1349     </xs:sequence>
1350     </xs:complexType>
1351     </xs:element>
1352 </xs:sequence>
1353 </xs:extension>
1354 </xs:complexContent>
1355 </xs:complexType>

```

SegmentationJobDocument

```

1357     <xs:element name="SegmentationJobDocument" xmlns:tns="http://xml.vidispine.com/
↳schema/vidispine" type="tns:SegmentationJobType"/>
1358     <xs:complexType name="SegmentationJobType">
1359         <xs:complexContent>
1360             <xs:extension base="tns:TranscoderJobType">
1361                 <xs:sequence>
1362                     <!-- URI to material to segment. example: http://example.com/video.ts -->
1363                     <xs:element name="input" type="xs:anyURI"/>
1364                     <!-- URI to write playlist to when done. example: http://example.com/foo.
↳m3u -->
1365                     <xs:element name="playlistOutput" type="xs:anyURI"/>
1366                     <!-- The prefix and postfix combine with a number to form the full URI.
↳example:
1367                         prefix = "http://example.com/media/segment"
1368                         postfix = ".ts"
1369                         segment 1 = http://example.com/media/segment1.ts
1370                         segment 2 = http://example.com/media/segment2.ts etc.
1371                     -->
1372                     <xs:element name="segmentUriPrefix" type="xs:string"/>
1373                     <xs:element name="segmentUriPostfix" type="xs:string"/>
1374                     <!-- Container format to use for all segments. example: "mpegs" -->
1375                     <xs:element name="containerFormat" type="xs:string"/>
1376                     <!-- Suggested length of each segment. The transcoder will do its best if_
↳this is not a multiple of the GOP length -->
1377                     <xs:element name="segmentLength" type="tns:TimeCodeType"/>
1378                 </xs:sequence>
1379             </xs:extension>
1380         </xs:complexContent>
1381     </xs:complexType>

```

AAFGeneratorJobDocument

```

1384     <xs:element name="AAFGeneratorJobDocument" xmlns:tns="http://xml.vidispine.com/
↳ schema/vidispine" type="tns:AAFGeneratorJobType" />
1385     <xs:complexType name="AAFGeneratorJobType">
1386         <xs:complexContent>
1387             <xs:extension base="tns:TranscoderJobType">
1388                 <xs:sequence>
1389                     <xs:choice>
1390                         <xs:element name="aaf" type="xs:hexBinary" />
1391                         <xs:element name="xml" type="xs:string" />
1392                     </xs:choice>
1393                 </xs:sequence>
1394             </xs:extension>
1395         </xs:complexContent>
1396     </xs:complexType>
1397
1398     <!-- XML types for NLEJob -->
1399
1400     <xs:complexType name="SubClipType">
1401         <xs:attribute name="id" type="xs:int" use="required"/>
1402         <xs:attribute name="start" type="xs:int" use="required"/>
1403         <xs:attribute name="length" type="xs:unsignedInt" use="required"/>
1404     </xs:complexType>
1405
1406     <xs:complexType name="ClipType">
1407         <xs:sequence>
1408             <xs:element name="subClip" type="tns:SubClipType" minOccurs="0" maxOccurs=
↳ "unbounded"/>
1409         </xs:sequence>
1410         <xs:attribute name="uri" type="xs:anyURI" use="optional"/>
1411         <xs:attribute name="stream" type="xs:unsignedShort" use="optional"/>
1412         <xs:attribute name="id" type="xs:anyURI" use="optional"/>
1413         <xs:attribute name="track" type="xs:unsignedShort" use="optional"/>
1414     </xs:complexType>
1415
1416     <xs:complexType name="VideoClipType">
1417         <xs:complexContent>
1418             <xs:extension xmlns:tns="http://xml.vidispine.com/schema/vidispine" base=
↳ "tns:ClipType"/>
1419         </xs:complexContent>
1420     </xs:complexType>
1421
1422     <xs:complexType name="AudioClipType">
1423         <xs:complexContent>
1424             <xs:extension xmlns:tns="http://xml.vidispine.com/schema/vidispine" base=
↳ "tns:ClipType">
1425                 <xs:attribute name="channel" type="xs:unsignedShort" use="required"/>
1426             </xs:extension>
1427         </xs:complexContent>
1428     </xs:complexType>
1429
1430     <xs:complexType name="TextRenditionType">
1431         <xs:sequence>
1432             <xs:element name="line" type="xs:string" maxOccurs="unbounded"/>
1433         </xs:sequence>
1434         <xs:attribute name="align" type="xs:string" use="optional"/> <!-- Text_
↳ alignment. May be "center" (default), "left" or "right" -->
1435         <xs:attribute name="x" type="xs:int" use="optional"/> <!--_
↳ default = 0. Center of text box relative to the center of the frame, in pre-SAR_
↳ pixels (X part) -->

```

```

1436     <xs:attribute name="y" type="xs:int" use="optional"/>           <!--
↳ default = 0. Center of text box relative to the center of the frame, in pre-SAR
↳ pixels (Y part) -->
1437     <xs:attribute name="xRel" type="xs:double" use="optional"/>       <!--
↳ optional, overrides x if set, in units of full width -->
1438     <xs:attribute name="yRel" type="xs:double" use="optional"/>       <!--
↳ optional, overrides y if set, in units of full height -->
1439     <xs:attribute name="horizontalBase" type="xs:string" use="optional"/> <!--
↳ optional, only used if xRel is set, specifies if corner specifies left of test box,
↳ center (default), or right -->
1440     <xs:attribute name="verticalBase" type="xs:string" use="optional"/> <!--
↳ optional, only used if yRel is set, specifies if corner specifies top of test box,
↳ middle (default), or bottom -->
1441     <xs:attribute name="font" type="xs:string" use="optional"/>       <!--
↳ default = "Arial". Font to use -->
1442     <xs:attribute name="size" type="xs:unsignedInt" use="optional"/>   <!--
↳ default = 12. Size of font in pixels -->
1443     <xs:attribute name="sizeRel" type="xs:double" use="optional"/>     <!--
↳ optional, overrides size if set, size of font in units of full height -->
1444     <xs:attribute name="r" type="xs:unsignedByte" use="optional"/>     <!--
↳ default = 255. Text color, red -->
1445     <xs:attribute name="g" type="xs:unsignedByte" use="optional"/>     <!--
↳ default = 255. Text color, green -->
1446     <xs:attribute name="b" type="xs:unsignedByte" use="optional"/>     <!--
↳ default = 255. Text color, blue -->
1447     <xs:attribute name="a" type="xs:unsignedByte" use="optional"/>     <!--
↳ default = 255. Text color, alpha -->
1448
1449     <!-- Outline type. Values:
1450         "none" = No outline (default)
1451         "box" = Draw solid box behind text, SVT style
1452         "stroke" = Stroke text
1453     -->
1454     <xs:attribute name="outline" type="xs:string" use="optional"/>
1455
1456     <!-- "box": How much larger the box is on each side compared to the text's
↳ bounding box
1457         "stroke": How far out the font is stroked
1458     -->
1459     <xs:attribute name="outlineSize" type="xs:unsignedInt" use="optional"/>
1460
1461     <xs:attribute name="outlineR" type="xs:unsignedByte" use="optional"/> <!--
↳ default = 0. Outline color, red -->
1462     <xs:attribute name="outlineG" type="xs:unsignedByte" use="optional"/> <!--
↳ default = 0. Outline color, green -->
1463     <xs:attribute name="outlineB" type="xs:unsignedByte" use="optional"/> <!--
↳ default = 0. Outline color, blue -->
1464     <xs:attribute name="outlineA" type="xs:unsignedByte" use="optional"/> <!--
↳ default = 255. Outline color, alpha -->
1465     <xs:attribute name="language" type="xs:string" use="optional"/> <!--
↳ ISO-639 -->
1466 </xs:complexType>
1467
1468 <xs:complexType name="SubtitleClipType">
1469     <xs:complexContent>
1470         <xs:extension xmlns:tns="http://xml.vidispine.com/schema/vidispine" base=
↳ "tns:TextRenditionType">
1471             <xs:attribute name="id" type="xs:int" use="required"/>

```

```

1472     <xs:attribute name="length" type="xs:unsignedInt" use="required"/>
1473   </xs:extension>
1474 </xs:complexContent>
1475 </xs:complexType>
1476
1477   <!-- Like TransitionType, except we use xs:unsignedInt for duration and only_
↳attributes -->
1478   <xs:complexType name="NLEJobTransitionType">
1479     <xs:sequence>
1480       <xs:element name="border" type="tns:BorderType" minOccurs="0"/>
1481     </xs:sequence>
1482     <xs:attribute name="length" type="xs:unsignedInt" use="required"/>
1483     <xs:attribute name="wipe" type="xs:int" use="optional"/>
1484     <xs:attribute name="transition" type="xs:string" use="optional"/>
1485     <xs:attribute name="horizRepeat" type="xs:int" use="optional"/>
1486     <xs:attribute name="vertRepeat" type="xs:int" use="optional"/>
1487     <xs:attribute name="startPercentage" type="xs:int" use="optional"/>
1488     <xs:attribute name="endPercentage" type="xs:int" use="optional"/>
1489     <xs:attribute name="reverse" type="xs:boolean" use="optional"/>
1490
1491     <!-- For internal transcoder use when cutting NLEJobDocuments -->
1492     <xs:attribute name="delta" type="xs:unsignedInt" use="optional"/>
1493   </xs:complexType>
1494
1495   <xs:complexType name="TrackSegmentType">
1496     <xs:sequence>
1497       <xs:element name="effect" type="tns:EffectType" minOccurs="0" maxOccurs=
↳"unbounded"/>
1498       <xs:element name="transition" type="tns:NLEJobTransitionType" minOccurs="0
↳"/>
1499     </xs:sequence>
1500     <xs:attribute name="fillerLength" type="xs:unsignedInt" use="optional"/> <!
↳-- filler, with the value being the length to fill -->
1501     <xs:attribute name="subClip" type="xs:int" use="optional"/> <!
↳-- ID of subClip -->
1502   </xs:complexType>
1503
1504   <xs:complexType name="EffectPointType">
1505     <xs:attribute name="value" type="xs:float" use="required"/>
1506
1507     <!-- The position of this value relative to the segment -->
1508     <xs:attribute name="position" type="xs:int" use="required"/>
1509   </xs:complexType>
1510
1511   <xs:complexType name="EffectParameterType">
1512     <xs:sequence>
1513       <!-- Points are used for changing a parameter's value over time -->
1514       <xs:element name="point" type="tns:EffectPointType" minOccurs="0"
↳
↳maxOccurs="unbounded"/>
1515     </xs:sequence>
1516     <xs:attribute name="name" type="xs:string" use="required"/>
1517
1518     <!-- Setting this value causes it to be applied to the segment's entire_
↳interval.
↳
↳ In other words, it makes the parameter non-temporal.
↳
↳ -->
1519     <xs:attribute name="value" type="xs:float" use="optional"/>
1520
1521   </xs:complexType>
1522

```



```

1523     <xs:complexType name="EffectType">
1524         <xs:sequence>
1525             <xs:element name="parameter" type="tns:EffectParameterType" minOccurs="0"
1526 ↪maxOccurs="unbounded"/>
1527         </xs:sequence>
1528         <xs:attribute name="name" type="xs:string" use="required"/>
1529     </xs:complexType>
1530
1531
1532     <xs:complexType name="TrackType">
1533         <xs:sequence>
1534             <xs:element name="segment" type="tns:TrackSegmentType" maxOccurs=
1535 ↪"unbounded"/>
1536         </xs:sequence>
1537     </xs:complexType>
1538
1539     <xs:complexType name="NLEJobSequenceType">
1540         <xs:sequence>
1541             <xs:element name="track" type="tns:TrackType" maxOccurs="unbounded"/> <!-- List of tracks in ascending priority -->
1542         </xs:sequence>
1543         <xs:attribute name="id" type="xs:int" use="required"/>
1544         <xs:attribute name="length" type="xs:unsignedInt" use="required"/>
1545     </xs:complexType>
1546
1547     <xs:complexType name="NLEJobVideoOutputType">
1548         <xs:sequence>
1549             <xs:element name="preset" type="xs:string" minOccurs="0" maxOccurs=
1550 ↪"unbounded"/>
1551             <xs:attribute name="uri" type="xs:anyURI" use="optional"/> <!-- used when outputting OPAtom -->
1552             <xs:attribute name="sequence" type="xs:int" use="required"/>
1553             <xs:attribute name="codec" type="xs:string" use="required"/>
1554             <xs:attribute name="bitrate" type="xs:unsignedInt" use="required"/>
1555             <xs:attribute name="pixelFormat" type="xs:string" use="optional"/> <!-- needed for choosing between DV variants -->
1556             <xs:attribute name="gopSize" type="xs:unsignedShort" use="optional"/> <!-- set to zero for intra-only -->
1557             <xs:attribute name="maxBframes" type="xs:unsignedShort" use="optional"/> <!-- maximum number of B-frames between P-frames. zero disables B-frames -->
1558         </xs:sequence>
1559     </xs:complexType>
1560
1561     <xs:complexType name="NLEJobAudioOutputType">
1562         <xs:sequence>
1563             <xs:element name="sequence" type="xs:int" maxOccurs="unbounded"/> <!-- Audio sequences are mono, which means we need one sequence per output channel -->
1564         </xs:sequence>
1565         <xs:attribute name="uri" type="xs:anyURI" use="optional"/> <!-- used when outputting OPAtom -->
1566         <xs:attribute name="codec" type="xs:string" use="required"/>
1567         <xs:attribute name="bitrate" type="xs:unsignedInt" use="optional"/> <!-- not applicable to PCM -->
1568     </xs:complexType>
1569
1570     <xs:complexType name="NLEJobOutputType">
1571         <xs:sequence>

```

```

1570     <xs:element name="video" type="tns:NLEJobVideoOutputType" minOccurs="0"
↳maxOccurs="unbounded"/>
1571     <xs:element name="audio" type="tns:NLEJobAudioOutputType" minOccurs="0"
↳maxOccurs="unbounded"/>
1572   </xs:sequence>
1573   <xs:attribute name="uri" type="xs:anyURI" use="optional"/> <!--
↳-- unique URIs are set in each <video> and <audio> element when outputting OPAtoms,
↳hence optional here -->
1574   <xs:attribute name="containerFormat" type="xs:string" use="required"/>
1575   <xs:attribute name="umid" type="tns:UMIDType" use="optional"/> <!--
↳-- Should be set when outputting OPAtom - generated otherwise -->
1576
1577   <!-- MaterialPackage -> Name for MXF.
1578       Not applicable to most other formats (except maybe MOV).
1579   -->
1580   <xs:attribute name="clipName" type="xs:string" use="optional"/>
1581 </xs:complexType>
1582
1583 <xs:complexType name="NLEJob2VideoOutputType">
1584   <xs:complexContent>
1585     <xs:extension xmlns:tns="http://xml.vidispine.com/schema/vidispine" base=
↳"tns:ComplexJobVideoOutputType">
1586       <xs:sequence>
1587         <xs:element name="uri" type="xs:anyURI" minOccurs="0" maxOccurs="1
↳" />
↳!-- used when outputting OPAtom -->
1588         <xs:element name="sequence" type="xs:int" minOccurs="1" />
1589       </xs:sequence>
1590     </xs:extension>
1591   </xs:complexContent>
1592 </xs:complexType>
1593
1594 <xs:complexType name="NLEJob2AudioOutputType">
1595   <xs:complexContent>
1596     <xs:extension xmlns:tns="http://xml.vidispine.com/schema/vidispine" base=
↳"tns:ComplexJobAudioOutputType">
1597       <xs:sequence>
1598         <xs:element name="uri" type="xs:anyURI" minOccurs="0" maxOccurs="1
↳" />
↳!-- used when outputting OPAtom -->
1599         <xs:element name="sequence" type="xs:int" maxOccurs="unbounded" />
1600       </xs:sequence>
1601     </xs:extension>
1602   </xs:complexContent>
1603 </xs:complexType>
1604
1605 <xs:complexType name="NLEJob2OutputType">
1606   <xs:sequence>
1607     <xs:element name="format" type="tns:ComplexJobOutputFormatType" minOccurs=
↳"1" maxOccurs="1"/>
1608     <xs:element name="video" type="tns:NLEJob2VideoOutputType" minOccurs="0"
↳maxOccurs="unbounded"/>
1609     <xs:element name="audio" type="tns:NLEJob2AudioOutputType" minOccurs="0"
↳maxOccurs="unbounded"/>
1610   </xs:sequence>
1611 </xs:complexType>

```

NLEJobDocument

```

1613 <xs:element name="NLEJobDocument" xmlns:tns="http://xml.vidispine.com/schema/
↳vidispine" type="tns:NLEJobType"/>
1614 <xs:complexType name="NLEJobType">
1615 <xs:complexContent>
1616 <xs:extension base="tns:TranscoderJobType">
1617 <xs:sequence>
1618 <xs:element name="frameRate" type="tns:FrameRateType"/>
1619 <xs:element name="width" type="xs:unsignedShort"/>
1620 <xs:element name="height" type="xs:unsignedShort"/>
1621 <xs:element name="dar" type="tns:AspectRatioType"/>
1622 <xs:element name="sampleRate" type="xs:unsignedInt"/>
1623
1624 <!-- What frame to pause the rendering at.
1625 See ticket #106.
1626 -->
1627 <xs:element name="pauseFrame" type="xs:unsignedInt" minOccurs="0"/>
1628
1629 <xs:element name="videoClip" type="tns:VideoClipType" minOccurs="0"
↳maxOccurs="unbounded"/>
1630 <xs:element name="audioClip" type="tns:AudioClipType" minOccurs="0"
↳maxOccurs="unbounded"/>
1631 <xs:element name="subtitleClip" type="tns:SubtitleClipType" minOccurs="0"
↳maxOccurs="unbounded"/>
1632 <xs:element name="sequence" type="tns:NLEJobSequenceType" maxOccurs=
↳"unbounded"/>
1633 <xs:element name="output" type="tns:NLEJobOutputType" minOccurs="0"
↳maxOccurs="unbounded"/>
1634 <xs:element name="output2" type="tns:NLEJob2OutputType" minOccurs="0"
↳maxOccurs="unbounded"/>
1635 </xs:sequence>
1636 </xs:extension>
1637 </xs:complexContent>
1638 </xs:complexType>
1639
1640 <!-- QueueJob -->

```

QueueJobDocument

```

1641 <xs:element name="QueueJobDocument" xmlns:tns="http://xml.vidispine.com/schema/
↳vidispine" type="tns:QueueJobType"/>
1642 <xs:complexType name="QueueJobType">
1643 <xs:sequence>
1644 <!-- Ordered list of jobs to run. Recursion (putting QueueJobs in job_
↳elements) is allowed -->
1645 <xs:element name="job" type="tns:JobRequestChoiceType" maxOccurs=
↳"unbounded"/>
1646 </xs:sequence>
1647 </xs:complexType>
1648
1649 <!-- For specifying one of the valid job request types.
1650 Also useful since a virtual funtion in the Job class can return_
↳JobRequestChoiceType and have each implementation fill in the correct request -->
1651 <xs:complexType name="JobRequestChoiceType">
1652 <xs:choice>
1653 <xs:element name="timelineRequest" type="tns:TimelineJobRequestType"/>
1654 <xs:element name="complexRequest" type="tns:ComplexJobType"/>
1655 <xs:element name="movIndexRequest" type="tns:MOVIndexJobType"/>
1656 <xs:element name="mxfTimecodeExtractionRequest" type="tns:
↳MXFTimecodeExtractionJobType"/>

```

```

1657     <xs:element name="mxfOplbRequest" type="tns:MXFOplbJobType"/>
1658     <xs:element name="segmentationRequest" type="tns:SegmentationJobType"/>
1659     <xs:element name="nleRequest" type="tns:NLEJobType"/>
1660     <xs:element name="queueRequest" type="tns:QueueJobType"/>
1661     <xs:element name="durationRequest" type="tns:DurationJobType"/>
1662     <xs:element name="shapeDeductionRequest" type="tns:ShapeDeductionJobType"/
↳>
1663     <xs:element name="xmpRequest" type="tns:XMPJobType"/>
1664     <xs:element name="hashRequest" type="tns:HashJobType"/>
1665     <xs:element name="transferRequest" type="tns:TransferJobType"/>
1666     <xs:element name="aafGeneratorRequest" type="tns:AAFGeneratorJobType"/>
1667   </xs:choice>
1668 </xs:complexType>
1669
1670 <xs:complexType name="JobLogEntryType">
1671   <xs:simpleContent>
1672     <xs:extension base="xs:string">
1673       <xs:attribute name="timestamp" type="xs:dateTime"/>
1674       <xs:attribute name="level" type="xs:string"/>
1675     </xs:extension>
1676   </xs:simpleContent>
1677 </xs:complexType>
1678
1679 <xs:complexType name="SequenceRangeType">
1680   <xs:simpleContent>
1681     <xs:extension base="xs:string">
1682       <xs:attribute name="start" type="xs:long" use="required"/>
1683       <xs:attribute name="width" type="xs:int" use="optional" />
1684       <xs:attribute name="count" type="xs:long" use="optional"/>
1685       <xs:attribute name="wildcard" type="xs:string" use="required"/>
1686     </xs:extension>
1687   </xs:simpleContent>
1688 </xs:complexType>
1689
1690 <xs:complexType name="JobInputProgressType">
1691   <xs:sequence>
1692     <!-- Highest (timestamp + duration - startTime) of all packets processed
↳>for this input so far -->
1693     <xs:element name="mediaTime" type="tns:TimeCodeType"/>
1694
1695     <!-- Duration of file, if known -->
1696     <xs:element name="duration" type="tns:TimeCodeType" minOccurs="0"/>
1697   </xs:sequence>
1698 </xs:complexType>
1699
1700 <!-- For returning job status in various cases -->

```

JobStatusDocument

```

1701     <xs:element name="JobStatusDocument" xmlns:tns="http://xml.vidispine.com/schema/
↳>vidispine" type="tns:JobStatusType" />
1702     <xs:complexType name="JobStatusType">
1703       <xs:sequence>
1704         <xs:element name="statusUri" type="xs:anyURI"/>
↳>
1705         <!-- URI from to which a JobStatusRequestDocument can be sent to poll status -->
1706         <xs:element name="id" type="tns:SiteIdType"/>
1707         <xs:element name="isRunning" type="xs:boolean"/>
1708         <xs:element name="isPaused" type="xs:boolean"/>

```

```

1708     <xs:element name="walltime" type="xs:double"/>
1709     <xs:element name="exitcode" type="xs:int" minOccurs="0"/>
↪ <!-- Exit code if done running -->
1710     <xs:element name="message" type="xs:string" minOccurs="0"/>
↪ <!-- Possible exit message (exceptions, malformed requests etc.) -->
1711     <xs:element name="log" type="tns:JobLogEntryType"
1712         minOccurs="0" maxOccurs="unbounded"/>
↪ <!-- Log entries with timestamps and levels -->
1713     <xs:element name="request" type="tns:JobRequestChoiceType" minOccurs="0"/>
↪ <!-- the request that started this job -->
1714     <xs:element name="inputProgress" type="tns:JobInputProgressType"
1715         minOccurs="0" maxOccurs="unbounded"/>
↪ <!-- Amount of media processed per input file -->
1716     <xs:element name="progress" type="xs:float" minOccurs="0"/>
↪ <!-- Overall percentage of media processed so far.
1717
↪     It is only set if all inputs have known durations -->
1718     <xs:element name="estimatedTimeLeft" type="xs:float" minOccurs="0"/>
↪ <!-- walltime/(progress/100) - walltime -->
1719     <xs:element name="thumbnail" type="tns:ThumbnailInfoType"
1720         minOccurs="0" maxOccurs="unbounded" />
↪ <!-- Info on thumbnails generated -->
1721     <xs:element name="shapeDeductionResponse" type="tns:ShapeDeductionResponse
↪ " minOccurs="0" maxOccurs="unbounded" />
1722     <xs:element name="durationResponse" type="tns:DurationResponse" minOccurs=
↪ "0" maxOccurs="unbounded" />
1723     <xs:element name="xmpResponse" type="tns:XMPResponse" minOccurs="0"
↪ maxOccurs="unbounded" />
1724     <xs:element name="hashResponse" type="tns:HashResponse" minOccurs="0"
↪ maxOccurs="unbounded" />
1725     <xs:element name="transferResponse" type="tns:TransferResponse" minOccurs=
↪ "0" maxOccurs="unbounded" />
1726     <xs:element name="aafGeneratorResponse" type="tns:AAFGeneratorResponse"
↪ minOccurs="0" maxOccurs="unbounded" />
1727     </xs:sequence>
1728 </xs:complexType>
1729
1730 <xs:complexType name="XMPResponse">
1731     <xs:sequence>
1732         <xs:element name="id" type="xs:string" />
1733         <xs:element name="uri" type="xs:anyURI" />
1734         <xs:element name="xmp" type="xs:string" />
1735     </xs:sequence>
1736 </xs:complexType>
1737
1738 <xs:complexType name="HashResponse">
1739     <xs:sequence>
1740         <xs:element name="id" type="xs:string" />
1741         <xs:element name="uri" type="xs:anyURI" />
1742         <xs:element name="function" type="xs:string" />
1743     <xs:choice>
1744         <xs:element name="hash" type="xs:string" />
1745         <xs:element name="error" type="xs:string" />
1746     </xs:choice>
1747 </xs:sequence>
1748 </xs:complexType>
1749
1750 <xs:complexType name="TransferResponse">

```

```

1751     <xs:sequence>
1752       <xs:element name="id" type="xs:string" />
1753       <xs:element name="sourceUri" type="xs:anyURI" minOccurs="1" maxOccurs=
↪ "unbounded" />
1754       <xs:element name="destinationUri" type="xs:anyURI" minOccurs="1"
↪ maxOccurs="unbounded" />
1755       <xs:element name="error" type="xs:string" minOccurs="0" maxOccurs="1" />
1756     </xs:sequence>
1757   </xs:complexType>
1758
1759   <xs:complexType name="ShapeDeductionResponse">
1760     <xs:sequence>
1761       <xs:element name="id" type="xs:string" />
1762       <xs:element name="uri" type="xs:anyURI" minOccurs="0" maxOccurs="1"/>
1763       <xs:element name="range" type="tns:SequenceRangeType" maxOccurs="unbounded
↪ "/>
1764       <xs:element name="shape" type="tns:ShapeType" />
1765     </xs:sequence>
1766   </xs:complexType>
1767
1768   <xs:complexType name="DurationResponse">
1769     <xs:sequence>
1770       <xs:element name="id" type="xs:string" />
1771       <xs:element name="uri" type="xs:anyURI" />
1772       <xs:element name="duration" type="tns:DurationType" />
1773     </xs:sequence>
1774   </xs:complexType>
1775
1776   <xs:complexType name="AAFGeneratorResponse">
1777     <xs:sequence>
1778       <xs:choice>
1779         <xs:element name="aaf" type="xs:hexBinary" />
1780         <xs:element name="xml" type="xs:string" />
1781       </xs:choice>
1782     </xs:sequence>
1783   </xs:complexType>
1784
1785   <xs:complexType name="ThumbnailInfoType">
1786     <xs:sequence>
1787       <xs:element name="timeCode" type="tns:TimeCodeType" />
1788       <xs:element name="uri" type="xs:string" />
1789     </xs:sequence>
1790   </xs:complexType>

```

JobStatusListDocument

```

1791   <xs:element name="JobStatusListDocument" xmlns:tns="http://xml.vidispine.com/
↪ schema/vidispine" type="tns:JobStatusListType" />
1792
1793   <xs:complexType name="JobStatusListType">
1794     <xs:sequence>
1795       <xs:element name="hits" type="xs:int" minOccurs="0" maxOccurs="1"/>
1796       <xs:element name="job" type="tns:JobStatusType" minOccurs="0" maxOccurs=
↪ "unbounded"/>
1797     </xs:sequence>
1798   </xs:complexType>
1799
1800   <!-- Deprecated -->

```

SimpleTimelineDocument

```

1801 <xs:element name="SimpleTimelineDocument" xmlns:tns="http://xml.vidispine.com/
↳ schema/vidispine" type="tns:SimpleTimelineType" />
1802 <xs:complexType name="SimpleTimelineType">
1803 <xs:sequence>
1804 <xs:element name="destinationURI" type="xs:string"/>
1805 <xs:element name="source" minOccurs="0" maxOccurs="unbounded">
1806 <xs:complexType>
1807 <xs:sequence>
1808 <xs:element name="sequence" type="xs:int"/> <!--
↳ For guaranteeing ordering -->
1809 <xs:choice> <!--
↳ Use URI when talking to transcoder -->
1810 <xs:element name="uri" type="xs:anyURI"/>
1811 <xs:element name="siteId" type="tns:SiteIdType"/>
1812 </xs:choice>
1813 <xs:element name="interval"
1814 type="tns:TimeIntervalType"/>
↳ <!-- Interval to use -->
1815 </xs:sequence>
1816 </xs:complexType>
1817 </xs:element>
1818 </xs:sequence>
1819 </xs:complexType>

```

TimelineDocument

```

1821 <xs:element name="TimelineDocument" xmlns:tns="http://xml.vidispine.com/schema/
↳ vidispine" type="tns:TimelineType" />
1822 <xs:complexType name="TimelineType">
1823 <xs:sequence>
1824 <xs:element name="destination" type="tns:ShapeType"/>
1825 <xs:element name="track">
1826 <xs:complexType>
1827 <xs:sequence>
1828 <xs:element name="source" minOccurs="0" maxOccurs="unbounded">
1829 <xs:complexType>
1830 <xs:sequence>
1831 <xs:element name="sequence" type="xs:int"/>
↳ <!-- For guaranteeing ordering -->
1832 <xs:choice>
↳ <!-- Use URI when talking to transcoder -->
1833 <xs:element name="uri" type="xs:anyURI"/>
1834 <xs:element name="siteId" type="tns:SiteIdType
↳ "/>
1835 </xs:choice>
1836 <xs:element name="track" type="xs:string"/>
↳ <!-- Which track in the source to use for this segment -->
1837 <xs:element name="interval"
1838 type="tns:TimeIntervalType"/>
↳ <!-- Interval to use -->
1839 <xs:element name="transition"
1840 type="tns:TimeCodeType" minOccurs="0"/>
↳ <!-- Length of transition period following the interval, if any -->
1841 <xs:element name="effect"
1842 type="xs:string" minOccurs="0"/>
↳ <!-- Transition effect to use. Default if not set -->
1843

```

```

1844         </xs:sequence>
1845     </xs:complexType>
1846 </xs:element>
1847 </xs:sequence>
1848     <xs:attribute name="index" type="xs:string"/>
1849 </xs:complexType>
1850 </xs:element>
1851 </xs:sequence>
1852 </xs:complexType>
1853
1854 <!-- Types used for indexing files on tape and other media where seeking is very_
↳expensive -->
1855 <xs:complexType name="PartialFileRandomIndexType">
1856     <xs:sequence>
1857         <xs:element name="packet" minOccurs="0" maxOccurs="unbounded">
1858             <xs:complexType>
1859                 <xs:attribute name="pts" type="xs:long"/> <!-- In_
↳MediaComponentType/timeBase units -->
1860                 <xs:attribute name="dts" type="xs:long"/> <!-- In_
↳MediaComponentType/timeBase units -->
1861                 <xs:attribute name="offset" type="xs:unsignedLong"/>
1862                 <xs:attribute name="length" type="xs:unsignedInt"/>
1863                 <xs:attribute name="duration" type="xs:unsignedInt"/> <!-- In_
↳MediaComponentType/timeBase units -->
1864                 <xs:attribute name="stream" type="xs:unsignedByte"/> <!--_
↳References MediaComponentType/essenceStreamId -->
1865                 <xs:attribute name="isKeyFrame" type="xs:boolean"/>
1866             </xs:complexType>
1867         </xs:element>
1868     </xs:sequence>
1869 </xs:complexType>
1870
1871 <xs:complexType name="PartialFileDVDescriptorType">
1872     <xs:sequence>
1873         <xs:element name="frameSize" type="xs:unsignedInt"/>
1874         <xs:element name="frameCount" type="xs:unsignedInt"/>
1875     </xs:sequence>
1876 </xs:complexType>

```

PartialFileDescriptorDocument

```

1878 <xs:element name="PartialFileDescriptorDocument" type="tns:
↳PartialFileDescriptorType"/>
1879 <xs:complexType name="PartialFileDescriptorType">
1880     <xs:sequence>
1881         <xs:element name="label" type="xs:string" minOccurs="0"/>
1882
1883         <xs:element name="transcoderVersion" type="xs:string" minOccurs="0"/>
1884
1885         <!-- Corresponds to StartTimecode in TimecodeComponent in MXF -->
1886         <xs:element name="startTimecode" type="xs:long" minOccurs="0"/>
1887
1888         <!-- Corresponds to RoundedTimeBase in TimecodeComponent in MXF -->
1889         <xs:element name="roundedTimeBase" type="xs:int" minOccurs="0"/>
1890
1891         <!-- Corresponds to DropFrame in TimecodeComponent in MXF -->
1892         <xs:element name="dropFrame" type="xs:boolean" minOccurs="0"/>
1893

```



```

1894     <xs:element name="containerComponent" type="tns:ContainerComponentType"
↳ minOccurs="0"/>
1895     <xs:element name="audioStream" type="tns:AudioComponentType" minOccurs="0
↳ maxOccurs="unbounded"/>
1896     <xs:element name="videoStream" type="tns:VideoComponentType" minOccurs="0
↳ maxOccurs="unbounded"/>
1897     <xs:choice>
1898         <xs:element name="dvDescriptor" type="tns:PartialFileDVDescriptorType
↳"/>
↳ <!-- Used for DV -->
1899         <xs:element name="index" type="tns:PartialFileRandomIndexType"/>
↳ <!-- Used for MXF, AVI and similar -->
1900     </xs:choice>
1901 </xs:sequence>
1902 </xs:complexType>
1903
1904 <!-- Types for requesting a byte range for a time interval in a
↳ PartialFileDescriptorDocument -->

```

ByteRangeRequestDocument

```

1905 <xs:element name="ByteRangeRequestDocument" type="tns:ByteRangeRequestType"/>
1906 <xs:complexType name="ByteRangeRequestType">
1907     <xs:sequence>
1908         <xs:element name="interval" type="tns:TimeIntervalType"/>
1909         <xs:element name="descriptor" type="tns:PartialFileDescriptorType"/>
1910     </xs:sequence>
1911 </xs:complexType>

```

ByteRangeResponseDocument

```

1913 <xs:element name="ByteRangeResponseDocument" type="tns:ByteRangeResponseType"/>
1914 <xs:complexType name="ByteRangeResponseType">
1915     <xs:sequence>
1916         <xs:element name="start" type="xs:unsignedLong"/>
1917         <xs:element name="end" type="xs:unsignedLong"/>
1918     </xs:sequence>
1919 </xs:complexType>
1920
1921 <!-- XML types for dealing with DMS-1 metadata in MXF -->
1922 <xs:simpleType name="InstanceUID">
1923     <xs:restriction base="xs:hexBinary"/>
1924 </xs:simpleType>
1925 <xs:simpleType name="ULType"> <!-- "UL" seems a bit short, so I'm picking
↳ ULType -->
1926     <xs:restriction base="xs:hexBinary"/>
1927 </xs:simpleType>
1928 <xs:complexType name="MDOBJECTBase">
1929     <xs:attribute name="name" type="xs:string" use="optional"/>
1930     <xs:attribute name="ul" type="tns:ULType" use="required"/>
1931 </xs:complexType>
1932 <xs:complexType name="MDOBJECTWeakReference">
1933     <xs:complexContent>
1934         <xs:extension xmlns:tns="http://xml.vidispine.com/schema/vidispine" base=
↳ "tns:MDOBJECTBase">
1935             <xs:sequence>
1936                 <xs:element name="target" type="tns:InstanceUID"/>
1937             </xs:sequence>
1938         </xs:extension>

```

```

1939     </xs:complexContent>
1940 </xs:complexType>
1941 <xs:complexType name="MDOBJECTLeaf">
1942   <xs:complexContent>
1943     <xs:extension xmlns:tns="http://xml.vidispine.com/schema/vidispine" base=
↪ "tns:MDOBJECTBase">
1944       <xs:sequence>
1945         <xs:choice>
1946           <xs:element name="hexValue" type="xs:hexBinary"/>
1947           <xs:element name="stringValue" type="xs:string"/>
1948         </xs:choice>
1949       </xs:sequence>
1950     </xs:extension>
1951   </xs:complexContent>
1952 </xs:complexType>
1953 <xs:complexType name="MDOBJECTNode">
1954   <xs:complexContent>
1955     <xs:extension xmlns:tns="http://xml.vidispine.com/schema/vidispine" base=
↪ "tns:MDOBJECTBase">
1956       <xs:sequence>
1957         <xs:element name="leaf" type="tns:MDOBJECTLeaf" minOccurs="0"
↪ maxOccurs="unbounded"/>
1958         <xs:element name="child" type="tns:MDOBJECTNode" minOccurs="0"
↪ maxOccurs="unbounded"/>
1959         <xs:element name="strongReference" type="tns:
↪ MDOBJECTStrongReference" minOccurs="0" maxOccurs="unbounded"/>
1960         <xs:element name="weakReference" type="tns:MDOBJECTWeakReference"
↪ minOccurs="0" maxOccurs="unbounded"/>
1961       </xs:sequence>
1962       <xs:attribute name="instanceUid" type="tns:InstanceUID" use="optional
↪ "/>
1963     </xs:extension>
1964   </xs:complexContent>
1965 </xs:complexType>
1966 <xs:complexType name="MDOBJECTStrongReference">
1967   <xs:complexContent>
1968     <xs:extension xmlns:tns="http://xml.vidispine.com/schema/vidispine" base=
↪ "tns:MDOBJECTNode">
1969       <xs:attribute name="referenceUl" type="tns:ULType" use="required"/>
1970     </xs:extension>
1971   </xs:complexContent>
1972 </xs:complexType>
1973
1974 <xs:complexType name="MDSegment">
1975   <xs:sequence>
1976     <xs:element name="interval" type="tns:TimeIntervalType"/>
1977     <xs:element name="dms1Framework" type="tns:MDOBJECTNode"/> <!-- DMS-1
↪ scene or clip framework -->
1978   </xs:sequence>
1979 </xs:complexType>

```

DMS1Document

```

1981 <xs:element name="DMS1Document" type="tns:DMS1Type"/>
1982 <xs:complexType name="DMS1Type">
1983   <xs:sequence>
1984     <xs:element name="partition" minOccurs="0" maxOccurs="unbounded">
1985       <xs:complexType>

```

```

1986         <xs:sequence>
1987             <xs:element name="materialPackage" minOccurs="0" maxOccurs=
↪ "unbounded">
1988                 <xs:complexType>
1989                     <xs:sequence>
1990                         <xs:element name="staticTrack" minOccurs="0"
↪ maxOccurs="unbounded">
1991                             <xs:complexType>
1992                                 <xs:sequence>
1993                                     <xs:element name="dms1Framework" type=
↪ "tns:MDObjectNode"/> <!-- DMS-1 production framework -->
1994                                         </xs:sequence>
1995                                     </xs:complexType>
1996                                 </xs:element>
1997                                 <xs:element name="eventTrack" minOccurs="0"
↪ maxOccurs="unbounded">
1998                                     <xs:complexType>
1999                                         <xs:sequence>
2000                                             <xs:element name="segment" type="tns:
↪ MDSegment" minOccurs="0" maxOccurs="unbounded"/>
2001                                                 </xs:sequence>
2002                                             </xs:complexType>
2003                                         </xs:element>
2004                                     </xs:sequence>
2005                                 </xs:complexType>
2006                             </xs:element>
2007                         </xs:sequence>
2008                         <xs:attribute name="offset" type="xs:long"/>
2009                     </xs:complexType>
2010                 </xs:element>
2011             </xs:sequence>
2012         </xs:complexType>
2013
2014         <xs:simpleType name="UMIDType">
2015             <xs:restriction base="xs:hexBinary">
2016                 <!-- UMIDs are 256 bits -->
2017                 <xs:minLength value="32"/>
2018                 <xs:maxLength value="32"/>
2019             </xs:restriction>
2020         </xs:simpleType>
2021
2022         <xs:complexType name="MXFTimestampType">
2023             <xs:sequence>
2024                 <!-- Corresponds to mxfTimestamp in libMXF -->
2025                 <xs:element name="year" type="xs:short"/>
2026                 <xs:element name="month" type="xs:unsignedByte"/>
2027                 <xs:element name="day" type="xs:unsignedByte"/>
2028                 <xs:element name="hour" type="xs:unsignedByte"/>
2029                 <xs:element name="min" type="xs:unsignedByte"/>
2030                 <xs:element name="sec" type="xs:unsignedByte"/>
2031                 <xs:element name="qmsc" type="xs:unsignedByte"/>
2032             </xs:sequence>
2033         </xs:complexType>
2034
2035         <xs:complexType name="PackageTrackType">
2036             <xs:sequence>
2037                 <xs:element name="name" type="xs:string"/>
2038

```

```

2039     <!-- Physical track ID, like audio channels -->
2040     <xs:element name="number" type="xs:int"/>
2041
2042     <xs:element name="isPicture" type="xs:boolean"/>
2043
2044     <xs:element name="is50FPS" minOccurs="0" maxOccurs="1" type="xs:boolean"/>
2045
2046     <xs:element name="frameRate" minOccurs="0" maxOccurs="1" type="tns:
↪FrameRateType" />
2047
2048     <!-- Length of track in edit units -->
2049     <xs:element name="length" type="xs:int"/>
2050   </xs:sequence>
2051 </xs:complexType>
2052
2053 <xs:complexType name="MaterialPackageTrackType">
2054   <xs:complexContent>
2055     <xs:extension base="tns:PackageTrackType">
2056       <xs:sequence>
2057         <xs:element name="sourcePackageID" type="tns:UMIDType"/>
2058       </xs:sequence>
2059     </xs:extension>
2060   </xs:complexContent>
2061 </xs:complexType>
2062
2063 <xs:complexType name="TapePackageTrackType">
2064   <xs:complexContent>
2065     <xs:extension base="tns:PackageTrackType">
2066       <xs:sequence>
2067         <xs:element name="trackID" type="xs:int"/>
2068       </xs:sequence>
2069     </xs:extension>
2070   </xs:complexContent>
2071 </xs:complexType>
2072
2073 <xs:complexType name="PackageType">
2074   <xs:sequence>
2075     <xs:element name="umid" type="tns:UMIDType"/>
2076     <xs:element name="timestamp" type="tns:MXFTimestampType"/>
2077   </xs:sequence>
2078 </xs:complexType>
2079
2080 <xs:complexType name="MaterialPackageType">
2081   <xs:complexContent>
2082     <xs:extension base="tns:PackageType">
2083       <xs:sequence>
2084         <xs:element name="track" type="tns:MaterialPackageTrackType"
↪minOccurs="1" maxOccurs="unbounded"/>
2085       </xs:sequence>
2086     </xs:extension>
2087   </xs:complexContent>
2088 </xs:complexType>
2089
2090 <xs:complexType name="TapePackageType">
2091   <xs:complexContent>
2092     <xs:extension base="tns:PackageType">
2093       <xs:sequence>
2094         <xs:element name="track" type="tns:TapePackageTrackType"
↪minOccurs="1" maxOccurs="unbounded"/>

```

```

2095         </xs:sequence>
2096     </xs:extension>
2097 </xs:complexContent>
2098 </xs:complexType>
2099
2100 <!-- Needed for muxing OpAtom -->
2101 <xs:complexType name="MXFPackagesType">
2102     <xs:sequence>
2103         <xs:element name="materialPackage" type="tns:MaterialPackageType"/>
2104         <xs:element name="tapePackage" type="tns:TapePackageType" minOccurs="0"/>
2105
2106         <!-- Material package track to link to file package track, like "V1" -->
2107         <xs:element name="materialTrackName" type="xs:string"/>
2108
2109         <!-- Tape package track to link file package track to, like "V1".
2110              Must be set if tapePackage is set.
2111         -->
2112         <xs:element name="tapeTrackName" type="xs:string" minOccurs="0"/>
2113         <xs:element name="projectEditRate" type="tns:FrameRateType" minOccurs="0"
↳maxOccurs="1" />
2114     </xs:sequence>
2115 </xs:complexType>
2116
2117 <!--- START METADATA TYPES -->
2118
2119 <xs:complexType name="KeyValuePairType">
2120     <xs:sequence>
2121         <xs:element name="key" minOccurs="1" maxOccurs="1" type="xs:string"/>
2122         <xs:element name="value" minOccurs="1" maxOccurs="1" type="xs:string"/>
2123     </xs:sequence>
2124 </xs:complexType>
2125
2126 <!--
2127     MetadataReferenceType is only used when posting new metadata.
2128     They only need to be unique within the same MetadataDocument.
2129     The middleware will transform them to proper UUIDs, unless they already
↳formatted as UUIDs pointing to existing metadata.
2130 -->
2131 <xs:simpleType name="MetadataReferenceType">
2132     <xs:restriction base="xs:string"/>
2133 </xs:simpleType>
2134
2135 <xs:complexType name="MetadataGroupValueType">
2136     <xs:sequence>
2137         <xs:element name="name" type="xs:string" minOccurs="0" maxOccurs="1"/>
2138         <xs:element name="id" type="xs:string" minOccurs="0" maxOccurs="unbounded
↳"/>
2139         <xs:element name="referenced" type="tns:MetadataReferencedType" minOccurs=
↳"0" maxOccurs="1"/>
2140     <xs:choice>
2141         <xs:sequence>
2142             <xs:element name="field" type="tns:MetadataFieldValueType"
↳minOccurs="0" maxOccurs="unbounded"/>
2143             <xs:element name="group" type="tns:MetadataGroupValueType"
↳minOccurs="0" maxOccurs="unbounded"/>
2144         </xs:sequence>
2145     </xs:sequence>
2146         <xs:element name="reference" type="tns:MetadataReferenceType"
↳minOccurs="1" maxOccurs="1"/>

```

```

2147         </xs:sequence>
2148     </xs:choice>
2149     <xs:element name="data" minOccurs="0" maxOccurs="unbounded" type="tns:
↪KeyValuePairType"/>
2150     </xs:sequence>
2151     <xs:attributeGroup ref="tns:MetadataValueAttributes"/>
2152     <xs:attribute name="inheritance" type="xs:string" use="optional"/>
2153     <xs:attribute name="cycle" type="xs:boolean" use="optional"/>
2154 </xs:complexType>
2155
2156 <xs:complexType name="MetadataFieldValueType">
2157     <xs:sequence>
2158         <xs:element name="name" type="xs:string" minOccurs="0" maxOccurs="1"/>
2159         <xs:element name="id" type="xs:string" minOccurs="0" maxOccurs="unbounded
↪ " />
2160         <xs:element name="referenced" type="tns:MetadataReferencedType" minOccurs=
↪ "0" maxOccurs="1"/>
2161         <xs:choice>
2162             <xs:element name="value" type="tns:MetadataValueType" minOccurs="0"
↪ maxOccurs="unbounded"/>
2163             <xs:element name="reference" type="tns:MetadataReferenceType"
↪ minOccurs="1" maxOccurs="1"/>
2164         </xs:choice>
2165         <xs:element name="data" minOccurs="0" maxOccurs="unbounded" type="tns:
↪KeyValuePairType"/>
2166         <xs:element name="type" minOccurs="0" maxOccurs="1" type="tns:
↪MetadataFieldType"/>
2167     </xs:sequence>
2168     <xs:attributeGroup ref="tns:MetadataValueAttributes"/>
2169     <xs:attribute name="track" type="xs:string" use="optional"/>
2170     <xs:attribute name="inheritance" type="xs:string" use="optional"/>
2171 </xs:complexType>
2172
2173 <xs:complexType name="MetadataReferencedType">
2174     <xs:attribute name="id" type="xs:string" use="required"/>
2175     <xs:attribute name="uuid" type="xs:string" use="required"/>
2176     <xs:attribute name="type" type="xs:string" use="required"/>
2177 </xs:complexType>
2178
2179 <xs:complexType name="MetadataValueType">
2180     <xs:simpleContent>
2181         <xs:extension base="xs:string">
2182             <xs:attributeGroup ref="tns:MetadataValueAttributes"/>
2183             <xs:attribute name="lang" type="xs:language" use="optional"/>
2184             <xs:attribute name="id" type="xs:string" use="optional"/>
2185         </xs:extension>
2186     </xs:simpleContent>
2187 </xs:complexType>
2188
2189 <xs:attributeGroup name="MetadataValueAttributes">
2190     <xs:attribute name="uuid" type="tns:MetadataReferenceType" use="optional"/>
2191     <xs:attribute name="user" type="xs:string" use="optional"/>
2192     <xs:attribute name="timestamp" type="xs:dateTime" use="optional"/>
2193     <xs:attribute name="change" type="tns:SiteIdType" use="optional"/>
2194     <xs:attribute name="conflict" type="xs:boolean" use="optional"/>
2195     <xs:attribute name="mode" type="tns:MetadataModeType" use="optional"/>
2196 </xs:attributeGroup>
2197

```

```

2198 <xs:simpleType name="MetadataModeType">
2199   <xs:restriction base="xs:string">
2200     <xs:enumeration value="add"/>
2201     <xs:enumeration value="remove"/>
2202   </xs:restriction>
2203 </xs:simpleType>

```

MetadataDocument

```

2205 <xs:element name="MetadataDocument" xmlns:tns="http://xml.vidispine.com/schema/
↳vidispine" type="tns:MetadataType" />
2206 <xs:complexType name="MetadataType">
2207   <xs:sequence maxOccurs="1" minOccurs="1">
2208     <xs:element name="revision" type="xs:string" minOccurs="0" maxOccurs="1"/>
2209     <xs:element name="template" type="xs:string" minOccurs="0" maxOccurs="1"/>
↳ <!-- obsolete -->
2210     <xs:element name="group" type="xs:string" minOccurs="0" maxOccurs=
↳"unbounded"/>
2211     <xs:element name="timespan" maxOccurs="unbounded" minOccurs="0">
2212       <xs:complexType>
2213         <xs:sequence>
2214           <xs:element name="field" type="tns:MetadataFieldValueType"
↳minOccurs="0" maxOccurs="unbounded"/>
2215           <xs:element name="group" type="tns:MetadataGroupValueType"
↳minOccurs="0" maxOccurs="unbounded"/>
2216         </xs:sequence>
2217         <xs:attribute name="start" type="xs:string" />
2218         <xs:attribute name="end" type="xs:string" />
2219         <xs:attribute name="base" type="xs:string" />
2220       </xs:complexType>
2221     </xs:element>
2222   </xs:sequence>
2223 </xs:complexType>
2224
2225 <!-- END METADATA TYPES -->
2226
2227 <!-- START METADATA FIELD TYPE TYPES -->
2228
2229 <xs:simpleType name="MetadataFieldTypeType">
2230   <xs:restriction base="xs:string">
2231     <xs:enumeration value="date"/>
2232     <xs:enumeration value="date-noindex"/>
2233     <xs:enumeration value="date-sortable"/>
2234     <xs:enumeration value="float"/>
2235     <xs:enumeration value="float-noindex"/>
2236     <xs:enumeration value="float-sortable"/>
2237     <xs:enumeration value="integer"/>
2238     <xs:enumeration value="integer-noindex"/>
2239     <xs:enumeration value="integer-sortable"/>
2240     <xs:enumeration value="long"/>
2241     <xs:enumeration value="long-noindex"/>
2242     <xs:enumeration value="string"/>
2243     <xs:enumeration value="string-sortable"/>
2244     <xs:enumeration value="string-exact"/>
2245     <xs:enumeration value="string-exact-sortable"/>
2246     <xs:enumeration value="string-noindex"/>
2247     <xs:enumeration value="boolean"/>
2248     <xs:enumeration value="boolean-noindex"/>

```

```

2249     <xs:enumeration value="timeCode"/>
2250     <xs:enumeration value="timeCode-noindex"/>
2251
2252     </xs:restriction>
2253 </xs:simpleType>
2254
2255 <xs:simpleType name="MetadataFieldIndexType">
2256     <xs:restriction base="xs:string">
2257         <xs:enumeration value="noindex"/>
2258         <xs:enumeration value="index"/>
2259         <xs:enumeration value="extend"/>
2260     </xs:restriction>
2261 </xs:simpleType>
2262
2263 <xs:complexType name="MetadataFieldFloatType">
2264     <xs:sequence>
2265         <xs:element name="minInclusive" type="xs:double" minOccurs="0" maxOccurs=
↪ "1"/>
2266         <xs:element name="maxInclusive" type="xs:double" minOccurs="0" maxOccurs=
↪ "1"/>
2267     </xs:sequence>
2268 </xs:complexType>
2269
2270 <xs:complexType name="MetadataFieldIntegerType">
2271     <xs:sequence>
2272         <xs:element name="minInclusive" type="xs:int" minOccurs="0" maxOccurs="1"/
↪ >
2273         <xs:element name="maxInclusive" type="xs:int" minOccurs="0" maxOccurs="1"/
↪ >
2274     </xs:sequence>
2275 </xs:complexType>
2276
2277 <xs:complexType name="MetadataFieldLongType">
2278     <xs:sequence>
2279         <xs:element name="minInclusive" type="xs:long" minOccurs="0" maxOccurs="1
↪ "/>
2280         <xs:element name="maxInclusive" type="xs:long" minOccurs="0" maxOccurs="1
↪ "/>
2281     </xs:sequence>
2282 </xs:complexType>
2283
2284 <xs:complexType name="MetadataFieldStringType">
2285     <xs:sequence>
2286         <xs:element name="minLength" type="xs:int" minOccurs="0" maxOccurs="1"/>
2287         <xs:element name="maxLength" type="xs:int" minOccurs="0" maxOccurs="1"/>
2288         <xs:element name="pattern" type="xs:string" minOccurs="0" maxOccurs="1"/>
2289     </xs:sequence>
2290 </xs:complexType>

```

MetadataFieldDocument

```

2292     <xs:element name="MetadataFieldDocument" xmlns:tns="http://xml.vidispine.com/
↪ schema/vidispine" type="tns:MetadataFieldType" />
2293     <xs:complexType name="MetadataFieldType">
2294         <xs:sequence>
2295             <xs:element name="name" type="xs:string" minOccurs="0" maxOccurs="1"/>
2296             <xs:element name="schema" type="tns:MetadataSchemaElementType" minOccurs=
↪ "0" maxOccurs="1"/>

```



```

2297     <xs:element name="type" type="tns:MetadataFieldTypeType" minOccurs="0"
↳maxOccurs="1"/>
2298     <xs:element name="index" type="tns:MetadataFieldIndexType" minOccurs="0"
↳maxOccurs="1"/>
2299     <xs:element name="fullText" type="xs:boolean" minOccurs="0" maxOccurs="1"/
↳>
2300     <xs:element name="constraint" minOccurs="0" maxOccurs="1">
2301       <xs:complexType>
2302         <xs:sequence>
2303           <xs:element name="dataset" type="xs:string" minOccurs="1"
↳maxOccurs="1"/>
2304           <xs:element name="levelProperty" type="xs:string" minOccurs="1
↳" maxOccurs="1"/>
2305           <xs:element name="levelValue" type="xs:string" minOccurs="1"
↳maxOccurs="1"/>
2306           <xs:element name="value" type="xs:string" minOccurs="1"
↳maxOccurs="1"/>
2307           <xs:choice>
2308             <xs:element name="validationGroup" type="xs:string"
↳minOccurs="0" maxOccurs="1"/>
2309             <xs:element name="parent" type="xs:string" minOccurs="0"
↳maxOccurs="1"/>
2310           </xs:choice>
2311         </xs:sequence>
2312       </xs:complexType>
2313     </xs:element>
2314     <xs:choice minOccurs="0" maxOccurs="1">
2315       <xs:element name="floatRestriction" type="tns:MetadataFieldFloatType"/
↳>
2316       <xs:element name="integerRestriction" type="tns:
↳MetadataFieldIntegerType"/>
2317       <xs:element name="longRestriction" type="tns:MetadataFieldLongType"/>
2318       <xs:element name="stringRestriction" type="tns:MetadataFieldStringType
↳"/>
2319     </xs:choice>
2320     <xs:element name="data" minOccurs="0" maxOccurs="unbounded" type="tns:
↳KeyValuePairType"/>
2321     <xs:element name="values" minOccurs="0" maxOccurs="1" type="tns:
↳SimpleMetadataType"/>
2322     <xs:element name="defaultValue" type="xs:string" minOccurs="0" maxOccurs=
↳"1"/>
2323     <xs:element name="externalId" type="xs:string" minOccurs="0" maxOccurs=
↳"unbounded" />
2324     <xs:element name="origin" type="xs:string" minOccurs="0" maxOccurs="1" />
2325     <xs:element name="boost" type="xs:float" minOccurs="0" maxOccurs="1" />
2326   </xs:sequence>
2327   <xs:attribute name="system" type="xs:string" use="optional"/>
2328   <xs:attribute name="sortable" type="xs:boolean" use="optional"/>
2329   <xs:attribute name="inheritance" type="xs:string" use="optional"/>
2330 </xs:complexType>
2331
2332 <!-- END METADATA FIELD TYPE TYPES -->
2333
2334 <xs:complexType name="SimpleMetadataType">
2335   <xs:sequence>
2336     <!-- TODO: use tns:KeyValuePairType instead -->
2337     <xs:element name="field" minOccurs="0" maxOccurs="unbounded" >
2338       <xs:complexType>

```

```

2339         <xs:sequence>
2340             <xs:element name="key" type="xs:string" minOccurs="1"
↳maxOccurs="1" />
2341             <xs:element name="value" type="xs:string" />
2342         </xs:sequence>
2343     </xs:complexType>
2344 </xs:element>
2345 </xs:sequence>
2346 </xs:complexType>
2347
2348     <!-- Decode/encode permissions and license document. Wildcards are allowed.
2349           Example how a license document allowing any input to be transcoded to H.
↳264+MP3 might look like:
2350         <TranscoderLicenseStatusDocument>
2351             <mayDecode>*</mayDecode>
2352             <mayEncode>*mp3*</mayEncode>
2353             <mayEncode>*264*</mayEncode>
2354         </TranscoderLicenseStatusDocument>
2355     -->

```

TranscoderLicenseStatusDocument

```

2356     <xs:element name="TranscoderLicenseStatusDocument" xmlns:tns="http://xml.
↳vidispine.com/schema/vidispine" type="tns:TranscoderLicenseStatusType"/>
2357     <xs:complexType name="TranscoderLicenseStatusType">
2358         <xs:sequence>
2359             <xs:element name="mayDecode" type="xs:string" minOccurs="0" maxOccurs=
↳"unbounded"/>
2360             <xs:element name="mayEncode" type="xs:string" minOccurs="0" maxOccurs=
↳"unbounded"/>
2361             <xs:element name="production" type="xs:boolean" minOccurs="0" maxOccurs="1
↳"/>
2362         </xs:sequence>
2363     </xs:complexType>
2364
2365     <!-- Returned by the transcoder's duration resource -->

```

DurationDocument

```

2366     <xs:element name="DurationDocument" xmlns:tns="http://xml.vidispine.com/schema/
↳vidispine" type="tns:DurationType"/>
2367     <xs:complexType name="DurationType">
2368         <xs:sequence>
2369             <!-- duration = max_x{ptsInterval.end_x} - min_x{ptsInterval.start_x} -->
2370             <xs:element name="duration" type="tns:TimeCodeType"/>
2371
2372             <!-- Information about the individual video streams
2373                   duration = stream.end - stream.start
2374             -->
2375             <xs:element name="stream" type="tns:StreamIntervalType" maxOccurs=
↳"unbounded"/>
2376         </xs:sequence>
2377     </xs:complexType>
2378
2379     <xs:complexType name="StreamIntervalType">
2380         <xs:complexContent>
2381             <xs:extension xmlns:tns="http://xml.vidispine.com/schema/vidispine" base=
↳"tns:TimeIntervalType">

```

```

2382     <!-- AKA essenceStreamId -->
2383     <xs:attribute name="index" type="xs:unsignedShort" use="required"/>
2384
2385     <!-- number of frames decoded -->
2386     <xs:attribute name="numberOfFrames" type="xs:int" use="required"/>
2387   </xs:extension>
2388 </xs:complexContent>
2389 </xs:complexType>

```

TranscoderVersionDocument

```

2391   <xs:element name="TranscoderVersionDocument" xmlns:tns="http://xml.vidispine.com/
↳schema/vidispine" type="tns:TranscoderVersionType"/>
2392   <xs:complexType name="TranscoderVersionType">
2393     <xs:sequence>
2394       <xs:element name="version" type="xs:string" minOccurs="1" maxOccurs="1" />
2395       <xs:element name="submodule" maxOccurs="unbounded" minOccurs="0">
2396         <xs:complexType>
2397           <xs:sequence>
2398             <xs:element name="name" type="xs:string" minOccurs="1"
↳maxOccurs="1"/>
2399             <xs:element name="version" type="xs:string" minOccurs="0"
↳maxOccurs="1"/>
2400             <xs:element name="info" type="tns:KeyValuePairType" minOccurs=
↳"0" maxOccurs="unbounded" />
2401           </xs:sequence>
2402         </xs:complexType>
2403       </xs:element>
2404       <xs:element name="feature" maxOccurs="unbounded" minOccurs="0">
2405         <xs:complexType>
2406           <xs:sequence>
2407             <xs:element name="name" type="xs:string" minOccurs="1"
↳maxOccurs="1"/>
2408             <xs:element name="version" type="xs:string" minOccurs="0"
↳maxOccurs="1"/>
2409             <xs:element name="info" type="tns:KeyValuePairType" minOccurs=
↳"0" maxOccurs="unbounded" />
2410           </xs:sequence>
2411         </xs:complexType>
2412       </xs:element>
2413     </xs:sequence>
2414   </xs:complexType>
2415
2416 </xs:schema>
2417

```

17.38.3 transcoder.xsd

Common elements to API and Transcoder.

```

1 <?xml version="1.0" encoding="UTF-8"?>
2 <xs:schema xmlns:xs="http://www.w3.org/2001/XMLSchema"
3   targetNamespace="http://xml.vidispine.com/schema/vidispine"
4   elementFormDefault="qualified"
5   xmlns:tns="http://xml.vidispine.com/schema/vidispine">
6   <!-- Schemas for transcoder configurations -->

```

```

7   <xs:simpleType name="GUIDType">
8     <xs:restriction base="xs:string">
9       <xs:pattern value="(\\{([0-9a-fA-F]){8}-([0-9a-fA-F]){4}-([0-9a-fA-F]){4}-
↪ ([0-9a-fA-F]){4}-([0-9a-fA-F]){12}\\})"/>
10    </xs:restriction>
11  </xs:simpleType>
12  <xs:complexType name="CarbonPreset">
13    <xs:sequence>
14      <xs:element name="name" type="xs:string"/>
15      <xs:element name="description" type="xs:string"/>
16      <xs:element name="containerFormat" type="xs:string"/>
17      <xs:element name="videoCodec" type="xs:string"/>
18      <xs:element name="audioCodec" type="xs:string"/>
19      <xs:element name="displayAspectRatio" type="tns:AspectRatioType"/>
20      <xs:element name="GUID" type="tns:GUIDType"/>
21    </xs:sequence>
22  </xs:complexType>
23  <xs:complexType name="PluginType">
24    <xs:sequence>
25      <xs:element name="alias" type="xs:string"/>
26      <xs:element name="fileName" type="xs:string"/> <!-- Name of .dll/.so_
↪file -->
27    </xs:sequence>
28  </xs:complexType>
29  <xs:complexType name="AddressPortType">
30    <xs:sequence>
31      <xs:choice>
32        <xs:element name="host" type="xs:string"/>
33        <xs:element name="address" type="xs:string"/>
34      </xs:choice>
35      <xs:element name="port" type="xs:int"/>
36    </xs:sequence>
37  </xs:complexType>
38  <xs:complexType name="StatsDReceiverType">
39    <xs:sequence>
40      <xs:element name="destination" type="tns:AddressPortType"/>
41      <xs:element name="prefix" type="xs:string" minOccurs="0"/>
42    </xs:sequence>
43  </xs:complexType>
44  <xs:simpleType name="REDDecoderType">
45    <xs:restriction base="xs:string">
46      <xs:enumeration value="CPU"/>
47      <xs:enumeration value="CUDA"/> <!-- default, will fall back to CPU if_
↪CUDA is not available -->
48      <xs:enumeration value="OPENCL"/>
49    </xs:restriction>
50  </xs:simpleType>

```

TranscoderConfigurationDocument

```

51  <xs:element name="TranscoderConfigurationDocument" type="tns:
↪TranscoderConfigurationType" />
52  <xs:complexType name="TranscoderConfigurationType">
53    <xs:sequence>
54      <!-- TODO: replace these two with an AddressPortType element -->
55      <xs:element name="address" type="xs:string"/>
56      <xs:element name="port" type="xs:int"/>
57

```

```

58     <!-- Number of threads to use in encoders.
59         Applies mostly to MainConcept and libx264 as of writing.
60
61         Not set = Leave thread count alone. This means a single thread
↳for libavcodec, auto for MainConcept.
62             0         = Auto.
63             >=1      = Use specified number of threads. Should be somewhere
↳around 150% of the number of cores.
64         -->
65         <xs:element name="encoderThreads" type="xs:int" minOccurs="0"/>
66         <xs:element name="decoderOfferThreads" type="xs:int" minOccurs="0"/>
67         <xs:element name="apiUsername" type="xs:string"/>
68         <xs:element name="apiPassword" type="xs:string"/>
69
70     <!-- If set, grab TranscoderLicenseStatusDocuments from apiURL/API/
↳transcoder-validate
71         Else, wait for such documents to be PUT on /license
72         See T#114
73     -->
74     <xs:element name="apiURL" type="tns:AddressPortType" minOccurs="0"/>
75     <xs:element name="thumbnailResolution" type="tns:ResolutionType"/>
76     <xs:element name="thumbnailPeriod" type="tns:TimeCodeType" minOccurs=
↳"0" />
77     <xs:element name="bilinearEffects" type="xs:boolean"/> <!
↳-- If true, use bilinear filtering for effects -->
78     <xs:element name="carbonServer" minOccurs="0" maxOccurs="unbounded"
↳type="tns:AddressPortType"/>
79     <xs:element name="carbonPreset" type="tns:CarbonPreset" minOccurs="0"
↳maxOccurs="unbounded"/>
80     <xs:element name="faceDetectorPlugin" type="tns:
↳PluginType" minOccurs="0" maxOccurs="unbounded"/>
81     <xs:element name="dataPath" type="xs:string"/>
82     <xs:element name="presetPath" type="xs:string"/>
83     <xs:element name="tempPath" type="xs:string" minOccurs="0" />
84     <xs:element name="proresDecoder" minOccurs="0" type="tns:
↳AddressPortType"/>
85     <xs:element name="proresEncoder" minOccurs="0" type="tns:
↳AddressPortType"/>
86     <xs:element name="vp6Encoder" minOccurs="0" type="tns:AddressPortType
↳"/>
87     <xs:element name="vp6EncoderPoolSize" minOccurs="0" type="xs:int"/>
88     <xs:element name="logo" minOccurs="0" type="xs:string"/>
89     <xs:element name="imagemagick" minOccurs="0" maxOccurs="unbounded"
↳type="tns:KeyValuePairType"/>
90     <xs:element name="logLevel" minOccurs="0" type="xs:string"/>
91     <xs:element name="statsd" type="tns:StatsDRecieverType" minOccurs="0"
↳maxOccurs="unbounded"/>
92     <xs:element name="readBufferLength" type="xs:int" minOccurs="0"/>
93     <xs:element name="dataBufferSize" type="xs:int" minOccurs="0"/>
94     <xs:element name="dataBufferWriteSize" type="xs:int" minOccurs="0"/>
95     <xs:element name="dataBufferFlushTime" type="xs:int" minOccurs="0"/>
96     <xs:element name="colorProfilePath" type="xs:string" minOccurs="0"
↳maxOccurs="unbounded"/>
97     <xs:element name="redDecoderType" type="tns:REDDecoderType" minOccurs=
↳"0" maxOccurs="1"/>
98     </xs:sequence>
99     </xs:complexType>
100

```

```

101 <!-- Schemas for communicating with Carbon -->
102 <xs:complexType name="CarbonJobInfoType">
103   <xs:sequence>
104     <xs:element name="Failures" minOccurs="0">
105       <xs:complexType>
106         <xs:sequence>
107           <xs:element name="Warnings" type="xs:string" minOccurs="0"/>
108           <xs:element name="Errors" type="xs:string" minOccurs="0"/>
109         </xs:sequence>
110       </xs:complexType>
111     </xs:element>
112   </xs:sequence>
113   <xs:attribute name="Name" type="xs:string" use="required"/>
114   <xs:attribute name="GUID" type="tns:GUIDType" use="required"/>
115   <xs:attribute name="State" type="xs:string" use="required"/>
116   <xs:attribute name="Status" type="xs:string" use="required"/>
117   <xs:attribute name="Progress.DWD" type="xs:int" use="required"/>
118   <xs:attribute name="Speed.DBL" type="xs:double" use="optional"/>
119   <!-- Not documented -->
120   <xs:attribute name="Description" type="xs:string" use="required"/>
121   <xs:attribute name="User" type="xs:string" use="required"/>
122   <xs:attribute name="SourceDescription" type="xs:string" use="required"/>
123   <xs:attribute name="AgentIP" type="xs:string" use="required"/>
124   <xs:attribute name="Priority.DWD" type="xs:int" use="required"/>
125   <xs:attribute name="Capabilities.DWD" type="xs:int" use="optional"/>
126   <!-- Not documented -->
127   <xs:attribute name="DeleteProcessedSource.DWD" type="xs:int" use="optional"/>
128   <!-- Not documented -->
129   <xs:attribute name="DeleteRealAsset.DWD" type="xs:int" use="optional"/>
130   <!-- Not documented -->
131   <xs:attribute name="CheckInTime" type="xs:string" use="required"/>
132   <xs:attribute name="CheckInTime_CNLT" type="xs:string" use="required"/>
133   <xs:attribute name="CheckInTime_SCM" type="xs:string" use="required"/>
134   <xs:attribute name="CheckInTimePrecise.QWD" type="xs:long" use="optional"/>
135   <!-- Not documented -->
136   <xs:attribute name="StartTime" type="xs:string" use="optional"/>
137   <xs:attribute name="StartTime_CNLT" type="xs:string" use="optional"/>
138   <xs:attribute name="StartTime_SCM" type="xs:string" use="optional"/>
139   <xs:attribute name="CompletedTime" type="xs:string" use="optional"/>
140   <xs:attribute name="CompletedTime_CNLT" type="xs:string" use="optional"/>
141   <xs:attribute name="CompletedTime_SCM" type="xs:string" use="optional"/>
142   <xs:attribute name="Error" type="xs:string" use="optional"/>
143   <!-- Not documented -->
144 </xs:complexType>

```

Reply

```

139 <xs:element name="Reply">
140   <xs:complexType>
141     <xs:sequence>
142       <xs:element name="JobInfo" type="tns:CarbonJobInfoType" minOccurs="0"/>
143     </xs:sequence>
144     <xs:attribute name="GUID" type="tns:GUIDType" use="optional"/>
145     <xs:attribute name="Success" type="xs:string" use="required"/>
146     <xs:attribute name="Error" type="xs:string" use="optional"/>
147     <xs:attribute name="NrOfJobs.DWD" type="xs:int" use="optional"/>
148   </xs:complexType>

```

149
150

```
</xs:element>  
</xs:schema>
```


RELEASE NOTES

This page contains the release notes for each Vidispine release. For older versions, see the [release notes](http://www.vidispine.com/partner/my-documentation) (<http://www.vidispine.com/partner/my-documentation>) in the Vidispine Partner Portal.

18.1 Prerequisites

The following prerequisite software is supported in this version.

Operating systems

Vidispine server (VS):

- Ubuntu 16.04 LTS (64 bit)
- Ubuntu 18.04 LTS (64 bit)
- Red Hat Linux 6.5
- Red Hat Linux 7.0

Vidispine server agent (VSA):

- Ubuntu 16.04 LTS (64 bit) ¹
- Ubuntu 18.04 LTS (64 bit) ¹
- CentOS 6.5 (64 bit) ¹

Databases

- PostgreSQL 9.6 and 11
- MySQL 5.6 and 5.7 ¹
- Microsoft SQL Server 2017 ¹

Java

- Java 8

¹ Vidispine Enterprise edition only.

Other

- Solr 4.10.0 (if installed manually)
- Zookeeper 3.4.6 (for HA systems) ¹
- Elasticsearch 5.6.x, 6.0.x, 6.1.x, or 6.2.x.

Changed in version 4.17: Support for PostgreSQL 11 and Ubuntu 18.04 was added. Support for PostgreSQL 9.1, PostgreSQL 9.3, MySQL 5.5 and Ubuntu 14.04 was removed.

Changed in version 4.14.2: Support for PostgreSQL 9.6 was added.

Changed in version 4.13: Support for Microsoft SQL Server was added.

Changed in version 4.9: Support for Ubuntu 12.04 was removed.

Changed in version 4.8: Support for running the server agent on Ubuntu 16.04 was added.

Changed in version 4.6: Support for Ubuntu 16.04 and MySQL 5.7 was added. Support for Microsoft Windows Server, GlassFish and Java 7 was removed.

18.2 Upgrade notes

18.2.1 General

- Your system must be running Vidispine version 4.0.x or later in order to upgrade to Vidispine 4.x.
- You may upgrade directly from release 4.0.x or later to e.g. 4.5, without first installing each intermediate release.
- When upgrading a major or minor (4.x to 4.y) version you should always *migrate the database*, for a maintenance release (4.13.x to 4.13.y) it is typically not needed.

18.2.2 Upgrading from 4.16 to 4.17

- APInit is needed due to new metadata fields added for TTML parsing.
- Solr: No changes to the documents. Re-indexing is not required.

18.2.3 Upgrading from 4.15 to 4.16

- Solr: No changes to the documents. Re-indexing is not required.

18.2.4 Upgrading from 4.14 to 4.15

- Solr: No changes to the documents. Re-indexing is not required.
- The type of job that is created for the *placeholder raw import request* has changed from THUMB-NAIL/TRANSCODE to PLACEHOLDER_IMPORT.

18.2.5 Upgrading from 4.13 to 4.14

- Solr: No changes to the documents. Re-indexing is not required.
- Elasticsearch: Supported versions have been changed to 5.6.x, 6.0.x, 6.1.x, or 6.2.x.
- The item re-index process will no longer also rebuild the thumbnail index that is maintained internally by VS. The thumbnail index can now instead be rebuilt separately using a *re-index thumbnail request*. To restore the old behaviour, set *disableThumbnailReindexing* to *false*.
- A number of new job steps have been added to support checksum validation on transfer.
 - COPY_FILE/MOVE_FILE, step 90 - Waiting for source file hash.
 - COPY_FILE/MOVE_FILE, step 92 - Retrieving source file hash.
 - COPY_FILE/MOVE_FILE, step 140 - Waiting for destination file hash.
 - COPY_FILE/MOVE_FILE, step 150 - Verifying file hashes.
- Previous versions had a bug where collections containing libraries did not always have recursive ACL's properly applied items in those libraries. This is fixed for newly created ACL's, but any old ones with this problem will need to be *re-indexed* with:

```
PUT /reindex/acl
```

- A role have been added for reading Vidispine Agents: *_vxa_read*. To make sure admin users receives the role properly, please run *APIinit*:

```
POST /APIinit
```

18.2.6 Upgrading from 4.12 to 4.13

- Solr: No changes to the documents. Re-indexing is not required.

18.2.7 Upgrading from 4.11 to 4.12

- Solr: No changes to the documents. Re-indexing is not required.
- All media shape deductions from jobs are now performed using asynchronous job steps. A number of new job steps have been added to support this.
 - TRANSCODE, step 400 - Finalizing media check.
 - CONFORM, step 400 - Finalizing media check.
 - AUTO_IMPORT, step 550 - Finalizing media check.
 - AUTO_IMPORT, step 1100 - Finalizing media check.
 - ESSENCE_VERSION, step 800 - Finalizing media check.
 - TIMELINE, step 400 - Creating the entities.
- To support removal of old essence files, a new job step has been added:
 - SHAPE_IMPORT, step 1000 - Remove old essence files.
- Make sure to run *APIinit* when upgrading to create the above mentioned job steps. Any existing custom job steps using these step numbers will be overwritten, so make sure to adjust the step number of any custom job step definitions using these numbers and recreate the custom steps.

18.2.8 Upgrading from 4.10 to 4.11

- Solr: No changes to the documents. Re-indexing is not required.

18.2.9 Upgrading from 4.9 to 4.10

- Solr: No changes to the documents. Re-indexing is not required.

18.2.10 Upgrading from 4.8 to 4.9

- Solr: No changes to the documents. Re-indexing is not required.
- Support for Ubuntu 12.04 has been discontinued.

18.2.11 Upgrading from 4.7 to 4.8

- Solr: No changes to the documents. Re-indexing is not required.

18.2.12 Upgrading from 4.6 to 4.7

- Solr: The Solr schema must be updated to use the new *long integer datatype*.
- Solr: No changes to the documents. Re-indexing is not required.
- Version 3.2 of the MatrixStore SDK is now installed by default. The *vidispine-server-matrixstore3.1* package must be installed to connect to MatrixStore 3.1.

18.2.13 Upgrading from 4.5 to 4.6

- Solr: No changes to the documents. Re-indexing is not required.
- Support for GlassFish has been discontinued. Use *Standalone Vidispine* instead.
- Support for Java 7 has been discontinued. Use Java 8 instead.
- Support for Microsoft Windows Server has been discontinued.

18.2.14 Upgrading from 4.4 to 4.5

- Solr: No changes to the documents. Re-indexing is not required.
- Support for JBoss has been discontinued. Use *Standalone Vidispine* instead.

18.2.15 Upgrading from 4.3 to 4.4

- Solr: No changes to the documents. Re-indexing is not required.
- The property *indexCollectionItemOrder* is now set to `false` by default. Set it to `true` before upgrading if you rely on the old behaviour.

- The transcode preset script is now also evaluated for conform jobs. The difference compared to transcodes is that the shape is empty. If you use the same preset for both transcodes and conforms, then make sure that the script verifies the existence of the components of the shape before using them to avoid null pointer exceptions from the script.

18.2.16 Upgrading from 4.2 to 4.3

- Solr: No changes to the documents. Re-indexing is not required.

18.2.17 Upgrading from 4.1 to 4.2

- Solr: The indexing of items, collections and files has changed. *Re-indexing is required.*
- *Essence version* resource representation has changed from `URIListDocument` to `EssenceVersionListDocument`, and now returns additional information about the version.

Platform:

- Java 7u67 is now supported with GlassFish. The installer must be used to install this update onto GlassFish, as configuration and libraries in GlassFish must be patched to work with Java 7u67.
- The installer will now install Solr 4.10.0 instead of Solr 4.5.1, but Solr 4.5.1 is still supported. Large systems may benefit of upgrading to Solr 4.10.0 as it brings additional search performance improvements.

18.2.18 Upgrading from 4.0 to 4.1

- The ObjectMatrix MatrixStore client SDK has been updated from 2.7.2.6 to 3.1.3.3. This version is not compatible with older MatrixStore server versions, so verify that you are running MatrixStore server 3.1.x before upgrading to Vidispine 4.1.5 or later.
- Support for Ubuntu 10.04 LTS has been discontinued, use Ubuntu 12.04 LTS instead.
- On Linux the number of allowed open files per process (File Descriptor Limit) must be raised from the default (1024) to at least 50000 to avoid Java IO errors “java.io.IOException: Too many open files”. See [How to increase File Descriptor Limit on Linux](http://www.vidispine.com/partner/knowledge-forum-support/kb/how-tos/how-to-increase-file-descriptor-limit-on-linux) (<http://www.vidispine.com/partner/knowledge-forum-support/kb/how-tos/how-to-increase-file-descriptor-limit-on-linux>).

18.3 Version 4.17

The release notes will tell you what’s new in each version, and any changes that you must be aware of when upgrading. For reference, Vidispine ticket numbers are printed as (#1234).

18.3.1 4.17.2

2019-09-20

New features

- Allow analyze jobs to run as part of a transcode/import job (#3867).

Improvements

- Enable metadata update requests to *only return changed entries* (#3974).
- Allow collection to be *retrieved without items, collections or libraries* (#3927).
- Support Google Cloud transcoders in Vidinet (#3959).
- Improve performance of global metadata updates for large documents (#3965).
- Improve performance of metadata group search on global metadata (#3946).
- Faster removal of global metadata by UUID (#3922).
- Expose creation time for shapes (#3899).
- Support creation of shapes with components referencing different files (#3977).
- Allow user aliases to be set via Shiro (#3960).
- Reduce possible database locking error on “t_file” (#3923).
- Add flag to limit import of unfulfilled partial IMPs (#3853).

Bug fixes

- Metadata group is still returned after deletion in document metadata (#3917).
- Missing boost factor for phrase query in Solr (#3901).
- Components can get incorrect itemTrack when using path projections (#3895).
- Incorrect search result if query contains a “NOT” operator and a boost factor (#3878).
- Dataset field validation to support multiple hierarchies (#3994).
- Missing recursive element in item ACL response (#3887).
- VSA should only close proxy URIs that VSA has created, not proxy URIs that VS has created (#3892).
- VXA URIs should always be accepted for VSA transcoders with the same host (#3862).
- Use IMF IntrinsicDuration if SourceDuration is not present (#3849).

Transcoder fixes

- Watermark/timecode appearing in formats that should not have watermark (#3933).

18.3.2 4.17.1

2019-06-28

New transcoder features

- Support for extracting IPTC-metadata from images (#3710).

Bug fixes

- Job step marked as DISAPPEARED even though sub-steps are running (#3865).
- Render job fails if sequence does not contain tracks for all audio channels (#3839).
- NPE on LDAP sync if name attribute is missing from a user entry (#3838).
- Indexing failing for item with thousands of files (#3837).
- TTML timecode parser does not handle fractions (#3831).
- Incorrect essence version on item if essence import job fails (#3830).
- Binary components missing from shape after placeholder import of binary component (#3828).
- CloudConvert script not evaluated for essence import jobs (#3827).
- File on StorNext archive not shown as ARCHIVED (#3824).
- File on Glacier Deep Archive not shown as ARCHIVED (#3823).
- Placeholder import job incorrectly overwrites original shape metadata (#3821).
- Transcode of document formats not working with CloudConvert (#3817).
- Scheduled requests not working for all endpoints (#3815).
- Incorrect username migration query shown on dry-run (#3787).
- Import settings not applied during import to placeholder item (#3770).
- Normalizer class cannot be accessed from sandboxed JavaScript (#3749).
- Retrieving storages by storage group doesn't work since 4.16 (#3748).
- Dataset values not displayed in search results (#3734).
- Shape import of .mov file creates item with wrong mimeType and mediaType (#3732).
- Unable to update all action fields on a notification (#3705).
- Unable to update trigger on notifications (#3704).
- EJB notification is not fired if synchronous is set to false (#3703).
- Items and collections not reindexed after an external identifier change (#3697).
- Can't import to placeholder that was created before upgrade to 4.16.1 (#3693).
- Too large document_text causing too large messages on the index queue (#3669).
- Integer values accepted as input for date fields (#3665).
- Shape import of IMF package does not set system metadata, like original codec etc. (#3301).

Transcoder fixes

- Transcoder generates invalid MXF (#3889).
- Slow media check of tar file on S3 storage (#3835).
- Incorrect bit rate metadata for MPEG transport stream (#3788).
- Burn in timecode without background bar causes text shadow (#3777).
- Shape deduction of SVG files take a very long time (#3720).

Agent fixes

- Shape deduction by agent fails for file on S3 with special characters (#3563).

18.3.3 4.17

2019-03-29

PostgreSQL 11 and Ubuntu 18.04

PostgreSQL 11 and Ubuntu 18.04 are now officially supported.

Configure OAuth authentication using API

The *OAuth* configuration can now be set using the new *auth configuration endpoint*. Previously it was supported by adding the configuration in the Shiro configuration file.

See *Configure OAuth2 using the API* for more details.

Trigger notifications from JavaScript

Notifications can now be sent from JavaScript job steps (#3454). This is done using the *notification object*. This works for all notification actions.

For example, given an SQS notification with id VX-45, adding a message to that queue could be done using:

```
notification.send("VX-45", {
  "item": "VX-1",
  "state": "VALID"
});
```

Import of TTML subtitle sidecar files

Import and basic parsing of *TTML* (<https://www.w3.org/TR/2018/REC-ttml1-20181108>) subtitle files is now supported (#3581). The content of TTML files will be parsed as *subtitle metadata* on the items. Currently supported fields are *stl_text*, *stl_justification*, *stl_color* and *stl_font*.

Storage priority

The user can now assign a *priority to a storage*. When a source file exists on multiple storages Vidispine server will use the file from the storage with the highest priority. This is, for example, useful if one storage has much faster retrieval speed than the other(s) (#3578).

Control if a storage is active/inactive

This feature allows the user to mark a storage as active by adding a *.storage* file in the root of the storage. To enable this check for all storages you can add *storageActivationFile* to the *server.yaml*. To only enable it for a specific storage you can set the key *storageActivationFile* in the storage metadata (#3552).

Improved status of thumbnail resources

The thumbnail resource has been updated to contain online/offline information (#3228).

```
<ResourceDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <id>VX-6</id>
  <thumbnail>
    <path>file:///srv/thumbnails/</path>
    <state>ONLINE</state>
    <lastSuccess>2019-03-01T10:42:55.239+01:00</lastSuccess>
  </thumbnail>
</ResourceDocument>
```

Improved access control options

A new `appliesTo` setting is introduced for finer control of the entities that an *access control* entry is inherited to. This replaces the previous `recursive` option (#2369).

Improvements

- Preserve access granted by disabled users (#3631).
- Support for aborting jobs in Vidinet (#3630).
- *Metadata locks* on collections (#3590).
- Retry to send job to Vidinet if Vidinet is temporarily inaccessible instead of failing the Vidispine job (#3528).
- Support for using *Nexio FTP-servers* as storages (#3514).
- Skip unnecessary media checks for files on object storages (#3511).
- New endpoint to *set multiple configuration properties* at once (#3451).
- Support to *get all key/value metadata* of metadata-field/group (#3438).
- Validate bucket region when creating an S3 storage (#3147).

Bug fixes

- `IOException` for FTP storage when pooling is enabled (#3700).
- Get metadata not accepting all timecode formats of interval parameter (#3657).
- HTTP 500 when adding access controls in bulk (with `-Xss256k`) (#3617).
- Stack overflow error when running with a smaller stack size (#3612).
- High memory usage due to a large number of OpenEJB scheduler threads (#3611).
- Error message in log if no S3 bucket configured for audit trail purging (#3584).
- Thumbnail job does not honor resolution set in shape-tag (#3579).
- Search operator name not validated when using Elasticsearch (#3567).
- Cannot import sidecar with `fileId` on Vidinet (#3558).
- Jobs that have been in `WAIT` state cannot be deleted (#3555).
- Bad performance of `collection/{cid}/graph/dot` if ancestor collections have a lot of items (#3546).

- Permissions created by grantor persist after deleting grantor account (#3535).
- URI-escaping of files detected on Azure storages is not working properly (#3532).
- markDeletedFilesMissing gets stuck on huge amount of entries (#3428).
- Metadata changes on inherited metadata are not reflected in search index (#3238).

Transcoder fixes

- Improve transcoder retry logic for mutable regions (#3692).

Agent fixes

- Allow moving files within the same VSA storage (#3426).
- VSA rewrites CIFS URLs (#3391).

Platform

This release adds support for Ubuntu 18.04 and PostgreSQL 11. At the same time, support for PostgreSQL 9.1 and 9.3, MySQL 5.5 and Ubuntu 14.04 has been discontinued.

Upgrading from 4.16

- APInit is needed due to new metadata fields added for TTML parsing.
- Solr: No changes to the documents. Re-indexing is not required.

18.4 Version 4.16

The release notes will tell you what's new in each version, and any changes that you must be aware of when upgrading. For reference, Vidispine ticket numbers are printed as (#1234).

18.4.1 4.16.6

2019-09-20

New features

- Allow analyze jobs to run as part of a transcode/import job (#3867).

Improvements

- Enable metadata update requests to *only return changed entries* (#3974).
- Allow collection to be *retrieved without items, collections or libraries* (#3927).
- Support Google Cloud transcoders in Vidinet (#3959).
- Improve performance of global metadata updates for large documents (#3965).

- Improve performance of metadata group search on global metadata (#3946).
- Faster removal of global metadata by UUID (#3922).
- Expose creation time for shapes (#3899).

Bug fixes

- Metadata group is still returned after deletion in document metadata (#3917).
- Missing boost factor for phrase query in Solr (#3901).
- Components can get incorrect itemTrack when using path projections (#3895).
- Incorrect search result if query contains a “NOT” operator and a boost factor (#3878).

18.4.2 4.16.5

2019-07-03

Bug fixes

- Retrieving storages by storage group doesn't work since 4.16 (#3748).

18.4.3 4.16.4

2019-06-28

Bug fixes

- Indexing failing for item with thousands of files (#3837).
- Binary components missing from shape after placeholder import of binary component (#3828).
- CloudConvert script not evaluated for essence import jobs (#3827).
- File on StorNext archive not shown as ARCHIVED (#3824).
- File on Glacier Deep Archive not shown as ARCHIVED (#3823).
- Placeholder import job incorrectly overwrites original shape metadata (#3821).
- Incorrect username migration query shown on dry-run (#3787).
- Dataset values not displayed in search results (#3734).
- Unable to update all action fields on a notification (#3705).
- Unable to update trigger on notifications (#3704).
- EJB notification is not fired if synchronous is set to false (#3703).
- Items and collections not reindexed after an external identifier change (#3697).
- Can't import to placeholder that was created before upgrade to 4.16.1 (#3693).
- Too large document_text causing too large messages on the index queue (#3669).
- Integer values accepted as input for date fields (#3665).

Transcoder fixes

- Transcoder generates invalid MXF (#3889).
- Slow media check of tar file on S3 storage (#3835).
- Shape deduction of SVG files take a very long time (#3720).

Agent fixes

- Shape deduction by agent fails for file on S3 with special characters (#3563).

18.4.4 4.16.3

2019-03-28

Bug fixes

- Mutable range write failing if transcoder writes large “gaps” in file (#3713).
- Move metadata migration fails if target group exists (#3708).
- Very slow file write completion when using segment files on Azure (#3694).
- Failing to reindex collection if the collection number is high (#3668).
- Incorrect normalization of combining characters for JSON (#3663).
- Filename scripts that fail due to a temporary error causes jobs to fail instead of retry (#3573).
- Transcoding documents using CloudConvert fails (#3533).

Transcoder fixes

- MPEG-TS erroneously detected as MPEG-PS (#3666).
- Closed captions not recognized in MXF (#3620).
- Transcoder hangs on media check of tar file with encrypted MXF (#3559).
- Automatically adjust odd dimensions for H.264 output (#3414).

18.4.5 4.16.2

2019-03-13

Bug fixes

- Slow add/delete of item from large collection (#3671).
- CORS does not work with /API/user/{user-id} (#3662).
- Transfers to storage with read=false on method end up in WAITING state (NO_SUCH_METHOD) (#3622).
- Signed S3 URL generation doesn’t take into account SSE algorithm configuration (#3619).
- Jobs that had been in WAIT state can not be deleted (#3555).

- Unable to use scene change detection with thumbnail jobs (#3493).
- Repeated “Ingoring no longer waiting job” error in logs (#3681).

Transcoder fixes

- Transcode crashing on transcode of certain PSD files (#3691).

Agent fixes

- Incorrect Guava version in VSA 4.16.1 causing writes to fail (#3676).
- S3 files are not properly written by VSA when using mutable range writes (#3664).

18.4.6 4.16.1

2019-02-08

Improvements

- Resource for listing the *libraries that contain a specific item* (#3547).

Bug fixes

- Using empty:/// URI does not work for truncating audit log and transfer logs (#3609).
- HTTP 400 when setting external ids or metadata field groups in metadata (#3599).
- Incorrect file list counts if a file belongs to multiple items for Elasticsearch (#3595).
- Incorrect search result if the search value contains “literal” spaces for Elasticsearch (#3594).
- Auto-completion not case insensitive for string-exact for Elasticsearch (#3593).
- SAML authentication broken with Bouncy Castle 1.60 (#3588).
- Too strong SSH key generated by Vidispine on Java 1.8u91 and later (#3583).
- Proxy links for manually getting file data does not respect ‘apiNoauthUri’ property (#3096).
- Sorting users by username/realname not working when searching for users (#2961).

Transcoder fixes

- Tearing in video output when deinterlacing source (#3606).

18.4.7 4.16

2019-01-13

Sequence rendering using Vidinet

Sequence rendering can now be performed using Vidinet. This works just like when using a Vidinet transcoder to transcode or conform (#3221).

```
POST /sequence/render?tag=h264&resourceId=VX-42
```

Stream files from agent

You can now get access to read files directly from the VSA. Previously you could only access the files by streaming them through Vidispine. This make sense, if you for example are on the same on-premise network as the VSA and you have Vidispine server running in the cloud. The access is requested with a new `methodType`: *AUTO-VSA*.

Paging using cursors

It is now possible to use the `cursorMark` (https://lucene.apache.org/solr/guide/6_6/pagination-of-results.html#fetching-a-large-number-of-sorted-results-cursors)/`search after` (<https://www.elastic.co/guide/en/elasticsearch/reference/6.3/search-request-search-after.html#search-request-search-after>) features from Solr/Elasticsearch to improve the `deep paging` (https://lucene.apache.org/solr/guide/6_6/pagination-of-results.html#performance-problems-with-deep-paging) performance during a search (#3476).

This feature is supported on *collection* and *item* search as well as when *listing files* using the new the `cursor` parameter.

Note: Only metadata searches in the `generic` interval supports `cursor`.

Query boosting

It is now possible to *boost* field values in item and collection searches by adding boost factors in the search documents or metadata field definitions.

```
PUT /item
Content-Type: application/xml

<?xml version="1.0" encoding="UTF-8"?>
<ItemSearchDocument xmlns="http://xml.vidispine.com/schema/vidispine" version="2">
  <operator operation="OR">
    <field>
      <name>title_field</name>
      <value boost="10">phoenix</value>
    </field>
    <field>
      <name>description_field</name>
      <value>phoenix</value>
    </field>
  </operator>
  <sort>
    <name>_score</name>
    <value>descending</value>
  </sort>
</ItemSearchDocument>
```

```
<MetadataFieldDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <name>title_field</name>
  <type>string</type>
  <boost>10.0</boost>
</MetadataFieldDocument>
```

Key-value metadata improvements

Support for *key-value metadata* has been added to:

- Shape tags (#3440)
- Libraries (#3412)
- Task definitions (#3439)

The JavaScript job object has also been updated with additional functions for working with the job data (#3441 and #3437):

- `job.getKeys()`
- `job.containsKey()`
- `job.getDataOrDefault()`

Improvements

- Support for *bulk upload* of files to a placeholder shape (#3434).
- Option to configure which file extensions to *not treat as sidecar files* (#3430).
- Added missing permissions for multipart upload using *temporary S3 credentials* (#3548).
- Support for retrieving *temporary S3 credentials* from the EC2 instance profile (#3490).
- Ability to filter on groups that are roles when *searching for groups* (#3487).
- Support for pagination when *searching for users* (#3273).
- Support for creating *multiple (item) relationships* in a single request (#3452).
- Support for disabling the built in SSH server (#3448).
- Support for specifying destination storage of output file for *transcode jobs* (#3424).
- Support for metadata *dataset models in JSON-LD format* (#3416).
- Proper error message if transcoder discovery settings is not correct (#3483).
- Reduce the possible “Lock wait timeout” when running jobs (#3370).
- SMB 2 support (#3510).

Bug fixes

- Authentication failure when VSA connects over SSH to Vidispine running on Java 1.8u91 or later (#3569).
- Generating a pre-signed Azure URL results in a HTTP URL, expected HTTPS (#3551).
- Only sidecar files with lower case file extensions are picked up as sidecars (#3429).

- Resolution and aspect ratio not marshalled properly with useJackson=false when getting shapes as JSON (#3422).
- OptimisticLockException if JavaScript job problem is checked while job is running (#3565).
- JavaScript notification actions cannot be configured when running on a MS SQL Server database (#3315).
- GET or DELETE of a non-existent metadata lock returns 500 (#3303).
- Possible metadata migration failure due to long running database queries (#3280).
- Component import to shape fails because of duplicate job creation (#3278).
- Don't allow transient metadata fields to be modified (#3277).
- HTTP 500 response when importing a Final Cut XML that has a project element with no children (#3226).
- Missing mediainfo section for shapes imported by placeholder imports (#3206).
- GET storage ignores the status parameter (#3148).
- NPE instead of proper error message if export template fails to evaluate (#2889).
- Incorrect file key logged for API requests (#3568).

Transcoder fixes

- The transcoders StatsD metrics not compliant with collectd (#3192).

Upgrading from 4.15

- Solr: No changes to the documents. Re-indexing is not required.

18.5 Version 4.15

The release notes will tell you what's new in each version, and any changes that you must be aware of when upgrading. For reference, Vidispine ticket numbers are printed as (#1234).

18.5.1 4.15.4

2019-06-28

Bug fixes

- CloudConvert script not evaluated for essence import jobs (#3827).
- File on StorNext archive not shown as ARCHIVED (#3824).
- File on Glacier Deep Archive not shown as ARCHIVED (#3823).
- Can't import to placeholder that was created before upgrade to 4.16.1 (#3693).
- Too large document_text causing too large messages on the index queue (#3669).

Transcoder fixes

- Slow media check of tar file on S3 storage (#3835).

Agent fixes

- Shape deduction by agent fails for file on S3 with special characters (#3563).

18.5.2 4.15.3

2019-03-28

Bug fixes

- Move metadata migration fails if target group exists (#3708).
- Failing to reindex collection if the collection number is high (#3668).
- Incorrect normalization of combining characters for JSON (#3663).
- Filename scripts that fail due to a temporary error causes jobs to fail instead of retry (#3573).
- Transcoding documents using CloudConvert fails (#3533).

Transcoder fixes

- MPEG-TS erroneously detected as MPEG-PS (#3666).
- Closed captions not recognized in MXF (#3620).
- Transcoder hangs on media check of tar file with encrypted MXF (#3559).
- Automatically adjust odd dimensions for H.264 output (#3414).

18.5.3 4.15.2

2019-01-11

Bug fixes

- Slow update of Vidinet job status (#3507).
- db migrate from version 4.14.1 to 4.15 fails on MS SQL Server (#3503).
- Content-Disposition header support missing for schemes: file, smb, azure (#3496).
- Relative date search with Elasticsearch gives HTTP 500 (#3489).
- Shape import to placeholder does not set mimeType on item (#3475).

Transcoder fixes

- Transcode job fails for .tga file during raw import (#3557).
- Transcoder crash if MP3 encoder receives unsupported input, track with more than 2 channels (#3504).
- Transcoder crashes with unsupported TrueHD input (#3497).

18.5.4 4.15.1

2018-11-12

Bug fixes

- Shape metadata not saved when creating a placeholder shape (#3410).
- Transcoder DNS discovery not using hostname in TLS session (#3468).
- Faceted search with transient fields returns an incorrect field name against Solr (#3402).
- Display values for metadata dataset fields are not returned in /API/item/VX-NN?content=metadata (#3234).
- API/import/imf not honouring Vidinet transcoder (#3484).
- All files get the same componentOriginalFilename when importing to placeholder item in bulk (#3411).
- Metadata field originalFilename not set when using raw placeholder import (#3469).
- Sequence render request ignores destinationItem parameter (#2638).
- Deletion lock incorrectly prevent storage cleanup or file removal (#3466).
- Multiple items created if storage exception is thrown when creating entities. (#3404).
- Import failing when using asterisks (*) in filename (#3376).
- URI content parameter ignores the version parameter (#2790).
- File sequence marked as MISSING during long transcode (#3500).
- HTTP 500 Server error for timed out APIInoauth URL (#3485).
- Incorrect exit status from vidispine-admin db-apiinit (#3435).
- Collection creation with attached field group gets progressively slower (#3470).
- CloudConvert job failing if external identifier is used (#3392).
- Wildcard text query with uppercase characters failing with Elasticsearch (#3320).
- NPE when transcoding file on FTP (#3478).
- Placeholder imports to the same item fail with optimistic locking errors on clustered systems (#3477).
- Importing to a full storage creates a never ending job (#3181).
- Exporting using URL with query parameters generates a metadata file without .xml extension (#3480).
- FileNotFoundException in server log when using slave licensing (#3408).
- Metadata subgroups remain in search results after item/collection is deleted (#3196).

Transcoder fixes

- Wrong field order information from ProRes files (#3461).

Agent fixes

- VSA tries to re-connect to VS behind load balancer too aggressively (#3482).

18.5.5 4.15

2018-10-12

AWS Elemental MediaConvert

Transcoding using *AWS Elemental MediaConvert* is now supported via Vidinet (<https://www.vidispine.com/vidinet>) (#3420) for files on S3.

```
<ResourceDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <id>VX-1</id>
  <vidinet>
    <url>vidinet://e1423727-...:..@42a73b4c-8974-4402-a237-17b80bd11350</url>
    <name>My AWS MediaConvert</name>
    <endpoint>https://services.vidinet.net</endpoint>
    <type>ELEMENTAL_MEDIACONVERT</type>
    <state>ONLINE</state>
    <scheme>s3</scheme>
  </vidinet>
</ResourceDocument>
```

To transcode with the new Vidinet resource you need a new shape-tag with the `mediaconvert` tag in it.

```
<TranscodePresetDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <description>
    BROADCAST, XDCAM, MXF, MPEG2 HD422, WAV, 16x9 DAR, 1920x1080p, 23.98 Hz, 50 Mbps,
    ↪ CBR
  </description>
  <name>
    __mediaconvert_Broadcast_Xdcam_Mxf_Mpeg2_Wav_16x9_1920x1080p_24Hz_50Mbps
  </name>
  <audio/>
  <video/>
  <mediaconvert>
    <outputSetting>
      { "Type": "SYSTEM", "Category": "BROADCAST-XDCAM", ... }
    </outputSetting>
  </mediaconvert>
</TranscodePresetDocument>
```

Temporary credentials for S3/Azure

It is now possible to *generate temporary credentials* for S3 (#3389). These credentials are limited to a specific object and expire after a user defined time period.

```
POST /storage/file/VX-56/uri?scheme=s3&write=true
```

```
<URIListDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <uri>s3://ASIA.....@example/image.jpg?sessionToken=...</uri>
</URIListDocument>
```

If you prefer to work with HTTP, then presigned HTTP URLs can be requested instead. This works with both S3 and Azure Blob Storage.

```
POST /storage/file/VX-98/uri?scheme=http&write=true
```

```
<URIListDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <uri>https://example.blob.core.windows.net/image.jpg?sig=...</uri>
</URIListDocument>
```

CORS

Vidispine can be configured to emit *Cross-Origin Resource Sharing (CORS) headers* (#3299). For example, to configure that web application running on example.com may access the API:

```
<CORSConfigurationDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <entry>
    <request/>
    <response>
      <allowOrigin>http://example.com</allowOrigin>
    </response>
  </entry>
</CORSConfigurationDocument>
```

Deletion locks

It's now possible to set deletion locks on collections, items and files, to prevent them from been moved or deleted (#3283).

```
<DeletionLockDocument xmlns="http://xml.vidispine.com/schema/vidispine" >
  <id>VX-1574</id>
  <user>admin</user>
  <expiryTime>2018-10-22T14:27:03.175+02:00</expiryTime>
  <modified>2018-10-12T14:27:03.175+02:00</modified>
  <entityType>Item</entityType>
  <entityId>VX-32140</entityId>
</DeletionLockDocument>
```

Deletion locks can be *inherited* from parent to child entities, and used in *searches*. They also support *notifications*.

New features

- Get storage that would be *used for ingest* (#3390).
- Transcoder discovery via *SRV records* for secure HTTPS transcoder URLs (#3388).

Improvements

- Allow cycles and self-references in metadata hierarchy (#3394).
- Be able to return full component details using `GET /item/(id)/shape/(shape-id)/component/(component-id)` (#3344).
- Configurable *key and trust store* for HTTPS (#3310).
- Support for automatic restore of S3 objects in CONFORM jobs (#3290).
- Include Atempo job id in job metadata (#3263).

Transcoder improvements

- Remove incorrect file and folder name in shape metadata (#3433).

Bug fixes

- Old items/files not removed from Solr after reindex (#3432).
- Placeholder raw import for binary files fail due to NPE (#3349).
- Search index not updated after adding/removing item sequences (`__sequence_size`) (#3346).
- HTTP 401 when fetching components for shape (#3343).
- Jobs gets stuck if defaultTranscoder is not a valid Vidinet resource (#3328).
- Self tests halting on transcode self test failure (#3325).
- HTTP 500 on transcoder resources when schema validation is enabled (#3307).
- HTTP 500 when fetching job and specifying custom timezone (#3225).
- HTTP 404 on import request using shape-tag with comma in name (#3213).
- Can't set user metadata when creating a new user (#2926).
- Incorrect "loc" element for access controls (#2879).
- Not able to set metadata-field values using JSON (#2755).

Upgrading from 4.14

- Solr: No changes to the documents. Re-indexing is not required.
- The type of job that is created for the *placeholder raw import request* has changed from THUMB-NAIL/TRANSCODE to PLACEHOLDER_IMPORT.

18.6 Version 4.14

The release notes will tell you what's new in each version, and any changes that you must be aware of when upgrading. For reference, Vidispine ticket numbers are printed as (#1234).

18.6.1 4.14.6

2019-06-28

Bug fixes

- Can't import to placeholder that was created before upgrade to 4.16.1 (#3693).
- Too large document_text causing too large messages on the index queue (#3669).

Transcoder fixes

- Slow media check of tar file on S3 storage (#3835).

18.6.2 4.14.5

2019-03-28

Bug fixes

- Move metadata migration fails if target group exists (#3708).
- Failing to reindex collection if the collection number is high (#3668).
- Incorrect normalization of combining characters for JSON (#3663).

Transcoder fixes

- MPEG-TS erroneously detected as MPEG-PS (#3666).
- Transcoder hangs on media check of tar file with encrypted MXF (#3559).
- Automatically adjust odd dimensions for H.264 output (#3414).

18.6.3 4.14.4

2019-01-11

Bug fixes

- Content-Disposition header support missing for schemes: file, smb, azure (#3496).
- Relative date search with Elasticsearch gives HTTP 500 (#3489).
- Shape import to placeholder does not set mimeType on item (#3475).

Transcoder fixes

- Transcode job fails for .tga file during raw import (#3557).

18.6.4 4.14.3

2018-11-05

Bug fixes

- Collection creation with attached field group gets progressively slower (#3470).
- CloudConvert job failing if external identifier is used (#3392).
- Wildcard text query with uppercase characters failing with Elasticsearch (#3320).
- NPE when transcoding file on FTP (#3478).
- Placeholder imports to the same item fail with optimistic locking errors on clustered systems (#3477).
- Importing to a full storage creates a never ending job (#3181).
- Exporting using URL with query parameters generates a metadata file without .xml extension (#3480).
- FileNotFoundException in server log when using slave licensing (#3408).
- Metadata subgroups remain in search results after item/collection is deleted (#3196).

Transcoder fixes

- Wrong field order information from ProRes files (#3461).

18.6.5 4.14.2

2018-09-28

Improvements

- Support database purging/export for all supported storages (#3383).

Agent improvements

- Support checking file status on storage after transfer (#3413).
- Exclude \$RECYCLE.BIN from VSA indexed directories (#3321).

Bug fixes

- Newly added job step not being used by new jobs (#3419).
- Job feedback queue growing after running an ARCHIVE job (#3405).
- Vidispine server opening too many UDP sockets when metrics are enabled (#3401).
- Slow deletion of duplicate metadata documents on db migrate (#3400).
- Transcoder may get more jobs than the configured “maxJobs” (#3375).
- Cannot hard delete user with collections or quota rules (#3356).
- Infinispan cache sometimes gets cleared when a node leaves and rejoins the cluster (#3338).

- Modifying multiple metadata entries in one request gives HTTP 400 (#3289).
- File delete job finishing without removing file from storage (permission error) (#3284).
- Out of memory error when migrating username metadata (#3355).
- No thumbnails created on import with transcode disabled (#3353).
- Migration failing on MySQL when multiple databases exists (#3331).
- MySQL migration does not handle primary keys properly on clustered MySQL (#3329).
- Database migration from 4.13 fails on first attempt on MySQL (#3316).
- CloudConvert transcode fails when default transcoder is Vidinet (#3351).
- Media check using incorrect Vidinet transcoder (#3384).
- Thumbnail jobs using Vidinet fail if S3 bucket requires encryption (#3354).
- Conform job against Vidinet fails if there are local-file thumbnail resources (#3374).
- Conform of video only shape fails using Vidinet (#3368).
- Conform job against Vidinet fails if defaultTimeBase not set (#3350).
- External transcoding failing when default transcoder is Vidinet (#3362).
- Document metadata extraction failing for URIs containing query parameters (#3372).
- IMF import goes into WAITING if no local transcoder exists (#3366).
- UTF-16 sidecar file fails to import from S3 (#3380).
- Export templates fail with EvaluatorException when JavaScript sandboxing is enabled (#3364).
- HTTP 500 when fetching VXA jobs using API/vxa/job (#3347).
- HTTP 404 when fetching audit logs when no username is specified (#3371).
- HTTP 400 when adding OTIF plugin on S3 (#3281).
- No username returned from job.getData("username") (#3345).
- NPE when using Aurora via CeriTalk API to analyze files (#3377).
- NPE when creating storage without specifying method URI (#3201).

Transcoder fixes

- MXF muxing does not fail properly fail in case of HTTP PUT errors (#3373).
- Artifacts when seeking in RED transcoded material (#3199).

Agent fixes

- vidispine-agent-admin command doesn't work if the agent is not binded on localhost (#2759).

Command line tool fixes

- KeyError from vidispine-admin if database username/password is not specified (#3209).

Platform

- This release adds support for running Vidispine server with PostgreSQL 9.6 (#3415).

18.6.6 4.14.1

2018-08-06

Improvements

- Add a “job.getUser()” function to the javascript job object (#3336).
- Return databaseSize in bytes not megabytes (#3318).
- If a file is on VSA, pick VSA transcoder even though defaultTranscoder is ‘vidinet’ (#3311).
- Encrypt secret keys in export locations (#3118).
- Encrypt passwords in URIs in the job metadata (#2973).
- Support using “content=external” to fetch collection external ids (#2760).

New agent features

- Be able to configure VSA Job Concurrency in the agent config file (#2848).

Agent improvements

- Be able to set VXA transcoder directAccess setting in the agent configuration file (#3332).
- Add “s3 directAccess” as the default setting in the configuration file (#3333).

Bug fixes

- Fix possible connection issue between Vidispine cluster and VSA using websocket (#3341).
- NPE when trying to validate a vidinet shape without original tag (#3337).
- Fix thumbnail not generated during transcode jobs if thumbnail settings are specified in the shape tag (#3314).
- Fix to only use “CLOSED” or “BEING_READ” files as the source file of thumbnail jobs (#3137).

Agent fixes

- Fix per class log level setting not working in VSA (#3340).
- VSA regression: Possible NPE when connecting to vidispine via SSH (#3334).
- Fix WebSocket file descriptor leak in VSA (#3319).
- VaaS: VSA gets into ‘too many open files’ issue after a while (#3312).
- Ignore broken symbolic links on VSA storages (#3176).

18.6.7 4.14

2018-07-18

User rename

The username of users can now be *changed* (#3232). It is also possible to assign multiple usernames, or *aliases* to users. Aliases can be used to for example allow a user to log in using either the username or the users e-mail address (#3260).

```
PUT /user/stephen@example.com
Content-Type: application/xml

<UserDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <userName>stephen</userName>
  <alias>stephen@example.com</alias>
  <realName>Stephen</realName>
</UserDocument>
```

User access keys and tokens

Support for *user access keys* has been added. Access keys are long-lived tokens that can be used to authenticate a user, that can be used instead of username/password credentials.

```
POST /user/stephen/key/
```

```
<AccessKeyDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <id>VSID2C56CQTA7DWW7DLF</id>
  <secret>PiFHewzGN3tZ/3lSeAkBVX+5Y0w3wvpHTO2iqIaa</secret>
  <status>ACTIVE</status>
  <created>2018-06-01T10:36:13.891+02:00</created>
</AccessKeyDocument>
```

To make it easy to create authentication tokens when using aliases or access keys, a new *create token resource* has been added that does not require a username.

Group files by prefix

Files in file listings with the same prefix, in the same directory, can now be *grouped together* (#3230). This is supported for all types of storages, regardless if they have the notion of directories or not.

For example, given a file hierarchy of \$YEAR/\$MONTH/, we might have:

```
GET /storage/VX-1/file?prefix=true
```

```
<FileDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <file>
    ...
  </file>
  <prefixes>
    <prefix>2017/04/</prefix>
    <prefix>2017/05/</prefix>
    <prefix>2017/11/</prefix>
    <prefix>2018/02/</prefix>
  </prefixes>
</FileDocument>
```

```
</prefixes>
</FileDocument>
```

Checksum validation on transfer

Copy and move jobs have been updated to support *checksum validation* (#3229). If enabled, the checksum of the written file will be computed and verified against that of the source file, and if different, will cause the job to fail.

Elasticsearch 6

Elasticsearch 6.x is now supported (#3081). Due to the [removal of mapping types](https://www.elastic.co/guide/en/elasticsearch/reference/6.0/removal-of-types.html) (https://www.elastic.co/guide/en/elasticsearch/reference/6.0/removal-of-types.html), older Elasticsearch versions (<= 5.5.x) are not supported anymore.

The support of two-way SSL (client authentication) with Elasticsearch (#3231) is added as well. It can be used in setting up [PKI user authentication](https://www.elastic.co/guide/en/x-pack/current/pki-realm.html) (https://www.elastic.co/guide/en/x-pack/current/pki-realm.html).

Multiple audio codecs in presets

Creation of videos with audio tracks/streams with *different audio codecs* is now possible. Use the `audioTrack` element in the transcode preset (#2932). For example, to transcode audio to both AC-3 and AAC:

```
<?xml version="1.0" encoding="UTF-8" standalone="yes"?>
<TranscodePresetDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <format>mov</format>
  <audioTrack>
    <codec>ac3</codec>
    <bitrate>384000</bitrate>
  </audioTrack>
  <audioTrack>
    <codec>aac</codec>
    <bitrate>96000</bitrate>
  </audioTrack>
</TranscodePresetDocument>
```

Thumbnail reindexing

The thumbnail index can now be rebuilt using a *re-index thumbnail request* (#3224). This indexed used to be rebuilt when rebuilding the item index, but must now be rebuild separately. This can improve the item reindex performance, especially if thumbnails are stored on an object storage such as S3 or Azure.

AWS temporary credentials

The AWS credentials been sent to VSA can be configured using *s3CredentialType* (#2931).

EIDR metadata import

EIDR Integration (#2893).

You can now import metadata from the EIDR database. There is a new resource type for accessing EIDR. Synchronization is enabled by setting the EIDR id as metadata on an item. Later on a single item or a library of items can be synchronized.

Vidinet improvements

- Analyze shapes using Vidinet transcoder (#3219).
- Conform using Vidinet transcoder (#3220).
- Support placeholder raw import using Vidinet (#2962).

Agent improvements

- Execute *AAF export jobs* directly on agents (#3143).

Role changes

- Change role requirement for GET API/vxa (#3246).

Improvements

- Add *binary* as a component type for placeholder imports (#3122).
- Support *automatic creation of users* authenticated by custom Shiro realms (#3293).
- Add a *metadatabasehelper* object in the common JavaScript context (#3286).
- Make it possible to configure *S3 transfers to be HTTPS* (#3227).
- Spread transfer load over available VSAs (#3126).
- Allow archive beans to clean up in case of a failed job (#3109).
- Allow archive storages to be used as destinations in storage rules (#3108).
- Add configuration to stop archived files from being used as storage rule transfer sources (#3107).
- Allow archive beans to select source storage for archive jobs (#3106).
- Include item and shape ids in job metadata for transfers started from storage rules (#3127).
- Be able to skip auto-refreshing libraries updates after item metadata changes (#3298).
- Optimize database query for metadatafield retrieval (#3295).
- Performance improvement on group deleting if a group contains many ACLs (#3270).
- Improve IMF jobs so they are compliant with Vidinet (#3258).
- Performance improvements on updating much referenced metadata (#3129).
- Use a single S3 “PUT Object” request for small files (#2956).

New transcoder features

- Enable support for R3D files with multiple video streams (#3297).

Transcoder improvements

- Support for Closed Captions (608 & 708) (#3052).
- Automatic creation of *thumbnails at scene changes* (#3217).

Bug fixes

- Transcoder self test reports failed transcoders as OK (#3291).
- Transcode with destinationItem specified fails against Vidinet (#3279).
- Export jobs fail on systems with only Vidinet transcoders (#3276).
- Auto import jobs fail on systems with only Vidinet transcoders (#3274).
- Transcoder self test fails on systems with only Vidinet transcoders (#3004).
- Shape/essence import goes into WAITING if no Vidispine transcoder exists (#3269).
- Delete Jobs Finishing But Files Not Removed (#3284).
- Media check failing if apiNoauthUri contains amazonaws.com (#3255).
- Not possible to abort Atempo archive jobs (#3121).
- Item delete request with keepShapeTagStorage fails with NPE (#3210).
- Transcode failing when transcode preset contains multiple audio outputs specifying more channels than found in source file (#3178).
- Indexing error if multiple timespans have the same boolean field with different values (#3093).
- Scheduled requests without a body cannot be viewed (#2904).
- Parameter 'state' not optional when getting scheduled requests (#2903).
- JMS notifications fail with NameNotFoundException. (#3214).
- Item list from database becoming slower and slower (#3271).
- Thumbnail proxies are wrong when apiUrl does not end with /API/ (#3262).
- Checksum computed multiple times for the same file (#3259).
- Missing subtitle text from imported SCC file (#3242).
- Incorrect output length when rendering NTSC sequence (#3240).
- Database migration fails on name column change against MySQL (#3235).
- Fix incorrect role checking on metadata dataset resources (#3198).
- Shiro plugin cannot read form parameters from servlet request (#3195).
- Fix transcode failure if one of the transcode presets has "noVideo=true" and "noAudio=true" (#2988).
- Error resuming file listing if the path contains a space (#2987).
- Agent name not set properly by vidispine-admin vxa-enable (#2399).

Agent fixes

- VSA reports shares state incorrectly (#2980).

Transcoder fixes

- Thumbnail job fails on file with pixelFormat yuyv422 (#3257).

Upgrading from 4.13

- Solr: No changes to the documents. Re-indexing is not required.
- Elasticsearch: Supported versions have been changed to 5.6.x, 6.0.x, 6.1.x, or 6.2.x.
- The item re-index process will no longer also rebuild the thumbnail index that is maintained internally by VS. The thumbnail index can now instead be rebuilt separately using a *re-index thumbnail request*. To restore the old behaviour, set *disableThumbnailReindexing* to *false*.
- A number of new job steps have been added to support checksum validation on transfer.
 - COPY_FILE/MOVE_FILE, step 90 - Waiting for source file hash.
 - COPY_FILE/MOVE_FILE, step 92 - Retrieving source file hash.
 - COPY_FILE/MOVE_FILE, step 140 - Waiting for destination file hash.
 - COPY_FILE/MOVE_FILE, step 150 - Verifying file hashes.
- Previous versions had a bug where collections containing libraries did not always have recursive ACL's properly applied items in those libraries. This is fixed for newly created ACL's, but any old ones with this problem will need to be *re-indexed* with:

```
PUT /reindex/acl
```

- A role have been added for reading Vidispine Agents: `_vxa_read`. To make sure admin users receives the role properly, please run APIinit:

```
POST /APIinit
```

18.7 Version 4.13

The release notes will tell you what's new in each version, and any changes that you must be aware of when upgrading. For reference, Vidispine ticket numbers are printed as (#1234).

18.7.1 4.13.4

2019-03-28

Bug fixes

- Move metadata migration fails if target group exists (#3708).
- Failing to reindex collection if the collection number is high (#3668).
- Incorrect normalization of combining characters for JSON (#3663).
- Infinispan cache sometimes gets cleared when a node leaves and rejoins the cluster (#3338).

Transcoder fixes

- Transcoder hangs on media check of tar file with encrypted MXF (#3559).
- Automatically adjust odd dimensions for H.264 output (#3414).

18.7.2 4.13.3

2018-11-05

Bug fixes

- Placeholder imports to the same item fail with optimistic locking errors on clustered systems (#3477).
- Importing to a full storage creates a never ending job (#3181).
- Exporting using URL with query parameters generates a metadata file without .xml extension (#3480).
- FileNotFoundException in server log when using slave licensing (#3408).
- Metadata subgroups remain in search results after item/collection is deleted (#3196).

Transcoder fixes

- Wrong field order information from ProRes files (#3461).

18.7.3 4.13.2

2018-09-28

Agent improvements

- Support checking file status on storage after transfer (#3413).
- Exclude \$RECYCLE.BIN from VSA indexed directories (#3321).

Bug fixes

- Vidispine server opening too many UDP sockets when metrics are enabled (#3401).
- Transcoder may get more jobs than the configured “maxJobs” (#3375).
- File delete job finishing without removing file from storage (permission error) (#3284).
- NPE when creating storage without specifying method URI (#3201).

Transcoder fixes

- Artifacts when seeking in RED transcoded material (#3199).

18.7.4 4.13.1

2018-07-06

Improvements

- Be able to skip auto-refreshing libraries updates after item metadata changes (#3298).
- Optimize database query for metadatafield retrieval (#3295).
- Support automatic creation of users authenticated by custom Shiro realms (#3293).
- Performance improvement on group deleting if a group contains many ACLs (#3270).
- Improve IMF jobs so they are compliant with Vidinet (#3258).
- Performance improvements on updating much referenced metadata (#3129).
- Use a single S3 “PUT Object” request for small files (#2956).

New transcoder features

- Enable support for R3D files with multiple video streams (#3297).

Bug fixes

- Item list from database becoming slower and slower (#3271).
- Thumbnail proxies are wrong when apiurl does not end with /API/ (#3262).
- Checksum computed multiple times for the same file (#3259).
- Missing subtitle text from imported SCC file (#3242).
- Incorrect output length when rendering NTSC sequence (#3240).
- Database migration fails on name column change against MySQL (#3235).
- Fix incorrect role checking on metadata dataset resources (#3198).
- Shiro plugin cannot read form parameters from servlet request (#3195).
- Fix transcode failure if one of the transcode presets has “noVideo=true” and “noAudio=true” (#2988).
- Error resuming file listing if the path contains a space (#2987).
- Agent name not set properly by vidispine-admin vxa-enable (#2399).

Transcoder fixes

- Thumbnail job fails on file with pixelFormat yuyv422 (#3257).

18.7.5 4.13

2018-04-24

Microsoft SQL Server 2017

Microsoft SQL Server 2017 is now supported. Make sure to use the correct *charset*, *collation* and *options* when using SQL Server (#3091).

Codec improvements

- DNxHR encoding (#3086).
- DNxHD shape tag and license (#2886). For more information about DNxH* encoding, please see *DNxHD*.
- Update Apple ProRes libraries to latest version in order to get support for ProRes4444XQ (#3103), see *ProRes*.

Thumbnailing using Vidinet

Vidinet transcoders can now be used to create *thumbnails*. Just specify the Vidinet resource when starting the thumbnail job to use Vidinet (#3046). Note that this only works when thumbnails are stored on S3.

```
POST /item/VX-45/thumbnail?createThumbnails=true&resourceId=VX-2
```

Improved field validation

Metadata fields can now be restricted to a certain set of values from a specific *dataset*. Multiple fields that are restricted to the same dataset can also be validated together (#3153). Retrieve all *allowed values* for a field, or return the allowed values given that another field has a specific value:

```
GET /metadata-field/test_city/allowed-values?constraint=test_state=New%20York
```

```
<ConstraintValueListDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <value id="city:ny">New York City</value>
</ConstraintValueListDocument>
```

Command-line improvements

A retry flag has been added to the `elasticsearch init`, `db init` and `db migrate` commands. This removes the need for checking if the database/search index is online and reachable during automation (#3085).

```
$ vidispine db init --retry
$ vidispine db migrate --retry
```

The `elasticsearch` command has also been extended with a `check` command, similar to the `db check` command, that can be used to check if Elasticsearch needs to be initialized or not (#3016).

```
$ vidispine elasticsearch check
```

Server configuration file improvements

The Solr endpoint can now be specified in the *server configuration file* instead of using the `solrPath` configuration property (#3072).

```
search:
  backend: solr
  url: http://solr.example.com:8983/solr/
```

Improvements

- Add support for specifying *KMS key* (#3033).
- Key-value parameter support for *EJB notifications* (#3167).
- VSA cannot connect to VS due to too few SSH threads (#3168).
- Use database instead of search engine for batch listing (#3166).
- Display name of Vidinet service from GET API/resource/vidinet (#2989).
- Storage group query parameter to limit API results (#2952).

Bug fixes

- Slow API/version if resources are unavailable (#2871).
- File move operation from SMB source storage doesn't delete source file (#3133).
- Invalid decoding/unescaping of smb:// credentials (#3094).
- Audio waveform start query parameter is broken (#3088).
- Storage rescan doesn't work behind a reverse proxy (#3087).
- Incorrect return code from Elasticsearch init command (#3051).
- Long restrictions on metadata fields don't work (#3083).
- Metadata locks are not locking the metadata (#3013).
- Inheritance should not be ignored on MetadataFieldGroups (#2992).
- EJB notifications don't work - beans are not found (#3090).

Transcoder fixes

- Fix color issue of thumbnails/posters for certain CMYK PDFs (#3188).
- Black frames bulky metadata is off-by-one after analyze (#3169).

Agent fixes

- Per package log setting doesn't work in VSA (#2763).

Platform

- This release adds support for running Vidispine server with Microsoft SQL Server 2017 (#3091).
- The PostgreSQL JDBC driver that Vidispine server is using has been updated to the latest version (#2995).

Upgrading from 4.12

- Solr: No changes to the documents. Re-indexing is not required.

18.8 Version 4.12

The release notes will tell you what's new in each version, and any changes that you must be aware of when upgrading. For reference, Vidispine ticket numbers are printed as (#1234).

18.8.1 4.12.5

2019-03-28

Bug fixes

- Move metadata migration fails if target group exists (#3708).
- Incorrect normalization of combining characters for JSON (#3663).
- Infinispan cache sometimes gets cleared when a node leaves and rejoins the cluster (#3338).

Transcoder fixes

- Transcoder hangs on media check of tar file with encrypted MXF (#3559).
- Automatically adjust odd dimensions for H.264 output (#3414).

18.8.2 4.12.4

2018-11-05

Bug fixes

- FileNotFoundException in server log when using slave licensing (#3408).
- Metadata subgroups remain in search results after item/collection is deleted (#3196).

18.8.3 4.12.3

2018-09-28

Bug fixes

- Vidispine server opening too many UDP sockets when metrics are enabled (#3401).
- Transcoder may get more jobs than the configured "maxJobs" (#3375).
- File delete job finishing without removing file from storage (permission error) (#3284).
- NPE when creating storage without specifying method URI (#3201).

18.8.4 4.12.2

2018-07-06

Improvements

- Be able to skip auto-refreshing libraries updates after item metadata changes (#3298).
- Performance improvement on group deleting if a group contains many ACLs (#3270).
- Use a single S3 “PUT Object” request for small files (#2956).
- Optimize database query for metadatafield retrieval (#3295).
- Performance improvements on updating much referenced metadata (#3129).

Bug fixes

- Thumbnail proxies are wrong when apiurl does not end with /API/ (#3262).
- Missing subtitle text from imported SCC file (#3242).
- Incorrect output length when rendering NTSC sequence (#3240).
- Shiro plugin cannot read form parameters from servlet request (#3195).
- Fix transcode failure if one of the transcode presets has “noVideo=true” and “noAudio=true” (#2988).
- Agent name not set properly by vidispine-admin vxa-enable (#2399).

18.8.5 4.12.1

2018-04-20

Improvements

- Only send transcode cost estimates to Vidinet transcodes that support the source URI scheme (#2969).

Transcoder improvements

- Enable further codec optimizations (#3079).

Bug fixes

- Relation already exists error when running db migrate against latest PostgreSQL (#3084).
- Better thumbnail handling for videos with varying framerate (#3076).
- Always use HTTPS for S3 pre-signed urls if S3 Server-Side Encryption is set to “aws:kms” (#3015).
- Fix APInit schema update failure if Elasticsearch index already exists (#2996).
- Fix import cost estimate does not support all URI schemes reported by Vidinet transcoders (#2974).

Transcoder fixes

- JPG CMYK colorshift when converting to PNG (#2979).

18.8.6 4.12

2017-12-22

Vidinet

Transcode and shape deduction on import can now be performed using a Vidinet transcoder. This is supported for *normal imports* as well as for *auto-imports*. Image transcodes are now also supported, see the Vidinet service documentation for more detail (#2955).

IMF support

The managing of IMF packages (IMP) has been improved.

- *Import* of assetmaps with multiple CPLs are supported, and will generate multiple shapes.
- Essence files are automatically shared between shapes, by matching UUID.
- Import of Partial IMPs are supported, and matched with existing content.
- *Export* of IMP now created up-to-date assetmaps, CPLs, PKLs.
- Upon export, subsets of virtual tracks can be selected, and *single CPLs* can be picked.

Transcoder job limit

The number of jobs that may use a specific transcoder at the same time can now be *controlled on a per transcoder basis* (#2826). For example:

```
<ResourceDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <id>VX-7</id>
  <transcoder>
    <url>http://transcoder.example.com:8888/</url>
    <maxJob>5</maxJob>
  </transcoder>
</ResourceDocument>
```

Atempo Digital Archive

Files can now be archived and retrieved using *Atempo Digital Archive* (#2777).

Metrics

Additional *metrics* exposing the online/offline status of storages, agents and resources has been added (#2806), as well as a metrics exposing the size of the cluster when running a clustered deployment (#2784).

Shape/component selection

- It is now possible to enter shape id when importing to placeholder items with multiple placeholder shapes. This `shapeId` query parameter has been added to the *placeholder import*, *request body import*, *passkey*, and *adopt request*.

- In order to allow for concurrent uploads to components of the same type of a shape, it is now possible to specify index (1-based) of the component. The `index` query parameter has been added to the *request body import* and *adopt request*.
- When exporting item/library/collection, it is now possible to specify which tracks (components) to export, e.g., if you only want to export audio tracks, see *Exports*.
- It is now possible to *delete a certain component* from a shape.

Component filenames

- The original filename of a component is now available in *file name scripts*.
- The component filename can also be enabled when *exporting a single shape*.

Essence version management

- Multi-file shapes can now be *copied to newer essence versions*, for further editing.
- Essence versions can be returned based on shape tag by setting `version=latest-per-shapetag`, see *Get information*.

Transcoder improvements

- Speed up burn-in-timecode filter (#2928).
- Prefix all temporary files with `transcoder-{pid}-` (#2976).
- MainConcept codec is now used to decode JPEG2000 (J2K).

Other improvements

- Support for single part upload via request body (#2864).
- Resumable file listing for VSA and WebDAV storages (#2971).
- Improve file listing speed of WebDAV storages (#2970).
- Support for *setting headers* in the JavaScript http object (#2920).
- Allow password change using `vidispine-admin` from scripts (#2947).
- Support restoring S3 objects in EXPORT jobs (#2873).
- Differentiate 404 error on non-existing external id namespace (#2860).
- Be able to prevent VSA from accessing other VSA's share via vidispine server proxy (#2821).
- Add file size to checksum log message (#2789).
- Make file size available for files immediately after transfer has completed (#2787).
- Expose *job information* to filename script (#2723).

Bug fixes

- `UnsupportedOperationException` when storing thumbnails on Azure (#2975).
- Vidispine cannot read blobs from Azure when blob type is “Append” (#2949).
- `API/storage/{id}/rescan` doesn’t work on systems with port forwarding (#2944).
- `API/init` overwrites customer set `solrPath` (#2935).
- `vidispine-admin` tool doesn’t understand environment variables in `server.yaml` (#2881).
- HTTP 500 when deleting a collection or library with multiple storage rules (#2875).
- Storage methods with custom type not ignored by Vidispine (#2813).
- Unresolveable hostname in metrics configuration causes HTTP 500 from API requests (#2688).
- Import of UTF-16 encoded text file fails when file metadata parsing is enabled (#2530).
- Documentation missing for request/response representations in WADL (#2876).

Platform

The `Apache Shiro` (<https://shiro.apache.org/>) version *bundled with Vidispine* has been updated to version 1.4.0 (#2884).

Upgrading from 4.11

- Solr: No changes to the documents. Re-indexing is not required.
- All media shape deductions from jobs are now performed using asynchronous job steps. A number of new job steps have been added to support this.
 - `TRANSCODE`, step 400 - Finalizing media check.
 - `CONFORM`, step 400 - Finalizing media check.
 - `AUTO_IMPORT`, step 550 - Finalizing media check.
 - `AUTO_IMPORT`, step 1100 - Finalizing media check.
 - `ESSENCE_VERSION`, step 800 - Finalizing media check.
 - `TIMELINE`, step 400 - Creating the entities.
- To support removal of old essence files, a new job step has been added:
 - `SHAPE_IMPORT`, step 1000 - Remove old essence files.
- Make sure to run `API/init` when upgrading to create the above mentioned job steps. Any existing custom job steps using these step numbers will be overwritten, so make sure to adjust the step number of any custom job step definitions using these numbers and recreate the custom steps.

18.9 Version 4.11

The release notes will tell you what’s new in each version, and any changes that you must be aware of when upgrading. For reference, Vidispine ticket numbers are printed as (#1234).

18.9.1 4.11.3

2018-07-06

Improvements

- Performance improvements on updating much referenced metadata (#3129).

Bug fixes

- Missing subtitle text from imported SCC file (#3242).
- Incorrect output length when rendering NTSC sequence (#3240).
- Fix transcode failure if one of the transcode presets has “noVideo=true” and “noAudio=true” (#2988).

18.9.2 4.11.2

2018-04-20

Transcoder improvements

- Enable further codec optimizations (#3079).

Bug fixes

- Relation already exists error when running db migrate against latest PostgreSQL (#3084).
- Better thumbnail handling for videos with varying framerate (#3076).
- Fix NPE when talking to the CeriTalk API in Aurora (#3040).

Transcoder fixes

- JPG CMYK colorshift when converting to PNG (#2979).

18.9.3 4.11.1

2017-12-22

Transcoder improvements

- Improved handling of MXF files with Open Partitions (#2951).
- Enable higher AAC bitrates (#2929).
- Support image overlays also for conform jobs (#2910).
- Improved memory handling in transcoder (less heap usage) (#2872).

Bug fixes

- Silent audio channels when rendering item with discrete audio components (#2967).
- Demuxer settings from preset not used for conform jobs (#2934).
- Frame rate and audio layout different across conform and transcode jobs (#2923).
- Reindexing collections stops certain item searches from working (#2917).
- StackOverflowError when changing access on collection with many grandchild-collections (#2909).
- Burn-in timecodes not working with conform jobs (#2883).

Transcoder fixes

- DNx Transcodes not working (#2937).
- Transcode progress missing from conform jobs (#2905).
- Bug in H.264 generation at high bitrates (#2894).
- Files encoded with Vidispine cause a crash in Avid MediaComposer (#2888).
- Transcoder media time is incorrect for AES3 audio (#2885).
- Incorrect resolution of Canon Raw file (CR2) (#2877).

18.9.4 4.11

2017-10-13

Vidinet

This release brings support for using services from our new media services platform [Vidinet](https://www.vidispine.com/vidinet) (<https://www.vidispine.com/vidinet>). Both *transcode* and *quality control* services are supported, and you can of course request *cost estimates* before using the services (#2781).

```
GET /resource/vidinet
```

```
<ResourceListDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <resource>
    <id>VX-1024</id>
    <vidinet>
      <url>vidinet://key:secret@7a104fb2-e520-430d-b6e2-b8acc9cbc588</url>
      <endpoint>https://services.vidinet.net</endpoint>
      <type>TRANSCODER</type>
      <state>ONLINE</state>
    </vidinet>
  </resource>
</ResourceListDocument>
```

Private key authentication for SFTP

Authentication using private keys is now supported for SFTP. This is supported for both storages and transfers (#2799).

Documentation in WADL

The application WADL has been updated to include documentation for methods and query and matrix parameters (#2832).

S3 part size selection

The S3 upload *part size* is now automatically increased to better handle uploads of large files. Files up to 3.5 TB are now supported without any further configuration (#2846).

Improvements

- Include external ids in *transient metadata* (#2855).
- Add support for selecting transcoder resource on *transcode* (#2801).
- Add support for selecting transcoder resource on *shape analysis* (#2828).
- Enable multiple VSAs computing hashes *concurrently* (#2778).
- Be able to *modify a notification* (#2193).

Bug fixes

- Media check of file on SFTP storage never finishing (#2822).
- Cannot export file to directory that does not exist using SFTP (#2823).
- Missing role checks for item resource (#2815).
- Slow library item metadata update jobs (#2603).
- Add hashing algorithm in the file hash notification (#2841).
- SCC and srt sidecar files should not be auto-imported by default (#2833).
- Indexing halting when adding a date field with *index=extend* (#2788).
- Not able to update group by UUID if there are multiple groups with the same name (#2761).
- Search for groups not containing field return internal server error (#2652).
- NPE on import if all storages are full (#2861).
- Empty timestamps returned when using path projections (#2858).

Transcoder fixes

- Transcode failing with *numberOfPackets* error on auto-import if fast start is enabled (#2798).

Upgrading from 4.10

- Solr: No changes to the documents. Re-indexing is not required.

18.10 Version 4.10

The release notes will tell you what's new in each version, and any changes that you must be aware of when upgrading. For reference, Vidispine ticket numbers are printed as (#1234).

18.10.1 4.10.4

2018-07-06

Improvements

- Performance improvements on updating much referenced metadata (#3129).

Bug fixes

- Missing subtitle text from imported SCC file (#3242).
- Incorrect output length when rendering NTSC sequence (#3240).
- Fix transcode failure if one of the transcode presets has “noVideo=true” and “noAudio=true” (#2988).

18.10.2 4.10.3

2018-04-20

Transcoder improvements

- Enable further codec optimizations (#3079).

Bug fixes

- Relation already exists error when running db migrate against latest PostgreSQL (#3084).
- Fix NPE when talking to the CeriTalk API in Aurora (#3040).

Transcoder fixes

- JPG CMYK colorshift when converting to PNG (#2979).

18.10.3 4.10.2

2017-12-22

Transcoder improvements

- Improved handling of MXF files with Open Partitions (#2951).
- Enable higher AAC bitrates (#2929).
- Support image overlays also for conform jobs (#2910).
- Improved memory handling in transcoder (less heap usage) (#2872).

Bug fixes

- Silent audio channels when rendering item with discrete audio components (#2967).
- Demuxer settings from preset not used for conform jobs (#2934).
- Frame rate and audio layout different across conform and transcode jobs (#2923).
- Reindexing collections stops certain item searches from working (#2917).
- StackOverflowError when changing access on collection with many grandchild-collections (#2909).
- Burn-in timecodes not working with conform jobs (#2883).

Transcoder fixes

- Transcode progress missing from conform jobs (#2905).
- Bug in H.264 generation at high bitrates (#2894).
- Incorrect resolution of Canon Raw file (CR2) (#2877).

18.10.4 4.10.1

2017-10-06

Improvements

- Save text and outline color to item metadata on STL sidecar import (#2785).

Transcoder improvements

- Support new H.264 FourCCs (#2819).

Bug fixes

- Infinispan stale locks problem (#2775).
- Possible Solr query errors on autocomplete on string-exact fields (#2865).
- Imports using AWS presigned URLs fail with HTTP 403 (#2863).
- Incorrect container component after auto-import of growing file (#2859).
- Failed to delete an item if its bulky metadata contain null values (#2857).
- Raw import with “ids” parameter fails to set external id (#2847).

- Incorrect data in file, storage and metadata notification (#2838).
- Possible failing conform job if the original file is lost (#2831).
- Incorrect result on wildcard search for string-exact if the value contains a space (#2796).
- HTTP 500 when searching for string-exact field with text containing AND/OR (#2793).
- Auto-completion not case insensitive for string-exact fields (#2780).

Transcoder fixes

- Avoid overflow in aspect ratio calculation (#2869).
- NPE (SIGSEGV) in Transcoder when reading MXF files (#2868).
- Start timecode is not set with correct in NLEJob (#2867).
- Signed integer problem with startTimecode (#2862).
- Exception occurred while opening wmv muxer for.... (#2850).

Agent fixes

- File transfer job in agent not using settings from agent conf (#2866).
- VSA fails to return transcoder status for job that is finishing (#2807).

18.10.5 4.10

2017-07-28

Elasticsearch

- *Elasticsearch support* (#2628). Elasticsearch can be used instead of Solr for *searching*. Certain *restrictions* apply.

Image sequence generation

- Image sequence output (#2726). The transcoder generates image sequences for shape tag with transcoder preset codec tiff, png, or dpx, e.g.:

```
<TranscodePresetDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <format>tiff</format>
  <audio>
    <noAudio>true</noAudio>
  </audio>
  <video>
    <codec>tiff</codec>
  </video>
  <sequenceOutput/>
</TranscodePresetDocument>
```

Universal storage method

Vidispine is able to manage files that are not under a common root using a *universal storage*.

And it's also possible to import files to a universal storage *without firstly copy it to another storage* (#2719).

Improvements

- Allow owner of an item/collection to be changed (#2706).
- Support removal of values by actual value (#2635).
- Add option when updating metadata group so that resulting group exactly matches input XML (#2747).
- Configurable transcoder DNS cache TTLs (#2712).
- Filter jobs by completion date (#2702).
- S3 lifecycled bucket as ARCHIVE storage (#2697).
- Expose the source storage for COPY_FILE jobs (sourceStorageId) (#2691).

Transcoder improvements

- Faster MXF parsing in transcoder (#2753).

Bug fixes

- Slow disk reads causing optimistic locking errors on import (#2756).
- JDBC connection not returned to pool on thread interrupt/XA exception (#2754).
- Storage method with type "AUTO" not selected when requesting an auto method (#2750).
- Excessive logging for empty storages (#2730).
- Excessive DNS logging when DNS entry missing (#2727).
- NPE from auto-import job after deleting source storage (#2718).
- Transcoder transfer only performed for local file transfers (#2715).
- File size missing in job progress for copy jobs performed by agent (#2714).
- Cannot copy files between S3 buckets in different regions (#2703).
- GET /job/{id} accept:text/plain gives 500 Internal Server Error (#2700).
- GET/DELETE /resource/{resourcetype}/{id} should validate that id is of type resourcetype (#2696).
- Aborted jobs not purged from the database (#2692).
- POST /storage/abc/rescan gives Internal Server Error (#2681).
- No notification sent for file delete on readonly storage (#2675).
- Create storage where method metadata key is missing gives 503 Service Unavailable (#2655).
- POST /item/{id1}/relation/{id2} without direction gives NullPointerException (#2643).

Transcoder fixes

- Transcoder dies when creating overlay on video (#2667).
- Job fails on certain sequence renderings (#2779).

Agent fixes

- Agent proxy URIs lost when jobs are accepted at the same time (#2717).
- No progress for transfer jobs on agent (#2713).
- Agent does not support named transcoder licenses (#2711).

Upgrading from 4.9

- Solr: No changes to the documents. Re-indexing is not required.

18.11 Version 4.9

The release notes will tell you what's new in each version, and any changes that you must be aware of when upgrading. For reference, Vidispine ticket numbers are printed as (#1234).

18.11.1 4.9.3

2017-12-22

Bug fixes

- Silent audio channels when rendering item with discrete audio components (#2967).
- Frame rate and audio layout different across conform and transcode jobs (#2923).

Transcoder fixes

- Incorrect resolution of Canon Raw file (CR2) (#2877).

18.11.2 4.9.2

2017-10-06

Bug fixes

- JDBC connection not returned to pool on thread interrupt/XA exception (#2754).
- Infinispan stale locks problem (#2775).
- Possible Solr query errors on autocomplete on string-exact fields (#2865).
- Imports using AWS presigned URLs fail with HTTP 403 (#2863).

- Incorrect container component after auto-import of growing file (#2859).
- Failed to delete an item if its bulky metadata contain null values (#2857).
- Incorrect data in file, storage and metadata notification (#2838).
- Incorrect result on wildcard search for string-exact if the value contains a space (#2796).
- HTTP 500 when searching for string-exact field with text containing AND/OR (#2793).
- Auto-completion not case insensitive for string-exact fields (#2780).

Transcoder fixes

- Signed integer problem with startTimecode (#2862).

18.11.3 4.9.1

2017-07-12

Improvements

- Allow eu-west-2 to be specified as region for S3 (#2772).

Bug fixes

- Content-Range header error when uploading file larger than 2GB to Google Cloud Storage (#2709).
- Waveform not created for audio-only file (#2751).
- License check failing with SocketException (ioctl SIOCGLIFFLAGS failed) (#2770).
- Packing list not properly detected from IMF (#2771).
- Sequence render job failing due to incorrect media type error (#2774).
- Cannot create storage with multiple image sequence definitions (#2765).
- Center aligned subtitles come out as left aligned after STL sidecar import (#2693).
- Incorrect mime type of .ai (Adobe Illustrator) file (#2588).

Transcoder fixes

- TTML import via MXF broken (#2769).
- Corrupt mp4 output created (#2768).
- Time code does not reflect NTSC frame rate (#2767).
- Interlacing setting is not respected in NLEJob (#2766).

Agent fixes

- Conform job URLs not proxied by agent (#2773).
- Overlay address not proxied by agent (#2687).

18.11.4 4.9

2017-04-03

Service configuration

It is now possible to configure if *Vidispine services* should be *allowed to run* on a specific server instance (#2671). For example, in a clustered setup, some instances could be configured to only serve API requests by disabling all background services:

```
services:
  disabled: all
```

Glacier improvements

Files on S3 buckets that have been archived on Glacier using lifecycle rules will now automatically be restored when copied between storages (#2597).

It is now also possible to configure the S3 retrieval policy for faster restores from Glacier (#2586). This can be configured *per job* or *per storage* using the `retrievalTier` parameter.

OpenAPI 2 compatibility

The API can now be configured to accept query parameters where matrix parameters are expected (#2684). This can make it easier to use Vidispine with clients/specifications that do not support matrix parameters, such as OpenAPI 2.

```
api:
  openApi2Compatible: true
```

Improvements

- Allow *deletion of individual jobs* (#2579).
- Allow *auto-import rules to be disabled* (#2553).
- Ability to *exclude self-tests* by name (#2540).
- Allow multiple URIs to be specified in an export location (#2679).
- Be able to *delete job metadata by key* from JavaScript (#2609).
- Support partial file restore with DIVA (#2537).

Transcoder improvements

- Increase read buffer length for improved S3 performance (#2683).
- Quicker shape deduction for streams without timecode (#2682).
- Support all Avid DNxHD and DNxHR profiles when decoding (#2686).
- Handling of different KAG values in MXF (#2685).

Agent improvements

- Make log rotation optional in agent (#2626).
- Add BlackPearl “physical placement” info to file metadata (#2607).

Bug fixes

- Agent registration failing when schema validation is enabled (#2678).
- Agent registration failing on system with DNS transcoder directory (#2665).
- Transcoder metrics not exposed for DNS discovered transcoders (#2657).
- Transcode in raw import waiting 5 seconds for preceding steps to finish (#2656).
- Cannot use segment files with URI containing query parameters (#2651).
- Transcoder directAccess not applied to DNS discovered transcoders (#2647).
- Move to BlackPearl deletes source file too quickly (#2615).
- Self tests fail with HTTP 500 when schema validation is enabled (#2612).
- NPE when indexing item with empty thumbnail database on S3 (#2605).
- Query parameter “id” in GET storage/file does not work with multiple ids (#2583).
- Missing role check for PUT API/storage/file/{id}/abandon (#2556).
- Rollback not performed if validation fails when creating a storage (#2550).
- Authentication token not invalidated after user password change (#2542).
- Authentication token not invalidated when user is disabled (#2541).
- Glacier archive job fails with “Invalid Content-Range” error (#2504).
- Reject S3 buckets with names that are not valid hostnames (#2416).

Transcoder fixes

- Transcode of PSD failing with CompressionNotSupported (#2601).

Agent fixes

- Agent fails to start if default port is in use (#2680).
- All jobs returned from agent when fetching running transcoder jobs only (#2658).
- Slow media checks when using agent as a transcoder proxy (#2654).
- Agent not deleting temp files when using segment files (#2653).
- Incorrect proxying of URIs containing query parameters (#2650).

Removed in 4.9

Support for Ubuntu 12.04 has been discontinued.

Upgrading from 4.8

- Solr: No changes to the documents. Re-indexing is not required.
- Support for Ubuntu 12.04 has been discontinued.

18.12 Version 4.8

The release notes will tell you what's new in each version, and any changes that you must be aware of when upgrading. For reference, Vidispine ticket numbers are printed as (#1234).

18.12.1 4.8.3

2017-10-06

Bug fixes

- JDBC connection not returned to pool on thread interrupt/XA exception (#2754).
- Infinispan stale locks problem (#2775).
- Imports using AWS presigned URLs fail with HTTP 403 (#2863).
- Incorrect container component after auto-import of growing file (#2859).
- Failed to delete an item if its bulky metadata contain null values (#2857).
- Incorrect data in file, storage and metadata notification (#2838).
- Incorrect result on wildcard search for string-exact if the value contains a space (#2796).
- HTTP 500 when searching for string-exact field with text containing AND/OR (#2793).
- Auto-completion not case insensitive for string-exact fields (#2780).

18.12.2 4.8.2

2017-07-12

Bug fixes

- License check failing with SocketException (ioctl SIOCGLIFFLAGS failed) (#2770).
- Center aligned subtitles come out as left aligned after STL sidecar import (#2693).
- Incorrect mime type of .ai (Adobe Illustrator) file (#2588).

Transcoder fixes

- Corrupt mp4 output created (#2768).
- Time code does not reflect NTSC frame rate (#2767).
- Interlacing setting is not respected in NLEJob (#2766).

Agent fixes

- Overlay address not proxied by agent (#2687).
- All jobs returned from agent when fetching running transcoder jobs only (#2658).

18.12.3 4.8.1

2017-03-31

Bug fixes

- Thumbnails not created for .pcd files (#2617).
- Thumbnails not working for .eps files (#2596).
- Transfers from vxa:// uri to file:// does not work (NPE) (#2616).
- Object on tape-only not restored properly from BlackPearl 3.x (#2670).
- PUT or POST from JavaScript fails if no input is specified (#2660).
- Incorrect noauth-URL returned from API/poster (#2666).

Transcoder fixes

- Transcode using partial file never finishes (#2571).
- Transcoder crashes when using burnTimecode=true (#2642).
- Transcoder crash on converting MP3 to JPEG (!) (#2625).
- Transcoder crash on JPEG input (#2624).
- Incorrect H264 level when using CBR (#2674).
- Binary component not created for .srt files (#2661).
- Transcoder does not recognize <setting><key>level</key> (#2646).
- Duration analysis failing on audio-only MOV files (#2611).
- Transcoder fails to calculate PTS to DTS ratio (I/O error2 - 22) (#2636).
- Transcoder accessing files in parent folder (#2608).

Agent fixes

- Agent not finding files with brackets, %20 and %21 in file name (#2610).

18.12.4 4.8

2017-01-12

8K RED support

The transcoder has been updated to support 8K RED files (#2581).

Amazon S3 Transfer Acceleration

Improve transfer speeds using [Amazon S3 Transfer Acceleration](http://docs.aws.amazon.com/AmazonS3/latest/dev/transfer-acceleration.html) (<http://docs.aws.amazon.com/AmazonS3/latest/dev/transfer-acceleration.html>) (#2308). Enable using the *acceleration parameter*.

Aspera FASP storage transfers

Transfers between storages can now be made using *Aspera FASP* (#1508).

Improvements

- Be able to specify the target storage for essence imports (#2529).
- Delete multiple *items* and *collections* in a single request (#2517).
- Allow *duplicate item relations* to be rejected (#2516).
- Allow *duplicate access control entries* to be rejected (#2227).
- Support *exclusive range queries* (#2515).
- Support *document metadata notifications* (#2493).
- Be able to skip sidecar import during auto import (#2444).
- Do not re-index an item if adding/removing it to a collection is a no-op (#2430).
- Set collection contents and metadata *on create* (#2297).
- Configurable Glacier archive description (#2063). See *glacierArchiveDescription*.

Bug fixes

- Update BlackPearl SDK to 3.2.8 (#2578).
- Incorrect job problem for import to specific storage (#2555).
- GET API/document does not show first document (#2554).
- Thumbnail jobs failing for image sequences (#2547).
- Transaction timeout when letting agent compute checksums (#2546).
- Hits not shown for API/document (#2535).
- Using “p=metadata.timespan.group.uuid” when searching for items can cause an NPE (#2524).
- Cannot fail waiting job from JavaScript (#2456).
- Cannot get item field-group using external id (#2455).
- Missing role check for DELETE API/storage/file/{id}/entity (#2454).
- Incorrect media type for image sequences (#2428).
- Shape import creates file on wrong storage (#2231).
- Cannot start placeholder import using external id (#2226).
- VS creating copy jobs to read-only storages (#2225).

Transcoder fixes

Agent fixes

- Reconnecting VSA to SSH-less VS may lead to NPE in VS (#2590).

Platform

- This release adds support for running the server agent on Ubuntu 16.04 (#2568).

Upgrading from 4.7

- Solr: No changes to the documents. Re-indexing is not required.

18.13 Version 4.7

The release notes will tell you what's new in each version, and any changes that you must be aware of when upgrading. For reference, Vidispine ticket numbers are printed as (#1234).

18.13.1 4.7.4

2017-10-06

Bug fixes

- JDBC connection not returned to pool on thread interrupt/XA exception (#2754).
- Infinispan stale locks problem (#2775).
- Imports using AWS presigned URLs fail with HTTP 403 (#2863).
- Incorrect container component after auto-import of growing file (#2859).
- Failed to delete an item if its bulky metadata contain null values (#2857).
- Incorrect data in file, storage and metadata notification (#2838).
- Auto-completion not case insensitive for string-exact fields (#2780).

18.13.2 4.7.3

2017-07-12

Bug fixes

- Center aligned subtitles come out as left aligned after STL sidecar import (#2693).
- Incorrect mime type of .ai (Adobe Illustrator) file (#2588).

Transcoder fixes

- Corrupt mp4 output created (#2768).
- Time code does not reflect NTSC frame rate (#2767).
- Interlacing setting is not respected in NLEJob (#2766).

Agent fixes

- Overlay address not proxied by agent (#2687).
- All jobs returned from agent when fetching running transcoder jobs only (#2658).

18.13.3 4.7.2

2017-03-31

Bug fixes

- Transfers from vxa:// uri to file:// does not work (NPE) (#2616).
- Object on tape-only not restored properly from BlackPearl 3.x (#2670).
- PUT or POST from JavaScript fails if no input is specified (#2660).
- Incorrect noauth-URL returned from API/poster (#2666).

Transcoder fixes

- Transcoder crashes when using burnTimecode=true (#2642).
- Transcoder crash on converting MP3 to JPEG (!) (#2625).
- Transcoder crash on JPEG input (#2624).
- Transcoder stuck on media check of ISO files (high swapfile usage) (#2505).
- Incorrect H264 level when using CBR (#2674).
- Binary component not created for .srt files (#2661).
- Transcoder does not recognize <setting><key>level</key> (#2646).
- Duration analysis failing on audio-only MOV files (#2611).
- Transcoder fails to calculate PTS to DTS ratio (I/O error2 - 22) (#2636).
- Transcoder accessing files in parent folder (#2608).

Agent fixes

- Agent not finding files with brackets, %20 and %21 in file name (#2610).

18.13.4 4.7.1

2016-12-21

Transcoder improvements

- Add option to not remove padding from IMX packets in MOV (#2591).

Agent improvements

- Have option not to create storages in Vidispine (#2594).
- Do not use the “instance host” field for shares with VSA (#2593).
- FTP connections should be reused (#2575).

Bug fixes

- Update BlackPearl SDK to 3.2.8 (#2578).
- Slow SFTP transfers (#2564).
- Incorrect media type for ProTools (.ptx) files (#2558).
- Server logs do not show meaningful error when VSA fails to compute checksum (#2557).
- NPE when setting indextimespans=false and using item field groups (#2545).
- BlackPearl writes failing if object prefix does not exist (#2531).
- File permission self test failing on CentOS 6 (#2565).
- File ETag not in double quotes (#2513).
- Excessive logging on slave license validation error (#2484).

Transcoder fixes

- High memory usage of idle transcoder (mmap threshold) (#2569).
- Memory leak with multi-page images (#2573).
- Huge transcoder log files (#2570).

Agent fixes

- Reconnecting VSA to SSH-less VS may lead to NPE in VS (#2590).
- ValueError when adding S3/DS3 network share on CentOS 6 (#2567).
- VSA remove-share not removed from Vidispine Server (#2589).
- Shares cannot be removed in VSA mode (#2563).
- Agent disconnecting due to buffer underflow (#2562).
- Requests to agent fail with HTTP 415 Unsupported media type (#2560).
- Username and password shown in VXA log (#2534).

18.13.5 4.7

2016-10-19

External storage of private keys and secrets

Storage credentials and private keys can now be stored in an *external location* and no longer need to be embedded in the storage URI (#2482).

Google Cloud Storage

Google Cloud Storage buckets can now be used as storages and with any job accepting a URI. See the *gs scheme* for details (#2322).

MatrixStore 3.2

The MatrixStore SDK has been updated from version 3.1 to version 3.2. This allows Vidispine to connect to MatrixStore 3.2 clusters. It is still possible to use the 3.1 SDK instead by installing an optional subpackage, see *Upgrade notes* (#2437).

Command line tools

The *vsctl* command line tool can be used to query, inspect and update Vidispine (#2436). For example, to get a glance of the status of a system:

```
$ vsctl -h vs.example.com status
http://vs.example.com:8080
Version: 4.7
Site: VX
License: valid

1 online transcoders
12 online storages, 5 offline
0 pending jobs, 7 waiting jobs, 0 job problems

Status:

- Capacity of storage VX-2671 is above the high watermark and needs cleanup
```

HTTP/2

Dropwizard has been updated to 1.0 which uses Jetty 9.3 (#2432). This adds support for the **HTTP/2 over TLS** (<http://www.dropwizard.io/1.0.2/docs/manual/configuration.html#http-2-over-tls>) (h2) and **HTTP/2 Plain Text** (<http://www.dropwizard.io/1.0.2/docs/manual/configuration.html#http-2-plain-text>) (h2c) server connectors:

```
- type: h2c
  port: 8088
- type: h2
  port: 8081
keyStorePath: /etc/vidispine/server.keystore
keyStorePassword: example
validateCerts: false
validatePeers: false
```

Improvements

- IMF *read and proxy generation* (#2319).
- Notification publishing to *Amazon SQS* (#2316).
- Support *64-bit integers* in metadata (#2345).
- *Update collection content* in a single request (#2392).
- Key-value metadata for *collection-item relationships* (#1173).
- Support for *text overlays* in video and images (#2488).
- *Cancel/pause reindexing* using the API (#1815).
- Select subtitle language when *rendering a sequence* (#2485).
- Make it possible to *create a file and write data* to it in one API call (#2413).
- Add endpoint to *delete all shapes* for an item (#2393).
- Support HEAD for noauth streaming URLs (#2495).
- Expose embedded broker *queue sizes as metrics* (#2490).
- Support growing files in VSA (#2441).
- Support fetching files with a *specific state* (#2438).
- Allow target storage to be specified for *shape imports* (#2417).
- Cacheable *saved search* endpoint (#2412).
- Support for *.scc subtitle import* and *export* (#2294).

Transcoder improvements

- Support for transcoding image sequences in ARRIRAW or OpenEXR format (#2499). Note that performance is quite slow.
- Support for transcoding image sequences in DNG format. Note that performance is quite slow (#2429).
- Improved rendering of Arabic subtitles (#2427).

Bug fixes

- Thumbnails not deleted from S3 storage (#2523).
- Library updates slowing down indexing (#2494).
- Incorrect result when listing files with “&” in path, using the “path” parameter (#2483).
- Schema validation not performed for item with assigned field group (#2423).
- Possible duplicate document entries due to concurrent creations (#2414).
- Transcode job retry failing with missing file error (#2400).
- Path projection not working for inherited metadata (#2419).
- PUT API/item/(id)/sequence/vidispine does not accept JSON (#2397).
- Exception stack traces in server log if license server is offline (#2500).
- Self test failing on transcoder directory resource (#2489).

- Transcode self test not using configured reverse address (#2487).
- Thumbnail self test fails for direct+ URLs (#1642).
- No websocket updates for new VXA registrations (#2447).

Transcoder fixes

- Transcoder updates modification time on input file (#2460).

Agent fixes

- When VSA is reconnecting, running transcode jobs cannot connect to same upload port (#2522).

Upgrading from 4.6

- Solr: The Solr schema must be updated to use the new *long integer datatype*.
- Solr: No changes to the documents. Re-indexing is not required.
- Version 3.2 of the MatrixStore SDK is now installed by default. The *vidispine-server-matrixstore3.1* package must be installed to connect to MatrixStore 3.1.

18.14 Version 4.6

The release notes will tell you what's new in each version, and any changes that you must be aware of when upgrading. For reference, Vidispine ticket numbers are printed as (#1234).

18.14.1 4.6.5

2017-07-12

Bug fixes

- Center aligned subtitles come out as left aligned after STL sidecar import (#2693).
- Incorrect mime type of .ai (Adobe Illustrator) file (#2588).

Transcoder fixes

- Time code does not reflect NTSC frame rate (#2767).
- Interlacing setting is not respected in NLEJob (#2766).

Agent fixes

- Overlay address not proxied by agent (#2687).
- All jobs returned from agent when fetching running transcoder jobs only (#2658).

18.14.2 4.6.4

2017-03-31

Bug fixes

- Object on tape-only not restored properly from BlackPearl 3.x (#2670).
- PUT or POST from JavaScript fails if no input is specified (#2660).
- Incorrect noauth-URL returned from API/poster (#2666).

Transcoder fixes

- Incorrect H264 level when using CBR (#2674).
- Binary component not created for .srt files (#2661).
- Transcoder does not recognize <setting><key>level</key> (#2646).
- Duration analysis failing on audio-only MOV files (#2611).
- Transcoder fails to calculate PTS to DTS ratio (I/O error2 - 22) (#2636).
- Transcoder accessing files in parent folder (#2608).

Agent fixes

- Username and password shown in agent log file (#2534).

18.14.3 4.6.3

2016-12-21

Transcoder improvements

- Add option to not remove padding from IMX packets in MOV (#2591).

Bug fixes

- Update BlackPearl SDK to 3.2.8 (#2578).
- Slow SFTP transfers (#2564).
- Incorrect media type for ProTools (.ptx) files (#2558).
- Server logs do not show meaningful error when VSA fails to compute checksum (#2557).
- NPE when setting indextimespans=false and using item field groups (#2545).
- BlackPearl writes failing if object prefix does not exist (#2531).

Transcoder fixes

- High memory usage of idle transcoder (mmap threshold) (#2569).
- Memory leak with multi-page images (#2573).
- Huge transcoder log files (#2570).
- Transcoder updates modification time on input file (#2460).

Agent fixes

- Reconnecting VSA to SSH-less VS may lead to NPE in VS (#2590).
- ValueError when adding S3/DS3 network share on CentOS 6 (#2567).

18.14.4 4.6.2

2016-10-13

Bug fixes

- Export job does not properly save files from being deleted (#2510).
- Slow reindex of standalone files (#2507).
- Library endpoints do not work with long identifiers (#2492).
- Export job creates sidecar XML with extension .xml.xml when using filename script (#2473).
- Cannot copy file between S3 and local S3 compatible storage (#2389).
- NPE on container raw passkey import (#2433).
- Waiting raw passkey import job not aborting (#2342).

Packaging fixes

- Config file /etc/sysconfig/vidispine and license replaced on upgrade (#2497).

Transcoder fixes

- Black video in Safari (#2511).
- D-10 VITC lines should be removed from poster (#2509).
- Transcoder does not handle content without aspect ration information (#2508).
- Don't create thumbnails for all layers in an image (#2472).

Agent fixes

- VSA is sometimes creating SSH connections that are not released (#2514).
- ConcurrentModificationException on agent reconnect (#2448).

18.14.5 4.6.1

2016-09-01

Improvements

- Delete an *external id for an entity* (#1138).
- Metadata performance improvements (#2424).

Transcoder improvements

- Improved handling of MXF files with incorrect footer position offsets (#2468).

Bug fixes

- Index checker holding lock on sequence table (#2370).
- Transient metadata of collection not updated when item is deleted (#2373).
- Incorrect query for phrase search containing quotation marks (#2375).
- “noescape” is affecting the result of version 2 search documents (#2376).
- Invalid range request exceptions with DS3 (#2406).
- Task servlets stops running without any error (#2410).
- Possible NPE when reindexing items with thumbnails on S3 (#2418).
- Transcode of a image sequence failed if the sequence number is padded (#2420).
- VSA import fails if the file path contains a space (#2421).
- VSA import fails if Vidispine server is restarted (#2422).
- Image sequence export jobs failing with FAILED_TOTAL (#2426).
- /APIoauth/stitch error - Comparison method violates its general contract! (#2431).
- Regression: “s3ProxyValidTime” setting not working (#2434).
- Deletion of entities should delete associated external IDs (#2443).
- Possible NPE on EVS sidecar import (#2445).
- Race between copy job and storage worker causing job to fail (#2462).
- Demuxer settings not passed to transcoder for thumbnail jobs (#2461).

Transcoder fixes

- Transcode failing for MPEG2 with truncated time base value (#2465).
- Transcoder crashing on transcode of DNxHD with mixed interlaced and progressive frames (#2466).
- Incorrect frame rate in WMV header for 30 FPS material (#2467).
- Out-of-sync output for 23.967 MPEG PS (#2469).
- Interlaced H264 incorrectly reported as progressive (#2470).

- Black video in Safari for transcoded 29.97 FPS H264 (#2471).
- Broken encoding of AAC in MP4 (#2425).
- D10 blanking lines included in posters (#2463).
- Incorrect scaling of posters from NTSC files (#2464).

18.14.6 4.6

2016-06-30

Read-only instances

An instance can now be connected to a read-only database such as an [Amazon RDS Read Replica](https://aws.amazon.com/rds/details/read-replicas/sph) (https://aws.amazon.com/rds/details/read-replicas/sph), or a MySQL or PostgreSQL replica (#2292).

```
database:
  type: read_only_replica
```

This can also be used to connect to a database snapshot that should not be modified.

```
database:
  type: read_only_snapshot
```

Request- and search logging is still enabled by default when connected to a read replica/snapshot. This works by having updates submitted to a read-write instance using ActiveMQ. To disable this, use:

```
api:
  requestLogging: false
  searchHistory: false
```

Image sequences

Image sequences can now be imported using the normal import jobs, or directly from a storage. When importing using a URI, the URI must contain a file fragment and a wildcard specifying the placement of the sequence number (#2296). See *Image sequences*.

```
POST API/import?uri=file:///srv/media/take1/\*.png#file=00000-15000
```

CloudConvert

[CloudConvert](https://cloudconvert.com/) (https://cloudconvert.com/) can be used by Vidispine as an alternative transcoder. This is supported in all import and transcode jobs. See *CloudConvert*.

```
<ResourceDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <cloudconvert>
    <apiKey>your-api-key</apiKey>
  </cloudconvert>
</ResourceDocument>
```

```
POST /item/\(item-id\)/transcode?jobmetadata=useCloudConvert=true
```

Storage load balancing

Files can now be *load balanced* across multiple selected storages (#2149). For example, to have a file stored on at least two of the storages from a specific group:

```
<StorageRuleDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <storageCount>2</storageCount>
  <pool>
    <group>local-storage-pool</group>
  </pool>
</StorageRuleDocument>
```

Additional storages could then be added to this group in case additional storage space is required.

Search improvements

- Configurable *facet limit and counts* (#2341).
- Support *autocomplete while searching* (#2351).

VSA in cluster configuration

- Support *VSA* connecting to Vidispine in a cluster configuration.

Other improvements

- Define your own *custom job types* (#2379).
- Threaded notification deliveries (#2192).
- *Read-only/offline thumbnail resources* (#2327).
- Make it possible to *delete a user* completely (#2381).
- Add document and PDF *media types* (#2357).
- Make it possible to set username in auto import rule (#2356).
- Quota rule *filtering* (#2353).
- Support for querying collection *child item count* (#2350).
- Add configuration property to control *agent sync behaviour* (#2382).
- Support useOriginalFilename=true with copy/move jobs (#2344).
- Setting *Content-Disposition headers* for S3 when signed URLs are generated (#2326).

Bug fixes

- Solr solrUpdateQueueSize setting not working (#2396).
- XMP sidecar import not working if parseXMP=false (#2354).
- MxfServerAccessControlBean uses a fixed connection ID (#2378).
- Add multipart/form-data noauth import resource (#2380).

Platform

- This release adds support for Ubuntu 16.04 and MySQL 5.7 (#2321).
- The transcoder no longer auto-starts when installed, and will restart if already during upgrade (from 4.6 and forward).

Deprecated in 4.6

- Image sequence auto-import using *auto-import rule settings*.
- Image sequence *placeholder import* using `type=image-sequence` or `type=dpx`.

Discontinued in 4.6

- Support for GlassFish has been discontinued. Use *Standalone Vidispine* instead.
- Support for Java 7 has been discontinued. Use Java 8 instead.
- Support for Microsoft Windows Server has been discontinued.

Upgrading from 4.5

- Solr: No changes to the documents. Re-indexing is not required.
- Support for GlassFish has been discontinued. Use *Standalone Vidispine* instead.
- Support for Java 7 has been discontinued. Use Java 8 instead.
- Support for Microsoft Windows Server has been discontinued.

18.15 Version 4.5

The release notes will tell you what's new in each version, and any changes that you must be aware of when upgrading. For reference, Vidispine ticket numbers are printed as (#1234).

18.15.1 4.5.9

2017-07-12

Bug fixes

- Center aligned subtitles come out as left aligned after STL sidecar import (#2693).
- Incorrect mime type of .ai (Adobe Illustrator) file (#2588).

Agent fixes

- Overlay address not proxied by agent (#2687).
- All jobs returned from agent when fetching running transcoder jobs only (#2658).

18.15.2 4.5.8

2017-03-31

Bug fixes

- Incorrect noauth-URL returned from API/poster (#2666).

Transcoder fixes

- Transcoder fails to calculate PTS to DTS ratio (I/O error2 - 22) (#2636).
- Transcoder accessing files in parent folder (#2608).

18.15.3 4.5.7

2016-12-21

Transcoder fixes

- High memory usage of idle transcoder (mmap threshold) (#2569).
- Memory leak with multi-page images (#2573).
- Huge transcoder log files (#2570).

18.15.4 4.5.6

2016-11-17

Bug fixes

- Incorrect media type for ProTools (.ptx) files (#2558).
- NPE when setting indextimespans=false and using item field groups (#2545).

Transcoder fixes

- Transcoder updates modification time on input file (#2460).

18.15.5 4.5.5

2016-10-13

Bug fixes

- Export job does not properly save files from being deleted (#2510).
- Slow reindex of standalone files (#2507).
- Sidecar import of STL file fails “Failed to parse sidecar file: EOF” (#2506).
- Export job creates sidecar XML with extension .xml.xml when using filename script (#2473).
- Possible NPE when reindexing items with thumbnails on S3 (#2418).

Server fixes

- Config file /etc/sysconfig/vidispine and license replaced on upgrade (#2497).

Transcoder fixes

- D-10 VITC lines should be removed from poster (#2509).
- Transcoder does not handle content without aspect ration information (#2508).
- Don’t create thumbnails for all layers in an image (#2472).

18.15.6 4.5.4

2016-08-01

Bug fixes

- File copy failing between S3 and S3 compatible storages (#2389).
- NPE on container raw passkey import (#2433).
- Fix waiting raw passkey import job not aborting (#2342).

Transcoder fixes

- Broken encoding of AAC in MP4 (#2425).

18.15.7 4.5.3

2016-06-21

Bug fixes

- Notification without media type causing notifications to not be sent (#2384).
- Cannot connect to S3 endpoint that requires *v2 signatures* (#2383).
- Use the storage with more free capacity using the high watermark evacuation (#2359).
- Do not move file to a storage without enough free space duration high watermark evacuation (#2360).
- Thumbnails on S3 sometimes cannot be updated (#2386).

- Updating thumbnails on S3 causing item reindex to fail (#2385).

Server fixes

- Index messages not rolled back on error (#2348).

Transcoder fixes

- Accurate editing of audio-only MXF files (#2394).

18.15.8 4.5.2

2016-05-09

Security notice

- Fix for [CVE-2016-3714](https://www.cve.mitre.org/cgi-bin/cvename.cgi?name=2016-3714) (<https://www.cve.mitre.org/cgi-bin/cvename.cgi?name=2016-3714>).

Although it is not likely that Vidispine systems are affected, as Vidispine does its own file type checking, the updated transcoder contains the suggested fix to the ImageMagick policy.xml (#2331).

Bug fixes

- `SQLException` when deleting item with large metadata (#2330).
- Slow mime-type check causing steps to disappear and retry (#2332).
- `NPE` when retrieving empty access control list (#2288).
- Collection metadata update with `skipForbidden=True` allows update of read-only fields (#2340).
- Azure HTTP `x-ms-version` header error (#2338).
- Fix duplicate keys when batch deleting AWS SQS messages (#2312).
- Error showing collection access graph if collection has ancestors (#2286).
- HTTP 500 when fetching components using content path and query result is empty (#2337).
- Library empty if hits greater than number of returned items (#2301).
- HTTP 500 when fetching default values for item with field groups (#2336).
- No `jobMetadata` for thumbnail job (#2329).
- S3 storage handler cannot successfully refresh from buckets via Google Storage Interoperability (#2300).

Server fixes

- Missing unique constraints on collection relationship tables (#2252).
- RPM upgrade recreates deployment `License.lic` which overrides `slaveAuth.lic` (#2307).
- Force server to use `LC_ALL=en_US.UTF-8` (#2311).
- Adjust start and stop priority for vidispine service on CentOS (#2150).

Transcoder fixes

- Correct shape deduction of MPEG transport streams with large frame sizes (#2309).
- Handle content where SPS/PPS does not match container timebase (#2335).
- Properly handle mixing of audio-only MXFs (#2281).
- For FLV files, read dimensions from container metadata instead of codec data (which is typically rounded up to the multiple of 8) (#2339).
- Fix for calculation of burnt-in timecode for QuickTime source sources contains EDLs (#2334).
- Properly handle MPEG-2 with separate field encoding (#2333).

For MPEG-2 interlaced video where fields are encoded separately, and stored in MPEG transport stream, use the following setting in the transcode preset document:

```
<demuxerSetting>
  <key>pts_mode</key>
  <value>original</value>
</demuxerSetting>
```

This will be the default in Vidispine 4.6.

18.15.9 4.5.1

2016-03-29

MatrixStore

- The MatrixStore SDK has been updated from 3.1.3.3 to 3.1.3.7. This fixes an exception when reading XML files from MatrixStore (#2246).

Bug fixes

- Solr self test fails when using SolrCloud (#1974).
- Incorrect Solr query when using nested OR operators (#2274).
- Jobs not running on MySQL (SQLGrammarException) (#2245).
- Slow update of user groups (#2272).
- Missing object metadata in MatrixStore (MXFS_FILENAME_UPPER) (#2271).
- SFTP file worker connection leak on file delete (#2249).
- IllegalArgumentException on item list to Azure (#2254).
- Moving a metadata timespan breaks references (#2218).
- Slow access DOT graph for items in a large amount of collections (#2251).
- No thumbnails created for certain files with an EDL (#2273).
- No document metadata for PDF files when transcoding on import (#2257).

Server fixes

- vidispine-admin failing if database URL contains port number (#2266).

Agent fixes

- Incorrect transcode output written to S3 and DS3 by VSA (#2276).
- Incorrect exit code from vidispine-agent-admin (#2267).

Transcoder fixes

- Added ability to use MainConcept MPEG-2 encoder (codec: mc_mpeg2video) for generic MPEG-2 for maximum control of encoding properties (#2279).
- Fixed problem canvas size when scaling images with non-proportional factors (#2268).
- Fix crash when using demuxerSetting and exception is thrown (#2282).
- PDF page count in shape metadata (image_pages) (#2283).
- Support *image sharpening* (#2278).
- Use DTS as fallback for missing PTS values (#2259).
- Long MediaInfo times for fragmented files (#2277).
- Handle WAV file with metadata of odd number of bytes (#2258).

18.15.10 4.5

2016-02-22

Vidispine agent with S3 compatible storages

The agent has been updated to support S3 compatible storages as shares. This allows on-premise storages and archives to be connected to VS via the agent (#2174).

Spectra Logic BlackPearl

Support for connecting Spectra Logic BlackPearl storage systems with Spectra S3 interface (#2049). Works for both Vidispine and Vidispine Agent. Connect as storage using the *ds3 scheme*. MD5, CRC32 and CRC32c checksums are supported.

Color profiles

Color profiles management has been improved for PDFs (#2242) and bitmap images (#2244). Color profiles can now be detected from XMP metadata. Several profiles are now bundled with the transcoder. See *Image-only settings*.

Content paths and aliases

The item search resources have been updated with support for *content paths and aliases*. This allows for reduced response sizes and improved performance when fetching content relating to an item (#2133).

```
GET API/item?p=id,v(title),shape[tag=original].containerComponent.[format,file]
```

```
<ItemListDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <hits>108265</hits>
  <item id="VX-481945">
    <metadata>
      <timespan start="-INF" end="+INF">
        <field>
          <name>title</name>
          <value>Stand On The Rock</value></field>
        </timespan>
      </metadata>
    </item>
    <shape>
      <tag>original</tag>
      <containerComponent>
        <file>
          <id>VX-5121000</id>
          <path>VX-5121000.jpg</path>
          <uri>file:///srv/media/VX-5121000.jpg</uri>
          <state>CLOSED</state>
          <size>12495</size>
          <hash>3fd6295d57e921f87505acce885e716930943c9f</hash>
          <timestamp>2016-02-21T12:24:10.967+01:00</timestamp>
          <refreshFlag>1</refreshFlag>
          <storage>VX-1</storage>
        </file>
        <format>JPEG</format>
      </containerComponent>
    </shape>
  </item>
  ...
</ItemListDocument>
```

The *batch list job* and *list library job* has also been updated to support content paths.

Search improvements

Full-text queries can now be used in search operators (#2126). This allows you to for example find collections matching one text query and that contain items matching another text query.

```
<ItemSearchDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <operator operation="OR">
    <operator operation="AND">
      <text>Time</text>
    </operator>
    <item>
      <operator operation="AND">
        <text>Sooner or later</text>
      </operator>
    </item>
  </operator>
</ItemSearchDocument>
```

```
</operator>
</ItemSearchDocument>
```

When *searching for metadata field groups* you can now opt to search for field groups only from items, collections, document or the global metadata (#2156).

```
PUT /metadata-field/field-group?source=item
Content-Type: application/xml

<MetadataFieldGroupSearchDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <field>
    <name>app_comment</name>
    <value>Listen up</value>
  </field>
</MetadataFieldGroupSearchDocument>
```

The performance of metadata updates on systems containing a large number of references has also been improved (#2145).

External identifiers

Collections and libraries now both support *external ids* (#1335).

Collection metadata improvements

The *collection metadata* resource has been updated with a number of endpoints that were previously only available for the item metadata.

- It is now possible to view and manage change sets for a collection just as with an item (#2140).
- Metadata on collections can now also be moved and modified by UUID. (#2155).

Export templates

Export templates are available as a beta version. The beta version means that syntax may change somewhat for the final implementation. This version is also a call for feedback for other functionality that you would like to see (#2117).

Other improvements

- The Amazon S3 *infrequent access* storage class is now supported (#2184).
- Libraries can now be listed using the *list library resource*, making it possible to more easily list a specific set of items (#2139).
- The position and style of burnt in timecodes can now be *customized per preset* (#2104).
- External transcodes support using non-local watchfolders (#2240).
- Support for adding *custom JARs* with vidispine-server (#2208).

Bug fixes

- Possible NPE when importing EVS sidecar XML (#2178).
- Deleting conflicting metadata in one request (#2118).

Transcoder fixes

- Transcoder crash on moof files with traf without streams (#2243).
- Transcoder uses a new ImageMagick, that fixes color issues with certain PDF/PS.
- Transcoder exposes some HTTP buffer settings, see *HTTP buffer sizes*.

Deprecated in 4.5

Support for GlassFish is being phased out and will be removed in Vidispine 4.6. We recommend that you switch to *Standalone Vidispine* when upgrading to Vidispine 4.3 or later.

Removed in 4.5

Support for JBoss has been discontinued. Use *Standalone Vidispine* instead.

Upgrading from 4.4

- Solr: No changes to the documents. Re-indexing is not required.
- Support for JBoss has been discontinued. Use *Standalone Vidispine* instead.

18.16 Version 4.4

The release notes will tell you what's new in each version, and any changes that you must be aware of when upgrading. For reference, Vidispine ticket numbers are printed as (#1234).

18.16.1 4.4.4

2016-05-09

Security notice

- Fix for [CVE-2016-3714](https://www.cve.mitre.org/cgi-bin/cvename.cgi?name=2016-3714) (<https://www.cve.mitre.org/cgi-bin/cvename.cgi?name=2016-3714>).

Although it is not likely that Vidispine systems are affected, as Vidispine does its own file type checking, the updated transcoder contains the suggested fix to the ImageMagick policy.xml (#2331).

Bug fixes

- SQLException when deleting item with large metadata (#2330).
- Slow mime-type check causing steps to disappear and retry (#2332).
- NPE when retrieving empty access control list (#2288).
- Collection metadata update with skipForbidden=True allows update of read-only fields (#2340).

Transcoder fixes

- Fix for calculation of burnt-in timecode for QuickTime source sources contains EDLs (#2334).
- Properly handle MPEG-2 with separate field encoding (#2333).

For MPEG-2 interlaced video where fields are encoded separately, and stored in MPEG transport stream, use the following setting in the transcode preset document:

```
<demuxerSetting>
  <key>pts_mode</key>
  <value>original</value>
</demuxerSetting>
```

This will be the default in Vidispine 4.6.

18.16.2 4.4.3

2016-03-24

MatrixStore

- The MatrixStore SDK has been updated from 3.1.3.3 to 3.1.3.7. This fixes an exception when reading XML files from MatrixStore (#2246).

Bug fixes

- Jobs not running on MySQL (SQLGrammarException) (#2245).
- Slow update of user groups (#2272).
- Missing object metadata in MatrixStore (MXFS_FILENAME_UPPER) (#2271).
- SFTP file worker connection leak on file delete (#2249).
- IllegalArgumentException on item list to Azure (#2254).
- Moving a metadata timespan breaks references (#2218).
- Slow access DOT graph for items in a large amount of collections (#2251).
- No thumbnails created for certain files with an EDL (#2273).
- No document metadata for PDF files when transcoding on import (#2257).

Server fixes

- vidispine-admin failing if database URL contains port number (#2266).

Agent fixes

- Incorrect exit code from vidispine-agent-admin (#2267).

Transcoder fixes

- Support *image sharpening* (#2278).
- Use DTS as fallback for missing PTS values (#2259).
- Long MediaInfo times for fragmented files (#2277).
- Handle WAV file with metadata of odd number of bytes (#2258).

18.16.3 4.4.2

2016-02-22

Bug fixes

- Slow listing of files on Azure (#2187).
- Video misidentified as image/cgm (#2185).
- Export transcode failure should fail export (#2183).
- File removed from Solr on shape delete with keepFiles=true (#2212).
- NPE on item reindex on thumbnail read error (#2221).
- Don't use IN subquery statements with MySQL (#2177).
- Be able to skip indexing of timed metadata (#2212).
- POST /storage/(storage-id)/file/data not creating file when using *segment files* (#2171).
- NPE instead of 404 for API/storage/{external-id}/file/{id} requests (#2179).
- NPE on DB migrate when correcting column nullable status (#2190).
- Files on local file system not found on Windows (#2238).
- Schema file transcoder.xsd missing from API (#2217).
- Make shape information available to conform presets (#2189).
- Temporary segment files not deleted (#2239).
- External transcode completing too early (#2241).
- Cannot update items' metadata via library and JSON (#2216).

Server fixes

- APInoauth application.wadl missing from vidispine-server (#2214).

Agent fixes

- Incorrect service status from vidispine-agent-admin on CentOS 6 (#2096).

Transcoder fixes

- Insecure parsing of m3u4 files (#2222).
- Shape deduction crash on invalid QuickTime file (#2180).
- Make transcoder fail on transcode of truncated QuickTime files (#2220).
- Transcoder crash on very short clip (#2223).

18.16.4 4.4.1

2015-12-16

Improvements

- Transcode jobs are now more resilient to connection errors. Use the *maxTranscoderUnavailableTime* property to control how long a transcoder may be unreachable before the job should fail (#2166).
- Use the *bulkyMetadataKeysToIgnore* property to avoid saving unused analysis results from analyze jobs in the bulky metadata (#2165).
- Support for marking a file as a duplicate of another (#2129).
- The *thumbnail format* used by the transcoder is now exposed as a setting (#2128).
- How frequently the transcode status in a job is updated can be configured using the *transcoderNonblockingStatusInterval* property (#2164).

Amazon S3 improvements

- Use the *sseAlgorithm* parameter to set the `x-amz-server-side-encryption` header for S3 object upload requests. See Amazon S3 [Server-Side Encryption](http://docs.aws.amazon.com/AmazonS3/latest/dev/server-side-encryption.html) (<http://docs.aws.amazon.com/AmazonS3/latest/dev/server-side-encryption.html>) for more information (#2103).

Transcoder improvements

- The transcoder will do a further analysis of GOP timecodes in MPEG video. If the first GOPs are not contiguous, the `startTimecode` element in the `videoComponent` of the shape is not present (#2176).
- The transcoder updates the GOP timecodes in MPEG video according to the `TranscodePresetDocument` of the shape-tag. This functionality also works when only remuxing (#2141).
- Ability to control GOP structure based on scene changes, see *sceneChangeThreshold*. Mostly used to disable scene change detection (#2160).
- Ability to disable writing of time code track, see *noTimeCodeTrack* (#2143).

Bug fixes

- No delay before job step retry if the asynchronous part of the step failed (#2161).
- The population of the *__representativeThumbnails* field would slow down collection metadata retrieval (#2119).
- Storage rule with a single `<not>` entry not honoured (#2158).
- All shape components not deleted on placeholder import failure (#2163).

- Cannot rename file on S3 (#2111).
- Shape created on wrong storage when doing *raw shape imports* and using the `tag` parameter (#2167).
- NPE when evaluating task groups for AUTO_IMPORT jobs (#2125).
- Signiant transfers failing for large files (#2152).
- Cannot delete group used in many ACLs on GlassFish (#2144).
- Username parameter ignored for *bulk item exports* (#2137).
- Rejected shape import requests causing empty jobs to be created (#2115).
- Configurable exclusive job step wait time. See *jobExclusiveStepMaxWait* (#2116).
- Export job failing to find and copy file created from transcode step (#2106).
- List item jobs not writing directly to S3 (#2120).
- List item jobs not finishing when listing by group (#2108).
- No thumbnails created for MTS files (#2107).

Transcoder fixes

- Transcoder fails to read from HTTPS (#2162).
- Transcoder crash on aborted jobs (#2159).
- Transcoder stuck on broken PDF (#2122).
- Add option to fail if frame cannot be decoded (#2124).
- Incorrect scaling of posters (#2123).

18.16.5 4.4

2015-10-23

Vidispine server agent

Support for the Vidispine Server Agent (VSA), a bundle of an agent for on-premise file storages and the Vidispine transcoder (#1806).

- Enables cloud deployments of Vidispine while keeping essence in the original place.
- VSA is available both for Ubuntu/Debian and CentOS/RedHat releases. See *Vidispine Server Agent* on how to install the VSA packages and configuration.

Amazon S3 improvements

- Amazon S3 file notifications are now supported, making it possible to have Amazon push file event notifications to Vidispine instead of having Vidispine poll buckets on S3 (#1949).
See *S3 Event Notifications* on how to set up the *Amazon SQS* (<https://aws.amazon.com/sqs/>) queue, configure S3 event notifications and connect the queue to a storage.
- Buckets in Beijing and Frankfurt are now supported as the latest AWS SDK is now in use which supports the signature version 4 signing process (#1712).

- The *region and endpoint* can be specified when configuring a storage. This is required when using buckets in the two new regions (#2040).

Transcoder discovery

Transcoders can be automatically *discovered* via either DNS or HTTP. The former allows integration with DNS servers and services such as [Amazon Route 53](http://aws.amazon.com/route53/) (<http://aws.amazon.com/route53/>) and [Consul](http://consul.io/) (<http://consul.io/>) (#2092).

```
<?xml version="1.0"?>
<ResourceDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <id>VX-1</id>
  <transcoder>
    <type>DIRECTORY</type>
    <url>dns://consul.example.com/transcoders.example.com</url>
    <state>ONLINE</state>
    <transcoder>
      <url>http://t1.transcoder.example.com:8888/</url>
      <version>4.4</version>
      <state>ONLINE</state>
    </transcoder>
    <transcoder>
      <url>http://t2.transcoder.example.com:8888/</url>
      <state>OFFLINE</state>
    </transcoder>
  </transcoder>
</ResourceDocument>
```

Transcoder sharing

Unexpected transcoder license errors have been an issue in the past when one or more Vidispine instances have been connected to the same transcoder. This is no longer an issue as the transcoder will respect the license of each instance (#2051).

See *Using multiple transcoders* on how to set this up.

Task groups

Task groups are a new entity that pairs an entity with a resource according to some rule. In this release these can be used to control the transcoders that should be used for certain types of jobs, for example to enforce that R3D jobs must use the transcoder supporting hardware decode of R3D, or to reserve some transcoders for high priority jobs (#2094).


```
<TaskGroupDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <job>
    <priority>HIGH</priority>
  </job>
  <transcoder id="VX-1"/>
  <transcoder id="VX-2"/>
  <priority>MEDIUM</priority>
</TaskGroupDocument>
```

Audio waveforms

The *Shape analysis* now also store information that can be used to create an “audio waveform”. After the analysis has been made, the waveform information is available either as numerical values or image (PNG, one image per channel)

(#2039).

- See *Waveform information* for how to retrieve the waveform information.

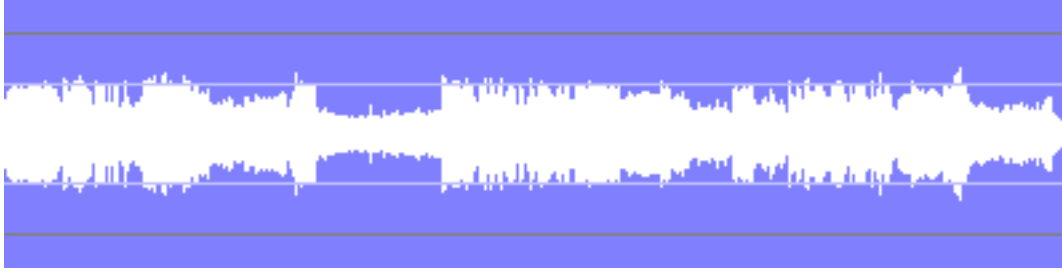

Other features

- Support for *OAuth 2.0 bearer-token authentication* (#1918).
- More efficient online check of S3 buckets(#2073).
- Ability to analyze a shape with multiple files (#2020).
- Ability to transcode directly into another item (#2044).
- Ability to add multiple overlays in same transcode profile (#2061).

Bug fixes

- Not able to proxy files in sequence render jobs (#2026).
- Conform job doesn't support audio mappings in preset (#2033).
- Exponential backoff for repeatedly failing services to prevent exhaustive logging (#2070).
- Deadlock in jobs would cause the job executor to shut down and prevent job execution until job gets marked as DISAPPEARED and later restarted (#2067).
- FTP storage to empty directory does not work (#2062).

Transcoder fixes

- Media check for .m2v files is time consuming (#2066).
- Transcoding from 23.976 FPS transport streams renders output out of sync (#2064).

Upgrading from 4.3

- Solr: No changes to the documents. Re-indexing is not required.
- The property *indexCollectionItemOrder* is now set to `false` by default. Set it to `true` before upgrading if you rely on the old behaviour.
- The transcode preset script is now also evaluated for conform jobs. The difference compared to transcodes is that the shape is empty. If you use the same preset for both transcodes and conforms, then make sure that the script verifies the existence of the components of the shape before using them to avoid null pointer exceptions from the script.

18.17 Version 4.3

The release notes will tell you what's new in each version, and any changes that you must be aware of when upgrading. For reference, Vidispine ticket numbers are printed as (#1234).

18.17.1 4.3.8

2016-05-09

Security notice

- Fix for [CVE-2016-3714](https://www.cve.mitre.org/cgi-bin/cvename.cgi?name=2016-3714) (<https://www.cve.mitre.org/cgi-bin/cvename.cgi?name=2016-3714>).
Although it is not likely that Vidispine systems are affected, as Vidispine does its own file type checking, the updated transcoder contains the suggested fix to the ImageMagick policy.xml (#2331).

Bug fixes

- SQLException when deleting item with large metadata (#2330).
- Slow mime-type check causing steps to disappear and retry (#2332).
- NPE when retrieving empty access control list (#2288).
- Collection metadata update with skipForbidden=True allows update of read-only fields (#2340).

Transcoder fixes

- Fix for calculation of burnt-in timecode for QuickTime source sources contains EDLs (#2334).
- Properly handle MPEG-2 with separate field encoding (#2333).

For MPEG-2 interlaced video where fields are encoded separately, and stored in MPEG transport stream, use the following setting in the transcode preset document:

```
<demuxerSetting>
  <key>pts_mode</key>
  <value>original</value>
</demuxerSetting>
```

This will be the default in Vidispine 4.6.

18.17.2 4.3.7

2016-03-22

MatrixStore

- The MatrixStore SDK has been updated from 3.1.3.3 to 3.1.3.7. This fixes an exception when reading XML files from MatrixStore (#2246).

Bug fixes

- Jobs not running on MySQL (SQLGrammarException) (#2245).
- Slow update of user groups (#2272).
- Missing object metadata in MatrixStore (MXFS_FILENAME_UPPER) (#2271).
- SFTP file worker connection leak on file delete (#2249).
- IllegalArgumentException on item list to Azure (#2254).
- Moving a metadata timespan breaks references (#2218).
- Slow access DOT graph for items in a large amount of collections (#2251).
- No thumbnails created for certain files with an EDL (#2273).
- No document metadata for PDF files when transcoding on import (#2257).

Server fixes

- vidispine-admin failing if database URL contains port number (#2266).

Transcoder fixes

- Long MediaInfo times for fragmented files (#2277).
- Handle WAV file with metadata of odd number of bytes (#2258).

18.17.3 4.3.6

2016-02-22

Bug fixes

- Slow listing of files on Azure (#2187).
- Video misidentified as image/cgm (#2185).
- Export transcode failure should fail export (#2183).
- File removed from Solr on shape delete with keepFiles=true (#2212).
- NPE on item reindex on thumbnail read error (#2221).
- Don't use IN subquery statements with MySQL (#2177).
- Be able to skip indexing of timed metadata (#2212).
- POST /storage/(storage-id)/file/data not creating file when using *segment files* (#2171).
- NPE instead of 404 for API/storage/{external-id}/file/{id} requests (#2179).

Transcoder fixes

- Insecure parsing of m3u4 files (#2222).
- Shape deduction crash on invalid QuickTime file (#2180).
- Make transcoder fail on transcode of truncated QuickTime files (#2220).
- Transcoder crash on very short clip (#2223).

18.17.4 4.3.5

2015-12-07

Improvements

- Support for marking a file as a duplicate of another (#2129).
- The *thumbnail format* used by the transcoder is now exposed as a setting (#2128).

Bug fixes

- Signiant transfers failing for large files (#2152).
- Cannot delete group used in many ACLs on GlassFish (#2144).
- Username parameter ignored for *bulk item exports* (#2137).

Transcoder fixes

- Transcoder crash on aborted jobs (#2159).

18.17.5 4.3.4

2015-11-06

Bug fixes

- Deadlock on job start causing job to stop running (#2067).
- Rejected shape import requests causing empty jobs to be created (#2115).
- Configurable exclusive job step wait time. See *jobExclusiveStepMaxWait* (#2116).
- Export job failing to find and copy file created from transcode step (#2106).
- List item jobs not writing directly to S3 (#2120).
- List item jobs not finishing when listing by group (#2108).
- FTP storage to empty directory does not work (#2062).
- No thumbnails created for MTS files (#2107).

Transcoder fixes

- Transcoder stuck on broken PDF (#2122).
- Add option to fail if frame cannot be decoded (#2124).
- Incorrect scaling of posters (#2123).

18.17.6 4.3.3

2015-10-01

Bug fixes

- Encrypt credentials in thumbnail resource URIs (#1982).
- Storage rule supervisor repeatedly restarting due to a long running transaction, causing copy jobs not to start (#2050).
- High JMS connection usage from storage supervisor (#2047).
- Slow file system metadata updates causing growing imports to end early (Tunable growing file timeout) (#2053).
- Slow library search due to rollbacks (#2028).
- Cached search bigtext entries not always removed (#2041).
- Solr searchers keeping GlassFish from shutting down (#2038).
- Quote characters in a collection name generates broken access DOT graph (#2052).
- Checksum not computed for file with %2B in name (#2056).

Server fixes

- Checksum fails to compute for large files with vidispine-server (#2022).
- No version available from vidispine-server --version (#2034).
- Don't put expired messages on the DLQ (#2023).

Transcoder fixes

- Interlace flag not working for H.264 (#2036).
- Incorrect subclipping of MXF OP1a with index in footer (#2057).
- Incorrect bit depth for AES3 (#2059).
- 32bit lpcm detected as 16bit (#2058).
- Burnt in timecode text offset from text box (#2060).

18.17.7 4.3.2

These are release highlights. For a full listing of the features, bug fixes and upgrade notes, please see the [release notes](http://www.vidispine.com/partner/my-documentation) (<http://www.vidispine.com/partner/my-documentation>) in the Vidispine Partner Portal.

2015-08-27

Improvements

- New Relic users will now see web requests with transaction names that match the path used in the request, instead of the automatic name assigned by New Relic which tends to group requests to different endpoints together.
- Speed ups when faceting on many fields with many matching terms.

Bug fixes

- Cached search documents not being removed from the big text table, causing it to grow over time.
- The periodic update of a large library could cause library API requests and index updates to halt due to a locking issue.
- When using SolrCloud the connection manager could abort long running requests, typically causing updates to Solr to fail.
- Various bug fixes and improvements.

For the full list of changes, see the [release notes](http://www.vidispine.com/partner/my-documentation) (<http://www.vidispine.com/partner/my-documentation>).

18.17.8 4.3.1

These are release highlights. For a full listing of the features, bug fixes and upgrade notes, please see the [release notes](http://www.vidispine.com/partner/my-documentation) (<http://www.vidispine.com/partner/my-documentation>) in the Vidispine Partner Portal.

2015-07-03

RHEL 7 support

Red Hat Enterprise Linux 7 is now a supported. You may have already seen some EL7 RPMs in 4.3, but now the packaging of the transcoder has also been completed making EL7 the latest addition to the list of supported operating system.

System overview

The metrics page available on the admin port when running standalone Vidispine has been redesigned. It now also features graphs of some of the metrics exposed via StatsD and the metrics admin resource.

Other

- Fixed incorrect role on `PUT /collection/{collection-id}/metadata`.
- JavaScript notifications now work on MySQL.
- WAITING jobs could cause job metrics to become incorrect.
- Various bug fixes and improvements.

For the full list of changes, see the [release notes](http://www.vidispine.com/partner/my-documentation) (<http://www.vidispine.com/partner/my-documentation>).

18.17.9 4.3

These are release highlights. For a full listing of the features, bug fixes and upgrade notes, please see the [release notes](http://www.vidispine.com/partner/my-documentation) (<http://www.vidispine.com/partner/my-documentation>) in the Vidispine Partner Portal.

2015-06-02

Standalone deployment

Vidispine can now be run without the need of an application server. See *Standalone Vidispine*.

Group search

It is now possible to *query field groups* when searching for items or collections.

```

<ItemSearchDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <group>
    <name>movie_info</name>
    <field>
      <name>movie_name</name>
      <value>StarWars</value>
    </field>
    <field>
      <name>episode_no</name>
      <value>1</value>
    </field>
  </group>
</ItemSearchDocument>

```

Other

- Support for *automatic removal* of old jobs.

18.18 Version 4.2

The release notes will tell you what's new in each version, and any changes that you must be aware of when upgrading. For reference, Vidispine ticket numbers are printed as (#1234).

18.18.1 4.2.16

2016-08-31

Bug fixes

- Race between copy job and storage worker causing job to fail (#2462).
- Demuxer settings not passed to transcoder for thumbnail jobs (#2461).

Transcoder fixes

- D10 blanking lines included in posters (#2463).
- Incorrect scaling of posters from NTSC files (#2464).

18.18.2 4.2.15

2016-05-09

Security notice

- Fix for [CVE-2016-3714](https://www.cve.mitre.org/cgi-bin/cvename.cgi?name=2016-3714) (<https://www.cve.mitre.org/cgi-bin/cvename.cgi?name=2016-3714>).

Although it is not likely that Vidispine systems are affected, as Vidispine does its own file type checking, the updated transcoder contains the suggested fix to the ImageMagick policy.xml (#2331).

Bug fixes

- SQLException when deleting item with large metadata (#2330).
- Slow mime-type check causing steps to disappear and retry (#2332).
- NPE when retrieving empty access control list (#2288).
- Collection metadata update with skipForbidden=True allows update of read-only fields (#2340).

Transcoder fixes

- Fix for calculation of burnt-in timecode for QuickTime source sources contains EDLs (#2334).
- Properly handle MPEG-2 with separate field encoding (#2333).

For MPEG-2 interlaced video where fields are encoded separately, and stored in MPEG transport stream, use the following setting in the transcode preset document:

```
<demuxerSetting>
  <key>pts_mode</key>
  <value>original</value>
</demuxerSetting>
```

This will be the default in Vidispine 4.6.

18.18.3 4.2.14

2016-03-21

MatrixStore

- The MatrixStore SDK has been updated from 3.1.3.3 to 3.1.3.7. This fixes an exception when reading XML files from MatrixStore (#2246).

Bug fixes

- Jobs not running on MySQL (SQLGrammarException) (#2245).
- Slow update of user groups (#2272).
- Missing object metadata in MatrixStore (MXFS_FILENAME_UPPER) (#2271).
- SFTP file worker connection leak on file delete (#2249).
- IllegalArgumentException on item list to Azure (#2254).
- Moving a metadata timespan breaks references (#2218).
- Slow access DOT graph for items in a large amount of collections (#2251).
- No thumbnails created for certain files with an EDL (#2273).
- No document metadata for PDF files when transcoding on import (#2257).

Transcoder fixes

- Handle WAV file with metadata of odd number of bytes (#2258).

18.18.4 4.2.13

2016-02-16

Bug fixes

- Slow listing of files on Azure (#2187).
- Video misidentified as image/cgm (#2185).
- Export transcode failure should fail export (#2183).
- File removed from Solr on shape delete with keepFiles=true (#2212).
- NPE on item reindex on thumbnail read error (#2221).
- Don't use IN subquery statements with MySQL (#2177).
- Be able to skip indexing of timed metadata (#2212).
- POST /storage/(storage-id)/file/data not creating file when using *segment files* (#2171).
- NPE instead of 404 for API/storage/{external-id}/file/{id} requests (#2179).

Transcoder fixes

- Insecure parsing of m3u4 files (#2222).
- Shape deduction crash on invalid QuickTime file (#2180).
- Make transcoder fail on transcode of truncated QuickTime files (#2220).
- Transcoder crash on very short clip (#2223).

18.18.5 4.2.12

2015-12-07

Improvements

- Support for marking a file as a duplicate of another (#2129).
- The *thumbnail format* used by the transcoder is now exposed as a setting (#2128).

Bug fixes

- Signiant transfers failing for large files (#2152).
- Cannot delete group used in many ACLs on GlassFish (#2144).
- Username parameter ignored for *bulk item exports* (#2137).

Transcoder fixes

- Transcoder crash on aborted jobs (#2159).

18.18.6 4.2.11

2015-11-06

Bug fixes

- Deadlock on job start causing job to stop running (#2067).
- Rejected shape import requests causing empty jobs to be created (#2115).
- Configurable exclusive job step wait time. See *jobExclusiveStepMaxWait* (#2116).
- Export job failing to find and copy file created from transcode step (#2106).
- List item jobs not writing directly to S3 (#2120).
- List item jobs not finishing when listing by group (#2108).
- FTP storage to empty directory does not work (#2062).

Transcoder fixes

- Transcoder stuck on broken PDF (#2122).
- Add option to fail if frame cannot be decoded (#2124).
- Incorrect scaling of posters (#2123).

18.18.7 4.2.10

2015-10-01

Bug fixes

- Storage rule supervisor repeatedly restarting due to a long running transaction, causing copy jobs not to start (#2050).
- High JMS connection usage from storage supervisor (#2047).
- Slow file system metadata updates causing growing imports to end early (Tunable growing file timeout) (#2053).
- Slow library search due to rollbacks (#2028).
- Cached search bigtext entries not always removed (#2041).
- Solr searchers keeping GlassFish from shutting down (#2038).
- Quote characters in a collection name generates broken access DOT graph (#2052).
- Checksum not computed for file with %2B in name (#2056).

Transcoder fixes

- Interlace flag not working for H.264 (#2036).
- Incorrect subclipping of MXF OP1a with index in footer (#2057).
- Incorrect bit depth for AES3 (#2059).
- 32bit lpcm detected as 16bit (#2058).
- Burnt in timecode text offset from text box (#2060).

18.18.8 4.2.9

These are release highlights. For a full listing of the features, bug fixes and upgrade notes, please see the [release notes](http://www.vidispine.com/partner/my-documentation) (<http://www.vidispine.com/partner/my-documentation>) in the Vidispine Partner Portal.

2015-08-27

This is a bug fix release with a large number of fixes.

Improvements

- New Relic users will now see web requests with transaction names that match the path used in the request, instead of the automatic name assigned by New Relic which tends to group requests to different endpoints together.
- Speed ups when faceting on many fields with many matching terms.

Bug fixes

- Cached search documents not being removed from the big text table, causing it to grow over time.
- The periodic update of a large library could cause library API requests and index updates to halt due to a locking issue.
- When using SolrCloud the connection manager could abort long running requests, typically causing updates to Solr to fail.
- Various bug fixes and improvements.

For the full list of changes, see the [release notes](http://www.vidispine.com/partner/my-documentation) (<http://www.vidispine.com/partner/my-documentation>).

18.18.9 4.2.8

These are release highlights. For a full listing of the features, bug fixes and upgrade notes, please see the [release notes](http://www.vidispine.com/partner/my-documentation) (<http://www.vidispine.com/partner/my-documentation>) in the Vidispine Partner Portal.

2015-07-03

This is a minor bug fix release that also adds two new job parameters.

Improvements

New job parameters:

- *cerifyPriority* - To set the *priority of jobs in Cerify*.
- *checksumMode* - To have checksums for imported items computed during the transfer step. See *Checksum on file transfer*.

Bug fixes

- Storage not marked as offline if MatrixStore vault goes offline.
- Poster format settings not working.
- Installer ignoring required but failing HTTP requests.
- Certain transcodes/render jobs crashing the transcoder.
- Various bug fixes and improvements.

For the full list of changes, see the [release notes](http://www.vidispine.com/partner/my-documentation) (<http://www.vidispine.com/partner/my-documentation>).

18.18.10 4.2.7

These are release highlights. For a full listing of the features, bug fixes and upgrade notes, please see the [release notes](http://www.vidispine.com/partner/my-documentation) (<http://www.vidispine.com/partner/my-documentation>) in the Vidispine Partner Portal.

2015-06-02

This is a minor bug fix release. See the [release notes](http://www.vidispine.com/partner/my-documentation) (<http://www.vidispine.com/partner/my-documentation>) for details.

18.18.11 4.2.6

These are release highlights. For a full listing of the features, bug fixes and upgrade notes, please see the [release notes](http://www.vidispine.com/partner/my-documentation) (<http://www.vidispine.com/partner/my-documentation>) in the Vidispine Partner Portal.

2015-05-13

Security notice

Apache POI (<https://poi.apache.org/>) has been updated from version 3.8 to 3.11 (<https://poi.apache.org/changes.html>) to mitigate XXE (https://www.owasp.org/index.php/XML_External_Entity_%28XXE%29_Processing) vulnerabilities (CVE-2014-3529 (<http://cve.mitre.org/cgi-bin/cvename.cgi?name=CVE-2014-3529>) and CVE-2014-3574 (<http://cve.mitre.org/cgi-bin/cvename.cgi?name=CVE-2014-3574>)) when extracting metadata from Office documents. This metadata extraction is only done if enabled using `parseFileMetadata`.

XXE has also been disabled in the XML parser used by Vidispine, to address vulnerabilities when parsing XML API requests and sidecar files for example.

Performance improvements

This release contains a number of performance improvements.

For the API:

- Faster collection update and delete.
- Faster group update and delete.
- Faster merged access retrieval.
- Faster storage-rule creation.

For items:

- Faster poster generation.

Changed defaults

Multi-site processing is now disabled by default. See *disableSiteCrunching*.

Other

- Indexing of items with large metadata text fields could cause indexing to halt. This has now been fixed.
- Field groups in the item metadata are now indexed less often.
- Additional audio and video settings from the transcode preset are now supported when rendering or conforming.
- More control over burnt-in subtitle placements. See *Subtitle metadata fields and groups*.
- Various bug fixes and improvements.

18.18.12 4.2.5

These are release highlights. For a full listing of the features, bug fixes and upgrade notes, please see the [release notes](http://www.vidispine.com/partner/my-documentation) (<http://www.vidispine.com/partner/my-documentation>) in the Vidispine Partner Portal.

2015-02-26

Temporary transcoder path

It is now possible to use another directory for *temporary files for the transcoder*. This is controlled via the `<tempPath>` element in the transcoder. This element is controlled via *local configuration file* or *transcoder resource definition* or by changing the configuration for *all transcoders*.

Optional hit count

The *hit count* can now be omitted from the results when searching. This can be done to reduce the response time of search requests.

```
GET API/item?count=false
```

Other

- Buckets with files in subfolders are now properly scanned and will now appear on your S3 storages.
- *Proxy services* can be used for cloud licensing.
- A number of issues with the multi-site sync have been fixed.
- Various bug fixes and improvements.

18.18.13 4.2.4

These are release highlights. For a full listing of the features, bug fixes and upgrade notes, please see the [release notes](http://www.vidispine.com/partner/my-documentation) (<http://www.vidispine.com/partner/my-documentation>) in the Vidispine Partner Portal.

2015-01-29

FTP connection pooling

If you perform a large number of imports or exports over high latency FTP connections then you can now create a *FTP connection pool* to reduce the overhead of establishing a new connection each time.

```
PUT /configuration/ftp-pool
Content-Type: application/xml

<FtpPoolConfigurationDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <pool>
    <minSize>0</minSize>
    <maxSize>-1</maxSize>
    <evictionInterval>30000</evictionInterval>
    <minIdleTime>60000</minIdleTime>
  </pool>
</FtpPoolConfigurationDocument/>
```

Find collections with specific items

An *item* subquery can now be used when searching for collections to find collections based on the items that they contain.

```
PUT /collection
Content-Type: application/xml

<ItemSearchDocument version="2" xmlns="http://xml.vidispine.com/schema/vidispine">
  <operator operation="OR">
    <field>
      <name>title</name>
      <value>Peach</value>
    </field>
  </operator>
</ItemSearchDocument>
```

```

</field>
<item>
  <field>
    <name>title</name>
    <value>Peach</value>
  </field>
</item>
</operator>
</ItemSearchDocument>

```

See *Searching for collections with specific items*.

Transcoder transfer and hash computation

Available transcoder with direct file access to media can be used to compute hash sums of files, or to do filesystem-to-filesystem transfers. This will offload the application server.

To enable this, use the configuration variables `enableTranscoderHashing` and `enableTranscoderTransfer`.

Database purging

Automatic routines for trimming two of the largest Vidispine tables are now included. For information about how to enable this, see *Database purging*.

18.18.14 4.2.3

These are release highlights. For a full listing of the features, bug fixes and upgrade notes, please see the [release notes](http://www.vidispine.com/partner/my-documentation) (<http://www.vidispine.com/partner/my-documentation>) in the Vidispine Partner Portal.

2014-12-18

StatsD metrics

Metrics related to operations performed by both Vidispine and the transcoders can now be exposed using the *StatsD* protocol. It is also possible to access the Vidispine metric statistics using *JMX*.

```

$ node stats.js config.js
17 Dec 12:23:31 - reading config file: config.js
17 Dec 12:23:31 - server is up
17 Dec 12:23:31 - DEBUG: Loading backend: ./backends/graphite
17 Dec 12:23:34 - DEBUG: vs.job.total.aborted:99|g
17 Dec 12:23:34 - DEBUG: vs.job.total.aborted_pending:0|g
17 Dec 12:23:34 - DEBUG: vs.job.total.failed_total:520|g
17 Dec 12:23:34 - DEBUG: vs.job.total.finished:50491|g
17 Dec 12:23:34 - DEBUG: vs.job.total.finished_warning:3|g
17 Dec 12:23:34 - DEBUG: vs.job.total.ready:0|g
17 Dec 12:23:34 - DEBUG: vs.job.total.started:1|g
17 Dec 12:23:34 - DEBUG: vs.job.total.waiting:0|g
17 Dec 12:23:34 - DEBUG: vs.service.load.5:0.02|g
17 Dec 12:23:34 - DEBUG: vs.service.load.60:0.02|g
...

```

Multithreaded transcoder pipeline

The decoding part of the transcoder is now multithreaded for I-frame-only content. This means that for content such as ProRes, D10/IMX, etc, you will see a speed-up, especially if the input material is in high resolution.

FileCatalyst transfers

FileCatalyst is now available as a transfer method between storage locations. The Vidispine application acts as a FileCatalyst client which can communicate to FileCatalyst servers for transferring files.

In order to register a FileCatalyst server for a storage, add a new transfer method to the storage.

```
<method>
  <uri>filecatalyst://fc:s3cret@localhost:2100/incoming/</uri>
  <type>TRANSFER</type>
</method>
```

For more information, see *FileCatalyst Integration*.

StorNext file information

For files residing on a Quantum StorNext file system, Vidispine can now show metadata on the file. In order to use this, enable web services on StorNext and add a HSM method to the storage.

```
<method>
  <uri>stornext://webservice:webservice@localhost:81/stornext/snfs/</uri>
  <type>HSM</type>
</method>
```

For more information, see *StorNext Integration*.

Standalone metadata

It is now possible to create *standalone documents* with arbitrary metadata. If you are using *global metadata* but need to store a large amount of data, leading to a large metadata documents, then consider splitting it up into smaller documents, for example by entity or group of entities.

```
PUT API/document/company\_a
```

```
<MetadataDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <timespan start="-INF" end="+INF">
    ...
  </timespan>
</MetadataDocument>
```

Filters and facets

Search *filters* have been added to replace the facet filters. They support arbitrary queries compared to facet filters that only allow a single field to be queried.

Filters can also be excluded from certain facets. This can be used to reduce the number of search requests need to display search pages that uses multiple facets and multiple drill down options.

```
PUT API/item
Content-Type: application/xml
```

```
<ItemSearchDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <filter name="typeFilter">
    <field>
      <name>mediaType</name>
      <value>audio</value>
    </field>
  </filter>
  <facet count="true">
    <field>mediaType</field>
    <exclude>typeFilter</exclude>
  </facet>
</ItemSearchDocument>
```

```
<ItemListDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <hits>1</hits>
  <item end="+INF" id="VX-361763" start="-INF">
    <timespan end="+INF" start="-INF"/>
  </item>
  <facet>
    <field>mediaType</field>
    <count fieldValue="none">1867</count>
    <count fieldValue="image">33</count>
    <count fieldValue="video">10</count>
    <count fieldValue="audio">1</count>
    <count fieldValue="data">1</count>
  </facet>
</ItemListDocument>
```

Other

- It is no longer necessary to use the application server's /tmp directory to store output files for Azure, S3, FTP destinations. Instead, this can be handled using *segment files* on the destination storage.
- The timestamp handling for generating MP4/H.264 files have been rewritten. This means that proxy files are frame accurate without without the previous tweaks (useDTSmode et al).

For the full list of changes, see the [release notes](http://www.vidispine.com/partner/my-documentation) (<http://www.vidispine.com/partner/my-documentation>).

18.18.15 4.2.2

These are release highlights. For a full listing of the features, bug fixes and upgrade notes, please see the [release notes](http://www.vidispine.com/partner/my-documentation) (<http://www.vidispine.com/partner/my-documentation>) in the Vidispine Partner Portal.

2014-11-03

Thumbnails on cloud storages

Thumbnails can now be stored on cloud storages such as Amazon S3 and Azure. Thumbnails will be stored using *one file per thumbnail*.

```
<ResourceDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <thumbnail>
    <path>direct+azure://:+kLZrqckLZrqckLZrqckLZrqc==@mystorage/my-container/</path>
  </thumbnail>
</ResourceDocument>
```

Job pools

Use *job pools* to ensure that long running low priority jobs don't block high priority jobs from running.

```
PUT /configuration/job-pool
Content-Type: application/xml

<JobPoolListDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <pool>
    <priorityThreshold>HIGH</priorityThreshold>
    <size>2</size>
  </pool>
  <pool>
    <priorityThreshold>LOWEST</priorityThreshold>
    <size>3</size>
  </pool>
</JobPoolListDocument>
```

Shape and file search

It is now possible to search for shapes and files, based on their key-value metadata, using the *shape search* and the *file search* resources.

```
PUT /search/shape
Content-Type: application/xml

<?xml version="1.0" encoding="UTF-8" standalone="yes"?>
<ShapeSearchDocument version="2" xmlns="http://xml.vidispine.com/schema/vidispine">
  <field>
    <name>language</name>
    <value>en</value>
  </field>
</ShapeSearchDocument>
```

Joins

Support for *joins* has also been added to allow for cross-entity search between items, shapes and files.

```
<?xml version="1.0" encoding="UTF-8" standalone="yes"?>
<ItemSearchDocument version="2" xmlns="http://xml.vidispine.com/schema/vidispine">
  <text>peach</text>
  <shape>
    <field>
      <name>language</name>
      <value>en</value>
    </field>
  </shape>
</ItemSearchDocument>
```


Platform

This release brings support for:

- PostgreSQL 9.3.
- Java 7 update 67.

Other

- *Signiant* can now be used to transfer files between storages.

For the full list of changes, see the [release notes](http://www.vidispine.com/partner/my-documentation) (<http://www.vidispine.com/partner/my-documentation>).

18.18.16 4.2.1

These are release highlights. For a full listing of the features, bug fixes and upgrade notes, please see the [release notes](http://www.vidispine.com/partner/my-documentation) (<http://www.vidispine.com/partner/my-documentation>) in the Vidispine Partner Portal.

2014-09-16

WADL improvements

A number of improvements have been made to the WADL file. Missing parameters have been added and duplicate parameters have been removed for example. It has been updated to also include:

- Parameter options.
- Markers for repeating parameters.

The WADL file can be obtained using `GET API/application.wadl`.

Other

- Support for copying of DTV 608/708 Closed Captions.
- Files can now also be sorted by *file extension*.

For the full list of changes, see the [release notes](http://www.vidispine.com/partner/my-documentation) (<http://www.vidispine.com/partner/my-documentation>).

18.18.17 4.2

These are release highlights. For a full listing of the features, bug fixes and upgrade notes, please see the [release notes](http://www.vidispine.com/partner/my-documentation) (<http://www.vidispine.com/partner/my-documentation>) in the Vidispine Partner Portal.

2014-07-04

API documentation

The API documentation has been moved from the Vidispine wiki into this documentation that you are now reading.

It is available online at <http://apidoc.vidispine.com/latest/> and also on your local installation at `/APIdoc`.

Java 7

The 4.2 series now requires Java 7, specifically Java 7 update 25 as later versions have known bugs with GlassFish 3.x.

Efficient file I/O

The new Java 7 File API is used to reduce the number of file system operations that are used when scanning local storages.

Indexing

The Solr configuration now exists in the *indexing configuration*, but note that the Solr configuration properties are still supported.

This configuration can also be used to specify which fields should be included in the full text index, unless specified explicitly for a specific field.

```
PUT /configuration/indexing
Content-Type: application/xml

<IndexingConfigurationDocument xmlns="http://xml.vidispine.com/schema/vidispine">
  <solrPath>http://localhost:8088/solr</solrPath>
  <fieldDefault>
    <name>xmp_*</name>
    <fullText>>false</fullText>
  </fieldDefault>
</IndexingConfigurationDocument>
```

Detect renamed files

Renamed files can be detected and re-associate based on the file checksum. Enable it using the *detectRenamedFiles* storage property.

Platform

This release adds support for Ubuntu 14.04, Windows 2012 R2 and MySQL 5.6. At the same time, support for PostgreSQL 8.x, MySQL 5.1 and Java 1.6 has been discontinued.

Other

- Ability to move fields from subgroups using *schema migrations*.
- Posters can now be created in either *JPEG or PNG format*.
- Support for storage exclude filters to exclude certain files from a storage. See *excludeFilter*.
- RED GPU acceleration
- Configurable *quality level* for RED file decoding.

For the full list of changes, see the [release notes](http://www.vidispine.com/partner/my-documentation) (<http://www.vidispine.com/partner/my-documentation>).

Other sources of information

- [Partner portal](http://www.vidispine.com/partner/partnerportal) (<http://www.vidispine.com/partner/partnerportal>), including the

- latest versions of the [software](http://www.vidispine.com/partner/my-software) (<http://www.vidispine.com/partner/my-software>),
- [knowledge base](http://www.vidispine.com/partner/knowledge-forum-support) (<http://www.vidispine.com/partner/knowledge-forum-support>),
- [getting started guide](http://support.vidispine.com/support/solutions/articles/14000032647-getting-started-with-the-vidispine-api) (<http://support.vidispine.com/support/solutions/articles/14000032647-getting-started-with-the-vidispine-api>), and
- discussion forum

Other tools already available on your installation

- Selftest
- Log report
- XML Schemas (XSDs)
 - `xmlSchema.xsd`
 - `transcoder.xsd`
 - `common.xsd`
- Javadoc of compiled versions of the XML Schemas, useful when writing JavaScript integration code

This copy of the documentation covers Vidispine version **4.17.2** (build **4.17.2-gf72591eb6d-19092**). You can find other versions in the Partner Portal.

/API

GET /API/selftest, 635
 GET /API/selftest/(test-name), 635

/APIoauth

GET /APIoauth/callback/cloudconvert, 568
 PUT /APIoauth/debug/echo, 567
 POST /APIoauth/import/raw, 393
 PUT /APIoauth/license/auth-info, 499
 GET /APIoauth/selftest, 635
 GET /APIoauth/stitch, 566
 GET /APIoauth/vidispine-logs/job/(job-id).zip, 709

/application.wadl

GET /application.wadl, 568

/auto-projection

GET /auto-projection, 499
 GET /auto-projection/(name), 500
 PUT /auto-projection/(name), 500
 DELETE /auto-projection/(name), 501
 PUT /auto-projection/(name)/disable, 501
 PUT /auto-projection/(name)/enable, 501
 GET /auto-projection/disable, 499
 GET /auto-projection/enable, 500

/collection

GET /collection, 334
 PUT /collection, 355
 POST /collection, 337
 DELETE /collection, 337
 GET /collection/(collection-id), 338
 PUT /collection/(collection-id), 349
 DELETE /collection/(collection-id), 337
 PUT /collection/(collection-id)/(id), 348
 DELETE /collection/(collection-id)/(id), 349
 GET /collection/(collection-id)/ancestor, 344

POST /collection/(collection-id)/export, 410
 PUT /collection/(collection-id)/folder-name, 360
 GET /collection/(collection-id)/item, 340
 PUT /collection/(collection-id)/item, 344
 PUT /collection/(collection-id)/map-to-folder, 360
 DELETE /collection/(collection-id)/map-to-folder, 360
 POST /collection/(collection-id)/order, 358
 PUT /collection/(collection-id)/rename, 338
 GET /collection/(id)/definition, 606
 GET /collection/(id)/definition/(format), 606
 PUT /collection/(id)/definition/(format), 606
 DELETE /collection/(id)/definition/(format), 607
 GET /collection/(id)/definition/(format)/asset, 607
 PUT /collection/(id)/definition/(format)/asset, 607
 DELETE /collection/(id)/definition/(format)/asset, 608
 GET /collection/(id)/definition/(format)/extradata, 608
 PUT /collection/(id)/definition/(format)/extradata, 608
 DELETE /collection/(id)/definition/(format)/extradata, 609
 POST /collection/(id)/version, 605
 GET /collection/(id)/version/export, 614
 POST /collection/(id)/version/export, 612
 GET /collection/history, 357
 POST /collection/project, 605
 POST /collection/project/inspect, 609

/configuration

GET /configuration, 364
 GET /configuration/auth, 372
 PUT /configuration/auth, 372
 DELETE /configuration/auth, 373
 GET /configuration/cors, 371
 PUT /configuration/cors, 371
 GET /configuration/ftp-pool, 369
 PUT /configuration/ftp-pool, 369
 DELETE /configuration/ftp-pool, 370
 GET /configuration/indexing, 364
 PUT /configuration/indexing, 365
 GET /configuration/job-pool, 366
 PUT /configuration/job-pool, 367
 DELETE /configuration/job-pool, 367
 DELETE /configuration/job-pool/(priority), 368
 GET /configuration/logreport, 370
 PUT /configuration/logreport, 370
 GET /configuration/metrics, 365
 PUT /configuration/metrics, 365
 GET /configuration/path-alias, 365
 PUT /configuration/path-alias, 366
 GET /configuration/properties, 373
 PUT /configuration/properties, 374
 POST /configuration/properties, 374
 GET /configuration/properties/(key), 373
 PUT /configuration/properties/(key), 375
 DELETE /configuration/properties/(key), 375
 GET /configuration/purging, 371
 PUT /configuration/purging, 371
 DELETE /configuration/purging, 372

/conform

POST /conform, 473

/cost

POST /cost/(path), 706
 GET /cost/estimate/(id), 707

/deletion-lock

GET /deletion-lock, 361
 GET /deletion-lock/(lock-id), 362
 PUT /deletion-lock/(lock-id), 363
 DELETE /deletion-lock/(lock-id), 364

/document

GET /document, 507
 GET /document/(name), 508
 PUT /document/(name), 509
 DELETE /document/(name), 511
 GET /document/(name)/changes, 510

/export-location

GET /export-location, 376
 GET /export-location/(location-name), 377
 PUT /export-location/(location-name), 376
 DELETE /export-location/(location-name), 377
 GET /export-location/(location-name)/script, 377
 PUT /export-location/(location-name)/script, 377

/external-id

GET /external-id, 378
 GET /external-id/(namespace-id), 378
 PUT /external-id/(namespace-id), 378
 DELETE /external-id/(namespace-id), 379
 DELETE /external-id/id/(external-id), 381

/group

GET /group, 382
 PUT /group, 384
 DELETE /group, 383
 GET /group/(group-name), 382
 PUT /group/(group-name), 383
 DELETE /group/(group-name), 383
 GET /group/(group-name)/children, 385
 GET /group/(group-name)/description, 385
 PUT /group/(group-name)/description, 385
 PUT /group/(group-name)/group/(child-groupname), 386
 DELETE /group/(group-name)/group/(child-groupname), 386
 GET /group/(group-name)/parents, 385
 GET /group/(group-name)/role, 382
 PUT /group/(group-name)/user/(username), 386
 DELETE /group/(group-name)/user/(username), 387
 GET /group/(group-name)/users, 386

/import

POST /import, 387
 GET /import/access/, 326
 PUT /import/access/group/(group-name), 327
 DELETE /import/access/group/(group-name), 327
 POST /import/imp, 395
 POST /import/placeholder, 397
 POST /import/placeholder/(item-id), 401

POST /import/placeholder/(item-id)/[content-type]/(shape-id)/component/(component-id), 397

POST /import/placeholder/(item-id)/[content-type]/(shape-id)/component/(component-id), 402

POST /import/placeholder/(item-id)/[content-type]/(shape-id)/raw-passkey, 399

POST /import/placeholder/(item-id)/raw-passkey, 402

POST /import/project, 611

POST /import/project/sequence, 610

POST /import/raw, 389

POST /import/raw-passkey, 391

GET /import/settings, 405

POST /import/settings, 404

GET /import/settings/(settings-id), 405

PUT /import/settings/(settings-id), 405

DELETE /import/settings/(settings-id), 406

POST /import/sidecar/(item-id), 403

POST /import/sidecar/(item-id)/raw, 403

GET /import/storage, 396

POST /item/(id)/shape/(shape-id)/component/(component-id), 464

POST /item/(id)/shape/(shape-id)/component/(component-id), 465

POST /item/(id)/shape/(shape-id)/raw, 465

DELETE /item/(id)/shape/(shape-id)/component/(component-id), 466

POST /item/(id)/shape/(shape-id)/component/(component-id), 463

POST /item/(id)/shape/(shape-id)/component/(component-id), 464

POST /item/(id)/shape/(shape-id)/component/placeholder, 466

GET /item/(id)/shape/(shape-id)/cpl, 443

GET /item/(id)/shape/(shape-id)/file, 451

GET /item/(id)/shape/(shape-id)/graph, 442

GET /item/(id)/shape/(shape-id)/graph/dot, 442

GET /item/(id)/shape/(shape-id)/mime/, 453

PUT /item/(id)/shape/(shape-id)/mime/(mime-type), 453

DELETE /item/(id)/shape/(shape-id)/mime/(mime-type), 453

PUT /item/(id)/shape/(shape-id)/placeholder, 450

POST /item/(id)/shape/(shape-id)/version, 449

PUT /item/(id)/shape/(shape-id)/version/(new-version), 450

POST /item/(id)/shape/create, 445

POST /item/(id)/shape/essence, 448

POST /item/(id)/shape/essence/raw, 448

POST /item/(id)/shape/imp, 446

POST /item/(id)/shape/placeholder, 450

POST /item/(id)/shape/raw, 444

GET /item/(id)/shape/version, 447

DELETE /item/(id)/shape/version/(version), 449

GET /item/(id)/shape/version/(version-number), 449

GET /item/(id)/timeline, 476

DELETE /item/(id)/timeline, 477

GET /item/(id)/timeline/(timeline-format), 476

PUT /item/(id)/timeline/(timeline-format), 477

DELETE /item/(id)/timeline/(timeline-format), 477

POST /item/(id)/timeline/(timeline-format)/conform, 474

/item

POST /item/(id1)/relation/(id2), 434	PUT /item/(item-id)/shape/(shape-id)/tag/(tag-name), 452
GET /item/(item-id), 416	DELETE /item/(item-id)/shape/(shape-id)/tag/(tag-name), 453
DELETE /item/(item-id), 419	POST /item/(item-id)/shape/(shape-id)/thumbnail, 446
GET /item/(item-id)/collections, 426	POST /item/(item-id)/shape/(shape-id)/transcode, 472
POST /item/(item-id)/export, 406	POST /item/(item-id)/shape/(shape-id)/update, 452
POST /item/(item-id)/export/imp, 408	POST /item/(item-id)/thumbnail, 466
GET /item/(item-id)/library, 426	GET /item/(item-id)/thumbnailresource, 468
GET /item/(item-id)/lock, 431	PUT /item/(item-id)/thumbnailresource, 468
PUT /item/(item-id)/lock, 432	POST /item/(item-id)/transcode, 471
POST /item/(item-id)/lock, 431	GET /item/(item-id)/uri, 429
DELETE /item/(item-id)/lock, 432	GET /item/(item-id)/waveform/alltracks, 461
GET /item/(item-id)/loudness, 456	GET /item/(item-id)/waveform/data, 458
PUT /item/(item-id)/loudness, 457	GET /item/(item-id)/waveform/image, 459
GET /item/(item-id)/metadata/bulky/, 502	GET /item/(item-id)/waveform/imageURI, 460
PUT /item/(item-id)/metadata/bulky/, 502	GET /item/(item-id)/waveform/values, 457
DELETE /item/(item-id)/metadata/bulky/, 502	POST /item/access/, 324
GET /item/(item-id)/metadata/bulky/(key), 502	DELETE /item/access/, 325
PUT /item/(item-id)/metadata/bulky/(key), 503	GET /item/history, 424
DELETE /item/(item-id)/metadata/bulky/(key), 504	POST /item/list, 425
GET /item/(item-id)/posterresource, 468	
PUT /item/(item-id)/posterresource, 468	
PUT /item/(item-id)/re-index, 424	
POST /item/(item-id)/shape/(shape-id)/analyze, 454	
POST /item/(item-id)/shape/(shape-id)/export, 409	
POST /item/(item-id)/shape/(shape-id)/export/imp, 412	
GET /item/(item-id)/shape/(shape-id)/filename, 677	
PUT /item/(item-id)/shape/(shape-id)/filename/(storage-id), 678	
DELETE /item/(item-id)/shape/(shape-id)/filename/(storage-id), 678	
GET /item/(item-id)/shape/(shape-id)/metadata/bulky/, 502	
PUT /item/(item-id)/shape/(shape-id)/metadata/bulky/, 502	
DELETE /item/(item-id)/shape/(shape-id)/metadata/bulky/(key), 502	
GET /item/(item-id)/shape/(shape-id)/metadata/bulky/(key), 502	
PUT /item/(item-id)/shape/(shape-id)/metadata/bulky/(key), 503	
DELETE /item/(item-id)/shape/(shape-id)/metadata/bulky/(key), 504	
GET /item/(item-id)/shape/(shape-id)/storage-rule, 679	
GET /item/(item-id)/shape/(shape-id)/tag/, 452	
	/javascript
	POST /javascript/session, 478
	GET /javascript/session/(id), 478
	DELETE /javascript/session/(id), 479
	POST /javascript/test, 478
	/job
	POST /job, 483
	DELETE /job, 484
	GET /job/(job-id), 481
	POST /job/(job-id), 481
	DELETE /job/(job-id), 482
	GET /job/(job-id)/problem, 483
	POST /job/(job-id)/re-run, 482
	DELETE /job/problem, 483
	/jobtype
	GET /jobtype, 485
	/library
	GET /library, 486
	POST /library, 487
	DELETE /library, 489
	GET /library/(library-id), 490

PUT /library/(library-id), 494
DELETE /library/(library-id), 488
PUT /library/(library-id)/(item-id), 494
DELETE /library/(library-id)/(item-id), 494
POST /library/(library-id)/export, 410
PUT /library/(library-id)/item-metadata, 495
POST /library/(library-id)/list, 495
GET /library/(library-id)/settings, 489
PUT /library/(library-id)/settings, 490

/license

GET /license, 497
GET /license/slave, 498
PUT /license/slave, 497
POST /license/slave, 498
GET /license/slave/(id), 498
DELETE /license/slave/(id), 498
GET /license/slave/(id)/license, 498
GET /license/slave/license, 498
GET /license/slave/license/(id), 499

/log

GET /log, 332
GET /log/export, 333
GET /log/transfer-log, 690

/metadata

GET /metadata, 504
PUT /metadata, 506
GET /metadata/(uuid), 506
DELETE /metadata/(uuid), 507
GET /metadata/dataset, 552
GET /metadata/dataset/(name), 553
PUT /metadata/dataset/(name), 554
DELETE /metadata/dataset/(name), 556
GET /metadata/migration, 556
POST /metadata/migration, 556
GET /metadata/migration/(id), 556

/metadata-field

GET /metadata-field, 538
GET /metadata-field/(field-name), 538
PUT /metadata-field/(field-name), 538
DELETE /metadata-field/(field-name), 539
GET /metadata-field/(field-name)/allowed-values, 539
POST /metadata-field/(field-name)/allowed-values, 540
GET /metadata-field/(field-name)/merged-access, 543
GET /metadata-field/(field-name)/values, 541
PUT /metadata-field/(field-name)/values, 541
GET /metadata-field/field-group, 547
PUT /metadata-field/field-group, 550
GET /metadata-field/field-group/(group-name), 549
PUT /metadata-field/field-group/(group-name), 548
DELETE /metadata-field/field-group/(group-name), 549
PUT /metadata-field/field-group/(group-name)/(field-name), 549
DELETE /metadata-field/field-group/(group-name)/(field-name), 550
GET /metadata-field/field-group/(group-name)/merged-access, 544
PUT /metadata-field/field-group/(parent-group-name), 550
DELETE /metadata-field/field-group/(parent-group-name), 550
GET /metadata-field/field-group/merged-access/, 544
GET /metadata-field/merged-access/, 542
GET /metadata-field/terse-schema, 542

/metadata-schema

GET /metadata-schema, 559
PUT /metadata-schema, 559
DELETE /metadata-schema, 560
GET /metadata-schema/(group-name), 560
PUT /metadata-schema/(group-name), 561
DELETE /metadata-schema/(group-name), 561

/projection

GET /projection, 557
DELETE /projection/(projection-id), 558
GET /projection/(projection-id)/incoming, 557
PUT /projection/(projection-id)/incoming, 558
GET /projection/(projection-id)/outgoing, 557
PUT /projection/(projection-id)/outgoing, 558

/quota

GET /quota, 616
POST /quota, 615
GET /quota/(rule-id), 617
DELETE /quota/(rule-id), 617
PUT /quota/(rule-id)/evaluate, 617

/reindex

GET /reindex/(index), 535
 PUT /reindex/(index), 534

/relation

POST /relation, 434
 GET /relation/(relation-id), 435
 PUT /relation/(relation-id), 435
 DELETE /relation/(relation-id), 436

/resource

GET /resource, 617
 POST /resource, 618
 GET /resource/(resource-type), 618
 POST /resource/(resource-type), 618
 GET /resource/(resource-type)/(resource-id), 619
 PUT /resource/(resource-type)/(resource-id), 618
 DELETE /resource/(resource-type)/(resource-id), 619
 GET /resource/(resource-type)/(resource-id)/status, 619
 POST /resource/(type)/(resource-id)/sync, 231

/scheduled-request

GET /scheduled-request, 620
 DELETE /scheduled-request/, 622
 GET /scheduled-request/(request-id), 621
 DELETE /scheduled-request/(request-id), 622
 GET /scheduled-request/(request-id)/response, 621

/search

GET /search, 622
 PUT /search, 625
 PUT /search/autocomplete, 631
 GET /search/file, 630
 PUT /search/file, 630
 POST /search/optimize, 634
 GET /search/shape, 629
 PUT /search/shape, 629

/sequence

POST /sequence/export, 612
 POST /sequence/render, 439

/shape-tag

GET /shape-tag/, 635
 GET /shape-tag/(tag-name), 636
 PUT /shape-tag/(tag-name), 636

DELETE /shape-tag/(tag-name), 636
 GET /shape-tag/(tag-name)/item/(item-id)/shape/(shape-id), 637
 GET /shape-tag/(tag-name)/script, 637
 PUT /shape-tag/(tag-name)/script, 637
 DELETE /shape-tag/(tag-name)/script, 637

/site

GET /site, 638
 GET /site/(site-id), 638
 PUT /site/(site-id), 638

/storage

GET /storage, 663
 POST /storage, 665
 GET /storage/(storage-id), 666
 PUT /storage/(storage-id), 666
 DELETE /storage/(storage-id), 667
 GET /storage/(storage-id)/auto-import/, 642
 PUT /storage/(storage-id)/auto-import/, 641
 DELETE /storage/(storage-id)/auto-import/, 643
 PUT /storage/(storage-id)/auto-import/disable, 642
 PUT /storage/(storage-id)/auto-import/enable, 643
 PUT /storage/(storage-id)/evacuate, 672
 DELETE /storage/(storage-id)/evacuate, 672
 GET /storage/(storage-id)/export, 671
 GET /storage/(storage-id)/freespace, 668
 GET /storage/(storage-id)/method, 668
 PUT /storage/(storage-id)/method, 669
 GET /storage/(storage-id)/method/(method-id), 670
 PUT /storage/(storage-id)/method/(method-id), 670
 DELETE /storage/(storage-id)/method/(method-id), 671
 DELETE /storage/(storage-id)/method;url=(url), 671
 POST /storage/(storage-id)/rescan, 668
 GET /storage/(storage-id)/status, 668
 PUT /storage/(storage-id)/type/(type), 668
 GET /storage/auto-import/, 642
 POST /storage/import, 671
 GET /storage/storage-group/, 676
 GET /storage/storage-group/(group-name), 676
 PUT /storage/storage-group/(group-name), 676

GET /vidispine-logs/job/(job-id)/uri,
709

/vidispine-service

GET /vidispine-service, 710
 PUT /vidispine-service/disable, 711
 PUT /vidispine-service/enable, 711
 GET /vidispine-service/service/(service),
710
 PUT /vidispine-service/service/(service)/disable,
711
 PUT /vidispine-service/service/(service)/enable,
711
 GET /vidispine-service/stacktrace, 711

/vxa

GET /vxa, 712
 GET /vxa/(uuid), 712
 DELETE /vxa/(uuid), 713
 GET /vxa/(uuid)/configuration, 712
 PUT /vxa/enable-ssh, 712

/whoami

GET /whoami, 568

/{access-entity}

GET {access-entity}/(entity-id)/access/,
323
 POST {access-entity}/(entity-id)/access/,
323
 GET {access-entity}/(entity-id)/access/(access-id),
324
 DELETE {access-entity}/(entity-id)/access/(access-id),
324
 POST {access-entity}/(entity-id)/access/bulk,
325
 GET {access-entity}/(entity-id)/access/graph,
331
 GET {access-entity}/(entity-id)/access/graph/dot,
331
 PUT {access-entity}/(entity-id)/access/owner/{username},
325
 GET {access-entity}/(entity-id)/merged-access/
328
 GET {access-entity}/(entity-id)/merged-access/graph,
329
 DELETE {access-entity}/(item-id)/access/bulk,
326

/{eidr-content-resource}

PUT {eidr-content-resource}/eidr/sync,
303

/{external-id-resource}

GET {external-id-resource}, 380
 DELETE {external-id-resource}, 381
 PUT {external-id-resource}/(external-id),
380
 DELETE {external-id-resource}/(external-id),
381

/{field-access-resource}

GET {field-access-resource}, 545
 POST {field-access-resource}, 546
 DELETE {field-access-resource}/(access-id),
546

/{file-resource}

GET {file-resource}, 648
 DELETE {file-resource}, 660
 PUT {file-resource}/abandon, 662
 GET {file-resource}/data, 649
 POST {file-resource}/data, 649
 DELETE {file-resource}/entity, 661
 POST {file-resource}/import, 654
 POST {file-resource}/import/assetmap,
655
 POST {file-resource}/path, 661
 PUT {file-resource}/re-index, 663
 PUT {file-resource}/restore, 280
 PUT {file-resource}/state/(state), 662
 POST {file-resource}/storage/(target-storage-id),
659
 POST {file-resource}/uri, 650

/{item-content-resource}

GET {item-content-resource}, 427

/{key-value-metadata-resource}

GET {key-value-metadata-resource}, 512
 PUT {key-value-metadata-resource}, 513
 DELETE {key-value-metadata-resource},
514
 GET {key-value-metadata-resource}/(keypath),
514
 PUT {key-value-metadata-resource}/(keypath),
514
 DELETE {key-value-metadata-resource}/(keypath),
515
 PUT {key-value-metadata-resource}/(prefix),
513

/{lock-entity}

GET {lock-entity}/deletion-lock, 362
 POST {lock-entity}/deletion-lock, 363
 GET {lock-entity}/deletion-lock/(lock-id),
363

PUT {lock-entity}/deletion-lock/(lock-id)	364	POST {notification-entity}/(entity-id)/notification	602
DELETE {lock-entity}/deletion-lock/(lock-id)	364	DELETE {notification-entity}/(entity-id)/notification	602
/{metadata-entity}		GET {notification-entity}/(entity-id)/notification	602
GET {metadata-entity}/(entity-id)/metadata	515	PUT {notification-entity}/(entity-id)/notification	603
PUT {metadata-entity}/(entity-id)/metadata	518	DELETE {notification-entity}/(entity-id)/notification	602
GET {metadata-entity}/(entity-id)/metadata/changes	520	/{notification-resource}	
PUT {metadata-entity}/(entity-id)/metadata/changes	528	GET {notification-resource}/,	599
GET {metadata-entity}/(entity-id)/metadata/changes/compareTo/previous	522	POST {notification-resource}/,	599
PUT {metadata-entity}/(entity-id)/metadata/changes/(changeset-id),	525	DELETE {notification-resource}/,	600
DELETE {metadata-entity}/(entity-id)/metadata/changes/(changeset-id),	530	GET {notification-resource}/(notification-id),	600
GET {metadata-entity}/(entity-id)/metadata/changes/(changeset-id)/compareTo/(from-changeset-id)	522	PUT {notification-resource}/(notification-id),	603
DELETE {metadata-entity}/(entity-id)/metadata/changes/(changeset-id)/compareTo/previous,	522	DELETE {notification-resource}/(notification-id),	601
PUT {metadata-entity}/(entity-id)/metadata/changes/(changeset-id)/trim,	528	/{rule-resource}	
PUT {metadata-entity}/(entity-id)/metadata/changes/(changeset-id)/trim,	528	GET {rule-resource},	680
PUT {metadata-entity}/(entity-id)/metadata/changes/(changeset-id)/trim,	528	DELETE {rule-resource},	681
PUT {metadata-entity}/(entity-id)/metadata/changes/(changeset-id)/trim,	528	GET {rule-resource}/(tag-name),	681
PUT {metadata-entity}/(entity-id)/metadata/changes/(changeset-id)/trim,	528	PUT {rule-resource}/(tag-name),	682
PUT {metadata-entity}/(entity-id)/metadata/changes/(changeset-id)/trim,	533	DELETE {rule-resource}/(tag-name),	682
/{site-rule-entity}		PUT {notification-resource}/(notification-id),	601
PUT {metadata-entity}/(entity-id)/metadata/changes/(changeset-id)/trim,	532	GET {site-rule-entity}/site-rule,	639
GET {metadata-entity}/(entity-id)/metadata/changes/(changeset-id)/trim,	534	POST {site-rule-entity}/site-rule/,	640
GET {metadata-entity}/(entity-id)/metadata/changes/(changeset-id)/trim,	534	GET {site-rule-entity}/site-rule/(id),	641
PUT {metadata-entity}/(entity-id)/metadata/changes/(changeset-id)/trim,	519	PUT {site-rule-entity}/site-rule/(id),	641
DELETE {site-rule-entity}/site-rule/(id),	641	DELETE {site-rule-entity}/site-rule/(id),	641
/{metadata-resource}		/{storage-resource}	
GET {metadata-resource}/(id)/metadata-lock	536	GET {storage-resource}/file,	643
POST {metadata-resource}/(id)/metadata-lock	537	POST {storage-resource}/file,	661
GET {metadata-resource}/(id)/metadata-lock	536	POST {storage-resource}/file/data,	648
PUT {metadata-resource}/(id)/metadata-lock/(lock-id),	537	POST {storage-resource}/file/import,	656
DELETE {metadata-resource}/(id)/metadata-lock/(lock-id),	537	POST {storage-resource}/file/import/assetmap,	658
DELETE {metadata-resource}/(id)/metadata-lock/(lock-id),	537	GET {storage-resource}/importable,	651
/{notification-entity}		/{thumbnail-resource}	
GET {notification-entity}/(entity-id)/notification	601	GET {thumbnail-resource},	469
DELETE {notification-entity}/(entity-id)/notification	601	DELETE {thumbnail-resource},	470
PUT {notification-entity}/(entity-id)/notification	601	GET {thumbnail-resource}/(time),	470
		PUT {thumbnail-resource}/(time),	469

```
DELETE {thumbnail-resource}/{time},470  
POST {thumbnail-resource}/{time}/export,  
    470
```

A

additionalHash
 reserved key, 672

alwaysGenerateThumbnails
 configuration property, 257

api.dataType() (api method), 271

api.delete() (api method), 271

api.get() (api method), 271

api.getInfo() (api method), 272

api.header() (api method), 271

api.input() (api method), 271

api.path() (api method), 271

api.post() (api method), 271

api.put() (api method), 271

api.queryParam() (api method), 271

api.rich() (api method), 272

api.timeout() (api method), 271

api.user() (api method), 271

apiNoauthUri
 configuration property, 252

apiUri
 configuration property, 252

auditTrailPurgingDirectory
 configuration property, 263

auditTrailPurgingTime
 configuration property, 263

autoRemoveExpiredDeletionLocks
 configuration property, 265

azureSasValidTime
 configuration property, 259

B

bulkyMetadataKeysToIgnore
 configuration property, 264

C

cerifyPriority
 job metadata key, 486

changeLogForcePurgingTime
 configuration property, 264

changeLogPurgingTime
 configuration property, 263

checksumMode
 job metadata key, 486

closeLimit
 reserved key, 672

clusterName
 configuration property, 252

com.vidispine.credentials.dir, 146

com.vidispine.site, 7

compressDocumentMessages
 configuration property, 263

concurrentJobs
 configuration property, 256

configuration property
 alwaysGenerateThumbnails, 257
 apiNoauthUri, 252
 apiUri, 252
 auditTrailPurgingDirectory, 263
 auditTrailPurgingTime, 263
 autoRemoveExpiredDeletionLocks, 265
 azureSasValidTime, 259
 bulkyMetadataKeysToIgnore, 264
 changeLogForcePurgingTime, 264
 changeLogPurgingTime, 263
 clusterName, 252
 compressDocumentMessages, 263
 concurrentJobs, 256
 defaultIngestStorage, 256
 defaultTranscoder, 253
 disableATime, 261
 disableMetadataSchema, 255
 disableSequenceChecker, 264
 disableSiteCrunching, 253
 disableThumbnailGeneration, 257
 disableThumbnailReindexing, 257
 elasticsearchPath, 253, 254
 enableTranscoderHashing, 258
 enableTranscoderTransfer, 262
 fileGrowingTimeout, 262
 fileHashAlgorithm, 258
 fileHashExecutionTime, 263
 fileHierarchy, 261
 fileNotGrowingTimeout, 262

- fileSequenceStart, 261
- fileTempKeyDuration, 258
- firstLastModifiedAsCreationTime, 261
- glacierArchiveDescription, 260
- groupImportableFiles, 257
- indexCollectionItemOrder, 255
- indexFieldGroups, 254
- indexTimespans, 255
- itemDeleteExecutionTime, 263
- itemDeleteInterval, 263
- itemDeleteIntervalShort, 263
- jobExclusiveStepMaxWait, 256
- jobPurgingDirectory, 264
- jobPurgingTime, 264
- jobRetryCount, 256
- keepEmptyDirectories, 257
- keepMissingFiles, 257
- ldapAuthentication, 255
- legacyTransientFieldTypes, 255
- libraryExpireTime, 262
- libraryUpdateInterval, 262
- localFSTimeData, 261
- maxFileMetadataLength, 256
- maxSearchResults, 255
- maxTranscoderUnavailableTime, 264
- mediaCheckInterval, 257
- parseFileMetadata, 256
- parseXMP, 256
- passwordHashAlgorithm, 255
- s3ConcurrentParts, 258
- s3ConnectionTimeout, 259
- s3CredentialType, 259
- s3MaxErrorRetry, 259
- s3PartSize, 258
- s3PartSizeIncrease, 258
- s3ProxyValidTime, 258
- s3SocketTimeout, 259
- signiantManagerHost, 261
- signiantManagerPassword, 262
- signiantManagerUser, 261
- simpleImageProcessor, 257
- skipLibraryIndexUpdates, 255
- slaveLicenseProxy, 253
- solrAutoSoftCommit, 254
- solrCollection, 254
- solrCommitInterval, 254
- solrPath, 253
- solrPingAttempts, 254
- solrPingTimeout, 254
- solrQueryTimeout, 254
- solrSoftCommitInterval, 254
- solrUpdateQueueSize, 254
- statsPerSecond, 261
- storageActivationFile, 258
- storageRuleDisableArchiveSources, 262
- stornextFileMetadata, 259
- stsAssumeRole, 260
- stsCredentialDuration, 260
- stsRegion, 260
- syncVxaDeletes, 265
- syncVxaFileChanges, 265
- thumbnailHierarchy, 261
- transcoderNonblockingStatusInterval, 264
- trustArchivedFiles, 260
- useAzureProxy, 259
- useLucene, 262
- useMutableRangeWrites, 259
- userTokenDefaultInterval, 256
- userTokenMaxInterval, 256
- userTokenRefreshInterval, 256
- useS3Proxy, 258
- useSegmentFiles, 259
- useVxaHash, 265
- useVxaMimeType, 265
- validatexml, 253
- xmpIgnoreElements, 257
- zkHost, 253
- constants
 - storage states, 135
 - storage types, 135
- context.getChannel() (context method), 159
- context.getComponent() (context method), 158
- context.getExtension() (context method), 158
- context.getFileId() (context method), 158
- context.getItem() (context method), 158
- context.getJobId() (context method), 159
- context.getJobMetadata() (context method), 158
- context.getJobType() (context method), 159
- context.getOriginalComponentFilename() (context method), 158
- context.getOriginalFilename() (context method), 158
- context.getShape() (context method), 158
- context.getStorage() (context method), 158
- context.getTags() (context method), 158
- D**
 - defaultIngestStorage
 - configuration property, 256
 - defaultTranscoder
 - configuration property, 253
 - deleteFileIfNotFound
 - reserved key, 673
 - deleteFileIfReadOnly
 - reserved key, 673
 - detectRenamedFiles
 - reserved key, 674
 - disableATime
 - configuration property, 261

disabledSidecarExtensions
 reserved key, 152
 disableMetadataSchema
 configuration property, 255
 disableSequenceChecker
 configuration property, 264
 disableSiteCrunching
 configuration property, 253
 disableThumbnailGeneration
 configuration property, 257
 disableThumbnailReindexing
 configuration property, 257

E

elasticsearchPath
 configuration property, 253, 254
 enableTranscoderHashing
 configuration property, 258
 enableTranscoderTransfer
 configuration property, 262
 environment variable
 com.vidispine.credentials.dir, 146, 266
 com.vidispine.license.dir, 265
 com.vidispine.license.tmpdir, 265
 com.vidispine.log.dir, 266
 com.vidispine.site, 7, 265
 com.vidispine.xml.prefix, 266
 vidispine.identifier.format, 7, 266
 excludeFilter
 reserved key, 674

F

file.getAllMetadata() (file method), 278
 file.getMetadata() (file method), 278
 file.setMetadata() (file method), 278
 fileGrowingTimeout
 configuration property, 262
 fileHashAlgorithm
 configuration property, 258
 fileHashExecutionTime
 configuration property, 263
 fileHierarchy
 configuration property, 261
 fileListBatchSize
 reserved key, 673
 fileNotGrowingTimeout
 configuration property, 262
 fileSequenceStart
 configuration property, 261
 fileTempKeyDuration
 configuration property, 258
 firstLastModifiedAsCreationTime
 configuration property, 261

G

glacierArchiveDescription
 configuration property, 260
 groupImportableFiles
 configuration property, 257

H

hashingThreadCount
 reserved key, 674
 hashMode
 reserved key, 672
 http.uri(uri):() (http method), 273

I

ignoreSidecarImport
 reserved key, 152
 indexCollectionItemOrder
 configuration property, 255
 indexFieldGroups
 configuration property, 254
 indexTimespans
 configuration property, 255
 itemDeleteExecutionTime
 configuration property, 263
 itemDeleteInterval
 configuration property, 263
 itemDeleteIntervalShort
 configuration property, 263

J

job metadata key
 cerifyPriority, 486
 checksumMode, 486
 lastSmpteTimeCode, 486
 smpteTimeCode, 486
 job.containsKey() (job method), 170
 job.deleteData() (job method), 169
 job.fail() (job method), 169
 job.fatalFail() (job method), 169
 job.getData() (job method), 169
 job.getDataOrDefault() (job method), 170
 job.getId() (job method), 169
 job.getKeys() (job method), 170
 job.getUser() (job method), 170
 job.log() (job method), 169
 job.setData() (job method), 169
 job.vidinetCost() (job method), 171
 job.vidinetJob() (job method), 171
 job.wait() (job method), 170
 jobExclusiveStepMaxWait
 configuration property, 256
 jobPurgingDirectory
 configuration property, 264

jobPurgingTime
configuration property, 264

jobRetryCount
configuration property, 256

K

keepEmptyDirectories
configuration property, 257
reserved key, 673

keepMissingFiles
configuration property, 257
reserved key, 673

L

lastSmpteTimeCode
job metadata key, 486

ldapAuthentication
configuration property, 255

legacyTransientFieldTypes
configuration property, 255

libraryExpireTime
configuration property, 262

libraryUpdateInterval
configuration property, 262

localFSTimeData
configuration property, 261

logger.json() (logger method), 274

logger.log() (logger method), 274

lostLimit
reserved key, 672

M

maxFileMetadataLength
configuration property, 256

maxSearchResults
configuration property, 255

maxTranscoderUnavailableTime
configuration property, 264

mediaCheckInterval
configuration property, 257

metadatahelper.createMetadata() (metadatahelper method), 274

metadatahelper.createMetadataGroup() (metadatahelper method), 274

metadatahelper.createMetadataTimespan() (metadatahelper method), 274

metadatahelper.generateMetadataField() (metadatahelper method), 274

metadatahelper.log() (metadatahelper method), 274

metadatahelper.metadataToStr() (metadatahelper method), 274

N

noDefaultHash

reserved key, 674

notification.send() (notification method), 275

P

parseFileMetadata
configuration property, 256

parseXMP
configuration property, 256

passwordHashAlgorithm
configuration property, 255

probeFileBeforeClosing
reserved key, 674

R

refreshInterval
reserved key, 672

refreshOnStart
reserved key, 673

reserved key
additionalHash, 672
closeLimit, 672
deleteFileIfNotFound, 673
deleteFileIfReadOnly, 673
detectRenamedFiles, 674
disabledSidecarExtensions, 152
excludeFilter, 674
fileListBatchSize, 673
hashingThreadCount, 674
hashMode, 672
ignoreSidecarImport, 152
keepEmptyDirectories, 673
keepMissingFiles, 673
lostLimit, 672
noDefaultHash, 674
probeFileBeforeClosing, 674
refreshInterval, 672
refreshOnStart, 673
sqsEndpoint, 674
sqsName, 674
statsPerSecond, 673
storageActivationFile, 675
toAppearLimit, 672
verifyHashAfterTransfer, 675
vxId, 674

S

s3ConcurrentParts
configuration property, 258

s3ConnectionTimeout
configuration property, 259

s3CredentialType
configuration property, 259

s3MaxErrorRetry
configuration property, 259

- s3PartSize
 - configuration property, 258
 - s3PartSizeIncrease
 - configuration property, 258
 - s3ProxyValidTime
 - configuration property, 258
 - s3SocketTimeout
 - configuration property, 259
 - shell.exec() (shell method), 273
 - signiantManagerHost
 - configuration property, 261
 - signiantManagerPassword
 - configuration property, 262
 - signiantManagerUser
 - configuration property, 261
 - simpleImageProcessor
 - configuration property, 257
 - skipLibraryIndexUpdates
 - configuration property, 255
 - slaveLicenseProxy
 - configuration property, 253
 - smpteTimeCode
 - job metadata key, 486
 - solrAutoSoftCommit
 - configuration property, 254
 - solrCollection
 - configuration property, 254
 - solrCommitInterval
 - configuration property, 254
 - solrPath
 - configuration property, 253
 - solrPingAttempts
 - configuration property, 254
 - solrPingTimeout
 - configuration property, 254
 - solrQueryTimeout
 - configuration property, 254
 - solrSoftCommitInterval
 - configuration property, 254
 - solrUpdateQueueSize
 - configuration property, 254
 - sqsEndpoint
 - reserved key, 674
 - sqsName
 - reserved key, 674
 - statsPerSecond
 - configuration property, 261
 - reserved key, 673
 - storage states
 - constants, 135
 - storage types
 - constants, 135
 - storageActivationFile
 - configuration property, 258
 - reserved key, 675
 - storageRuleDisableArchiveSources
 - configuration property, 262
 - stornextFileMetadata
 - configuration property, 259
 - stsAssumeRole
 - configuration property, 260
 - stsCredentialDuration
 - configuration property, 260
 - stsRegion
 - configuration property, 260
 - syncVxaDeletes
 - configuration property, 265
 - syncVxaFileChanges
 - configuration property, 265
- ## T
- thumbnailHierarchy
 - configuration property, 261
 - toAppearLimit
 - reserved key, 672
 - transcoderNonblockingStatusInterval
 - configuration property, 264
 - trustArchivedFiles
 - configuration property, 260
- ## U
- useAzureProxy
 - configuration property, 259
 - useLucene
 - configuration property, 262
 - useMutableRangeWrites
 - configuration property, 259
 - userTokenDefaultInterval
 - configuration property, 256
 - userTokenMaxInterval
 - configuration property, 256
 - userTokenRefreshInterval
 - configuration property, 256
 - useS3Proxy
 - configuration property, 258
 - useSegmentFiles
 - configuration property, 259
 - useVxaHash
 - configuration property, 265
 - useVxaMimeType
 - configuration property, 265
- ## V
- validatexml
 - configuration property, 253
 - verifyHashAfterTransfer
 - reserved key, 675
 - vidispine.identifier.format, 7

vxaId

reserved key, [674](#)

W

`wrapper.getBulkyMetadata()` (wrapper method), [64](#)

`wrapper.getMetadata()` (wrapper method), [64](#)

`wrapper.getOldBulkyMetadata()` (wrapper method), [64](#)

`wrapper.getOldMetadata()` (wrapper method), [64](#)

`wrapper.getShape()` (wrapper method), [64](#)

`wrapper.getShapeMetadata()` (wrapper method), [64](#)

`wrapper.setMetadata()` (wrapper method), [64](#)

X

`xmpIgnoreElements`

configuration property, [257](#)

Z

`zkHost`

configuration property, [253](#)